
Im I S I

G72R Irregular Tube Port Quick Connector

ONE-STOP CONNECTION

High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |

The G72R series is a dedicated connector for irregular radiator ports. It seals two closely spaced ports at the same time, solving sealing problems in confined spaces. Manually operated and easy to use, its special aviation aluminum alloy body stays robust while keeping the connector light, greatly reducing operator fatigue. A full range of models covers flanged tube sealing in many sizes. The straight-through design ensures high flow performance for both gas and liquid testing.



Flange Connection Solution

* Improved work efficiency and lower production cost
* Reliable sealing and long service life
* Lightweight and quick, reducing work intensity
* Built-in locking structure, suitable for high-pressure working environments

G72R Series Quick Connector Features

1. Handle press drive
Pressing the handle opens the jaws so the test sample can be inserted; releasing the handle closes them automatically to grip the sample and complete the connection, ready for gas testing.

2. Test port
A G threaded test port at the rear, customisable as required; BSPP1/8 thread is standard.

3. Aluminum body
Aviation aluminum body: light and robust.

4.Stainless steel jaws
The jaws are machined from stainless steel for sufficient strength and corrosion resistance; max. pressure 50 bar.

Selected Models



G72R-2G-270D1 (Dual Tube)



G72R-2K-40D01 (Dual Port)




G72R-1K-155-L200 (Single Port)


G72R Quick Connector Advantages and Features




Handle press drive:
Handle operation: simple, quick and highly efficient




Aluminum Body:
Lightweight and durable, low operating effort



Stainless steel jaws:
Sufficient strength together with corrosion resistance; maximum pressure 50Bar




Quick Seal Replacement:
Simple maintenance, longer service life




Test port:
G threaded test port at the rear; threaded ports can be customised

G72R Quick Connector Specifications

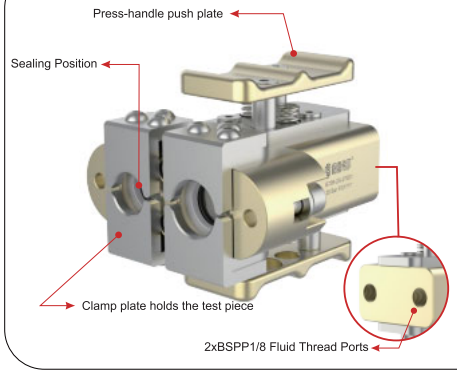

Max. Op. Pressure	Vacuum to 50 Bar
Sealing Range	Customised to the tube
Flow Port	BSPP1/8, BSPP1/4 Threaded Ports
Material	Aluminum
Main Seal	NBR
Operating Temp.	-20 °C to +120 °C

G72R Operation Demo



1. Press the handle: the jaws open.




2. Place the Insert the test piece test piece into the front test port of the G72R series



3. Release the handle: the jaws close automatically. Gas testing can then be carried out.

G72R Irregular Tube Port Quick Connector
ONE-STOP CONNECTION
High-Pressure Testing | Face Sealing | Pneumatic Drive | Full Model Range | Simple Operation | Various Seal Materials |


Application Cases

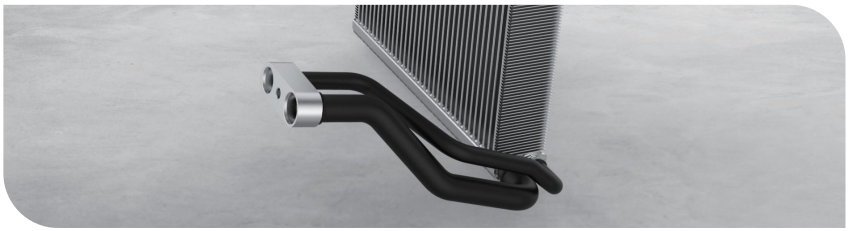

Evaporator Testing



Air-Conditioner Radiator Testing

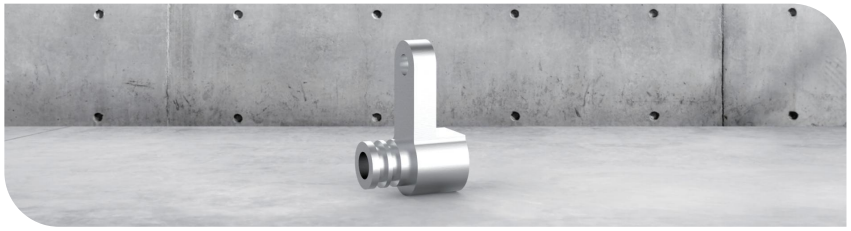


Irregular Tube Port Connection Testing

G72R

el Range | Simple






Dual-Tube Application

Model	Dim. A1	Dim. A2	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Jaw Material	Seal Material	Seal No.
G72R-2G-270D1	11.7	14.5	1	27	8.5	BSPP1/8	50 Bar	Stainless	NBR	*SG72R-2G-270D1-01 SG72R-2G-270D1-02*
G72R-2G-290D1	11.7	14.5	1	29	8					*SG72R-2G-290D1-01 SG72R-2G-290D1-02*






Dual-Port Application

Model	Dim. A1	Dim. A2	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Jaw Material	Seal Material	Seal No.
G72R-2K-310D1	15.5	18.3	1	31	9.5	BSPP1/8	50 Bar	Stainless	NBR	*SG72R-2K-310D1-01 SG72R-2K-310D1-02*
G72R-2K-350D1	15.5	18.3	1	35	9.5					*SG72R-2K-350D1-01 SG72R-2K-350D1-02*
G72R-2K-400D1	15.5	18.3	1	40	9.5					*SG72R-2K-400D1-01 SG72R-2K-400D1-02*





Single-Tube Application

Model	Dim. A1	Body No.	Dim. B	Dim. C	Fluid Port D	Max. Pressure	Jaw Material	Seal Material	Seal No.
G72R-1G-155D1	15.5	1	14.5	33	BSPP1/8	50 Bar	Stainless	NBR	SG72R-1G-155D1-01
G72R-1G-183D1	18.3	1	14.5	33					SG72R-1G-183D1-01