

Metal Jaw Standard Model

2

G90 Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

The G90 series is a lever-operated manual connector. Its aluminum body keeps the connector strong while reducing operating effort. The special internal structure does not damage the customer product surface, preserving its appearance. It is widely used for engine fuel rails and new energy coolant ports.



Lever-Type Damage-Free Connector

* Lever operation saves time and effort
* No seal, so no consumables
* Aluminum construction: light and robust
* Few leak paths, high sealing class

G90 Series Quick Connector Features

1. Lever drive
Leverage reduces the operating force required and lowers operator load.

2. No seal required
Sealing uses the internal seal of the female fuel port, so there are no consumable parts and maintena nce cost is zero.

3. High sealing class
Only one sealing point inside the sealing channel makes helium testing easy.

4. 360° rotating inlet (optional)
The inlet port rotates freely, eliminating tangled air lines

Selected Models


G90L Series


G90R Series


G90SP Series


G90SPR Series

G90 Quick Connector Advantages and Features



Two operating modes:
Handle operation or push-button operation



Optional orientation:
Straight-through or side inlet options, flexibly configured to suit the site



Damage-free connection:
A PEEK insert design and the polymer piston nesting ensure damage-free connection to aluminium or plastic VDA structures




Mini body:
The miniaturised body suits situations with positional interference and offers broad adaptability



Adapter function:
G90SP / G90SPR offervarious Straight-through or side-exit adapters to other fitting types, including flanged tubes, J2044 and even threaded fittings

G90 Quick Connector Specifications

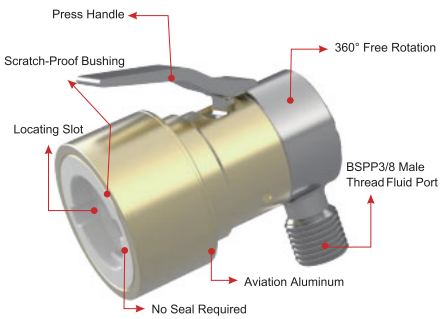

Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	10mm~56mm
Flow Port	BSPP1/8, BSPP1/4, BSPP3/8, BSPP1/2
Material	Aluminum, Stainless, Nylon
Main Seal	NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

G90 Operation Demo




1. Align the quick connector with the femalepart
2. Insert to form the seal
3. Press the side handle to pull it out easily

G90 Lever-Type Connector
ONE-STOP CONNECTION
Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

Application Cases



New Energy Electronic Control Cooling System

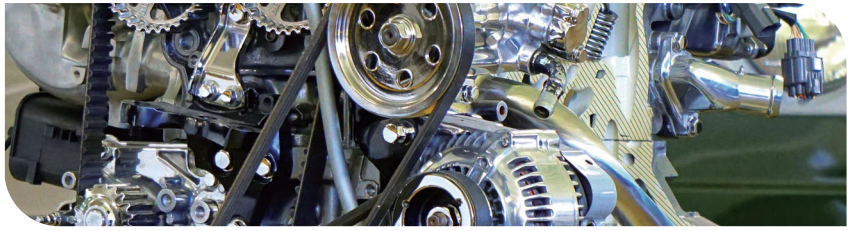

Engine Cooling System




Engine Fuel System


G90 Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |










G90L Quick Connector (Straight-Through) - VDA Standard Male Port

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90L-NW6	75	90NW1	37	58	BSPP1/4"	10.4	10Bar	Aluminum	NBR	SG90L-NW6
G90L-NW8	75	90NW1	37	58		12.4				SG90L-NW8
G90L-NW12	77	90NW2	43	61	BSPP3/8"	16.3				SG90L-NW12
G90L-NW16	79	90NW3	49	64		22.3				SG90L-NW16
G90L-NW18	81	90NW4	53	66		23.8				SG90L-NW18
G90L-NW20	81	90NW4	53	66		26.3				SG90L-NW20
G90L Quick Connector (Damage-Free Straight-Through) - VDA Standard Male Tube										
G90LP-NW12	77	90NW2	43	61	BSPP3/8"	16.3	10Bar	Aluminum	NBR	SG90L-NW12
G90LP-NW16	79	90NW3	49	64		22.3				SG90L-NW16







G90R Quick Connector (L Type) - VDA Standard Male Port

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim.E	Max. Pressure	Material	Seal Material	Seal No.
G90R-NW12	77	90NW2	43	61	BSPP3/8"	16.3	10Bar	Aluminum	NBR	SG90R-NW12
G90R-NW16	79	90NW3	49	64		22.3				SG90R-NW16
G90R-NW12HF10	77	90NW2	43	61		16.3				SG90R-NW12
G90R-NW16HF10	79	90NW3	49	64		22.3				SG90R-NW16


GripSeal offers additional non-standard sealing solutions - please contact us anytime if required!


G90SP Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |









G90SP Quick Connector - VDA Standard Male Tube, Direct Outlet


Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SP-NW06-045	43	90SNW1	26	35	BSP P1/4	10.4	10Bar	Aluminum	NBR	SG90SP-NW06
G90SP-NW08-065	45	90SNW2	28	37	BSP P3/8	12.4				SG90SP-NW08
G90SP-NW12-085	48	90SNW3	31	40	BSPP1/2	16.3				SG90SP-NW12
G90SP-NW16-085	51	90SNW6	38	49	BSPP1/2	22.3				SG90SP-NW16
G90SP-NW18-085	53	90SNW7	40	52	BSPP1/2	23.8				SG90SP-NW18
G90SP-NW20-125	58	90SNW8	45	58	BSPP3/4	26.3				SG90SP-NW20



Type A



Type B



G90SP Quick Connector - VDA Standard Male Tube, Straight-Through Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SP-NW12-T200	50	31	41	20	A	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90SP-NW16-T200	54	38	49			22.3				SG90S-NW16
G90SP-NW12-T160	50	31	41	16	A	16.3				SG90S-NW12
G90SP-NW16-T160	54	38	49			22.3				SG90S-NW16
G90SP-NW12-J158	50	31	41	15.8	B	16.3				SG90S-NW12
G90SP-NW16-J158	54	38	49			22.3				SG90S-NW16



G90SP-NW12-T200




G90SP-NW16-J158

G90SPR Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

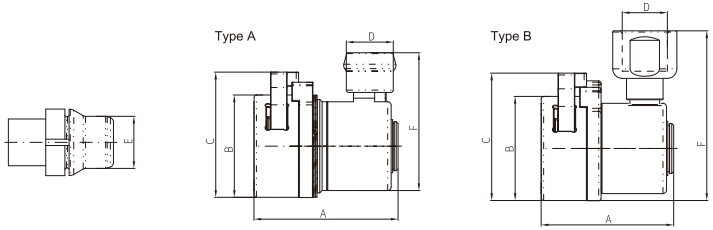

G90SPR Quick Connector - VDA Standard Male Tube, Side-Exit Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SPR-NW12-T200	58	31	63	20	A	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90SPR-NW16-T200	62	38	71			22.3				SG90S-NW16
G90SPR-NW12-T160	58	31	63	16	A	16.3				SG90S-NW12
G90SPR-NW16-T160	62	38	71			22.3				SG90S-NW16
G90SPR-NW12-085	58	31	63	15.8	B	16.3				SG90S-NW12
G90SPR-NW16-085	62	38	71			22.3				SG90S-NW16



G90SPR-NW16-T200




G90SPR-NW16-085

G90S Lever-Type Connector


ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

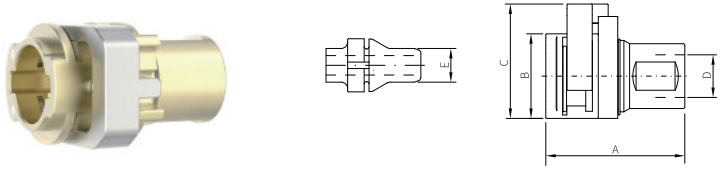

G90S Quick Connector - VDA Standard Male Tube, Direct Outlet

Model	Dim. A	Body No.	Dim. B	Dim. C	Dim. D	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90S-NW06-045	43	90SNW1	26	35	BSPP1/4	10.4	10Bar	Aluminum	NBR	SG90S-NW06
G90S-NW08-065	45	90SNW2	28	37	BSPP3/8	12.4				SG90S-NW08
G90S-NW12-085	48	90SNW3	31	40	BSPP1/2	16.3				SG90S-NW12
G90S-NW16-085	51	90SNW6	38	49	BSPP1/2	22.3				SG90S-NW16
G90S-NW18-085	53	90SNW7	40	52	BSPP1/2	23.8				SG90S-NW18
G90S-NW20-125	58	90SNW8	45	58	BSPP3/4	26.3				SG90S-NW20

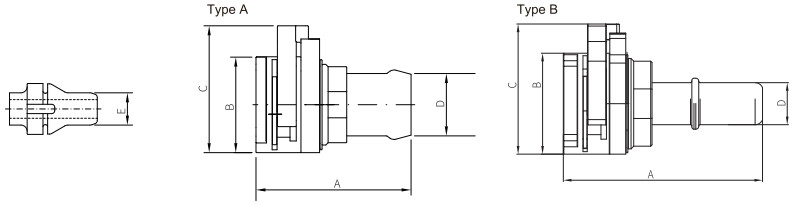

G90S Quick Connector - VDA Standard Male Tube, Straight-Through Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90S-NW12-T200	50	31	41	20	A	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90S-NW16-T200	54	38	49			22.3				SG90S-NW16
G90S-NW12-T160	50	31	41	16	A	16.3				SG90S-NW12
G90S-NW16-T160	54	38	49			22.3				SG90S-NW16
G90S-NW12-J158	50	31	41	15.8	B	16.3				SG90S-NW12
G90S-NW16-J158	54	38	49			22.3				SG90S-NW16



G90S-NW12-T200




G90S-NW16-J158

G90S Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

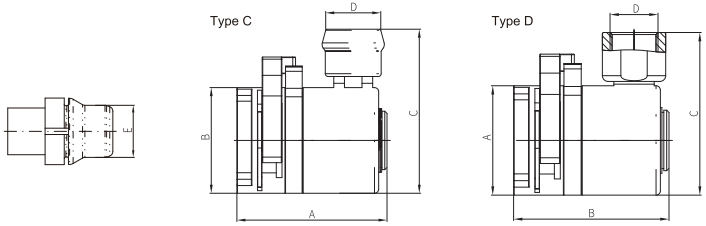

G90SL Quick Connector - VDA Standard Male Tube, Side-Exit Adapter

Model	Dim. A	Dim. B	Dim. C	Dim. D	Rear End	Connector Dim. E	Max. Pressure	Material	Seal Material	Seal No.
G90SL-NW12-T200	58	31	63	20	C	16.3	10Bar	Aluminum	NBR	SG90S-NW12
G90SL-NW16-T200	62	38	71			22.3				SG90S-NW16
G90SL-NW12-T160	58	31	63	16	C	16.3				SG90S-NW12
G90SL-NW16-T160	62	38	71			22.3				SG90S-NW16
G90SL-NW12-085	58	31	63	BSPP1/2"	D	16.3				SG90S-NW12
G90SL-NW16-085	62	38	71			22.3				SG90S-NW16




G90SL-NW16-T200

G90SL-NW16-085

G90 Lever-Type Connector

ONE-STOP CONNECTION

Lever Operation | Damage-Free Connection |Custom Design | Up to 1 MPa | Aluminum Alloy | High Sealing Class |

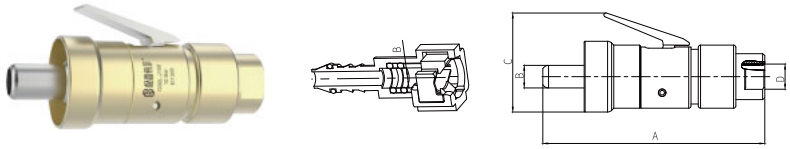


G90L Quick Connector - J2044 Standard Female

Model	Dim. A	Body No.	Dim. B	Dim. C	Fluid Port D	Female Dim.B	Max. Pressure	Material	Seal No.
G90L-J063	116	90J1	Φ6.3	52	BSPP1/4"	6.3	10Bar	Aluminum	SG90L-J063
G90L-J079	116	90J1	Φ7.9	52	BSPP1/4"	7.9			SG90L-J079
G90L-J095	116	90J1	Φ9.5	52	BSPP1/4"	9.5			SG90L-J095
G90L-J099	116	90J1	Φ9.9	52	BSPP1/4"	9.9			SG90L-J099
G90L-J110	116	90J1	Φ11.0	52	BSPP1/4"	11.0			SG90L-J110
G90L-J118	116	90J1	Φ11.8	52	BSPP1/4"	11.8			SG90L-J118
G90L-J126	116	90J2	Φ12.6	55	BSPP3/8"	12.6			SG90L-J126
G90L-J158	116	90J2	Φ15.8	55	BSPP3/8"	15.8			SG90L-J158
G90L-J189	116	90J2	Φ18.9	55	BSPP3/8"	18.9			SG90L-J189


The G90 series offers extensive customisation, including J2044 / VDA and various specific functions. Some examples we have produced are shown below for reference.




G90S-M5-HF14




G90S-NW16-TNW16



G90S-NW16-LM5



G90S-NW12OD165-085



G90V-J079



G90L-J079