TBK-L530 Differential Pressure Leak Tester

Fast | Reliable | Accurate | High Flow Rate | Best Leak Tester

www.industhub.com | sales@industhub.com



Applications:

- Automotive
- Domestic appliances
- Medical & Pharmaceutical
- Aeronautic industry
- Electrical Components


Overview:

L530 is a single - channel differential pressure airtightness tester, features a built-in electronic regulator, it has a 10" touch screen display and a 304 stainless-steel case , aiming to offer users an ultimate detection experience and meeting the standards of various industries.

L530 integrates advanced technology, with high-flow air control valve, the inflation speed is fast. With high precision monocrystalline silicon differential pressure sensor, it achieve a resolution up to 0.1Pa. With various interfaces such as USB, Ethernet, and PLC signal ports, it facilitates data interaction and system integration with other devices.
Based on the latest control board (ARMxxx), L530 offers fast processing speed and response capabilities, ensuring efficient detection work.

Advantages:

- High - precision differential pressure sensor
- Flexible Pressure Regulation
- High Flow Rate
- Various Interfaces and Data Management
- Modular Design and Easy Maintenance
- Multilingual Support

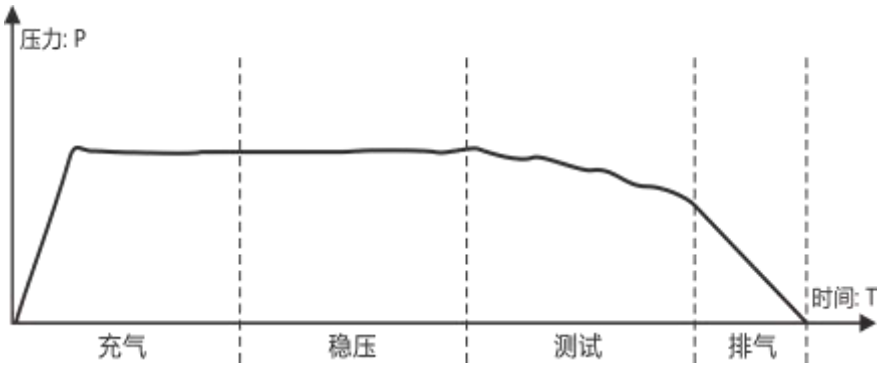

Physical Interfaces:

- Test Interface: 1/4" BSPP (G) female thread
- USB Interface: Type-A, supporting data export / firmware upgrade
- Ethernet Port: 10/100M adaptive, supporting remote control and data transmission
- PLC Interface: Supports PNP/NPN signal modes



TBK-L530 Differential Pressure Leak Tester

Fast | Reliable | Accurate | High Flow Rate | Best Leak Tester

www.industhub.com | sales@industhub.com

Model	L530	
Specification:		
Pressure Range	0-100KPa， 0-350Kpa 0-700KPa	
accuracy	0.25%FS	
Differential Pressure Sensor	single - crystal silicon	+/-6Kpa
	high stability	0.05%F.S per year
	withstanding pressure	40MPa
	minimum resolution	0.1PA
Test port	1/4" BSPP (G) female thread	
Connection Interfaces	USB, I/O interface, Ethernet port (TCP/IP).	
Display	10" ultra - clear capacitive touch screen	
Pressure Regulating Valve	0 - 100 kPa, 0 - 500 kPa, and 0 - 900 kPa, With built - in electronic pressure regulating valves , can automatically adjust the pressure.	
Programme	100 groups (can be upgraded to an unlimited number).	
Time Setting	0.1 to 9999.9 seconds	
Firmware Upgrade	Long distance remote assistance/USB	
Data Management	Internal data storage and data output functions.	
Power Supply	24VDC, 60 W (equipped with a dedicated charging port)	
PHYSICAL		
Weight		
Size		
TEMPERATURE		