

Gripseal (Shenzhen) Technology Co., Ltd
4/F, No. 30 Building, Chentian Industrial Park,
Xi XiangBao'an District，Shenzhen,518102,China
Email: info@gripseal.com
Tel:+86-755-86215125
Website: en.gripseal.com

Scan to
English website

GripSeal

Liquid Cooling Couplings



GripSeal (Shenzhen) Technology Co., Ltd.

R1.5

Brand Profile

GripSeal (Shenzhen) Technology Co., Ltd. was founded in 2006 and is rooted in Shenzhen, in the heart of the Greater Bay Area, with more than a decade of international trade experience providing industrial equipment and quick-connect products and services to industrial and medical customers. After decades of dedication to the quick-connect market, the GripSeal own brand has launched thousands of standard and custom quick disconnect couplings, manifold assemblies, mating inserts and valves, greatly improving test-connection efficiency.

The GripSeal coupling business — metal and plastic quick disconnect couplings — offers convenient solutions for rapidly connecting and disconnecting gas and liquid lines, covering both automated docking and manual connection. For different fluids, temperatures, pressures, bore sizes and connection methods, we provide a full range of male and female coupling solutions for batch industrial applications involving gas/liquid switching: new-energy testing, automotive parts testing, energy-storage equipment, functional test equipment,burn-in equipment, high-speed rail, marine and automation integration.

Drip-free couplings are a category developed to greatly reduce the risk of leakage caused by internal fluid spillage, cutting residual liquid and leakage on disconnect to a drip-free level. This matters wherever liquids and electronics are involved: it greatly improves equipment cleanliness and prevents,by design, electric shock or major equipment loss caused by leakage. Most GripSeal couplings are made of 316 or special stainless steel, built for demanding long-term use. Hybrid plastic-metal connectors balance cost and performance for higher volumes — and the range keeps expanding.

Every coupling passes rigorous in-house development and production tests — pressure, air-tightness, safety,flow, mating life and more — with consistency, interchangeability and durability as our design goals. Beyond a wide range of standard connectors, we can develop special interfaces or entirely new couplings for specific customers and applications, including customized needs such as corrosive fluids and high cleanliness.

GripSeal is committed to being the preferred brand of quick disconnect — making test connections no longer a challenge!





GripSeal Universal Quick Disconnect (UQD)

One-stop solutions for all your needs







Product features



- OCP compliant
- One-hand operation
- High flow, no spillage
- 316L stainless steel,corrosion-resistant
- Smaller footprint
- Distinct color coding
- Std seal material: EPDM
- Custom tail port

In-rack Solution




UQD
Quick Disconnect

UQD couplings are designed for high flow and no spillage — the perfect choice for in-rack applications with smaller hose lines.

Technical Specifications

Model	Coupling (N)	Working Pressure	Min. Burst Pressure	Flow Bore	Cv Value	Spillage (cc)
UQD02	40	16bar	40bar	3mm	0.4	0.02
UQD04	40	16bar	40bar	6mm	1.5	0.025
UQD06	55	10bar	20bar	8mm	2.5	0.035
UQD08	75	10bar	20bar	10mm	4.1	0.07


Flow Curve

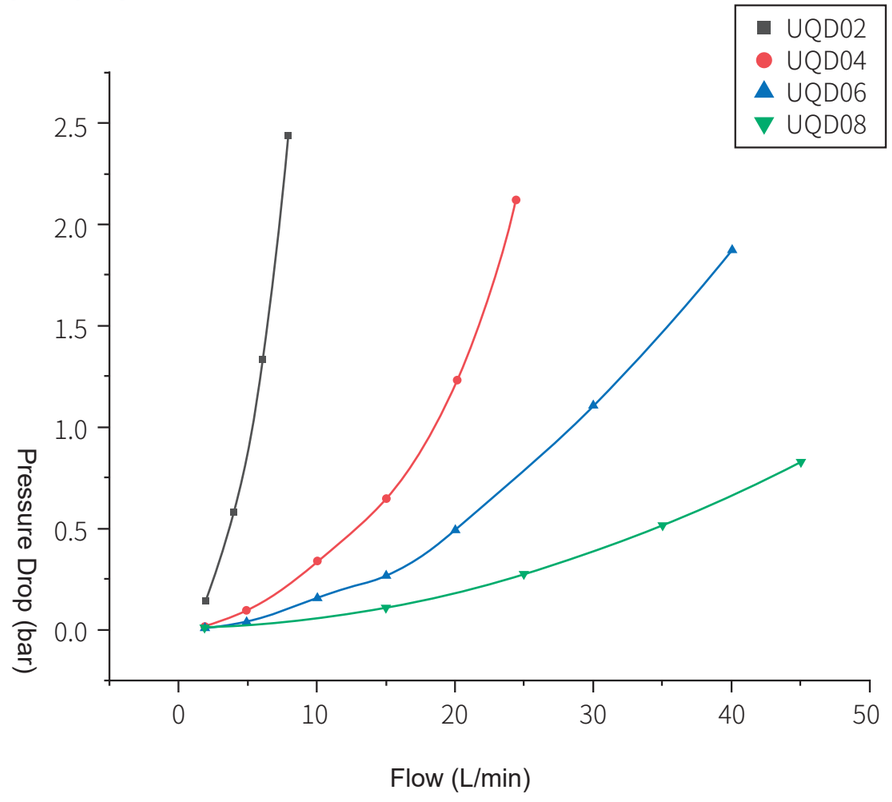

Test Conditions


- Fluid: Water
- Flow: Plug → Socket

Socket

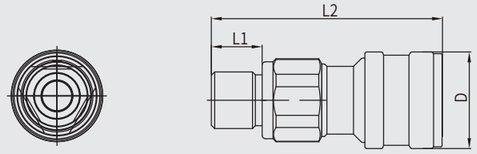


UQD	Part No.	End Size	Color Code	Dimensions (mm)		
				D	L1	L2
UQD02	C7020WGB	BSPP1/8	Blue	19.5	10	44.5
UQD02	C7020WGR	BSPP1/8	Red	19.5	10	44.5
UQD02	C7020WUB	7/16-20UNF	Blue	19.5	10	44.5
UQD02	C7020WUR	7/16-20UNF	Red	19.5	10	44.5
UQD04	C7040WGB	BSPP1/4	Blue	24	12	56.3
UQD04	C7040WGR	BSPP1/4	Red	24	12	56.3
UQD04	C7040WUB	9/16-18UNF	Blue	24	12	56.3
UQD04	C7040WUR	9/16-18UNF	Red	24	12	56.3
UQD06	C7060WGB	BSPP3/8	Blue	28.5	15	68.2
UQD06	C7060WGR	BSPP3/8	Red	28.5	15	68.2
UQD06	C7060WUB	3/4-16UNF	Blue	28.5	15	68.2
UQD06	C7060WUR	3/4-16UNF	Red	28.5	15	68.2
UQD08	C7080WGB	BSPP1/2	Blue	31	18	72.5
UQD08	C7080WGR	BSPP1/2	Red	31	18	72.5
UQD08	C7080WUB	7/8-14UNF	Blue	31	18	72.5
UQD08	C7080WUR	7/8-14UNF	Red	31	18	72.5

Socket

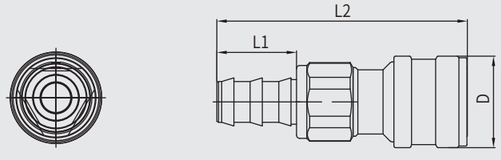

UQD	Part No.	End Size	Color Code	Dimensions (mm)		
				D	L1	L2
UQD02	C7020TB	1/4 Hose	Blue	19.5	21.5	55.5
UQD02	C7020TR	1/4 Hose	Red	19.5	21.5	55.5
UQD04	C7040TB	3/8 Hose	Blue	24	24.5	68.8
UQD04	C7040TR	3/8 Hose	Red	24	24.5	68.8
UQD06	C7060TB	1/2 Hose	Blue	28.5	24.8	78
UQD06	C7060TR	1/2 Hose	Red	28.5	24.8	78
UQD08	C7080TB	5/8 Hose	Blue	31	23.3	77.5
UQD08	C7080TR	5/8 Hose	Red	31	23.3	77.5

Plug

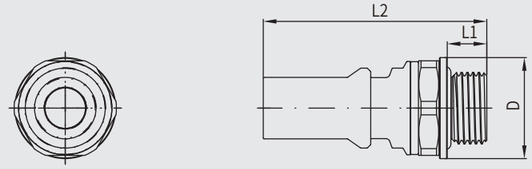


UQD	Part No.	End Size	Color Code	Dimensions (mm)		
				D	L1	L2
UQD02	C7025GB	BSPP 1/8	Blue	16	9	40
UQD02	C7025GR	BSPP 1/8	Red	16	9	40
UQD02	C7025UB	7/16-20UNF	Blue	16	9	40
UQD02	C7025UR	7/16-20UNF	Red	16	9	40
UQD04	C7045GB	BSPP 1/4	Blue	24	24.5	68.8
UQD04	C7045GR	BSPP 1/4	Red	24	24.5	68.8
UQD04	C7045UB	9/16-18UNF	Blue	24	24.5	68.8
UQD04	C7045UR	9/16-18UNF	Red	24	24.5	68.8
UQD06	C7065GB	BSPP 3/8	Blue	23.5	9.2	52
UQD06	C7065GR	BSPP 3/8	Red	23.5	9.2	52
UQD06	C7065UB	3/4-16UNF	Blue	23.5	9.2	52
UQD06	C7065UR	3/4-16UNF	Red	23.5	9.2	52
UQD08	C7085GB	BSPP 1/2	Blue	30	11.5	56
UQD08	C7085GR	BSPP 1/2	Red	30	11.5	56
UQD08	C7085UB	7/8-14UNF	Blue	30	11.5	56
UQD08	C7085UR	7/8-14UNF	Red	30	11.5	56



GripSeal Universal Blind Mate (UQDB)


One-stop solutions for all your needs

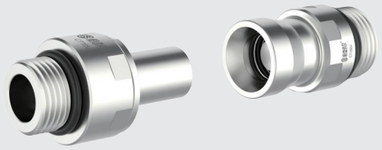






Product features

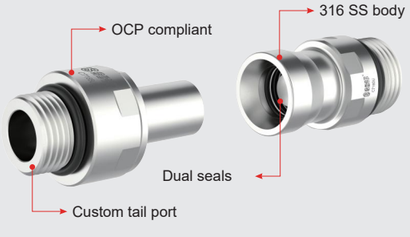

- Designed to OCP UQDB spec
- 1 mm radial compensation
- One-hand push-in design
- High flow, low pressure drop
- Flat-face drip-free design
- Sizes: -02/-04/-06/-08
- Std material: stainless steel
- Std seal material: EPDM
- Custom threaded end

Internal Rack Solution

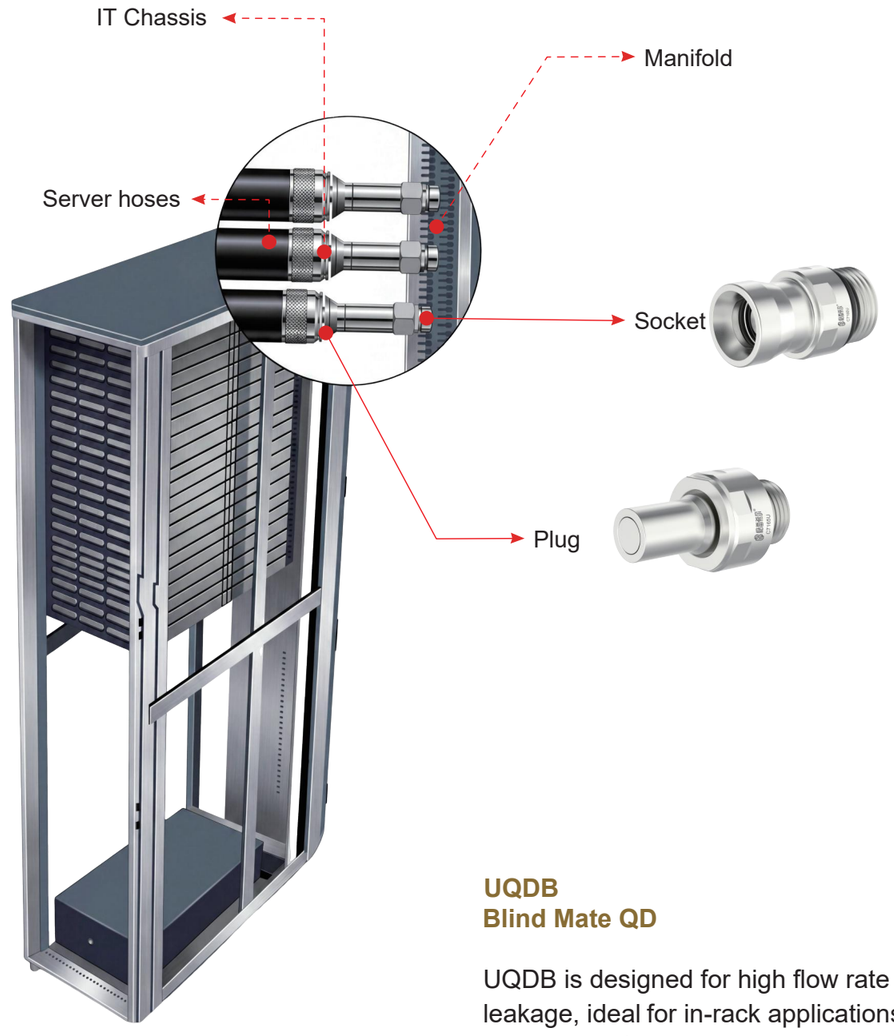


UQDB
Blind Mate QD

UQDB is designed for high flow rate and zero leakage, ideal for in-rack applications with limited visibility and/or access.

Technical Specifications

Model	Coupling Force	Working Pressure	Min. Burst Pressure	Flow Bore	Cv Value	Spillage
UQDB02	40	7Bar	20Bar	3mm	0.4	0.02
UQDB04	40	7Bar	20Bar	6mm	1.5	0.025
UQDB06	55	7Bar	20Bar	8mm	2.5	0.035
UQDB08	75	7Bar	20Bar	10mm	4.1	0.07


Flow Curve

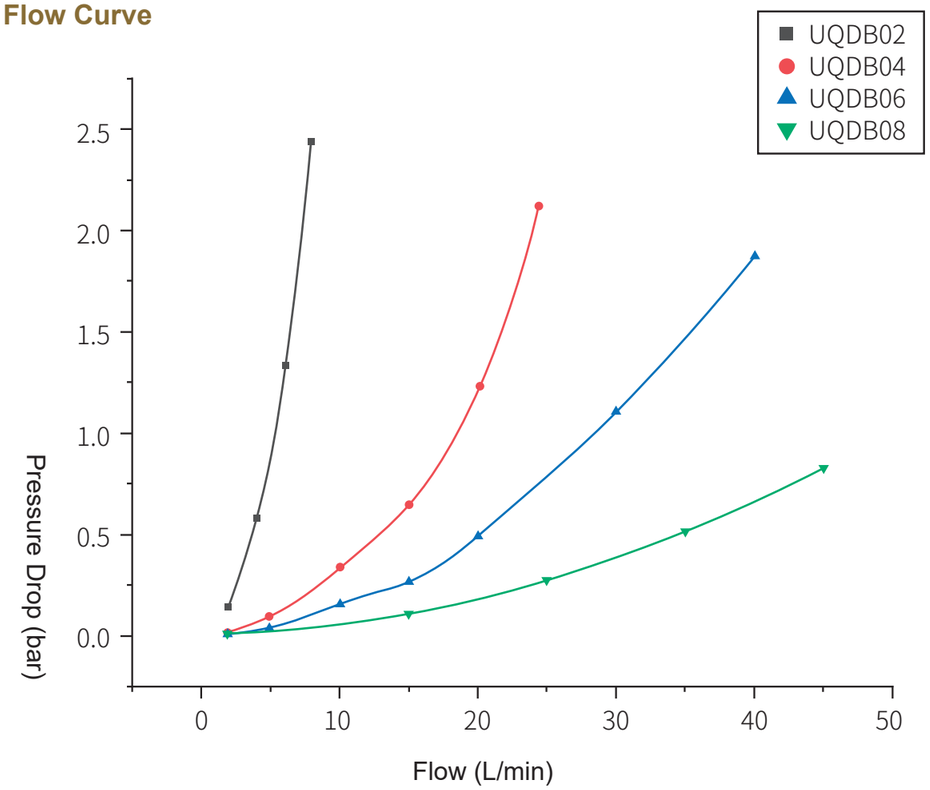

Test Conditions


- Fluid: Water
- Flow: Plug → Socket

Plug

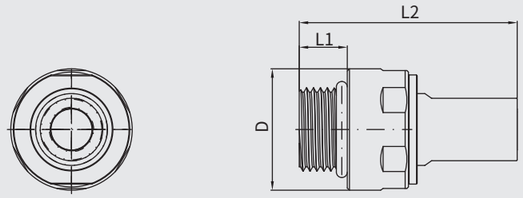

UQD	Part No.	End Size	Dimensions (mm)		
			D	L1	L2
UQDB02	C7125U	7/16-20UNF	20.5	9	36
UQDB04	C7145U	9/16-18UNF	23	10	45.4
UQDB06	C7165U	3/4-16UNF	27.8	11	49.9
UQDB08	C7185U	7/8-14UNF	31	12.7	55.6

Socket

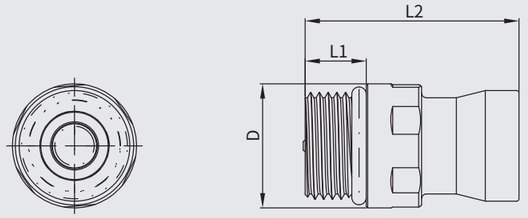


UQD	Part No.	End Size	Dimensions (mm)		
			D	L1	L2
UQDB02	C7120U	9/16-18UNF	19.6	10	33.6
UQDB04	C7140U	3/4-16UNF	22.6	11	39.5
UQDB06	C7160U	7/8-14UNF	25.8	12.7	44.5
UQDB08	C7180U	1 1/16-12UNF	30.7	15.1	50.6



GripSeal Universal Blind Mate (BMQC)


One-stop solutions for all your needs

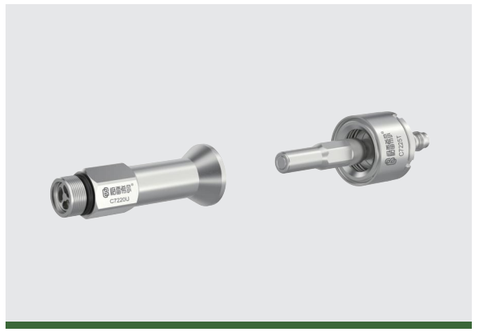






Product features

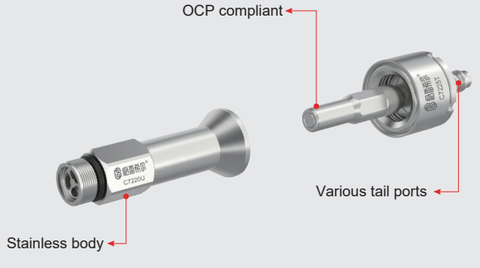


- Designed to OCP BMQC spec
- 5 mm radial compensation
- One-hand push-in design
- High flow, low pressure drop
- Flat-face drip-free design
- Std material: stainless steel
- Std seal material: EPDM
- Custom threaded end

Technical Specifications

Model	Coupling Force	Working Pressure	Min. Burst Pressure	Flow Bore	Cv Value	Offset	Angle Dev.
BMQC02	40N	3bar	20bar	7mm	1.1	±5mm	±2.7°

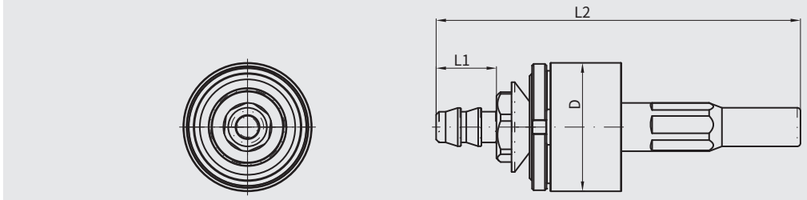

MQD	Part No.	End Size	Dimensions (mm)		
			D	L1	L2
BMQC02	C7225T	7/16-20UNF	40	18.7	113

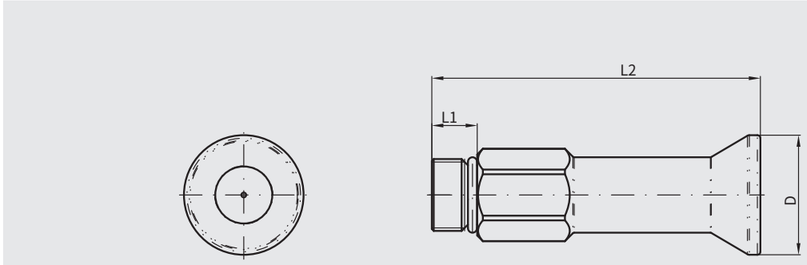

MQD	Part No.	End Size	Dimensions (mm)		
			D	L1	L2
BMQC02	C7220U	3/4-16UNF	31.7	12	87



GripSeal MQD Liquid Cooling Couplings

One-stop solutions for all your needs







Product features




- Ultra-compact size
- One-hand push-in design
- High flow, low pressure drop
- Flat-face drip-free design
- Sizes: -02/-03
- Std material: stainless steel
- Std seal material: EPDM
- Custom threaded end

Technical Specifications

Model	Coupling Force	Working Pressure	Min. Burst Pressure	Flow Bore	Cv Value	Spillage
MQD02	45	7	20	3.5	0.8	0.02
MQD03	40	7	20	4.7	2.5	0.025
MQD04	50	7	20	6.4	3.5	0.028


Flow Curve

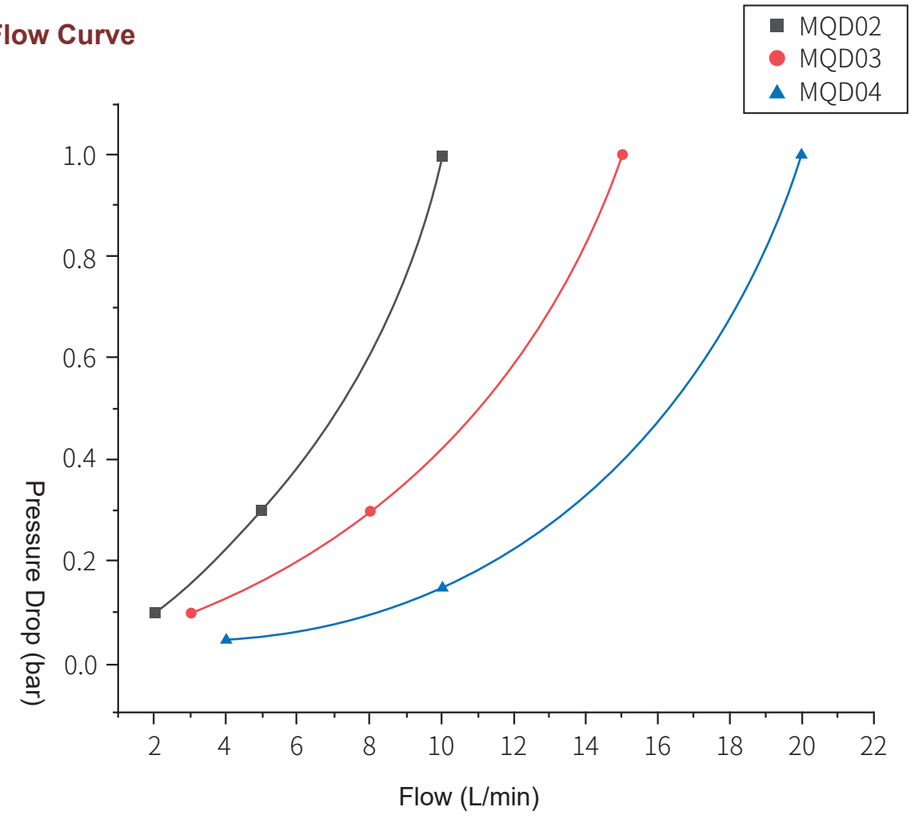

Test Conditions


- Fluid: Water
- Flow: Plug → Socket

Plug

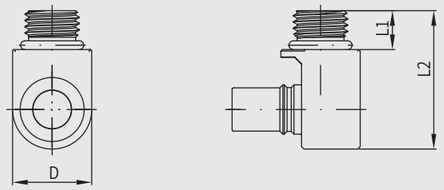

MQD	Part No.	End Size	Color Code	Dimensions (mm)		
				D	L1	L2
MQD02	C7525TRL	1/4 Hose	Red	13	15	25
MQD02	C7525TBL	1/4 Hose	Blue	13	15	25
MQD03	C7535URL	7/16-20UNF	Red	16	7.9	28.1
MQD03	C7535UBL	7/16-20UNF	Blue	16	7.9	28.1
MQD04	C7545URL	7/16-20UNF	Red	18	8	31.9
MQD04	C7545UBL	7/16-20UNF	Blue	18	8	31.9

Socket

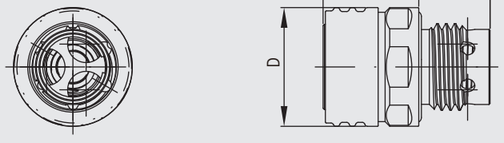

MQD	Part No.	End Size	Color Code	Dimensions (mm)		
				D	L1	L2
MQD02	C7520UR	7/16-20UNF	Red	18	10.3	25.6
MQD02	C7520UB	7/16-20UNF	Blue	18	10.3	25.6
MQD03	C7530GR	BSPP1/4	Red	18	10.8	25.3
MQD03	C7530GB	BSPP1/4	Blue	18	10.8	25.3
MQD04	C7540GR	BSPP3/8	Red	21.6	9.8	31.6
MQD04	C7540GB	BSPP3/8	Blue	21.6	9.8	31.6



GripSeal C783 Dual Interlock Ball Valve


One-stop solutions for all your needs







Product features

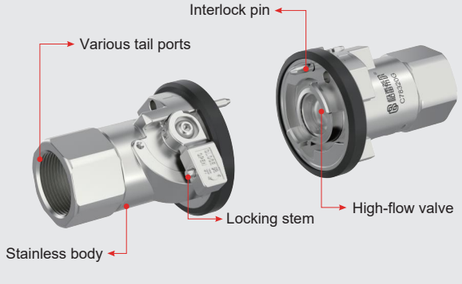


- Locking-pin design: dual interlock keeps safety when the lever handle is disconnected and prevents accidental opening
- Std seal material: EPDM; other materials available on request
- Std body material: stainless steel
- Full-flow quick disconnect
- Identical coupling halves
- Easy maintenance and service
- Stainless steel suits a wide range of fluids
- Multiple port connection options

Technical Specifications

Model	Max. Op. Pressure	Min. Burst Pressure	Rated Flow	Flow Bore	Fluid Loss	Cv Value
1"	10bar	20bar	200L/MIN	20mm	6ml	32
2"	10bar	20bar	800L/MIN	40mm	15ml	130

The C783 is designed for fluid transfer and electronics cooling applications that require full flow, where fluid compatibility and safety are critical. C783 features identical left and right halves with dual interlock to eliminate leakage and ensure maximum safety: the poppets cannot open before the halves are coupled, and the halves cannot be disconnected before the poppets are closed.


Flow Curve

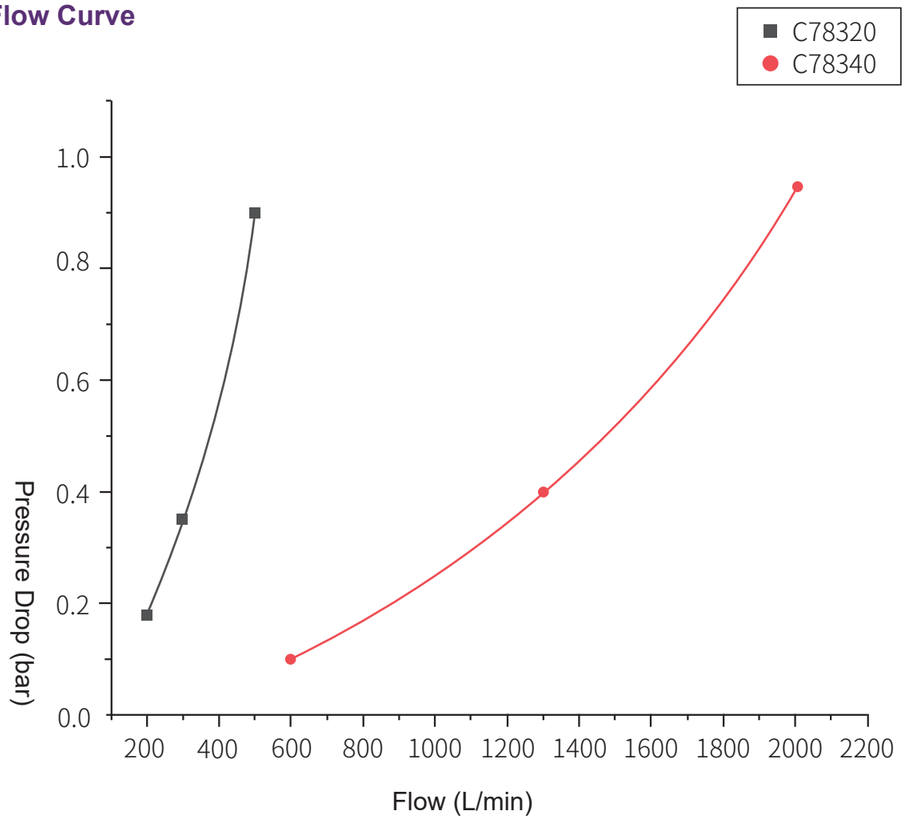

Test Conditions


- Fluid: Water
- Flow: Plug → Socket






Part No.	Body Spec	Tail Port	A	B	C	D
C78320G	2	Female	82	68	27	BSPP1
C78340G	4	Female	110	104	48	BSPP2





Part No.	Body Spec	Tail Port	A	B	C	D
C78320F	2	Sanitary	80	68	25	50.5
C78340F	4	Sanitary	100	104	29	64





Part No.	Body Spec	Tail Port	A	B	C	D
C78320T	2	Barb	90	68	35	25.5
C78340T	4	Barb	110	104	50	50.5



GripSeal C78 High-Flow Couplings

One-stop solutions for all your needs







Product features




- Designed to OCP LQC spec
- Threaded locking
- 5 bar connect under pressure
- Drip-free in both directions
- Std seal material: EPDM; other materials available on request
- Dual O-ring seals
- Std body material: stainless steel
- Color coded
- Custom tail connection

Technical Specifications


Model	Max. Op. Pressure	Min. Burst Pressure	Rated Flow	Fluid Loss	Cv Value	Torque
1"	10Bar	20bar	200L/min	0.02ml	32	3.5N.M

Socket

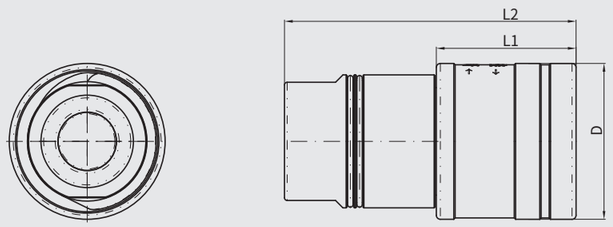

Part No.	End Size	Color Code	Dimensions (mm)		
			D	L1	L2
C78165GR	BSPP1	Red	58	52	108.5
C78165GB	BSPP1	Blue	58	52	108.5

Plug

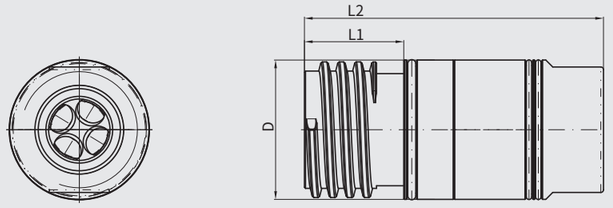

Part No.	End Size	Color Code	Dimensions (mm)		
			D	L1	L2
C78160GR	BSPP1	Red	52.2	37.2	112
C78160GB	BSPP1	Blue	52.2	37.2	112