nn
o 40
us

ded ports. With a large through-bore and high flow, it
t-off relief valve prevents the test medium from escaping,
various gaze and liquid media.



aight-Through Female Threaded Quick Connector

* Secure against loosening with a firm connection
* Large flow bore that does not affect testing
* Very high pressure rating - testing up to 400 kg
* Self-sealing design prevents the test medium from overflowing

G65 Series Quick Connector Features

1. Anti-loosening clip
Once the connector is locked, twisting the housing locks it further to prevent loosening.

2. Built-in overflow shut-off valve
An overflow shut-off valve is built into the connector. When not connected to a threaded port the valve stays closed, preventing the test medium from overflowing.

3. Pressure up to 400 kg
The connector assembly uses high-performance stainless steel: it withstands high pressure and resists rust and corro sion.


4. Straight-through design
A straight-through flow channel greatly reduces loss of test pressure and flow (versions without a shut-off valve only)

Selected Models





G65 Quick Connector Advantages and Features



Straight-through design: Straight-through flow channel with high flow



Anti-loosening clip: Prevents loosening during testing and improves test safety



Built-in shut-off valve: When not connected, the shut-off valve closes to prevent the test medium from overflowing




Standard seal: The face seal is a standard O-ring: easy to and remove and simple to maintain



Threaded jaws: High-performance fit stainless steel with special heat treatment; pressure up to 400 kg

G65 Quick Connector Specifications

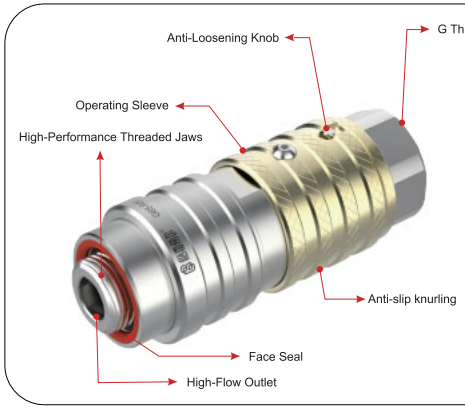

Max. Op. Pressure	Vacuum to 400 Bar
Sealing Range	See Selection Table
Top Bead Width	4-8mm
Flow Port	See Selection Table
Material	316 Stainless
Main Seal	Neoprene, NBR
Inner Seal	NBR
Operating Temp.	-20 °C to +120 °C

Thanks to high flow, high pressure and anti-overflow performance, the G65 series is the best connection solution forliquid pressure testing, running testing and flow testing.

G65 Operation Demo



1. Align the front threaded jaws of the connector with the threaded port to be connecteed



2. Push the rear of the connector to form the seal

G65 Straight-Through Female Threaded Connector
ONE-STOP CONNECTION
Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |


Application Cases



Pressure Transmitter



High-Pressure Testing

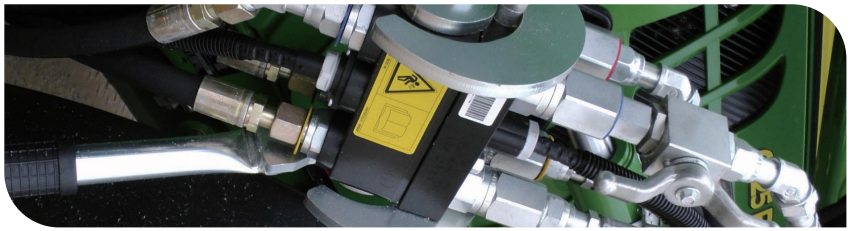


Hydraulic Connection

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

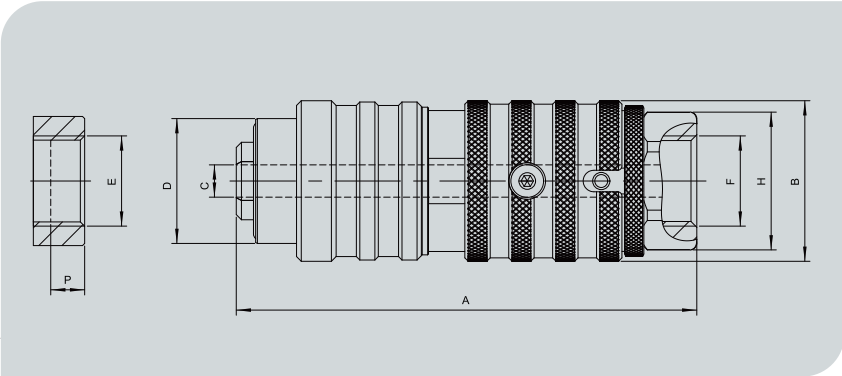

Body No.	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	P (mm)	SH (mm)
2	71	25	5	20	BSPP1/4"	6.5	20
3	85	32	6	25	BSPP3/8"	6.5	21
4	107	37	7.5	29	BSPP1/2"	10	29
6	113	43	12	36	BSPP3/4"	12	35
8	126	54	15	44	BSPP1"	15	45

G65 Pipe Thread Specification Table

Model	Female Thread Dim.E	Body No.	Insertion Depth(mm)	Rear Thread Port	Flow Dia. (mm)	Max. Pressure	Material	Seal Material	Seal No.
G65V-G02 (with valve)	BSPP1/4"	2	6.5	BSPP1/4"	5	400Bar	Stainless	NBR	SG65-02
G65-G02									
G65V-G03 (with valve)	BSPP3/8"	3	6.5	BSPP3/8"	6				SG65-03
G65-G03									
G65V-G04 (with valve)	BSPP1/2"	4	10	BSPP1/2"	7.5				SG65-04
G65-G04									
G65V-G06 (with valve)	BSPP3/4"	6	12	BSPP3/4"	12				SG65-06
G65-G06									
G65V-G08 (with valve)	BSPP1"	8	15	BSPP1"	15				SG65-08
G65-G08									

G65 Taper Pipe Thread Specification Table

Model	Female Thread Dim.E	Body No.	Insertion Depth(mm)	Rear Thread Port	Flow Dia. (mm)	Max. Pressure	Material	Seal Material	Seal No.
G65V-R02 (with valve)	BSPT1/4"	2	6.5	BSPP1/4"	5	400Bar	Stainless	NBR	SG65-02
G65-R02									
G65V-R03 (with valve)	BSPT3/8"	3	6.5	BSPP3/8"	6				SG65-03
G65-R03									
G65V-R04 (with valve)	BSPT1/2"	4	10	BSPP1/2"	7.5				SG65-04
G65-R04									
G65V-R06 (with valve)	BSPT3/4"	6	12	BSPP3/4"	12				SG65-06
G65-R06									
G65V-R08 (with valve)	BSPT1"	8	15	BSPP1"	15				SG65-08
G65-R08									

G65 Straight-Through Female Threaded Connector

ONE-STOP CONNECTION

Straight-Through | Sliding Sleeve | Female Thread | Built-in Valve | High Flow | Locking |

G65 Metric Thread Specification Table

Model	Female Thread Dim.E	Body No.	Insertion Depth(mm)	Rear Thread Port	Flow Dia. (mm)	Max. Pressure	Material	Seal Material	Seal No.
G65V-M14E (with valve)	M14x1.5	2	6.5	BSPP1/4"	5	400Bar	Stainless	NBR	SG65-M14
G65-M14E									
G65V-M16E (with valve)	M16x1.5	3	6.5	BSPP3/8"	6				SG65-M16
G65-M16E									
G65V-M18E (with valve)	M18x1.5								SG65-M18
G65-M18E									
G65V-M20E (with valve)	M20x1.5	4	10	BSPP1/2"	7.5				SG65-M20
G65-M20E									
G65V-M22E (with valve)	M22x1.5								SG65-M22
G65-M22E									
G65V-M24E (with valve)	M24x1.5	6	12	BSPP3/4"	12				SG65-M24
G65-M24E									
G65V-M27E (with valve)	M27x1.5								SG65-M27
G65-M27E									
G65V-M30E (with valve)	M30x1.5	8	15	BSPP1"	15				SG65-M30
G65-M30E									
G65V-M33E (with valve)	M33x1.5								SG65-M33
G65-M33E									

Selected Customised Models



G65LRV-M18E



G65-M22E-6149

All GripSeal connectors are designed with safety built in from the start. However, users of the connectors are responsible for designing their own safety precautions, to avoid property damage caused by incorrect sizing or other reasons. Safety chains, protective nets, protective cages or dedicated fixtures are all good protective measures. GripSeal can also provide, or help customers identify, potential safety hazards.

GripSeal offers additional non-standard sealing solutions - please contact us anytime if required!