

# G80

ll
ing of



## Female Thread Connection Solution

* Face seal, easy to replace
* Handle lever operation, simple
* Various drive options for different scenarios
* Customisable neck length to avoid interference

## G80 Series Quick Connector Features

**1. Modular drive**
Three operation modes - pneumatic, push-button valve and lever - meet the requirements of every application.

**2. O-ring sealing**
Simple and reliable, easy to replace, low maintenance cost and a choice of O-ring material for different fluids.

**3. 316 stainless steel construction**
Excellent mechanical properties: strong and wear-resistant, greatly extending connector service life.

**4. Optional neck length**
Common models offer three neck lengths to clear obstructions and avoid interference.

**5. Standardised maintenance**
Modular internal structure, replaced as one unit, for simple repair

Selected Models



Handle Drive



Push-Button Drive



Pneumatic Drive

## G80 Quick Connector Advantages and Features



Female threaded port:
Expanding threaded jaws grip with minimal damage to the thread



Modular drive:
Meets customer requirements for manual and pneumatic operation



Customisable neck length:
avoids interference




Flow Port:
Some jaws have additional flow holes to shorten test time



Face O-Ring:
simple replacement, easy maintenance

## G80 Quick Connector Specifications

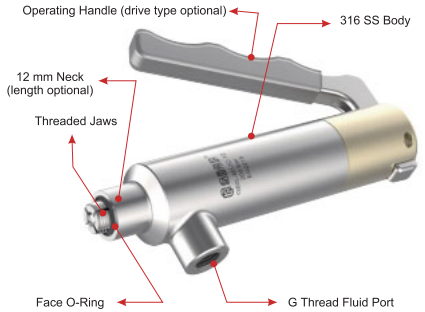


| | |
|---|---|
| Max. Op. Pressure | Vacuum to 350 Bar |
| Sealing Range | See the relevant selection table |
| Min. Thread Depth | See the relevant selection table |
| Flow Port | BSPP1/8,BSPP1/4,BSPP3/8,BSPP1/2 |
| Material | 316 Stainless |
| Main Seal | NBR |
| Inner Seal | NBR / FKM |
| Operating Temp. | -20 °C to +120 °C |

### G80 Operation Demo



Step 1: Press the handle down



Step 2: Insert into the threaded ter




3: Release the handle to complete the connection




G80 Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |


## Application Cases

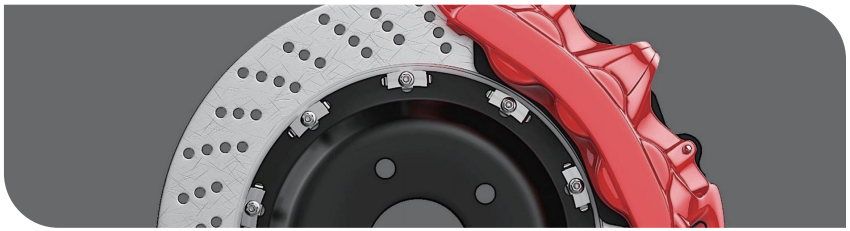

Brake Caliper

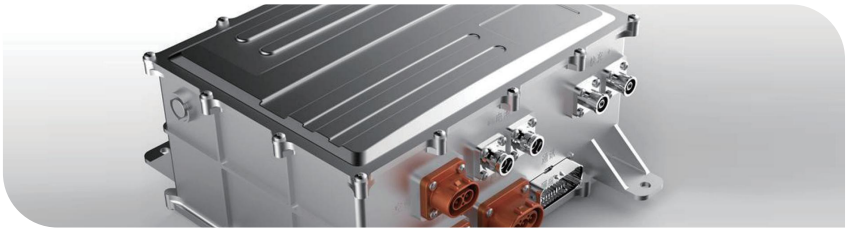


Motor Controller Housing

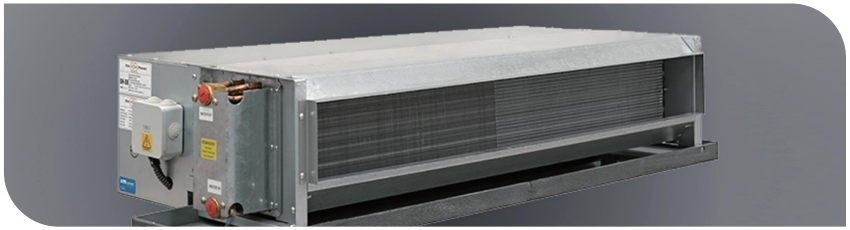

Air-Conditioning Industry

Modular drive options: handle drive G80L, pneumatic drive G80P and push-button drive G80V. They are interchangeable to reduce retrofit cost, and customised service is available.

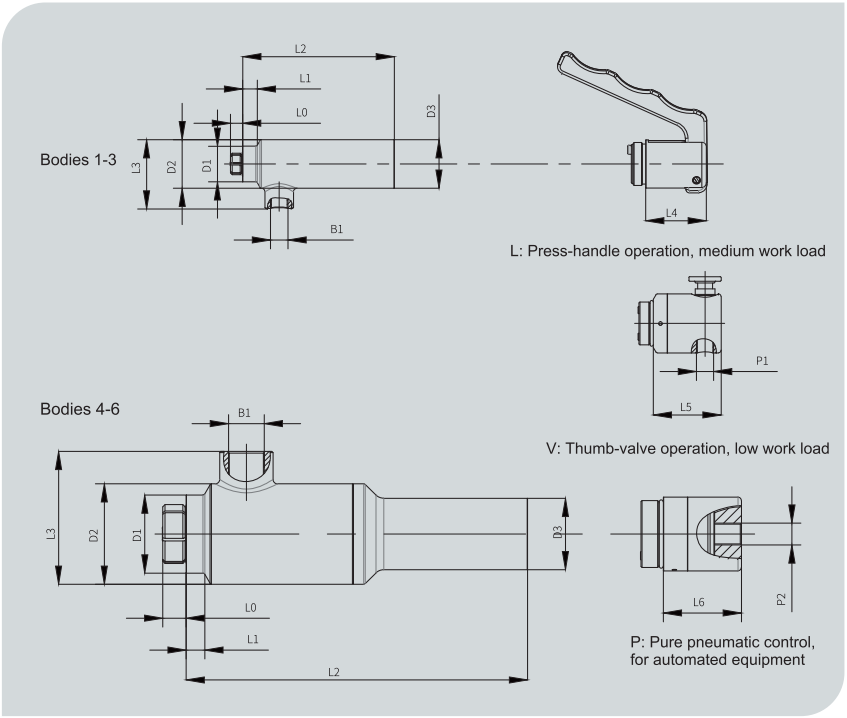



| Body No. | B1 (Media Port) | D1 | D2 | D3 | L0 | L1 | L2 | L3 | L4 | L5 | L6 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | BSPP1/8" | 16 | 27 | 27 | 7 | 6.5 | 85 | 38.5 | 34 | 38 | 32 |
| 1A | BSPP1/8" | 16 | 27 | 27 | 7 | 12.5 | 90 | 38.5 | 34 | 38 | 32 |
| 1B | BSPP1/8" | 16 | 27 | 27 | 7 | 25.5 | 105 | 38.5 | 34 | 38 | 32 |
| 2 | BSPP1/8" | 20 | 27 | 27 | 7.5 | 6.5 | 85 | 38.5 | 34 | 38 | 32 |
| 2A | BSPP1/8" | 20 | 27 | 27 | 7.5 | 12.5 | 90 | 38.5 | 34 | 38 | 32 |
| 2B | BSPP1/8" | 20 | 27 | 27 | 7.5 | 25.5 | 110 | 38.5 | 34 | 38 | 32 |
| 3 | BSPP1/4" | 25 | 32 | 32 | 10 | 9.5 | 100 | 46 | 35 | 41 | 35 |
| 4 | BSPP1/4" | 30 | 38 | 32 | 11.5 | 8.5 | 123 | 54 | 35 | 41 | 35 |
| 5 | BSPP3/8" | 35 | 45 | 32 | 12 | 7.5 | 153 | 60 | 35 | 41 | 35 |
| 6 | BSPP3/8" | 40 | 50 | 32 | 12 | 7.5 | 153 | 67 | 35 | 41 | 35 |

Unit: mm



G80 Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |








## G80 Metric M Thread Specification Table

| Model | Female Thread Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-M8C | M8x1.0 | 1 | 7 | BSPP1/8 | 200 Bar | 316 SS | NBR | SG80L-M8C |
| G80L-M8D | M8x1.25 | 1 | | | | | | SG80L-M8D |
| G80L-M10C | M10 x 1.0 | 1 | | | | | | SG80L-M10C |
| G80L-M10D | M10 x 1.25 | 1 | | | | | | SG80L-M10D |
| G80L-M10E | M10 x 1.5 | 1 | | | | | | SG80L-M10E |
| G80L-M10C-12 | M10 x 1.0 | 1A* | | | | | | SG80L-M10C-12 |
| G80L-M10D-12 | M10 x 1.25 | 1A | | | | | | SG80L-M10D-12 |
| G80L-M10E-12 | M10 x 1.5 | 1A | | | | | | SG80L-M10E-12 |
| G80L-M10C-25 | M10 x 1.0 | 1B* | | | | | | SG80L-M10C-25 |
| G80L-M10D-25 | M10 x 1.25 | 1B | | | | | | SG80L-M10D-25 |
| G80L-M10E-25 | M10 x 1.5 | 1B | | | | | | SG80L-M10E-25 |
| G80L-M12C | M12 x 1.0 | 2 | 7.5 | | | | | SG80L-M12C |
| G80L-M12D | M12 x 1.25 | 2 | | | | | | SG80L-M12D |
| G80L-M12E | M12 x 1.5 | 2 | | | | | | SG80L-M12E |
| G80L-M12C-12 | M12 x 1.0 | 2A* | | | | | | SG80L-M12C-12 |
| G80L-M12D-12 | M12 x 1.25 | 2A | | | | | | SG80L-M12D-12 |
| G80L-M12E-12 | M12 x 1.5 | 2A | | | | | | SG80L-M12E-12 |
| G80L-M12C-25 | M12 x 1.0 | 2B* | | | | | | SG80L-M12C-25 |
| G80L-M12D-25 | M12 x 1.25 | 2B | | | | | | SG80L-M12D-25 |
| G80L-M12E-25 | M12 x 1.5 | 2B | | | | | | SG80L-M12E-25 |
| G80L-M14C | M14x1.0 | 2 | | | | | | SG80L-M14C |
| G80L-M14D | M14x1.25 | 2 | | | | | | SG80L-M14D |
| G80L-M14E | M14x1.5 | 2 | | | | | | SG80L-M14E |
| G80L-M16B | M16x0.8 | 3 | 10 | BSPP1/4 | | | | SG80L-M16B |
| G80L-M16C | M16x1.0 | 3 | | | | | | SG80L-M16C |
| G80L-M16E | M16x1.5 | 3 | | | | | | SG80L-M16E |
| G80L-M18E | M18x1.5 | 3 | | | | | | SG80L-M18E |
| G80L-M20E | M20x1.5 | 4 | 11.5 | | | | | SG80L-M20E |
| G80L-M22E | M22x1.5 | 4 | | | | | | SG80L-M22E |
| G80L-M24E | M24x1.5 | 5 | 12 | BSPP3/8 | | | | SG80L-M24E |
| G80L-M26E | M26x1.5 | 5 | | | | | | SG80L-M26E |
| G80L-M27F | M27x2.0 | 5 | | | | | | SG80L-M27F |
| G80L-M28E | M28x1.5 | 6 | 12 | | | | | SG80L-M28E |
| G80L-M30E | M30x1.5 | 6 | | | | | | SG80L-M30E |
| G80L-M33F | M33x2.0 | 6 | | | | | | SG80L-M33F |

1. Other thread specifications can be customised on request, up to 2 inch. 2.
Bodies 1A and 2A have a neck length of 12.5 mm.

3. Bodies 1B and 2B have a neck length of 25.5 mm, suitable for position-restricted applications.

## G80 Pipe Thread Specification Table

| Model | Female Thread Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-G01 | BSPP1/8" | 1 | 7 | BSPP1/8 | 200 Bar | 316 SS | NBR | SG80-01 |
| G80L-G02 | BSPP1/4" | 2 | 7.5 | | | | | SG80-02 |
| G80L-G03 | BSPP3/8" | 3 | 10 | BSPP1/4 | | | | SG80-03 |
| G80L-G04 | BSPP1/2" | 4 | 11.5 | | | | | SG80-04 |
| G80L-G06 | BSPP3/4" | 5 | 12 | BSPP3/8 | | | | SG80-06 |
| G80L-G08 | BSPP1" | 6 | 12 | | | | | SG80-08 |

## G80 Taper Pipe Thread Specification Table

| Model | Female Thread Dim. A | Body No | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-R01 | R1/8" (BSPT) | 1 | 7 | BSPP1/8 | 200 Bar | 316 SS | NBR | SG80-01 |
| G80L-R02 | R1/4" (BSPT) | 2 | 7.5 | | | | | SG80-02 |
| G80L-R03 | R3/8" (BSPT) | 3 | 10 | BSPP1/4 | | | | SG80-03 |
| G80L-R04 | R1/2" (BSPT) | 4 | 11.5 | | | | | SG80-04 |
| G80L-R06 | R3/4" (BSPT) | 5 | 12 | BSPP3/8 | | | | SG80-06 |
| G80L-R08 | R1" (BSPT) | 6 | 12 | | | | | SG80-08 |


## G80 US Taper Pipe Thread - NPT Specification Table

| Model | Female Thread Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-N01 | NPT1/8" | 1 | 7 | BSPP1/8 | 200 Bar | 316 SS | NBR | SG80-01 |
| G80L-N02 | NPT1/4" | 2 | 7.5 | | | | | SG80-02 |
| G80L-N03 | NPT3/8" | 3 | 10 | BSPP1/4 | | | | SG80-03 |
| G80L-N04 | NPT1/2" | 4 | 11.5 | | | | | SG80-04 |
| G80L-N06 | NPT3/4" | 5 | 12 | BSPP3/8 | | | | SG80-06 |
| G80L-N08 | NPT1" | 6 | 12 | | | | | SG80-08 |

## G80 US Fine Thread - UNF Specification Table

| Model | Female Thread Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-U02 | UNF5/16-24 | 1 | 7 | BSPP1/8 | 200 Bar | 316 SS | NBR | SG80-UN02 |
| G80L-U03 | UNF3/8-24 | 1 | 7 | | | | | SG80-UN03 |
| G80L-U04 | UNF7/16-20 | 2 | 7.5 | | | | | SG80-UN04 |
| G80L-U05 | UNF1/2-20 | 2 | 7.5 | | | | | SG80-UN05 |
| G80L-U06 | UNF9/16-18 | 2 | 7.51 | | | | | SG80-UN06 |
| G80L-U08 | UNF3/4-16 | 4 | 1.51 | BSPP1/4 | | | | SG80-UN08 |
| G80L-U10 | UNF 7/8-14 | 4 | 1.5 | | | | | SG80-UN10 |
| G80L-U12 | UNF 1-1/16-12 | 5 | 12 | BSPP3/8 | | | | SG80-UN12 |
| G80L-U14 | UNF1-3/16-12 | 6 | 12 | | | | | SG80-UN14 |
| G80L-U16 | UNF 1-5/16-12 | 6 | 12 | | | | | SG80-UN16 |









## G80S Short Low-Pressure Version

| Model | Dim. A | Body No. | Min. Insert Depth | Fluid Por | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-M16ES | M16*1.5 | 3S | 10 | BSPP3/8" | 50 Bar | 316 SS | NBR | SG80-M16 |
| G80L-M18ES | M18*1.5 | 3S | 10 | BSPP3/8" | | | | SG80-M18 |
| G80L-G03S | BSPP3/8" | 3S | 10 | BSPP3/8" | | | | SG80-G03 |
| G80L-R03S | BSPT3/8" | 3S | 10 | BSPP3/8" | | | | SG80-R03 |



G80 Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |








## G80HL Long-Jaw Metric M Thread Specification Table

| Model | Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80HL-M10C | M10X1.0 | 1 | 10.5 | BSPP1/8 | 350 Bar | 316 SS | NBR | SG80HL-M10C |
| G80HL-M10C-12 | M10X1.0 | 1A | 9 | BSPP1/8 | | | | SG80HL-M10C-12 |
| G80HL-M10C-25 | M10X1.0 | 1B | 10 | BSPP1/8 | | | | SG80HL-M10C-25 |
| G80HL-M10E-12 | M10X1.5 | 1A | 9.2 | BSPP1/8 | | | | SG80HL-M10E-12 |
| G80HL-M12C | M12X1.0 | 2 | 11.75 | BSPP1/8 | | | | SG80HL-M12C |
| G80HL-M12C-12 | M12X1.0 | 2A | 11.75 | BSPP1/8 | | | | SG80HL-M12C-12 |
| G80HL-M12D | M12X1.25 | 2 | 11.75 | BSPP1/8 | | | | SG80HL-M12D |
| G80HL-M12D-12 | M12X1.25 | 2A | 11.75 | BSPP1/8 | | | | SG80HL-M12D-12 |
| G80HL-M12E-12 | M12X1.5 | 2A | 11.75 | BSPP1/8 | | | | SG80HL-M12E-12 |
| G80HL-M14E-12 | M14X1.5 | 2A | 11.25 | BSPP1/8 | | | | SG80HL-M14E-12 |
| G80HL-M16E | M16X1.5 | 3 | 12.5 | BSPP1/4 | | | | SG80HL-M16E |
| G80HL-M18E | M18X1.5 | 3 | 12.5 | BSPP1/4 | | | | SG80HL-M18E |
| G80HL-M20E | M20X1.5 | 4 | 12.8 | BSPP1/4 | | | | SG80HL-M20E |

## G80HL Long-Jaw Pipe Thread Specification Table

| Model | Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80HL-G02 | BSPP1/4 | 2 | 14.7 | BSPP1/8 | 350 Bar | 316 SS | NBR | SG80HL-G02 |
| G80HL-G03 | BSPP3/8 | 3 | 12.5 | BSPP1/4 | | | | SG80HL-G03 |
| G80HL-G04 | BSPP1/2 | 4 | 12.8 | BSPP1/4 | | | | SG80HL-G04 |

## G80HL Long-Jaw UNF Fine Thread Specification Table


| Model | Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80HL-U06 | 1/2-20UN | 3 | 11.5 | BSPP1/4 | 350 Bar | 316 SS | NBR | SG80HL-U06 |
| G80HL-U12 | 1 1/16-12UN | 5 | 14.76 | BSPP3/8 | | | | SG80HL-U12 |


# G80 Female Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |











## G80L Long-Jaw Metric M Thread Specification Table (ISO 6149-1)


| Model | Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-M12E-6149 | M12X1.5 | 2 | 11.75 | BSPP1/8 | 350 Bar | 316 SS | NBR | SG80L-M12E-6149 |
| G80L-M14E-6149 | M14X1.5 | 2 | 11.25 | BSPP1/8 | | | | SG80L-M14E-6149 |
| G80L-M16E-6149 | M16X1.5 | 3 | 12.5 | BSPP1/4 | | | | SG80L-M16E-6149 |
| G80L-M18E-6149 | M18X1.5 | 3 | 12.5 | BSPP1/4 | | | | SG80L-M18E-6149 |
| G80L-M20E-6149 | M20X1.5 | 4 | 12.8 | BSPP1/4 | | | | SG80L-M20E-6149 |
| G80L-M22E-6149 | M22X1.5 | 4 | 12.8 | BSPP1/4 | | | | SG80L-M22E-6149 |
| G80L-M27F-6149 | M27X2.0 | 5 | 13 | BSPP3/8 | | | | SG80L-M27F-6149 |

## G80L Long-Jaw UNF Fine Thread Specification Table (ISO 11926-1)

| Model | Dim. A | Body No. | Min. Insert Depth | Fluid Port | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80L-U05-6149 | UNF1/2-20 | 2 | 11.75 | BSPP1/8 | 350 Bar | 316 SS | NBR | SG80L-U05-6149 |
| G80L-U06-6149 | UNF9/16-18 | 2 | 11.75 | BSPP1/8 | | | | SG80L-U06-6149 |
| G80L-U08-6149 | UNF3/4-16 | 4 | 12.8 | BSPP1/4 | | | | SG80L-U08-6149 |
| G80L-U10-6149 | UNF 7/8-14 | 4 | 12.8 | BSPP1/4 | | | | SG80L-U10-6149 |
| G80L-U12-6149 | UNF 1-1/16-12 | 5 | 13 | BSPP3/8 | | | | SG80L-U12-6149 |





## G80L-T Thin-Wall Bore Connector

| Model | Dim. A | Body No. | Thin-Wall Plate Thickness Range | Fluid Port | Max Pressure | Material | Seal No. |
|---|---|---|---|---|---|---|---|
| G80L-T065 | 6.5 | 1 | 0.5-4 | BSPP1/8 | 10Bar | Stainless | SG80-T065 |
| G80L-T090 | 9 | 1 | 0.5-4 | BSPP1/8 | | | SG80-T090 |
| G80L-T10-12 | 10 | 1A | 0.5-4 | BSPP1/8 | | | SG80-T10 |
| G80L-T105-12 | 10.5 | 1A | 0.5-4 | BSPP1/8 | | | SG80-T105 |




# G80R Female Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |








## G80R Adjustable Rear End Specification Table

| Model | Dim. A | Body No. | Min. Insert Depth | Dim. B | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|
| G80R-M10C | M10X1.0 | 1 | 7 | BSPP 1/8 | 200 Bar | Stainless | NBR | SG80R-M10C |
| G80R-M10D | M10X1.25 | 1 | | BSPP 1/8 | | | | SG80R-M10D |
| G80R-M10E | M10X1.5 | 1 | | BSPP 1/8 | | | | SG80R-M10E |
| G80R-M10C-12 | M10X1.0 | 1A | | BSPP 1/8 | | | | SG80R-M10C-12 |
| G80R-M10D-12 | M10X1.25 | 1A | | BSPP 1/8 | | | | SG80R-M10D-12 |
| G80R-M10E-12 | M10X1.5 | 1A | | BSPP 1/8 | | | | SG80R-M10E-12 |
| G80R-M10C-25 | M10X1.0 | 1B | | BSPP 1/8 | | | | SG80R-M10C-25 |
| G80R-M10D-25 | M10X1.25 | 1B | | BSPP 1/8 | | | | SG80R-M10D-25 |
| G80R-M10E-25 | M10X1.5 | 1B | | BSPP 1/8 | | | | SG80R-M10E-25 |
| G80R-M12C | M12X1.0 | 2 | 7.5 | BSPP 1/4 | | | | SG80R-M12C |
| G80R-M12D | M12X1.25 | 2 | | BSPP 1/4 | | | | SG80R-M12D |
| G80R-M12E | M12X1.5 | 2 | | BSPP 1/4 | | | | SG80R-M12E |
| G80R-M12C-12 | M12X1.0 | 2A | | BSPP 1/4 | | | | SG80R-M12C-12 |
| G80R-M12D-12 | M12X1.25 | 2A | | BSPP 1/4 | | | | SG80R-M12D-12 |
| G80R-M12E-12 | M12X1.5 | 2A | | BSPP 1/4 | | | | SG80R-M12E-12 |
| G80R-M12C-25 | M12X1.0 | 2B | | BSPP 1/4 | | | | SG80R-M12C-25 |
| G80R-M12D-25 | M12X1.25 | 2B | | BSPP 1/4 | | | | SG80R-M12D-25 |
| G80R-M12E-25 | M12X1.5 | 2B | | BSPP 1/4 | | | | SG80R-M12E-25 |
| G80HR-M10C | M10X1.0 | 1 | 10.5 | BSPP 1/8 | 350 Bar | Stainless | NBR | SG80HR-M10C |
| G80HR-M10D | M10X1.25 | 1 | | BSPP 1/8 | | | | SG80HR-M10D |
| G80HR-M10E | M10X1.5 | 1 | | BSPP 1/8 | | | | SG80HR-M10E |
| G80HR-M10C-12 | M10X1.0 | 1A | 9 | BSPP1/8 | | | | SG80HR-M10C-12 |
| G80HR-M10D-12 | M10X1.25 | 1A | | BSPP1/8 | | | | SG80HR-M10D-12 |
| G80HR-M10E-12 | M10X1.5 | 1A | | BSPP 1/8 | | | | SG80HR-M10E-12 |
| G80HR-M10C-25 | M10X1.0 | 1B | 10 | BSPP 1/8 | | | | SG80HR-M10C-25 |
| G80HR-M10D-25 | M10X1.25 | 1B | | BSPP 1/8 | | | | SG80HR-M10D-25 |
| G80HR-M10E-25 | M10X1.5 | 1B | | BSPP 1/8 | | | | SG80HR-M10E-25 |



1. Press the locking button; the handle can then be rotated





2. Rotate the handle to a suitable position



3.Release the handle button to f ix the position






## G80NL Mini Low-Pressure Version - Metric ISO Thread (M Thread)

| Model | Dim. A | No.Body | Min. Insert Depth | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G | Max. Pressure | Boby Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| G80NL-M10C | M10X1.0 | 1NL | 7 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | 50Bar | Stainless | SG80NL-M10 |
| G80NL-M10D | M10X1.25 | 1NL | 7 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10E | M10X1.5 | 1NL | 7 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10C-12 | M10X1.0 | 1NLA | 6 | 16 | 18.5 | 71 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10D-12 | M10X1.25 | 1NLA | 6 | 16 | 18.5 | 71 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10E-12 | M10X1.5 | 1NLA | 6 | 16 | 18.5 | 71 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10C-25 | M10X1.0 | 1NLB | 6 | 16 | 31.5 | 84 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10D-25 | M10X1.25 | 1NLB | 6 | 16 | 31.5 | 84 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M10E-25 | M10X1.5 | 1NLB | 6 | 16 | 31.5 | 84 | BSPP1/8 | 58 | 18.2 | | | |
| G80NL-M12C | M12X1.0 | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | SG80NL-M12 |
| G80NL-M12D | M12X1.25 | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12E | M12X1.5 | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12C-12 | M12X1.0 | 2NLA | 8 | 20 | 18.5 | 73 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12D-12 | M12X1.25 | 2NLA | 8 | 20 | 18.5 | 73 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12E-12 | M12X1.5 | 2NLA | 8 | 20 | 18.5 | 73 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12C-25 | M12X1.0 | 2NLB | 8 | 20 | 31.5 | 86 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12D-25 | M12X1.25 | 2NLB | 8 | 20 | 31.5 | 86 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M12E-25 | M12X1.5 | 2NLB | 8 | 20 | 31.5 | 86 | BSPP1/8 | 60 | 22.5 | | | |
| G80NL-M14E | M14X1.5 | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | SG80NL-M14 |
| G80NL-M16E | M16X1.5 | 3NL | 8 | 24 | 6 | 65 | BSPP1/8 | 65 | 27 | | | SG80NL-M16 |
| G80NL-M18E | M18X1.5 | 3NL | 8 | 24 | 6 | 65 | BSPP1/8 | 65 | 27 | | | SG80NL-M18 |
| G80NL-M20E | M20X1.5 | 4NL | 11.5 | 29 | 6.2 | 70.4 | BSPP1/8 | 71.9 | 32 | | | SG80NL-M20 |
| G80NL-M22E | M22X1.5 | 4NL | 11.5 | 29 | 6.2 | 70.4 | BSPP1/8 | 71.9 | 32 | | | SG80NL-M22 |
| G80NL-M24E | M24X1.5 | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-M24 |
| G80NL-M24F | M24X2.0 | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-M24 |
| G80NL-M26E | M26X1.5 | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-M26 |
| G80NL-M27F | M27X2.0 | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-M27 |



G80N Mini Female Threaded Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium | Compact |

## G80NL Mini Low-Pressure Version - Pipe Thread (G Thread)

| Model | Dim. A | Body No. | Min. Insert Depth | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G | Max. Pressure | Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| G80NL-G01 | BSPP1/8 | 1NL | 7 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | 50Bar | Stainless | SG80NL-001 |
| G80NL-G02 | BSPP1/1 | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | SG80NL-002 |
| G80NL-G03 | BSPP1/8 | 3NL | 8 | 24 | 6 | 65 | BSPP1/8 | 65 | 27 | | | SG80NL-003 |
| G80NL-G04 | BSPP1/2 | 4NL | 11.5 | 29 | 6.2 | 70.4 | BSPP1/8 | 71.9 | 32 | | | SG80NL-004 |
| G80NL-G06 | BSPP3/4 | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-006 |


## G80NL Mini Low Pressure Version - Taper Pipe Thread (BSPT)


| Model | Dim. A | Body No. | Min. Insert Depth | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G | Max. Pressure | Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| G80NL-R01 | R1/8"(BSPT) | 1NL | 7 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | 50Bar | Stainless | SG80NL-001 |
| G80NL-R02 | R1/4"(BSPT) | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | SG80NL-002 |
| G80NL-R03 | R3/8"(BSPT) | 3NL | 8 | 24 | 6 | 65 | BSPP1/8 | 65 | 27 | | | SG80NL-003 |
| G80NL-R04 | R1/2"(BSPT) | 4NL | 11.5 | 29 | 6.2 | 70.4 | BSPP1/8 | 71.9 | 32 | | | SG80NL-004 |
| G80NL-R06 | R3/4"(BSPT) | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-006 |

## G80NL Mini Low-Pressure Version - US Taper Pipe Thread (NPT)

| Model | Dim. A | Body No. | Min. Insert Depth | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G | Max. Pressure | Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| G80NL-N01 | NPT1/8" | 1NL | 7 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | 50Bar | Stainless | SG80NL-001 |
| G80NL-N02 | NPT1/4" | 2NL | 8 | 20 | 6 | 60.5 | BSPP1/8 | 60 | 22.5 | | | SG80NL-002 |
| G80NL-N03 | NPT3/8" | 3NL | 8 | 24 | 6 | 65 | BSPP1/8 | 65 | 27 | | | SG80NL-003 |
| G80NL-N04 | NPT1/2" | 4NL | 11.5 | 29 | 6.2 | 70.4 | BSPP1/8 | 71.9 | 32 | | | SG80NL-004 |
| G80NL-N06 | NPT3/4" | 5NL | 12 | 33.7 | 7.5 | 80.2 | BSPP3/8 | 114.9 | 40.7 | | | SG80NL-006 |






## G80NL-T Thin-Wall Bore Connector (Mini Version)

| Model | Dim. A | Body No. | Thin-Wall Plate Thickness Range | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G | Max. Pressure | Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| G80NL-T065 | 6.5 | 1NL | 0.5-4 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | 50Bar | Stainless | SG80-T065 |
| G80NL-T090 | 9 | 1NL | 0.5-4 | 16 | 6 | 58.5 | BSPP1/8 | 58 | 18.2 | | | SG80-T090 |
| G80NL-T10-12 | 10 | 1NLA | 0.5-4 | 16 | 18.5 | 71 | BSPP1/8 | 58 | 18.2 | | | SG80-T10 |
| G80NL-T105-12 | 10.5 | 1NLA | 0.5-4 | 16 | 18.5 | 71 | BSPP1/8 | 58 | 18.2 | | | SG80-T105 |

1. Bodies 1NLA / 2NLA have a neck extended by 12.5 mm
2. Bodies 1NLB / 2NLB have a neck extended by 25.5 mm