
The G10 series pneumatic quick seal connector utilizes air pressure to inflate the seal and create an internal airtight connection with virtually any type of tube, which is ideal for high volume automated production testing.



Fully automated external connection solutions

* Reducing overall manufacturing costs through more efficient testing
* Maximizing throughput capabilities through highly integrated automated testing
* Eliminating waste arising from failed tests
* Improving the stability throughout the testing process

Features of G10 series quick connectors

1. Pneumatic actuated

Air can be injected through the rear pilot hole to push the built-in piston and compress the seal to achieve tight sealing

2. Automatic operation

Through the two mounting holes, the connector can be fixed to any actuator, realizing automatic operation with accuracy and reliability.

3. Test port


The straight-through design does not affect the flow. The G thread test port complies with the national standards

4. Damage-free connection

The seal is clamped without causing any damage to the surface of the test piece.


G10 series quick connectors are available in multiple body sizes (BSs), ranging from A to 3, offering a sealing range of 0.8mm to 50mm.

Body sizes

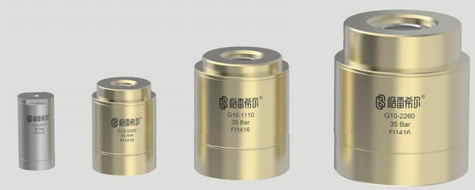

G10 Connectors for external tubes
One-stop connection solution
Easy to replace | Automatic operation | Full range of models| Quick operation | Diversified seal materials | External seal

Enable easier and reliable connections

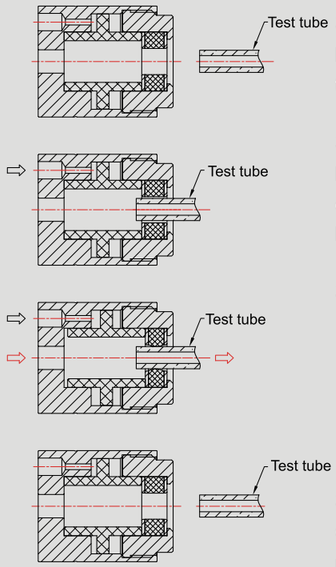

Step 1:

Insert the test tube into test port of the G10 series, and secure the test tube and connector.

Step 2:

Introduce pilot pressure to pilot port. The seal is squeezed, creating expansion, which in turn clings to outer wall of test tube. In result, a leak tight seal is formed.

Step 3:

a. Filling the test port with test medium upon the formation of the seal (such as compressed air, test fluid, etc.)

b. After the test is completed, release the inner test pressure to atmospheric pressure, then remove the pilot pressure, the seal is no longer be squeezed, the seal connection release the test tube.

Step 4:

Once the above operations are completed, the test tube can be removed from the connector.

G10 quick connectors



G10 Connectors for external tubes

One-stop connection solution

Easy to replace | Automatic operation | Full range of models| Quick operation | Diversified seal materials | External seal

Advantages of G10 quick connectors




Pneumatic actuated: Reliable sealing & stable operation



Flexible customization: Extended shaft to avoid space collisions



Quick seals replacement: Simple maintenance & extended service life




Seals materials: Different materials to meet specific customer needs



Automatic operation: Higher efficiency & more consistent test results

Specifications of G10 quick connectors

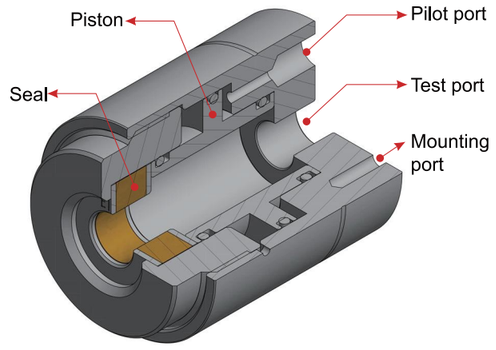

Max operation pressure	From Vacuum to 35 Bar
Sealing range	0.8mm - 80mm
Minimize insert depth	BS0, BS1: 15mm BS2, BS3: 30mm
Termination port	1/8"BSPP, 1/4"BSPP, 1/2"BSPP thread hole
Material of main body	Aluminum alloy or stainless steel
Main seal	Neoprene/silicone
Internal seal	Buna-N
Pilot pressure	4-6 Bar
Operation temperature	-20℃ - 120℃

The G10 series creates a leak-free external connection for a variety of fittings by applying the pneumatic actuated piston to compress the internal sealing ring. G10 connectors are ideal for Leak testing and functional testing

Test on cooling tube
Turbo
Radiator
Plastic port
Fuel pump



Charcoal canister



Medical catheters





Motor controller

G10 Connectors for external tubes

One-stop connection solution

Easy to replace | Automatic operation | Full range of models| Quick operation | Diversified seal materials | External seal





G10 specification sheet (Aluminum alloy version)

Part Number	Sealing Range	Dim	Dim B	Dim	Dim	Dim	Dim F	Dim G	Dim L	Main Seals Package**
G10-0007D	0.8 - 1.3	51.4	37.9	1/8"BSPP	M5	27.6	13.8	M5	15	SG100007D
G10-0013D	1.3 - 2.0									SG100013D
G10-0020D	2.0 - 3.3									SG100020D
G10-0025	2.5 - 4.5									SG100025
G10-0045	4.5 - 6.5									SG100045
G10-0065	6.5 - 8.5									SG100065
G10-0075	7.5 - 9.5									SG100075
G10-0085	8.5 - 10.5									SG100085
G10-0095	9.5 - 11.5									SG100095
G10-0105	10.5 - 13.0									SG100105
G10-1110	11.0 - 13.0	68.4	56.3	1/4"BSPP	1/8"BSPP	41.2	20	M5	15	SG101110
G10-1130	13.0 - 15.0									SG101130
G10-1150	15.0 - 17.0									SG101150
G10-1160	16.0 - 18.0									SG101160
G10-1170	17.0 - 19.0									SG101170
G10-1180	18.0 - 20.0									SG101180
G10-1190	19.0 - 21.0									SG101190
G10-2200	20.0 - 22.0	88.7	79	1/2"BSPP	1/8"BSPP	63.5	31.7	M6	30	SG102200
G10-2220	22.0 - 24.0									SG102220
G10-2240	24.0 - 26.0									SG102240
G10-2260	26.0 - 28.0									SG102260
G10-2280	28.0 - 30.0									SG102280
G10-2300	30.0 - 32.0									SG102300
G10-2320	32.0 - 34.0									SG102320
G10-2340	34.0 - 36.0									SG102340
G10-2360	36.0 - 38.0									SG102360
G10-3380	38.0 - 41.0	113.5	107.4	1"BSPP	1/8"BSPP	82.6	41.3	M6	30	SG103380
G10-3410	41.0 - 44.0									SG103410
G10-3440	44.0 - 47.0									SG103440
G10-3470	47.0 - 50.0									SG103470


1. Nonstandard models of G10 quick connectors include: larger outer diameter dimensions, shaft extension, shorter sealing length, etc.
2. Customized models of G10 quick connectors include: sealing various threads, non-circular shapes, with snap mechanism, multiple connector combinations, etc.
Please contact your local distributor or GripSeal sales representative for more information.

G10SS Connectors for external tubes (Stainless steel version)


One-stop connection solution


Easy to replace | Automatic operation | Full range of models| Quick operation | Diversified seal materials | External seal

G10SS-A

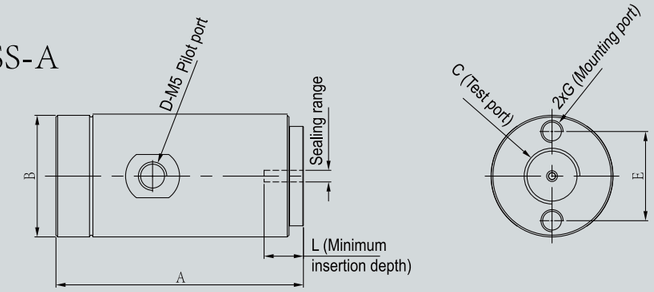

G10SS-0






G10SS specification sheet (Stainless steel version)


Part Number	Sealing Range	Dim A	Dim	Dim	Dim D	Dim E	Dim F	Dim G	Dim L	Main Seals Package**
G10SS-A007	0.8 - 1.3	43.5	21.4	1/8"BSPP	M5	15.7	N/A	M4	4.5	SG10A007
G10SS-A013	1.3 - 2.0									SG10A013
G10SS-A020	2.0 - 3.3									SG10A020
G10SS-A007C	0.8 - 1.3	43.5	21.4	1/8"BSPP	M5	15.7	N/A	M4	6.1	SG10A070C
G10SS-A013C	1.3 - 2.0									SG10A013C
G10SS-A020C	2.0 - 3.3									SG10A020C
G10SS-0007D	0.8 - 1.3	51.4	37.9	1/8"BSPP	M5	27.6	13.8	M5	15	SG100007D
G10SS-0013D	1.3 - 2.0									SG100013D
G10SS-0020D	2.0 - 3.3									SG100020D
G10SS-0025	2.5 - 4.5									SG100025
G10SS-0045	4.5 - 6.5									SG100045
G10SS-0065	6.5 - 8.5									SG100065
G10SS-0075	7.5 - 9.5									SG100075
G10SS-0085	8.5 - 10.5									SG100085
G10SS-0095	9.5 - 11.5									SG100095
G10SS-0105	10.5 - 13.0									SG100105

G10RC Connectors for external tubes (BSPT thread)

One-stop connection solution

Easy to replace | Automatic operation | Full range of models| Quick operation | Diversified seal materials | External seal





G10RC specification sheet (Aluminum alloy version)

Part Number	Sealing Rang	Dim	Dim B	Dim	Dim	Dim E	Dim F	Dim G	Dim L	Main Seals Package**
G10RC-0007D	0.8 - 1.3	51.4	37.9	1/8"BSPT	M5	27.6	13.8	M5	15	SG100007D
G10RC-0013D	1.3 - 2.0									SG100013D
G10RC-0020D	2.0 - 3.3									SG100020D
G10RC-0025	2.5 - 4.5									SG100025
G10RC-0045	4.5 - 6.5									SG100045
G10RC-0065	6.5 - 8.5									SG100065
G10RC-0075	7.5 - 9.5									SG100075
G10RC-0085	8.5 - 10.5									SG100085
G10RC-0095	9.5 - 11.5									SG100095
G10RC-0105	10.5 - 13.0									SG100105
G10RC-1110	11.0 - 13.0	68.4	56.3	1/4"BSPT	1/8"BSPT	41.2	20	M5	15	SG101110
G10RC-1130	13.0 - 15.0									SG101130
G10RC-1150	15.0 - 17.0									SG101150
G10RC-1160	16.0 - 18.0									SG101160
G10RC-1170	17.0 - 19.0									SG101170
G10RC-1180	18.0 - 20.0									SG101180
G10RC-1190	19.0 - 21.0									SG101190
G10RC-2200	20.0 - 22.0	88.7	79	1/2"BSPT	1/8"BSPT	63.5	31.7	M6	30	SG102200
G10RC-2220	22.0 - 24.0									SG102220
G10RC-2240	24.0 - 26.0									SG102240
G10RC-2260	26.0 - 28.0									SG102260
G10RC-2280	28.0 - 30.0									SG102280
G10RC-2300	30.0 - 32.0									SG102300
G10RC-2320	32.0 - 34.0									SG102320
G10RC-2340	34.0 - 36.0									SG102340
G10RC-2360	36.0 - 38.0									SG102360
G10RC-3380	38.0 - 41.0	113.5	107.4	1"BSPT	1/8"BSPT	82.6	41.3	M6	30	SG103380
G10RC-3410	41.0 - 44.0									SG103410
G10RC-3440	44.0 - 47.0									SG103440
G10RC-3470	47.0 - 50.0									SG103470

1. Nonstandard models of G10RC quick connectors include: larger outer diameter dimensions, shaft extension, shorter sealing length, etc.
2. Customized models of G10RC quick connectors include: sealing various threads, non-circular shapes, with snap mechanism, multiple connector combinations, etc.

Please contact your local distributor or GripSeal sales representative for more information.

G10 Pro

Connectors for external tubes

One-stop connection solution

Signal feedback | Automatic operation | OD sealing | Complete range of models | Non-destructive connection

In comparison to the traditional G10 series connectors, G10 Pro series can be mounted externally with a magnetic sensor, which enables more accurate tracking of the connector drive, seal expansion, eliminating incorrect connections resulted from improper sealing, and enhancing the efficiency of automated inspection.



Automated externally enclosed connection solutions

* Sensor feedback for advance judgment
* Eliminating waste caused by connection failures
* Automated testing to maximize throughput capabilities
* Improving the stability throughout the testing process

Features of G10 Pro series quick connectors

1. Sensor feedback
   Verify whether the connection good or not by setting the position of the sensor.
2. Pneumatic actuated
   Inject air through the rear pilot hole to push the built-in piston and compress the seal achieving tight sealing
3. Automatic operation
   Through the two mounting holes, the connector can be fixed to any actuator, realizing automatic operation with accuracy and reliability.
4. Damage-free connection
   The seal is clamped without causing any damage to the surface of the test piece.

G10 Pro series quick connectors are available in multiple body sizes, ranging from A to 3, offering a sealing range of 0.8mm to 50mm.

Body sizes




G10 Pro

Connectors for external tubes


One-stop connection solution

Signal feedback | Automatic operation | OD sealing | Complete range of models | Non-destructive connection


Advantages of G10 Pro quick connectors



Non-destructive connection, causing no damage to the product appearance



Position sensor: Reporting the movement of the internal piston in real time



Quick seals replacement: Simple maintenance & extended service life




Seals materials: Different materials to meet diversified customer needs



Automatic operation: Higher efficiency & more consistent test results

Specifications of G10 Pro quick connectors

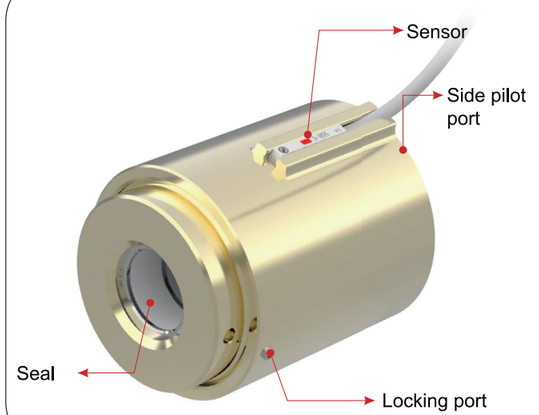

Max operation pressure	From Vacuum to 35 Bar
Sealing range	See the specification sheet.
Minimize insert depth	BS1, BS2: 15mm BS2, BS3: 30mm
Termination port	1/8"BSPP, 1/4"BSPP, 1/2"BSPP thread hole
Material of main body	Aluminum alloy or stainless steel
Main seal	Neoprene/silicone
Internal seal	Buna-N
Pilot pressure	4-6 Bar
Operation temperature	-20℃ - 120℃

The G10 Pro series creates a leak-free external connection for a variety of fittings by applying the pneumatic actuated piston to compress the internal sealing ring. G10 Pro connectors are ideal for air tightness testing and functional testing.

Test on cooling tube
Turbo
Radiator
Plastic port
Fuel pump



Charcoal canister



Medical catheters




Motor controller

G10 Pro

Connectors for external tubes

One-stop connection solution

Signal feedback | Automatic operation | OD sealing | Complete range of models | Non-destructive connection

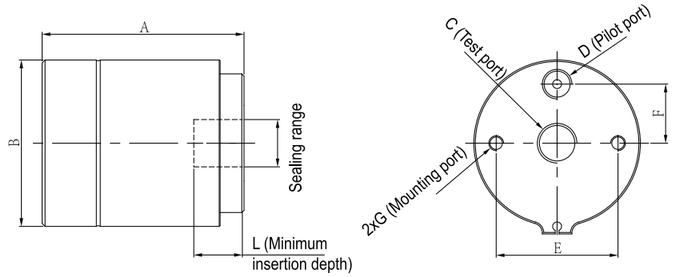

G10 Pro specification sheet (Aluminum alloy version)

Part Number	Sealing Range	Dim	Dim B	Dim	Dim	Dim E	Dim F	Dim G	Dim L	Main Seals Package**
G10Pro-0007D	0.8 - 1.3	53.6	41	1/8"BSPP	M5	27.6	13.8	M5	15	SG100007D
G10Pro-0013D	1.3 - 2.0									SG100013D
G10Pro-0020D	2.0 - 3.3									SG100020D
G10Pro-0025	2.5 - 4.5									SG100025
G10Pro-0045	4.5 - 6.5									SG100045
G10Pro-0065	6.5 - 8.5									SG100065
G10Pro-0075	7.5 - 9.5									SG100075
G10Pro-0085	8.5 - 10.5									SG100085
G10Pro-0095	9.5 - 11.5									SG100095
G10Pro-0105	10.5 - 13.0									SG100105
G10Pro-1110	11.0 - 13.0	68.4	60	1/4"BSPP	1/8"BSPP	41.2	20	M5	15	SG101110
G10Pro-1130	13.0 - 15.0									SG101130
G10Pro-1150	15.0 - 17.0									SG101150
G10Pro-1160	16.0 - 18.0									SG101160
G10Pro-1170	17.0 - 19.0									SG101170
G10Pro-1180	18.0 - 20.0									SG101180
G10Pro-1190	19.0 - 21.0									SG101190
G10Pro-2200	20.0 - 22.0	91.4	83	1/2"BSPP	1/8"BSPP	63.5	31.7	M6	30	SG102200
G10Pro-2220	22.0 - 24.0									SG102220
G10Pro-2240	24.0 - 26.0									SG102240
G10Pro-2260	26.0 - 28.0									SG102260
G10Pro-2280	28.0 - 30.0									SG102280
G10Pro-2300	30.0 - 32.0									SG102300
G10Pro-2320	32.0 - 34.0									SG102320
G10Pro-2340	34.0 - 36.0									SG102340
G10Pro-2360	36.0 - 38.0									SG102360

1. Nonstandard models of G10 Pro quick connectors include: larger outer diameter dimensions, shaft extension, shorter sealing length, etc.
2. Customized models of G10 Pro quick connectors include: sealing various threads, non-circular shapes, with snap mechanism, multiple connector combinations, etc.
Please contact your local distributor or GripSeal sales representative for more information.

G10D

External connectors (Double thrust)

One-stop connection solution

High flow | Side inlet | Externally enclosed design | Fixed inlet port | Small OD

The G10D series pneumatic quick connector uses the pilot pressure to push the internal piston and compress the seal to achieve tight sealing. Compared to the standard G10 series, the G10D series connectors have a smaller OD and are more suitable for scenarios with limited space. The innovative "double thrust" technology allows G10D to maintain stable thrust even with a small OD.



Pneumatic external connector

* Small size and high flow
* Reducing overall manufacturing costs through more efficient testing
* Automated testing to maximize throughput capabilities
* Improving the test stability
* Eliminating waste caused by connection failures

Features of G10D series quick connectors

1. Double thrust

   The "double thrust" technology allows G10D to provide strong thrust and maintain stable sealing even with a small OD.

2. Fixed termination port

   The side termination port is a fixed termination port that does not move with the internal movement of the connector, reducing disturbance. It helps maintain the stability of the test connector.

3. Small OD

   It is more suitable for automation application scenarios with limited space.

4. High flow

   Both the side inlet and the straight-through inlet adopt a large diameter design, fully ensuring the flow rate during liquid testing

G10D series quick connectors are available in multiple body sizes, ranging from 0 to 2, offering a sealing range of 0.8mm to 28mm.

Body sizes



G10D External connectors (Double thrust)

One-stop connection solution

High flow | Side inlet | Externally enclosed design | Fixed inlet port | Small OD

Advantages of G10D quick connectors




Side termination port:
This port facilitates on-site routing.




Smaller OD:
G10D is more slender and suitable for scenarios with limited space.



Double thrust:
It ensures stable compression force to maintain the stability of test results.




Double pilot ports:
The side and bottom pilot ports are available and can be selected flexibly according to the actual requirements.




Maintenance flat port.
This port facilitates assembly/disassembly, maintenance, and seal replacement of the connector.

Specifications of G10D quick connectors

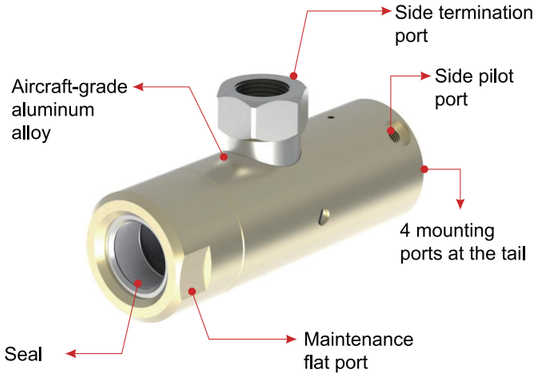

Max operation pressure	From Vacuum to 10 Bar
Sealing range	0.8mm - 28mm
Minimize insert depth	BS0, BS1, BS2:15mm
Termination port	1/8"BSPP, 3/8"BSPP, 1/2"BSPP thread hole
Material of main body	Aluminum alloy
Main seal	Medical-grade silicone/Neoprene
Internal seal	Buna-N
Pilot pressure	4-8Bar
Operation temperature	-20℃ - 120℃

G10D can be installed in multiple ways. It has four threaded holes at the bottom and the test port direction is adjustable. Either the side or bottom pilot port can be selected.

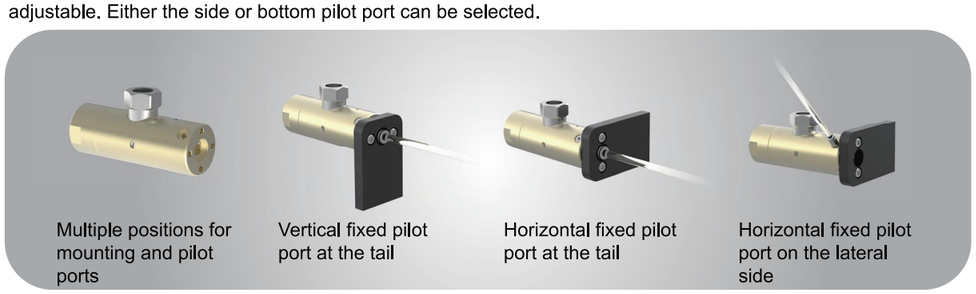

Multiple positions for mounting and pilot ports

Vertical fixed pilot port at the tail


Horizontal fixed pilot port at the tail

Horizontal fixed pilot port on the lateral side

G10D External connectors (Double thrust)

One-stop connection solution

High flow | Side inlet | Externally enclosed design | Fixed inlet port | Small OD

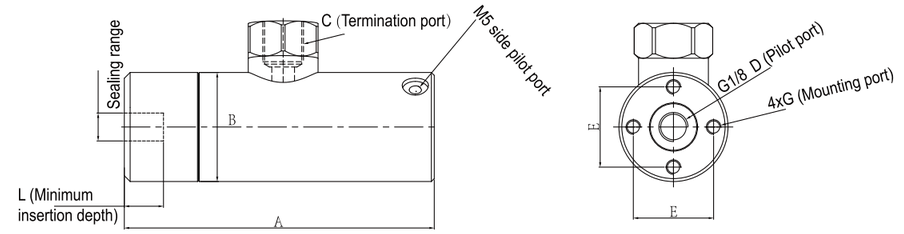

G10D specification sheet (Aluminum alloy version)

Part Number	Sealing Range	Dim A	Dim B	Dim C	Dim E	Dim G	Insertion Depth (L)	Main Seals Package**
G10D-0007D	0.8 - 1.3	99.9	29.7	1/8"BSPP	23	M4	15.4	SG10D0007D
G10D-0013D	1.3 - 2.0							SG10D0013D
G10D-0020D	2.0 - 3.3							SG10D0020D
G10D-0025	2.5 - 4.5							SG10D0025
G10D-0045	4.5 - 6.5							SG10D0045
G10D-0065	6.5 - 8.5							SG10D0065
G10D-0075	7.5 - 9.5							SG10D0075
G10D-0085	8.5 - 10.5							SG10D0085
G10D-0095	9.5 - 11.5							SG10D0095
G10D-0105	10.5 - 13.0							SG10D0105
G10D-1110	11.0 - 13.0	106.6	37.5	3/8"BSPP	27.6	M5	15.3	SG10D1110
G10D-1130	13.0 - 15.0							SG10D1130
G10D-1150	15.0 - 17.0							SG10D1150
G10D-1160	16.0 - 18.0							SG10D1160
G10D-1170	17.0 - 19.0							SG10D1170
G10D-1180	18.0 - 20.0							SG10D1180
G10D-1190	19.0 - 21.0							SG10D1190
G10D-1210	21.0 - 23.0							SG10D1210
G10D-2200	20.0 - 22.0	116.6	44.7	1/2"BSPP	32	M6	18.0	SG10D2200
G10D-2220	22.0 - 24.0							SG10D2220
G10D-2240	24.0 - 26.0							SG10D2240
G10D-2260	26.0 - 28.0							SG10D2260

The G10D series connectors have the advantages of small size, high flow, pneumatic actuated, and leak free, making them the best connection solution for the automated pressure test, running test, flow test, etc.
The G1/8 pilot port at the bottom of the connector and the M5 pilot port on the side can be selected by the user as required. The two air paths are connected, and the standard product is equipped with an M5 sealing cap.