G10D Wrap-Around Quick Connector (Double Thrust)

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD |

The G10D series pneumatic quick connector forms a seal by using drive air to push an internal piston that compresses the seal. Compared with the standard G10 series, G10D connectors have a smaller outer diameter and suit space-limited applications. The innovative Double Thrust technology keeps thrust stable despite the small outer diameter.



Pneumatic Wrap-Around Quick Connector

* Compact with high flow
* More effective testing lowers overall manufacturing cost
* Automated testing maximises output capacity
* Improved test stability
* Reduces cost waste caused by failed connections

G10D Series Quick Connector Features

1. Double thrust
Double Thrust technology lets the G10D provide strong thrust while keeping a small outer diameter, maintaining stable sealing.

2. Fixed fluid port
The side fluid port is fixed and does not move with the internal mechanism, reducing turbulence and helping to keep the test connector stable

3. Small OD
Better suited to automated applications with limited space.

4.High flow
Both side and straight-through inlets use a large-bore design, fully ensuring flow during liquid testing

G10D series quick connectors, from body 0 to body 2, seal plain tubes from 0.8 mm to 28 mm indiameter.
Selected Bodies



G10D Wrap-Around Quick Connector (Double Thrust)

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD |

G10D Quick Connector Advantages and Features



Side fluid port: simplifies on-site routing




Smaller OD: The G10D is slimmer and longer, suited to space-limited applications



Double thrust: Stable sealing force keeps test results consistent




Multiple drive ports: Both side and bottom drive ports are provided, for flexible selection to the situation




Maintenance flat: Simplifies connector removal, maintenance and seal suitreplacement

G10D Quick Connector Specifications

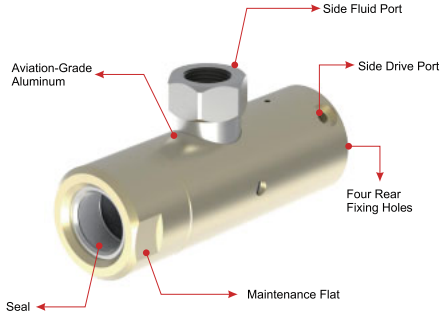

Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	0.8mm - 28mm
Min. Insert Depth	Bodies 0, 1, 2: 15 mm
Flow Port	BSPP1/8, BSPP3/8, BSPP1/2 Threaded Ports
Material	Aluminum
Main Seal	Medical Silicone / Neoprene
Inner Seal	NBR
Drive Pressure	4-88ar
Operating Temp.	-20 °C to +120 °C

Multiple mounting options for the G10D: four threaded holes on the base and an adjustable test port direction. The drive port can be at the base or at the side - choose either, for further flexibility.

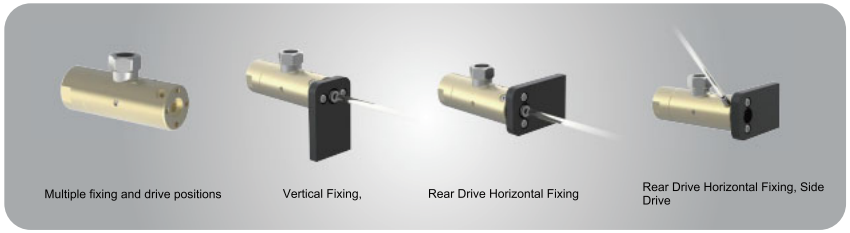


Multiple fixing and drive positions

Vertical Fixing,

Rear Drive Horizontal Fixing

Rear Drive Horizontal Fixing, Side Drive

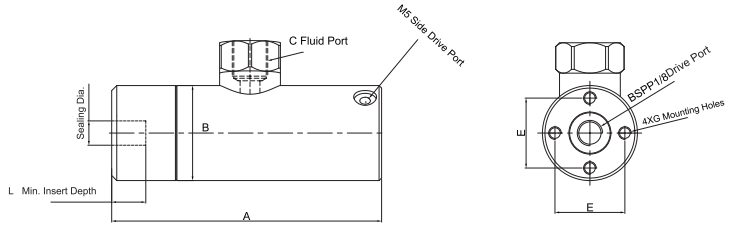


G10D Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Dim. A	Dim. B	Dim. C	Dim. E	Dim. G	Insert Depth L	Main Seal Kit**
G10D-0007D	0.8 - 1.3	99.9	29.7	BSPP1/8	23	M4	15.4	SG10D-0007D
G10D-0013D	1.3 - 2.0							SG10D-0013D
G10D-0020D	2.0 - 3.3							SG10D-0020D
G10D-0025	2.5 - 4.5							SG10D-0025
G10D-0045	4.5 - 6.5							SG10D-0045
G10D-0065	6.5 - 8.5							SG10D-0065
G10D-0075	7.5 - 9.5							SG10D-0075
G10D-0085	8.5 - 10.5							SG10D-0085
G10D-0095	9.5 - 11.5							SG10D-0095
G10D-0105	10.5 - 13.0							SG10D-0105
G10D-1110	11.0 - 13.0	106.6	37.5	BSPP3/8	27.6	M5	15.3	SG10D-1110
G10D-1130	13.0 - 15.0							SG10D-1130
G10D-1150	15.0 - 17.0							SG10D-1150
G10D-1160	16.0 - 18.0							SG10D-1160
G10D-1170	17.0 - 19.0							SG10D-1170
G10D-1180	18.0 - 20.0							SG10D-1180
G10D-1190	19.0 - 21.0							SG10D-1190
G10D-1210	21.0 - 23.0							SG10D-1210
G10D-2200	20.0 - 22.0	116.6	44.7	BSPP1/2	32	M6	18.0	SG10D-2200
G10D-2220	22.0 - 24.0							SG10D-2220
G10D-2240	24.0 - 26.0							SG10D-2240
G10D-2260	26.0 - 28.0							SG10D-2260

The small size, high flow, pneumatic drive and leak-free performance of the G10D series make it the best connection solution for automated pressure testing, running testing and flow testing.

The connector has a BSPP1/8 drive port at the base and an M5 drive port at the side; users may choose either, as both air paths are connected. Standard products are supplied with an M5 plug cap.

G10D Wrap-Around Quick Connector (Double Thrust)
ONE-STOP CONNECTION
High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD |

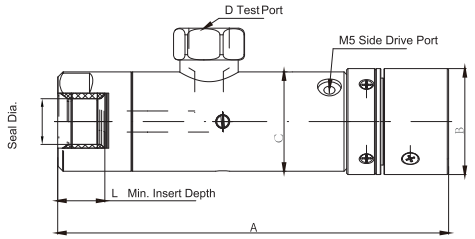

G10D Model Specification Table (Aluminum Version)

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Dim. C	Test Port D	Dim. E	Locating Pin F	Mount Hole G	Min. Insertion Depth L	Main Seal Kit**
G10D-0025PA-GFL	2.5 - 4.5	10 Bar	140	40	29.7	BSPP1/8	32.5	4	M4	16.9	SG10D-0025PA-GFL
G10D-0045PA-GFL	4.5 - 6.5										SG10D-0045PA-GFL
G10D-0065PA-GFL	6.5 - 8.5										SG10D-0065PA-GFL
G10D-0075PA-GFL	7.5 - 9.5										SG10D-0075PA-GFL
G10D-0085PA-GFL	8.5 - 10.5										SG10D-0085PA-GFL
G10D-0095PA-GFL	9.5 - 11.5										SG10D-0095PA-GFL
G10D-0105PA-GFL	10.5 - 13.0										SG10D-0105PA-GFL
G10D-1110PA-GFL	11.0 - 13.0		147.59	40	37.5	BSPP3/8	32.5	4	M4	17.9	SG10D-1110PA-GFL
G10D-1120PA-GFL	12.0 - 14.0										SG10D-1120PA-GFL
G10D-1130PA-GFL	13.0 - 15.0										SG10D-1130PA-GFL
G10D-1140PA-GFL	14.0 - 16.0										SG10D-1140PA-GFL
G10D-1150PA-GFL	15.0 - 17.0										SG10D-1150PA-GFL
G10D-1160PA-GFL	16.0 - 18.0										SG10D-1160PA-GFL
G10D-1170PA-GFL	17.0 - 19.0										SG10D-1170PA-GFL
G10D-1180PA-GFL	18.0 - 20.0										SG10D-1180PA-GFL
G10D-1190PA-GFL	19.0 - 21.0										SG10D-1190PA-GFL
G10D-1210PA-GFL	21.0 - 23.0										SG10D-1210PA-GFL



Body 0



Body 1

G10T Wrap-Around Quick Connector

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD | Damage-Free Connection | Float Compensation |

The G10T series pneumatic quick connector forms a seal by using drive air to push an internal piston that compresses the seal. Compared with the standard G10 series, G10T connectors use a PEEK spacer for damage-free connection, and the drive and test ports are moved to the side, making them suitable for GFL float compensation modules.



Pneumatic Wrap-Around Quick Connector

* Damage-free connection
* With a float compensation module it aligns automatically with the product
* Automated testing maximises output capacity
* Improved test stability
* Reduces cost waste caused by failed connections

G10T Series Quick Connector Features

1. Damage-free connection
PEEK is used at contact points to prevent damage to the product.

2.Automatic alignment
Supplied with a float compensation module with 2 mm unilateral offset, compatible with most alignment situations.

3. Small OD
Better suited to automated applications with limited space.

4.High flow
Both side and straight-through inlets use a large-bore design, fully ensuring flow during liquid testing

G10T series quick connectors, from body 0 to body 1, seal plain tubes from 0.8 mm to 19 mm in diameter.

Selected Bodies



G10T Wrap-Around Quick Connector

ONE-STOP CONNECTION

High Flow | Side Inlet | Wrap-Around | Fixed Inlet Port | Small OD | Damage-Free Connection | Float Compensation |


G10T Quick Connector Advantages and Features



Damage-free connection:
PEEK is used at all contact points to prevent damage to the product



With float compensation module:
Automatic alignment with the product



Side drive and test ports:
for easy mounting of bottom accessories



Quick seal replacement:
simple maintenance and a longer service life



Seal material:
Optional materials to meet different customer requirements

G10T Quick Connector Specifications



Max. Op. Pressure	Vacuum to 10 Bar
Sealing Range	0.8mm - 19mm
Min. Insert Depth	Bodies 0, 1, 2: 15 mm
Flow Port	BSPP1/8, BSPP3/8 , BSPP1/2, BSPP1/4 Threaded Port
Material	Aluminum
Main Seal	Medical Silicone / Neoprene
Inner Seal	NBR
Drive Pressure	4-8Bar
Operating Temp.	-20 °C to +120 °C

The G10T series uses pneumatic drive to compress the internal seal, creating a leak-free external connection for all kinds of fittings. The G10T connector is the ideal choice for leak testing and function testing.

Water Channel Testing

Turbocharger
Radiator
Plastic Port
Fuel Pump



Carbon Canister



Medical Tubing





Motor Controller

G10T

-Around | F ection









G10T Model Specification Table

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Drive Port C	Test Port D	Dim. E	Locating Pin F	Mount Hole	Min. Insert Depth L	Main Seal Kit**
G10T-0007D-GFL	0.8 - 1.3	10Bar	100	40	M5	BSPP1/8	32.5	4	M4	16.9	SG10T-0007D-GFL
G10T-0013D-GFL	1.3 - 2.0										SG10T-0013D-GFL
G10T-0020D-GFL	2.0 - 3.3										SG10T-0020D-GFL
G10T-0025-GFL	2.5 - 4.5										SG10T-0025-GFL
G10T-0045-GFL	4.5 - 6.5										SG10T-0045-GFL
G10T-0065-GFL	6.5 - 8.5										SG10T-0065-GFL
G10T-0075-GFL	7.5 - 9.5										SG10T-0075-GFL
G10T-0085-GFL	8.5 - 10.5										SG10T-0085-GFL
G10T-0095-GFL	9.5 - 11.5										SG10T-0095-GFL
G10T-0105-GFL	10.5 - 13.0										SG10T-0105-GFL
G10T-1110-GFL	11.0 - 13.0	10Bar	121.4	59.8	BSPP1/8	BSPP1/4	32.5	4	M4	17.8	SG10T-1110-GFL
G10T-1120-GFL	12.0 - 14.0										SG10T-1120-GFL
G10T-1130-GFL	13.0 - 15.0										SG10T-1130-GFL
G10T-1140-GFL	14.0 - 16.0										SG10T-1140-GFL
G10T-1150-GFL	15.0 - 17.0										SG10T-1150-GFL
G10T-1160-GFL	16.0 - 18.0										SG10T-1160-GFL
G10T-1170-GFL	17.0 - 19.0										SG10T-1170-GFL
G10T-1180-GFL	18.0 - 20.0										SG10T-1180-GFL
G10T-1190-GFL	19.0 - 21.0										SG10T-1190-GFL







GFL Model Specification Table

Model	Unilateral Float Range	A	B	C	D	E
GFL-S2-Z	2	40	33.5	32.5	4	M4
GFL-S3-Z	3	60	36	53	4	M4