G15T Pneumatic Expanding Connector

ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials | Damage-Free Connection | Float Compensation |

The G15T series pneumatic quick sealing connector uses air pressure to expand the seal, creating an internal leak-tight connection with all kinds of bore ports Ideal for high-volume automated production testing. PEEK is used where the head contacts the test product, effectively protecting it for damage-free testing. The drive and test ports are moved to the side,making it suitable for GFL float compensation modules and solving the problem of test alignment.



Pneumatic Expanding Connector

* With float compensation module for automatic centring
* Automated testing maximises output capacity
* Damage-free connection
* Even faster seal replacement and shorter maintenance time

G15T Series Quick Connector Features

1. Fast maintenance
The centre rod can be unscrewed quickly, making seal replacement easier than with a circlip design.

2. Internal expanding seal
Compact internal structure, small size and a wide range of applications.

3. Damage-free
All parts connected to the test port are rubber, so customer products are never damaged.

4.Pneumatic drive
The seal can be expanded and contracted pneumatically - ideal for automated applications

G15T series quick connectors, from body 0 to body 4, seal plain tubes from 8.5 mm to 35 mm indiameter.
Selected Bodies



G15T Pneumatic Expanding Connector


ONE-STOP CONNECTION

Fast Replacement | Automation | Internal Expanding | Compact | Various Seal Materials | Damage-Free Connection | Float Compensati

G15T Quick Connector Advantages and Features



Damage-free connection:
PEEK is used at all contact points to prevent damage to the product



With float compensation module:
Automatic alignment with the product



Side drive and test ports:
for easy mounting of bottom accessories




Quick Seal Replacement:
Simple maintenance, longer service life



Multiple materials:
A choice of seal materials to suit different testing scenarios

G15T Quick Connector Specifications

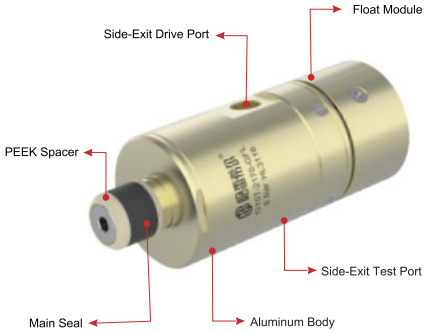

Max. Op. Pressure	Vacuum to 8 Bar
Sealing Range	8.5mm ~ 35mm
Min. Insert Depth	Bodies 0, 1, 2: 14.3 mm Bodies 3, 4: 16.3 mm
Flow Port	M5,BSPP1/8,BSPP1/4
Material	Aluminum
Main Seal	Neoprene / PU / Silicone
Inner Seal	NBR
Drive Pressure	4-6 Bar
Operating Temp.	-20 °C to +120 °C

The G15T system injects drive pressure into the rear drive port, pushing the housing forward to compress the front seal and create a leak-free internal connection suitable for all kinds of fittings. The G15 connector is the ideal choice for high-volume automated production.

Water Channel Testing
Turbocharger
Radiator
Plastic Port
Fuel Pump



Motor Water Channel



Engine Assembly Testing




Motor Controller

G15T P

tomation



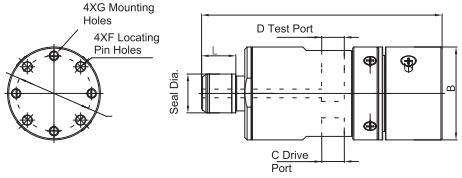

G15T Model Specification Table

Model	Sealing Dia.	Max. Press.	Length A	Dia. B	Drive Port C	Test Port D	Dim. E	Locating Pin F	Mount Hole	Min. Insert Depth L	Main Seal Kit**
G15T-0080-GFL	8.0 - 8.5	8Bar	103	40	M5	M5	32.5	4	M4	14.3	SG15T-0080-GFL
G15T-0085-GFL	8.5 - 9.5										SG15T-0085-GFL
G15T-0095-GFL	9.5 - 10.5										SG15T-0095-GFL
G15T-0100-GFL	10.5 - 11.5										SG15T-0100-GFL
G15T-1110-GFL	11.5 - 12.5	8Bar	103	40	BSPP1/8	BSPP1/8	32.5	4	M4	14.3	SG15T-1110-GFL
G15T-1120-GFL	12.5 - 13.5										SG15T-1120-GFL
G15T-1130-GFL	13.5 - 14.5										SG15T-1130-GFL
G15T-1140-GFL	14.5 - 15.5										SG15T-1140-GFL
G15T-1150-GFL	15.5 - 17.0										SG15T-1150-GFL
G15T-2160-GFL	17.0 - 18.0	8Bar	103.6	40	BSPP1/8	BSPP1/8	32.5	4	M4	14.7	SG15T-2160-GFL
G15T-2170-GFL	18.0 - 19.0										SG15T-2170-GFL
G15T-2180-GFL	19.0 - 20.0										SG15T-2180-GFL
G15T-2190-GFL	20.0 - 21.0										SG15T-2190-GFL
G15T-2200-GFL	21.0 - 22.0										SG15T-2200-GFL
G15T-2210-GFL	22.0 - 23.0										SG15T-2210-GFL
G15T-3220-GFL	23.0 - 24.0	8Bar	119	60	BSPP1/8	BSPP1/4	53	4	M4	16.1	SG15T-3220-GFL
G15T-3230-GFL	24.0 - 25.0										SG15T-3230-GFL
G15T-3240-GFL	25.0 - 26.0										SG15T-3240-GFL
G15T-3250-GFL	26.0 - 27.0										SG15T-3250-GFL
G15T-3260-GFL	27.0 - 28.0										SG15T-3260-GFL
G15T-3270-GFL	28.0 - 29.0										SG15T-3270-GFL
G15T-4280-GFL	29.0 - 30.0	8Bar	119.2	60	BSPP1/8	BSPP1/4	53	4	M4	16.3	SG15T-4280-GFL
G15T-4290-GFL	30.0 - 31.0										SG15T-4290-GFL
G15T-4300-GFL	31.0 - 32.0										SG15T-4300-GFL
G15T-4310-GFL	32.0 - 33.0										SG15T-4310-GFL
G15T-4320-GFL	33.0 - 34.0										SG15T-4320-GFL
G15T-4330-GFL	34.0 - 35.0										SG15T-4330-GFL