# G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

The G25F series is intended for leak testing of electrical interfaces; for communication / electrical testing please refer to the E10 series. The electrical interface bore is sealed by expanding the seal. The connector is short overall, preventing its own length and weight from affecting sealing performance.



Electrical Connector Testing Connection Solution

* Sliding sleeve locks to prevent ejection
* Shorter body to prevent tipping
* Handle operation: simple, effort-saving, self-locking and anti-rebound
* Rotatable handle for easy operation
* Aluminum body: light and robust
* Self-adjusting spring extends service life

## G25F Series Quick Connector Features

**1. Handle operation**
Simple operation: align with the electrical interface and fold the handle down 90° to make the sealed connection.

**2. Expanding seal**
Reliable sealing, easy seal replacement and simple maintenance.

**3. Four versions available**
G25F-DK high-current pin / hole type, G25F-DJ high-current clip type, G25F-T probe type, G25F-JP low-current clip type.

**4. Multiple material options**
The connector housing is made of aviation aluminum, POM, glass-filled nylon, resin and similar materials: lightweight and durable, ensuring connector life while reducing operator effort

**5. Pneumatic version G15F**
The G15F is designed for automated or pneumatic connection, using pneumatic drive for fast sealing of electrical interfaces

1

Selected Bodies



G25F-DJ517419R6.7



G25F-T400210R3



G15F-T300210R3



G15F-JP318305R7.3-GF



G25F Electrical Connector Test Quick Connector


ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |


## G25F Quick Connector Advantages and Features



Self-adjusting spring:
Seal pressure adjusts automatically to the bore diameter, extending service life



Sliding sleeve locking:
Sliding sleeve locks to prevent ejection



Rotatable handle:
The handle rotates for easier operation




Aluminum Body:
Lightweight and durable, reducing operator fatigue



Handle operation:
Simple, effort-saving, self-locking and anti-rebound

## G25F Quick Connector Specifications

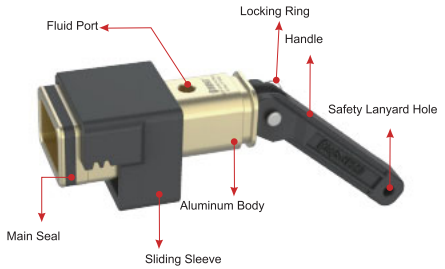



| | |
|---|---|
| Max. Op. Pressure | Vacuum to 50 kPa |
| Sealing Range | Customised to the electrical interface size |
| Flow Port | M5,BSPP1/8 |
| Material | Aluminum |
| Main Seal | Neoprene / Silicone |
| Operating Temp. | -20 °C to +120 °C |

G25F Operation Demo





1. Insert the front seal of the connector into the electrical connector to be sealed



2.Lock the sliding sleeve and fold the handle to form the seal

# G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |

Application Cases:

EV Battery Pack Testing
Motor Controller Leak Testing





EV Battery Pack



Motor Controller






## G25F-JP Low-Current Clip Type

| Model | Inner Length A | Inner Width B | Corner Radius C | Dim. D | Dim. E | Dim. L | Fluid Port M | Max. Pressure | Main Seal Kit** |
|---|---|---|---|---|---|---|---|---|---|
| G25F-JP275183R6.6 | 27.5 | 18.3 | 6.6 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP275183R6.6 |
| G25F-JP280254R6.6 | 28.0 | 25.4 | 6.6 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP280254R6.6 |
| G25F-JP281188R6 | 28.1 | 18.8 | 6.0 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP281188R6 |
| G25F-JP285175R6.8 | 28.5 | 17.5 | 6.8 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP285175R6.8 |
| G25F-JP287194R6.2 | 28.7 | 19.4 | 6.2 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP287194R6.2 |
| G25F-JP290192R6.7 | 29.0 | 19.2 | 6.7 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP290192R6.7 |
| G25F-JP291203R8.3 | 29.1 | 20.3 | 8.3 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP291203R8.3 |
| G25F-JP298184R6.3 | 29.8 | 18.4 | 6.3 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP298184R6.3 |
| G25F-JP330301R8.9 | 33.0 | 30.1 | 8.9 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP330301R8.9 |
| G25F-JP330193R5 | 33.0 | 19.3 | 5.0 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP330193R5 |
| G25F-JP330249R10.6 | 33.0 | 24.9 | 10.6 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP330249R10.6 |
| G25F-JP302207R7.1 | 30.2 | 22.0 | 7.1 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP302207R7.1 |
| G25F-JP303214R7.4 | 30.3 | 21.4 | 7.4 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP303214R7.4 |
| G25F-JP304201R7.5 | 30.4 | 20.1 | 7.5 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SSG25F-JP304201R7.5 |
| G25F-JP365296R8.0 | 36.5 | 29.6 | 8.0 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP365296R8.0 |
| G25F-JP379224R7.4 | 37.9 | 22.4 | 7.4 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP379224R7.4 |
| G25F-JP382230R7.7 | 38.2 | 23.0 | 7.7 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP382230R7.7 |
| G25F-JP403194R6.2 | 40.3 | 31.9 | 6.2 | 90.6 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP403194R6.2 |
| G25F-JP429254R10.7 | 42.9 | 25.4 | 10.7 | 132.1 | 24.7 | 127.6 | M5 | 50Kpa | SG25F-JP429254R10.7 |
| G25F-JP311298R9.4 | 31.1 | 29.8 | 9.4 | 132.1 | 32.0 | 127.6 | BSPP1/8 | 50Kpa | SG25F-JP311298R9.4 |
| G25F-JP313313R7.3 | 31.3 | 31.3 | 7.3 | 132.1 | 32.0 | 127.6 | BSPP1/8 | 50Kpa | SG25F-JP313313R7.3 |
| G25F-JP318305R7.3 | 31.8 | 30.5 | 7.3 | 132.1 | 32.0 | 127.6 | BSPP1/8 | 50Kpa | SG25F-JP318305R7.3 |
| G25F-JP330330R8 | 33.0 | 33.0 | 8.0 | 132.1 | 32.0 | 127.6 | BSPP1/8 | 50Kpa | SG25F-JP330330R8 |
| G25F-JP368318R9.9 | 36.8 | 31.8 | 9.9 | 132.1 | 32.0 | 127.6 | BSPP1/8 | 50Kpa | SG25F-JP368318R9.9 |





# G25F Electrical Connector Test Quick Connector

ONE-STOP CONNECTION

Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |






## G25F-DJ High-Current Clip Type

| Model | Inner Length A | Inner Width B | Corner Radius C | Dim. D | Dim. E | Dim. L | Fluid Port M | Max. Pressure | Main Seal Kit** |
|---|---|---|---|---|---|---|---|---|---|
| G25F-DJ378338R4.1 | 37.8 | 33.8 | 4.1 | 21.0 | 24.7 | 184.1 | M5 | 50Kpa | SG25F-DJ378338R4.1 |
| G25F-DJ387327R4.6 | 38.7 | 32.7 | 4.6 | 13.2 | 32.0 | 190.1 | BSPP1/8 | 50Kpa | SG25F-DJ387327R4.6 |
| G25F-DJ392340R5.3 | 39.2 | 34.0 | 5.3 | 20.8 | 24.7 | 184.1 | M5 | 50Kpa | SG25F-DJ392340R5.3 |
| G25F-DJ393312R6.8 | 39.3 | 31.2 | 6.8 | 13.2 | 32.0 | 190.1 | BSPP1/8 | 50Kpa | SG25F-DJ393312R6.8 |
| G25F-DJ400319R7.2 | 40.0 | 31.9 | 7.2 | 13.2 | 32.0 | 190.1 | BSPP1/8 | 50Kpa | SG25F-DJ400319R7.2 |
| G25F-DJ418338R3.9 | 41.8 | 33.8 | 3.9 | 9.2 | 32.0 | 194.1 | BSP P1/8 | 50Kpa | SG25F-DJ418338R3.9 |
| G25F-DJ429328R9.2 | 42.9 | 32.8 | 9.2 | 27.0 | 32.0 | 194.1 | BSP P1/8 | 50Kpa | SG25F-DJ429328R9.2 |
| G25F-DJ434358R4.1 | 43.4 | 35.8 | 4.1 | 13.0 | 32.0 | 195.7 | BSP P1/8 | 50Kpa | SG25F-DJ434358R4.1 |
| G25F-DJ445391R8.3 | 44.5 | 39.1 | 8.3 | 13.0 | 32.0 | 192.1 | BSPP1/8 | 50Kpa | SG25F-DJ445391R8.3 |
| G25F-DJ463404R8.2 | 46.3 | 40.4 | 8.2 | 16.3 | 32.0 | 194.1 | BSPP1/8 | 50Kpa | SG25F-DJ463404R8.2 |
| G25F-DJ456354R5.3 | 45.6 | 35.4 | 5.3 | 13.2 | 32.0 | 191.8 | BSPP1/8 | 50Kpa | SG25F-DJ456354R5.3 |
| G25F-DJ466379R4.1 | 46.6 | 38.9 | 4.1 | 16.3 | 30.0 | 194.1 | BSPP1/8 | 50Kpa | SG25F-DJ466379R4.1 |
| G25F-DJ467327R4.6 | 46.7 | 32.7 | 4.6 | 13.2 | 32.0 | 190.1 | BSPP1/8 | 50Kpa | SG25F-DJ467327R4.6 |
| G25F-DJ509414R6.3 | 50.9 | 41.4 | 6.3 | 15.1 | 32.0 | 201.7 | BSPP1/8 | 50Kpa | SG25F-DJ509414R6.3 |
| G25F-DJ517419R6.7 | 51.7 | 41.9 | 6.7 | 15.0 | 32.0 | 199.0 | BSPP1/8 | 50Kpa | SG25F-DJ517419R6.7 |
| G25F-DJ516437R7.5 | 51.6 | 43.7 | 7.5 | 15.0 | 32.0 | 199.1 | BSPP1/8 | 50Kpa | SG25F-DJ516437R7.5 |
| G25F-DJ523417R8.5 | 52.3 | 41.7 | 8.5 | 15.0 | 32.0 | 199.1 | BSPP1/8 | 50Kpa | SG25F-DJ523417R8.5 |
| G25F-DJ554464R5.7 | 55.4 | 46.4 | 5.7 | 13.0 | 32.0 | 212.9 | BSPP1/8 | 50Kpa | SG25F-DJ554464R5.7 |
| G25F-DJ554470R9 | 55.4 | 47.0 | 9.0 | 13.0 | 32.0 | 197.1 | BSPP1/8 | 50Kpa | SG25F-DJ554470R9 |
| G25F-DJ570470R9 | 57.0 | 47.0 | 9.0 | 13.2 | 32.0 | 213.1 | BSPP1/8 | 50Kpa | SG25F-DJ570470R9 |
| G25F-DJ587477R10.6 | 58.7 | 47.7 | 10.6 | 13.0 | 32.0 | 212.9 | BSPP1/8 | 50Kpa | SG25F-DJ587477R10.6 |

For Serrated Electrical Sockets




For Ear-Type Electrical Sockets



Note: 1. The bore must be deep enough to accept the seal at the front of the connector. 2. The main seal kit contains enough material for 5 replacements.



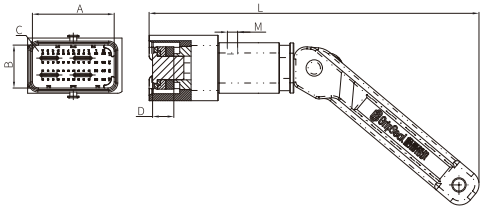



## G25F-T Probe Type

| Model | Inner Length A | Inner Width B | Corner Radius C | Pins | Dim. D | Dim. L | Fluid Port M | Max. Pressure | Main Seal Kit** |
|---|---|---|---|---|---|---|---|---|---|
| G25F-T186183R4.3 | 18.6 | 18.3 | 4.3 | 6 | 23.5 | 166.1 | M5 | 50Kpa | SG25F-T186183R4.3 |
| G25F-T216146R3.6 | 21.6 | 14.6 | 3.6 | 4 | 11.4 | 150.2 | M5 | 50Kpa | SG25F-T216146R3.6 |
| G25F-T217119R4 | 21.7 | 11.9 | 4.0 | 12 | 9.0 | 150.4 | M5 | 50Kpa | SG25F-T217119R4 |
| G25F-T260080R1.8 | 26.0 | 8.0 | 1.8 | 24 | 9.9 | 150.2 | M5 | 50Kpa | SG25F-T260080R1.8 |
| G25F-T266148R4.3 | 26.6 | 14.8 | 4.3 | 12 | 11.0 | 149.5 | M5 | 50Kpa | SG25F-T266148R4.3 |
| G25F-T267152R4.3 | 26.7 | 15.2 | 4.3 | 12 | 13.6 | 157.2 | M5 | 50Kpa | SG25F-T267152R4.3 |
| G25F-T278244R2.8 | 27.8 | 24.4 | 2.8 | 60 | 13.5 | 168.5 | M5 | 50Kpa | SG25F-T278244R2.8 |
| G25F-T280280R8 | 28.0 | 28.0 | 8.0 | / | 14.7 | 172.9 | M5 | 50Kpa | SG25F-T280280R8 |
| G25F-T281109R3.5 | 28.1 | 10.9 | 3.5 | 16 | 15.4 | 153.6 | M5 | 50Kpa | SG25F-T281109R3.5 |
| G25F-T284206R4.7 | 28.4 | 20.6 | 4.7 | 10 | 13.8 | 161.4 | M5 | 50Kpa | SG25F-T284206R4.7 |
| G25F-T296146R3.6 | 29.6 | 14.6 | 3.6 | 6 | 11.4 | 150.2 | M5 | 50Kpa | SG25F-T296146R3.6 |
| G25F-T300210R3.0 | 30.0 | 21.0 | 3.0 | 32 | 10.4 | 161.4 | M5 | 50Kpa | SG25F-T300210R3.0 |
| G25F-T318104R3.5 | 31.8 | 10.4 | 3.5 | / | 11.2 | 150.2 | M5 | 50Kpa | SG25F-T318104R3.5 |
| G25F-T319184R4.1 | 31.9 | 18.4 | 4.1 | 12 | 26.3 | 165.9 | M5 | 50Kpa | SG25F-T319184R4.1 |
| G25F-T319204R4 | 31.9 | 20.4 | 4.0 | 32 | 10.8 | 169.6 | M5 | 50Kpa | SG25F-T319204R4 |
| G25F-T362142R7.1 | 36.2 | 14.2 | 7.1 | 14 | 11.1 | 153.7 | M5 | 50Kpa | SG25F-T362142R7.1 |
| G25F-T378164R6.5 | 37.8 | 16.4 | 6.5 | 20 | 11.4 | 155.2 | M5 | 50Kpa | SG25F-T378164R6.5 |
| G25F-T400210R3 | 40.0 | 21.0 | 3.0 | 48 | 10.4 | 161.4 | M5 | 50Kpa | SG25F-T400210R3 |
| G25F-T404206R4.7 | 40.4 | 20.6 | 4.7 | 23 | 14.6 | 162.6 | M5 | 50Kpa | SG25F-T404206R4.7 |
| G25F-T428156R4.5 | 42.8 | 15.6 | 4.5 | 18 | 11.4 | 155.2 | M5 | 50Kpa | SG25F-T428156R4.5 |
| G25F-T406150R4.3 | 40.6 | 15.0 | 4.3 | 20 | 16.2 | 163.2 | M5 | 50Kpa | SG25F-T406150R4.3 |
| G25F-T432345R5.4 | 43.2 | 34.5 | 5.4 | 20 | 14.7 | 188.3 | BSPP1/8 | 50Kpa | SG25F-T432345R5.4 |
| G25F-T500210R3 | 50.0 | 21.0 | 3.0 | 64 | 10.3 | 163.6 | M5 | 50Kpa | SG25F-T500210R3 |
| G25F-T548268R10 | 54.8 | 26.8 | 10.0 | / | 9.6 | 160.2 | M5 | 50Kpa | SG25F-T548268R10 |
| G25F-T550270R9.5 | 55.0 | 27.0 | 9.5 | / | 13.5 | 159.9 | M5 | 50Kpa | SG25F-T550270R9.5 |
| G25F-T556296R14.8 | 55.6 | 29.6 | 14.8 | / | 16.3 | 165.5 | M5 | 50Kpa | SG25F-T556296R14.8 |
| G25F-T564206R4.7 | 56.4 | 20.6 | 4.7 | 35 | 10.8 | 169.6 | M5 | 50Kpa | SG25F-T564206R4.7 |
| G25F-T600340R17 | 60.0 | 34.0 | 17.0 | / | 15.0 | 177.1 | BSPP1/8 | 50Kpa | SG25F-T600340R17 |
| G25F-T660360R18 | 66.0 | 36.0 | 18.0 | / | 17.0 | 180.7 | BSPP1/8 | 50Kpa | SG25F-T660360R18 |
| G25F-T675366R8 | 67.5 | 36.6 | 8.0 | / | 15.7 | 176.9 | M5 | 50Kpa | SG25F-T675366R8 |
| G25F-T790414R20.7 | 79.0 | 41.4 | 20.7 | / | 14.0 | 182.1 | BSPP1/8 | 50Kpa | SG25F-T790414R20.7 |



G25F Electrical Connector Test Quick Connector
ONE-STOP CONNECTION
Low-Pressure Testing | Easy Replacement | Cost-Effective | Full Model Range | Fast Operation | Various Seal Materials |




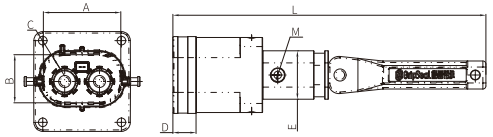


## G25F-DK High-Current Multi-Pin/Hole (Square)

| Model | Inner Cavity Length A | Inner Cavity B | Product Inner Cavity Corner Radius C | Dim. D | Dim. E | Dim. L | Fluid Port M | Max. Press. | Main Seal Kit** |
|---|---|---|---|---|---|---|---|---|---|
| G25F-DK496256R9.9 | 49.6 | 62.5 | 9.9 | 15.3 | 32.0 | 205.9 | BSP P1/8 | 50Kpa | SG25F-DK496256R9.9 |
| G25F-DK500310R13.5 | 50.0 | 31.0 | 13.5 | 15.3 | 32.0 | 206.9 | BSPP1/8 | 50Kpa | SG25F-DK500310R13.5 |
| G25F-DK502272R13.6 | 50.2 | 22.7 | 13.6 | 15.3 | 32.0 | 205.9 | BSPP1/8 | 50Kpa | SG25F-DK502272R13.6 |
| G25F-DK512318R14.1 | 51.2 | 31.8 | 14.1 | 15.3 | 32.0 | 206.9 | BSPP1/8 | 50Kpa | SG25F-DK512318R14.1 |
| G25F-DK522332R14.6 | 52.2 | 33.2 | 14.6 | 15.3 | 32.0 | 206.9 | BSPP1/8 | 50Kpa | SG25F-DK522332R14.6 |
| G25F-DK525332R10.5 | 52.5 | 33.2 | 10.5 | 15.3 | 32.0 | 191.1 | BSPP1/8 | 50Kpa | SG25F-DK525332R10.5 |



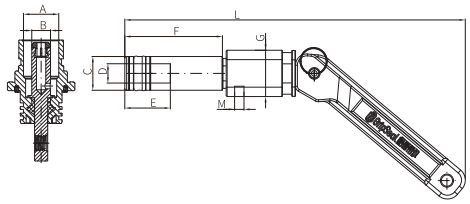


## G25F-DK-C High-Current Single Pin/Hole (Round)

| Model | Dim. A | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G | Dim. L | Fluid Port M | Max. Pressure | Main Seal Kit** |
|---|---|---|---|---|---|---|---|---|---|---|---|
| G25F-DK160091C | 16.0 | 9.1 | 15.4 | 9.4 | 24.3 | 30.8 | 24.7 | 183.0 | M5 | 50Kpa | SG25F-DK160091C |
| G25F-DK164080C | 16.4 | 9.4 | 15.4 | 9.4 | 24.2 | 52.0 | 24.7 | 181.7 | M5 | 50Kpa | SG25F-DK164080C |
| G25F-DK174080C | 17.4 | 8.0 | 17.0 | 10.3 | 24.3 | 52.1 | 24.7 | 181.7 | M5 | 50Kpa | SG25F-DK174080C |
| G25F-DK176100C | 17.6 | 10.0 | 17.0 | 10.3 | 24.3 | 52.1 | 24.7 | 181.7 | M5 | 50Kpa | SG25F-DK176100C |
| G25F-DK188100C | 18.8 | 10.0 | 18.0 | 10.3 | 24.3 | 52.1 | 24.7 | 181.7 | M5 | 50Kpa | SG25F-DK188100C |
| G25F-DK372326C | 37.2 | 32.6 | 36.2 | 28.7 | 40.0 | 49.0 | 32.0 | 196.0 | BSPP1/8 | 50Kpa | SG25F-DK372326C |