## GripSeal | Quick Connector Applications



133 Automotive



135 New Energy




137 Refrigeration System



139 Water Heater



141 Automation



143 Instrumentation



# G70P Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |

The G70P series is a special version of the classic G70 external-grip connector, developed to prevent scratches on customer products made of aluminum or engineering plastics. The parts that contact the customer product - the locking jaws - have been improved, achieving damage-free connection while still meeting functional requirements for sealing and jaw life.



### Damage-Free Quick Connector

* Polymer locking jaws for damage-free connection
* Sliding sleeve operation, intuitive to use
* Straight-through flow channel: high flow and low pressure loss
* Safety indicator at the rear for safe operation
* Moulded seal: excellent sealing and long life

## G70P Series Quick Connector Features

**1. Jaw locking**
High pressure rating, with test pressures up to 1 MPa.

**2.Polymer jaws**
The parts contacting the customer product use insert-type polymer jaws, so no scratches are caused.

**3. Sliding sleeve operation**
Intuitive design, simple to operate.

**4. Straight-through design**
Large flow bore, ideal for liquid running and ageing tests

Selected Models



G70P Series



G70RP Series



G70SP Series



G70NP Series

## G70P Quick Connector Advantages and Features




Polymer jaws:
No scratches on the customer product



Knurling:
Increases friction for easier operation



Sliding sleeve structure:
A light push locks or releases the connection




Straight-through design:
Reduces flow loss and ensures correct test results



Face seal:
Simple replacement, easy maintenance

## G70P Quick Connector Specifications

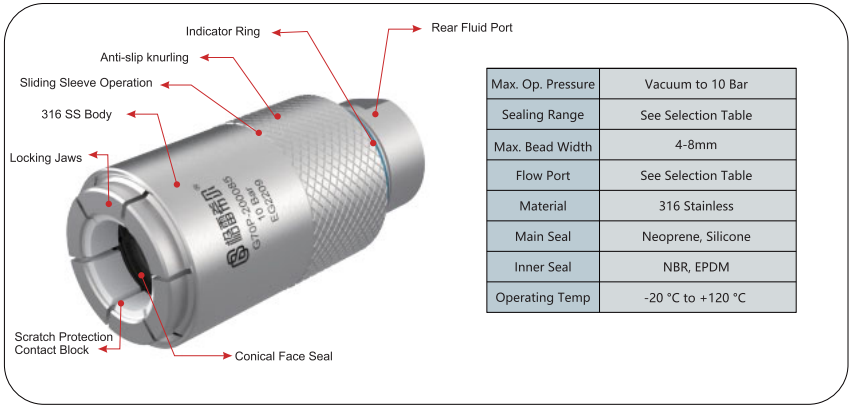


| | |
|---|---|
| Max. Op. Pressure | Vacuum to 10 Bar |
| Sealing Range | See Selection Table |
| Max. Bead Width | 4-8mm |
| Flow Port | See Selection Table |
| Material | 316 Stainless |
| Main Seal | Neoprene, Silicone |
| Inner Seal | NBR, EPDM |
| Operating Temp | -20 °C to +120 °C |

G70P Operation Demo



1. Align the connector with the tube to be sealed



2. Push to lock the connection



G70P Damage-Free Quick Connector
ONE-STOP CONNECTION
Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |


## Application Cases



EV Battery Cold Plate Testing



Motor Cooling System

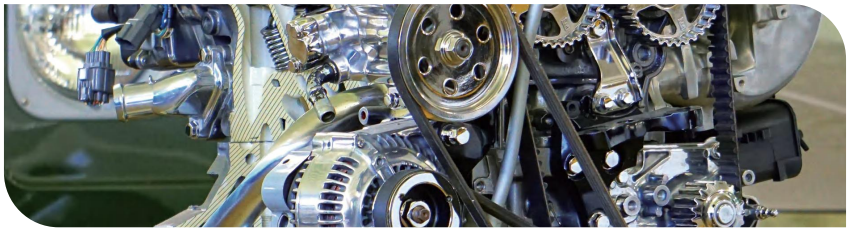


Engine Cooling Channel Testing


# G70P Damage-Free Quick Connector


ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |






## Coolant Pipe Selection Table

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D* | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70P-080025 | 8.0 | 2 | 25.4 | 80 | BSPP1/4 | 10Bar | 316 SS | Neoprene | SG70P-080025 |
| G70P-090025 | 9.0 | | | | | | | | SG70P-090025 |
| G70P-100045 | 10.0 | 3 | 30.4 | 80 | BSPP1/4 | 10Bar | 316 SS | Neoprene | SG70P-100045 |
| G70P-110045 | 11.0 | | | | | | | | SG70P-110045 |
| G70P-120045 | 12.0 | | | | | | | | SG70P-120045 |
| G70P-130045 | 13.0 | | | | | | | | SG70P-130045 |
| G70P-140065 | 14.0 | 4 | 35.4 | 83 | BSPP3/8 | 10Bar | 316 SS | Neoprene | SG70P-140065 |
| G70P-150065 | 15.0 | | | | | | | | SG70P-150065 |
| G70P-160065 | 16.0 | | | | | | | | SG70P-160065 |
| G70P-170065 | 17.0 | | | | | | | | SG70P-170065 |
| G70P-180085 | 18.0 | 5 | 40.4 | 85 | BSPP1/2 | 10Bar | 316 SS | Neoprene | SG70P-180085 |
| G70P-190085 | 19.0 | | | | | | | | SG70P-190085 |
| G70P-200085 | 20.0 | | | | | | | | SG70P-200085 |
| G70P-210085 | 21.0 | | | | | | | | SG70P-210085 |
| G70P-220085 | 22.0 | | | | | | | | SG70P-220085 |
| G70P-230125 | 23.0 | 6 | 46.4 | 93 | BSPP3/4 | 10Bar | 316 SS | Neoprene | SG70P-230125 |
| G70P-240125 | 24.0 | | | | | | | | SG70P-240125 |
| G70P-250125 | 25.0 | | | | | | | | SG70P-250125 |
| G70P-260125 | 26.0 | | | | | | | | SG70P-260125 |
| G70P-270125 | 27.0 | | | | | | | | SG70P-270125 |
| G70P-280125 | 28.0 | 7 | 50.4 | 93 | BSPP3/4 | 10Bar | 316 SS | Neoprene | SG70P-280125 |
| G70P-290125 | 29.0 | | | | | | | | SG70P-290125 |
| G70P-300125 | 30.0 | | | | | | | | SG70P-300125 |
| G70P-310125 | 31.0 | | | | | | | | SG70P-310125 |
| G70P-320125 | 32.0 | | | | | | | | SG70P-320125 |
| G70P-330125 | 33.0 | | | | | | | | SG70P-330125 |
| G70P-340125 | 34.0 | 8 | 55.4 | 93 | BSPP3/4 | 10Bar | 316 SS | Neoprene | SG70P-340125 |
| G70P-350125 | 35.0 | | | | | | | | SG70P-350125 |
| G70P-360125 | 36.0 | | | | | | | | SG70P-360125 |
| G70P-370125 | 37.0 | | | | | | | | SG70P3-70125 |
| G70P-380125 | 38.0 | | | | | | | | SG70P-380125 |
| G70P-390125 | 39.0 | | | | | | | | SG70P-390125 |
| G70P-400125 | 40.0 | | | | | | | | SG70P-400125 |
| G70P-400165 | 40.0 | 9 | 66 | 110.5 | BSPP1 | 5Bar | 316 SS | Neoprene | SG70P-400165 |
| G70P-410165 | 41.0 | | | | | | | | SG70P-410165 |
| G70P-420165 | 42.0 | | | | | | | | SG70P-420165 |
| G70P-430165 | 43.0 | | | | | | | | SG70P-430165 |
| G70P-440165 | 44.0 | | | | | | | | SG70P-440165 |
| G70P-450165 | 45.0 | | | | | | | | SG70P-450165 |
| G70P-460165 | 46.0 | | | | | | | | SG70P-460165 |
| G70P-470165 | 47.0 | | | | | | | | SG70P-470165 |
| G70P-480165 | 48.0 | | | | | | | | SG70P-480165 |






# G70P Damage-Free Quick Connector


ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |




## Coolant Pipe Selection Table

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70P-500205 | 50.0 | 10 | 79 | 113 | BSPP1 - 1/4 | 5Bar | Aluminum | Neoprene | SG70P-500205 |
| G70P-520205 | 52.0 | | | | | | | | SG70P-520205 |
| G70P-530205 | 53.0 | | | | | | | | SG70P-530205 |
| G70P-540205 | 54.0 | | | | | | | | SG70P-540205 |
| G70P-550205 | 55.0 | | | | | | | | SG70P-550205 |
| G70P-560205 | 56.0 | | | | | | | | SG70P-560205 |
| G70P-570205 | 57.0 | | | | | | | | SG70P-570205 |
| G70P-600285 | 60.0 | 11 | 89 | 118 | BSPP1 - 3/4 | 5Bar | Aluminum | Neoprene | SG70P-600285 |
| G70P-610285 | 61.0 | | | | | | | | SG70P-610285 |
| G70P-620285 | 62.0 | | | | | | | | SG70P-620285 |
| G70P-630285 | 63.0 | | | | | | | | SG70P-630285 |
| G70P-640285 | 64.0 | | | | | | | | SG70P-640285 |
| G70P-650285 | 65.0 | | | | | | | | SG70P-650285 |
| G70P-660285 | 66.0 | | | | | | | | SG70P-660285 |
| G70P-670285 | 67.0 | | | | | | | | SG70P-670285 |
| G70P-680285 | 68.0 | | | | | | | | SG70P-680285 |
| G70P-700285 | 70.0 | 12 | 98 | 118 | BSPP1 - 3/4 | 5 Bar | Aluminum | Neoprene | SG70P-700285 |
| G70P-720285 | 72.0 | | | | | | | | SG70P-720285 |
| G70P-740285 | 74.0 | | | | | | | | SG70P-740285 |
| G70P-750285 | 75.0 | | | | | | | | SG70P-750285 |

G70P (Body 10 to Body 12)



Body 10



Body 11




Body 12

# G70P Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |




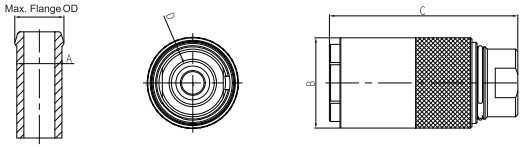


## G70PK Damage-Free Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70PK-080025 | 8.0 | 2 | 25.4 | 80 | BSPP1/4 | 10Bar | 316 SS | Neoprene | SG70PK-080025 |
| G70PK-100045 | 10.0 | 3 | 30.4 | 80 | BSPP1/4 | 10Bar | 316 SS | Neoprene | SG70PK-100045 |
| G70PK-120045 | 12.0 | | | | | | | | SG70PK-120045 |
| G70PK-140065 | 14.0 | 4 | 35.4 | 83 | BSPP3/8 | 10Bar | 316 SS | Neoprene | SG70PK-140065 |
| G70PK-160065 | 16.0 | | | | | | | | SG70PK-160065 |
| G70PK-170065 | 17.0 | | | | | | | | SG70PK-170065 |
| G70PK-180085 | 18.0 | 5 | 40.4 | 85 | BSPP1/2 | 10Bar | 316 SS | Neoprene | SG70PK-180085 |
| G70PK-190085 | 19.0 | | | | | | | | SG70PK-190085 |
| G70PK-200085 | 20.0 | | | | | | | | SG70PK-200085 |




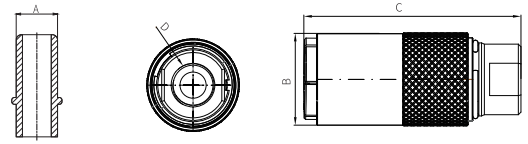


## G70PJ Damage-Free Short Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Materia | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70P-J079 | 7.89±0.06 | 2 | 25.4 | 80 | BSPP1/4 | 10 Bar | 316 SS | NBR | SG70P-J079 |
| G70P-J095 | 9.49±0.06 | 3 | 30.4 | 80 | BSPP1/4 | 10 Bar | 316 SS | NBR | SG70P-J095 |
| G70P-J118 | 11.80±0.10 | | | | | | | | SG70P-J118 |
| G70P-J126 | 12.61±0.10 | 4 | 35.4 | 83 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70P-J126 |
| G70P-J158 | 15.82±0.10 | | | | | | | | SG70P-J158 |



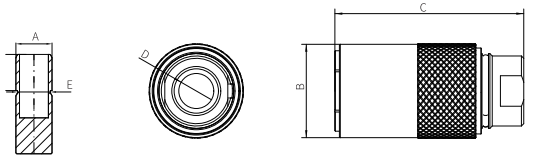


## G70P CQC Male Connector (Grooved Tube) Damage-Free Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70P-122045 | CQC14 | 3 | 30.4 | 80 | BSPP1/4 | 10 Bar | 316 SS | NBR | SG70P-122045 |
| G70P-142065 | CQC16 | 4 | 35.4 | 80 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70P-142065 |
| G70P-162065 | CQC18 | 4 | 35.4 | 80 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70P-162085 |
| G70P-182085 | CQC20 | 5 | 40.4 | 83 | BSPP1/2 | 10 Bar | 316 SS | NBR | SG70P-182085 |




# G70SP Small-Body Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |




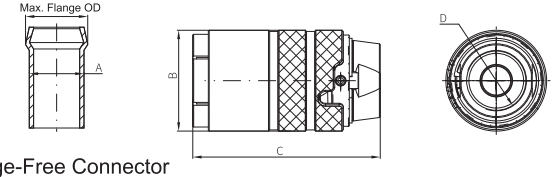


## G70SP Small-Body Damage-Free Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70SP-040 | 4.0 | 1SM | 15.9 | 50.9 | M8 | 10 Bar | 316 SS | Neoprene | SG70SP-040 |
| G70SP-050 | 5.0 | | | | | | | | SG70SP-050 |
| G70SP-060 | 6.0 | 1S | 20 | 51.9 | BSPP1/8 | 10 Bar | 316 SS | Neoprene | SG70SP-060 |
| G70SP-070 | 7.0 | | | | | | | | SG70SP-070 |
| G70SP-080 | 8.0 | | | | | | | | SG70SP-080 |
| G70SP-090 | 9.0 | | | | | | | | SG70SP-090 |
| G70SP-100 | 10.0 | | | | | | | | SG70SP-100 |
| G70SP-110 | 11.0 | 2S | 25 | 52.1 | BSPP1/4 | 10 Bar | 316 SS | Neoprene | SG70SP-110 |
| G70SP-120 | 12.0 | | | | | | | | SG70SP-120 |
| G70SP-130 | 13.0 | | | | | | | | SG70SP-130 |
| G70SP-140 | 14.0 | | | | | | | | SG70SP-140 |
| G70SP-160 | 16.0 | 3S | 30 | 54 | BSPP3/8 | 10 Bar | 316 SS | Neoprene | SG70SP-160 |
| G70SP-170 | 17.0 | | | | | | | | SG70SP-170 |
| G70SP-180 | 18.0 | | | | | | | | SG70SP-180 |
| G70SP-190 | 19.0 | 4S | 35 | 65.1 | BSPP1/2 | 10 Bar | 316 SS | Neoprene | SG70SP-190 |
| G70SP-200 | 20.0 | | | | | | | | SG70SP-200 |
| G70SP-220 | 22.0 | | | | | | | | SG70SP-220 |
| G70SP-230 | 23.0 | 5S | 40 | 66 | BSPP1/2 | 10 Bar | 316 SS | Neoprene | SG70SP-230 |
| G70SP-250 | 25.0 | | | | | | | | SG70SP-250 |
| G70SP-260 | 26.0 | | | | | | | | SG70SP-270 |
| G70SP-270 | 27.0 | | | | | | | | SG70SP-280 |
| G70SP-280 | 28.0 | 6S | 45 | 65.3 | BSPP3/4 | 10 Bar | 316 SS | Neoprene | SG70SP-300 |
| G70SP-300 | 30.0 | | | | | | | | SG70SP-320 |
| G70SP-320 | 32.0 | | | | | | | | SG70SP-330 |
| G70SP-330 | 33.0 | 7S | 50 | 65.8 | BSPP1 | 10 Bar | 316 SS | Neoprene | SG70SP-350 |
| G70SP-350 | 35.0 | | | | | | | | SG70SP-360 |
| G70SP-360 | 36.0 | | | | | | | | SG70SP-370 |
| G70SP-370 | 37.0 | | | | | | | | SG70SP-380 |
| G70SP-380 | 38.0 | 8S | 55 | 65.8 | BSPP1 | 10 Bar | 316 SS | Neoprene | SG70SP-400 |
| G70SP-400 | 40.0 | | | | | | | | SG70SP-420 |
| G70SP-420 | 42.0 | | | | | | | | SG70SP-430 |




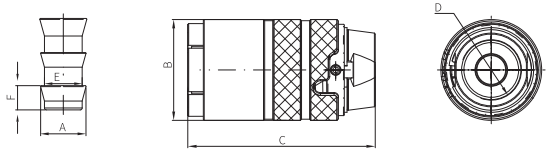




## G70SP-BT Liquid Cooling Barbed Port

| Model | Dim. A | Body No. | Dim. B | Dim. C | Dim. E | Dim. F | Fluid Thread D | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| G70SP-BT075L045 | 7.5 | 1S | 20 | 51.9 | 6.4 | 4.5 | BSPP1/8" | 10 Bar | Stainless | Neoprene | SG70SP-BT075L045 |
| G70SP-BT087L048 | 8.7 | 1S | 20 | 51.9 | 6.8 | 4.8 | BSPP1/8" | | | | SG70SP-BT087L048 |
| G70SP-BT120L057 | 12.0 | 2S | 25 | 52.1 | 9.9 | 5.7 | BSPP1/4" | | | | SG70SP-BT120L057 |
| G70SP-BT150L053 | 15.0 | 3S | 30 | 54 | 12.7 | 5.3 | BSPP3/8" | | | | SG70SP-BT150L053 |
| G70SP-BT180L049 | 18.0 | 3S | 30 | 54 | 15.9 | 4.9 | BSPP3/8" | | | | SG70SP-BT180L049 |

The models above are for illustration. For specific interface dimensions, please contact our sales team for the best solution.








## G70SP-TL Small-Body Damage-Free Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Thread Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70SP-060-TL025 | 6.00 | 1S | 20 | 60 | BSPP1/8 | 10 Bar | 316 SS | Neoprene | SG70SP-060-TL025 |
| G70SP-070-TL025 | 7.00 | | | | | | | | SG70SP-070-TL025 |
| G70SP-080-TL025 | 8.00 | | | | | | | | SG70SP-080-TL025 |
| G70SP-090-TL025 | 9.00 | | | | | | | | SG70SP-090-TL025 |
| G70SP-100-TL025 | 10.00 | | | | | | | | SG70SP-100-TL025 |
| G70SP-110-TL045 | 11.00 | 2S | 25 | 60 | BSPP1/4 | 10 Bar | 316 SS | Neoprene | SG70SP-110-TL045 |
| G70SP-120-TL045 | 12.00 | | | | | | | | SG70SP-120-TL045 |
| G70SP-130-TL045 | 13.00 | | | | | | | | SG70SP-130-TL045 |
| G70SP-140-TL045 | 14.00 | | | | | | | | SG70SP-140-TL045 |
| G70SP-150-TL085 | 15.00 | 3S | 30 | 62 | BSPP1/2 | 10 Bar | 316 SS | Neoprene | SG70SP-150-TL085 |
| G70SP-160-TL085 | 16.00 | | | | | | | | SG70SP-160-TL085 |
| G70SP-170-TL085 | 17.00 | | | | | | | | SG70SP-170-TL085 |
| G70SP-180-TL085 | 18.00 | | | | | | | | SG70SP-180-TL085 |
| G70SP-190-TL085 | 19.00 | 4S | 35 | 73 | BSPP1/2 | 10 Bar | 316 SS | Neoprene | SG70SP-190-TL085 |
| G70SP-200-TL085 | 20.00 | | | | | | | | SG70SP-200-TL085 |
| G70SP-210-TL085 | 21.00 | | | | | | | | SG70SP-210-TL085 |
| G70SP-220-TL085 | 22.00 | | | | | | | | SG70SP-220-TL085 |








## G70SP-NW Interface (Four-Segment Jaw) Straight-Through


| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70SP-NW6 | 10.40 | 3S | 30 | 54 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70SP-NW6 |
| G70SP-NW8 | 12.40 | | | | | | | | SG70SP-NW8 |
| G70SP-NW12 | 16.30 | 4S | 35 | 65.1 | BSPP1/2 | 10 Bar | 316 SS | NBR | SG70SP-NW12 |
| G70SP-NW14 | 17.50 | | | | | | | | SG70SP-NW14 |
| G70SP-NW14US | 19.15 | 5S | 40 | 66 | BSPP1/2 | 10Bar | 316 SS | NBR | SG70SP-NW14US |
| G70SP-NW16 | 22.30 | | | | | | | | SG70SP-NW16 |
| G70SP-NW18 | 23.75 | 6S | 45 | 65.3 | BSPP3/4 | 10 Bar | 316 SS | NBR | SG70SP-NW18 |
| G70SP-NW20 | 26.30 | | | | | | | | SG70SP-NW20 |
| G70SP-NW26 | 32.50 | 8S | 55 | 65.8 | BSPP1 | 10 Bar | 316 SS | NBR | SG70SP-NW26 |



G70SP Small-Body Damage-Free Quick Connector
ONE-STOP CONNECTION
Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |











## Fuel Line Connector - Compliant with J2044

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70SP-J063 | 6.30±0.06 | 2S | 25 | 52.1 | BSPP1/4 | 10 Bar | 316 SS | NBR | SG70SP-J063 |
| G70SP-J079 | 7.89±0.06 | | | | | | | | SG70SP-J079 |
| G70SP-J095 | 9.49±0.06 | | | | | | | | SG70SP-J095 |
| G70SP-J099 | 9.89±0.06 | | | | | | | | SG70SP-J099 |
| G70SP-J118 | 11.80±0.10 | 3S | 30 | 54 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70SP-J118 |
| G70SP-J126 | 12.61±0.10 | | | | | | | | SG70SP-J126 |
| G70SP-J158 | 15.82±0.10 | 4S | 35 | 65.1 | BSPP1/2 | 10 Bar | 316 SS | NBR | SG70SP-J158 |
| G70SP-J189 | 18.90±0.10 | 5S | 40 | 66 | BSPP1/2 | 10 Bar | 316 SS | NBR | SG70SP-J189 |
| G70SP-J227 | 22.70±0.15 | | | | | | | | SG70SP-J227 |
| G70SP-J255 | 25.50±0.15 | 6S | 45 | 65.3 | BSPP3/4 | 10 Bar | 316 SS | NBR | SG70SP-J255 |






## G70SP-CQC Damage-Free Small-Body Connector


| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Dim. E | Dim. F | Max. Pressure | Materia | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| G70SP-CQC10 | 10.0 | 1S | 20.0 | 52.0 | BSPP1/8 | 8.0 | 17.5 | 10Bar | 316 SS | NBR | SG70SP-CQC10 |
| G70SP-CQC14 | 14.0 | 2SM | 27.0 | 56.4 | BSPP3/8 | 12.2 | 18.3 | 10Bar | 316 SS | NBR | SG70SP-CQC14 |
| G70SP-CQC16 | 16.0 | 3S | 30.0 | 54.0 | BSPP3/8 | 14.2 | 16 | 10Bar | 316 SS | NBR | SG70SP-CQC16 |
| G70SP-CQC18 | 18.0 | 4S | 35.0 | 65.1 | BSPP1/2 | 16.5 | 19.8 | 10Bar | 316 SS | NBR | SG70SP-CQC18 |
| G70SP-CQC20 | 20.0 | 4S | 35.0 | 65.1 | BSPP1/2 | 18.2 | 19.9 | 10Bar | 316 SS | NBR | SG70SP-CQC20 |


# G70RP Rotating Sleeve Damage-Free Quick Connector


ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |







## G70RP Damage-Free Short Connector


| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70R-160PK | 16.0 | 4R | 35.4 | 73 | BSPP3/8 | 10 Bar | 316 SS | Neoprene | SG70R-160PK |
| G70R-160PKHF10 | 16.0 | | | | | | | | SG70R-160PKHF10 |
| G70R-160PK-TN085 | 16.0 | | | | | | | | SG70R-160PK-TN085 |
| G70R-200PK | 20.0 | 5R | 40.4 | 71 | BSPP3/8 | 10 Bar | 316 SS | Neoprene | SG70R-200PK |
| G70R-200PKHF10 | 20.0 | | | | | | | | SG70R-200PKHF10 |
| G70R-200PK-TN085 | 20.0 | | | | | | | | SG70R-200PK-TN085 |
| G70R-J158PK | 15.8 | 4R | 35.4 | 73 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70R-J158PK |
| G70R-J158PKHF10 | 15.8 | | | | | | | | SG70R-J158PKHF10 |
| G70R-J158PK-TN085 | 15.8 | | | | | | | | SG70R-J158PK-TN085 |

* Other fluid port specifications are available, including BSPP1/2 female thread, BSPP3/8 male flat port and barbed fittings. Please enquire.






## G70RP NW Interface (Four-Segment Jaw) L-Type Rotating Sleeve

| Model | Dim. A | Body No | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70R-NW12P | 16.30 | 4RS | 35.4 | 75 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70R-NW12P |
| G70R-NW16P | 22.30 | 5RS | 40.4 | 75 | BSPP3/8 | 10 Bar | 316 SS | NBR | SG70R-NW16P |





# G70NP Mini Damage-Free Quick Connector

ONE-STOP CONNECTION

Damage-Free Locking | Manual Operation | Full Model Range | Polymer Materials | High Flow | OD Sealing |












## G70NP Damage-Free Mini Quick Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Jaw Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70NP-080 | 8.0 | 2N | 24.7 | 43 | BSPP1/4 | 10 Bar | Polymer | Neoprene | SG70NP-080 |
| G70NP-100 | 10.0 | | | | | | | | SG70NP-100 |
| G70NP-110 | 11.0 | | | | | | | | SG70NP-120 |
| G70NP-160 | 16.0 | 4N | 34.6 | 43 | BSPP1/4 | 10 Bar | Polymer | Neoprene | SG70NP-160 |
| G70NP-170 | 17.0 | | | | | | | | SG70NP-170 |
| G70NP-180 | 18.0 | | | | | | | | SG70NP-180 |
| G70NP-190 | 19.0 | | | | | | | | SG70NP190 |
| G70NP-200 | 20.0 | | | | | | | | SG70NP-200 |
| G70NP-220 | 22.0 | 5N | 38.6 | 48 | BSPP1/4 | 10 Bar | Polymer | Neoprene | SG70NP-220 |
| G70NP-230 | 23.0 | | | | | | | | SG70NP-230 |






## G70NP-TL Damage-Free Mini Quick Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Dim. E | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|---|
| G70NP-080-TL025 | 8.0 | 2N | 19.8 | 43.7 | BSPP1/8 | 30.9 | 10 Bar | 316 SS | Neoprene | SG70N-080-TL025 |
| G70NP-100-TL025 | 10.0 | | | | | | | | | SG70N-100-TL025 |
| G70NP-110-TL025 | 11.0 | | | | | | | | | SG70N-110-TL025 |
| G70NP-160-TL085 | 16.0 | 4N | 34.6 | 46.8 | BSPP1/2 | 56.8 | | | | SG70N-160-TL085 |
| G70NP-170-TL085 | 17.0 | | | | | | | | | SG70N-170-TL085 |
| G70NP-180-TL085 | 18.0 | | | | | | | | | SG70N-180-TL085 |
| G70NP-190-TL085 | 19.0 | | | | | | | | | SG70N-190-TL085 |
| G70NP-200X-TL085 | 20.0 | | | | | | | | | SG70N-200-TL085 |
| G70NP-220-TL085 | 22.0 | | | | | | | | | SG70N-220-TL085 |
| G70NP-230X-TL085 | 23.0 | 5N | 38.6 | 48 | | 62.5 | | | | SG70N-230-TL085 |

The G70 series is an external-grip connector, widely used for leak testing, running tests and ageing tests of irregular tubes such as coolant pipes and fuel lines. Compact in structure, it can be held with one hand and is simple to use: a light hand push completes the connection.



## Irregular Tube Quick Connector

* Face seal, easy to replace
* Push-pull operation: simple and reliable
* No flow loss, efficient testing
* Safetyindicator for reliable production

## G70 Series Quick Connector Features

**1. Sliding sleeve operation**
Simple operation: a light push completes the threaded connection, and knurling on the housing increases grip for easier handling.

**2. Face seal**
Reliable sealing, high pressure rating, easy seal replacement and simple maintenance.

**3. 316 stainless steel construction**
Excellent mechanical properties: strong and durable, greatly extending connector service life.

**4. Straight-through design**
Maximises flow and minimises the effect on running tests.

**5. Safety indicator ring**
Position confirmation indicator for reliable production

Selected Models





G70 Irregular Tube Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |

## G70 Quick Connector Advantages and Features




External-grip jaw locking: grips the raised feature of the tube end directly



Knurling: Increases friction for easier operation



Sliding sleeve structure:A light push locks or releases the connection




Straight-through design: Reduces flow loss and ensures correct test results



Side inlet: the G70R type offers a side inlet option. The connector is shorter and suits confined spaces

## G70 Quick Connector Specifications

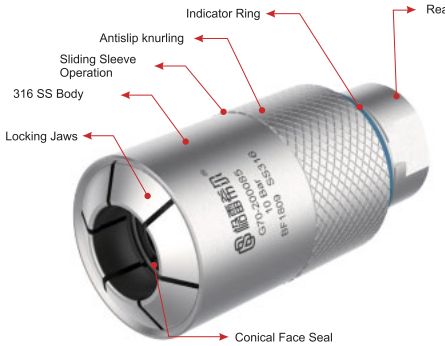


| | |
|---|---|
| Max. Op. Pressure | Vacuum to 70 Bar |
| Sealing Range | See Selection Table |
| Max. Bead Width | 4-8mm |
| Flow Port | See Selection Table |
| Material | 316 Stainless |
| Main Seal | Neoprene, NBR |
| Inner Seal | NBR |
| Operating Temp. | -20 °C to +120 °C |

G70 Operation Demo




1. Align the connector with the tube to be sealed



2. Push to lock the connection

## Application Cases

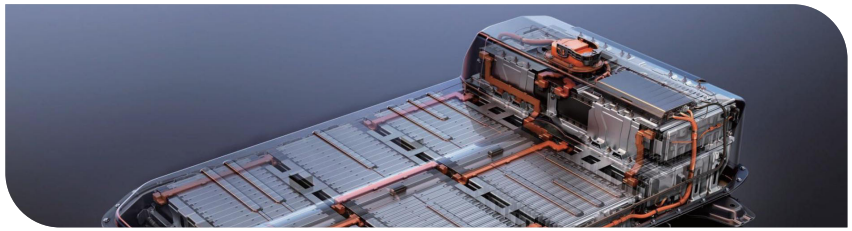

EV Battery Cold Plate Testing



Engine Assembly Testing



Engine Cooling Channel Testing



G70 Irregular Tube Quick Connector
ONE-STOP CONNECTION
Instant | Easy | Standard | Premium |





### Irregular Tube Selection Table Bodies 2-8

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70-080025 | 8.0 | 2 | 25.4 | 75 | BSPP1/4 | 10Bar | 316 SS | Neoprene | SG70-080025 |
| G70-100045 | 10.0 | 3 | 30.4 | 75 | BSPP1/4 | 10Bar | 316 SS | Neoprene | SG70-100045 |
| G70-120045 | 12.0 | | | | | | | | SG70-120045 |
| G70-140065 | 14.0 | 4 | 35.4 | 80 | BSPP3/8 | 10Bar | 316 SS | Neoprene | SG70-140065 |
| G70-160065 | 16.0 | | | | | | | | SG70-160065 |
| G70-170065 | 17.0 | | | | | | | | SG70-170065 |
| G70-180085 | 18.0 | 5 | 40.4 | 80 | BSPP1/2 | 10Bar | 316 SS | Neoprene | SG70-180085 |
| G70-190085 | 19.0 | | | | | | | | SG70-190085 |
| G70-200085 | 20.0 | | | | | | | | SG70-200085 |
| G70-250125 | 25.0 | 6 | 46.4 | 90 | BSPP3/4 | 10Bar | 316 SS | Neoprene | SG70-250125 |
| G70-320125 | 32.0 | 7 | 50.4 | 90 | BSPP3/4 | 10Bar | 316 SS | Neoprene | SG70-320125 |
| G70-350125 | 35.0 | 8 | 55.4 | 90 | BSPP3/4 | 10Bar | 316 SS | Neoprene | SG70-350125 |
| G70-380125 | 38.0 | | | | | | | | SG70-380125 |

Note: For G70 connectors with bodies 4-8, the flange diameter of the tube being sealed is 2 mm larger than the straight tube OD. For example, if G70-200085 seals a tube with dimension A of 20 mm, the flange diameter is 22 mm.

* The default maximum pressure of standard products is 10 Bar. Please contact us if high-pressure testing from 10 to 50 Bar is required.

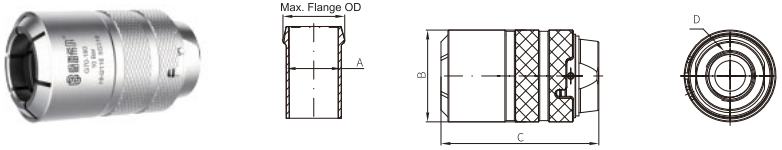


### G70S Small-Body Connector


| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70S-080 | 8.0 | 1S | 20 | 50 | BSPP1/8 | 10 Bar | 316 SS | Neoprene | SG70S-080 |
| G70S-100 | 10.0 | | | | | | | | SG70S-100 |
| G70S-120 | 12.0 | 2S | 25 | 50 | BSPP1/4 | 10 Bar | 316 SS | Neoprene | SG70S-120 |
| G70S-140 | 14.0 | | | | | | | | SG70S-140 |
| G70S-160M | 16.0 | 2SM | 27 | 55 | BSPP3/8 | 10 Bar | 316 SS | Neoprene | SG70S-160M |
| G70S-170 | 17.00 | 3S | 30 | 51.6 | BSPP3/8 | 10 Bar | 316 SS | Neoprene | SG70S-170 |
| G70S-180 | 18.00 | | | | | | | | SG70S-180 |
| G70S-190 | 19.00 | 4S | 35.6 | 63.5 | BSPP1/2 | 10 Bar | 316 SS | Neoprene | SG70S-190 |
| G70S-200 | 20.0 | | | | | | | | SG70S-200 |
| G70S-250 | 25.0 | 5S | 40 | 63.5 | BSPP1/2 | 10 Bar | 316 SS | Neoprene | SG70S-250 |
| G70S-280 | 28.0 | | | | | | | | SG70S-280 |
| G70S-320 | 32.0 | 6S | 45 | 62.5 | BSPP3/4 | 10 Bar | 316 SS | Neoprene | SG70S-320 |
| G70S-350 | 35.0 | 8S | 55 | 63 | BSPP1 | 10 Bar | 316 SS | Neoprene | SG70S-350 |
| G70S-380 | 38.0 | | | | | | | | SG70S-380 |

# G70N Mini Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |




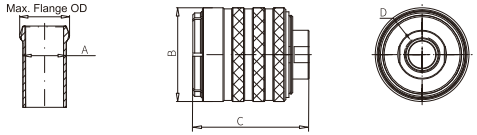


## G70N Small-Body Connector

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70N-080 | 8.0 | 2N | 24.7 | 43 | BSPP1/4 | 10 Bar | 316 SS | Neoprene | SG70N-080 |
| G70N-100 | 10.0 | | | | | | | | SG70N-100 |
| G70N-120 | 12.0 | | | | | | | | SG70N-120 |
| G70N-130 | 13.0 | | | | | | | | SG70N-130 |
| G70N-160 | 16.0 | 4N | 34.6 | 42 | BSPP1/4 | 10 Bar | 316 SS | Neoprene | SG70N-160 |
| G70N-200 | 20.0 | | | | | | | | SG70N-200 |




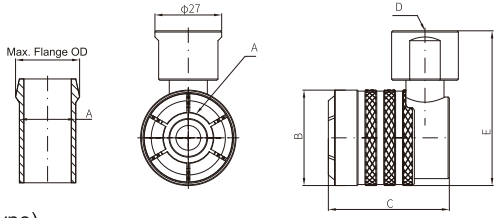


## G70N-TL (Rotating Sleeve, L Type)

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Dim. E | Max. Pressure | Material | Seal Material | Seal No |
|---|---|---|---|---|---|---|---|---|---|---|
| G70N-080-TL025 | 8.0 | 1N | 22.5 | 41.7 | BSPP 1/8 | 34.8 | 10 Bar | 316 SS | Neoprene | SG70N-080-TL025 |
| G70N-100-TL025 | 10.0 | | | | | | | | | SG70N-100-TL025 |
| G70N-120-TL025 | 12.0 | 2N | 24.7 | 43 | | / | | | | SG70N-120-TL025 |
| G70N-160-TL085 | 16.0 | 4N | 34.6 | 46.8 | BSPP 1/2 | 56.8 | | | | SG70N-160-TL085 |
| G70N-200-TL085 | 20.0 | | | | | | | | | SG70N-200-TL085 |

Grooved Tubes

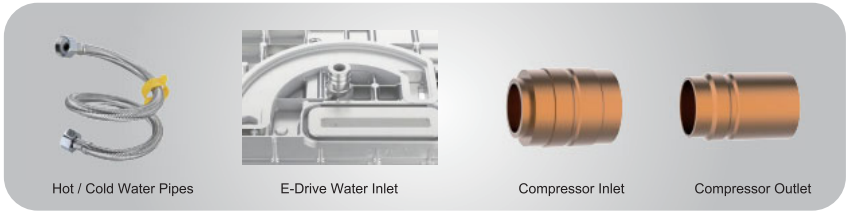


The G70 series suits gripping all kinds of grooved ports, as shown above. For other port sealing requirements, please contact us.




# G70R Rotating Sleeve Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |




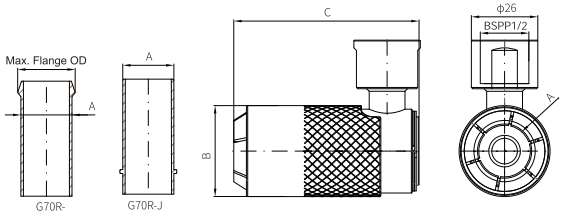


## G70R Short-Body Connector (Rotating Sleeve, L Type)

| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure* | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70R-J158S | 15.80 | 4R | 35.4 | 73 | BSPP3/8 Male Thread | 20Bar | 316 SS | NBR | SG70R-J158S |
| G70R-160S | 16.00 | 4R | 35.4 | 73 | BSPP3/8 Male Thread | 10Bar | 316 SS | Neoprene | SG70R-160S |
| G70R-190S | 19.00 | | | | | | | | SG70R-190S |
| G70R-200S | 20.00 | | | | | | | | SG70R-200S |
| G70R-160S-085 | 16.00 | 4R | 35.4 | 74 | BSPP1/2 Female Thread | 10Bar | 316 SS | Neoprene | SG70R-160S |
| G70R-190S-085 | 19.00 | | | | | | | | SG70R-190S |
| G70R-200S-085 | 20.00 | | | | | | | | SG70R-200S |
| G70R-190 | 19.00 | 5R | 40.4 | 70 | BSPP3/8 Male Thread | 10Bar | 316 SS | Neoprene | SG70R-190 |
| G70R-200 | 20.00 | | | | | | | | SG70R-200 |



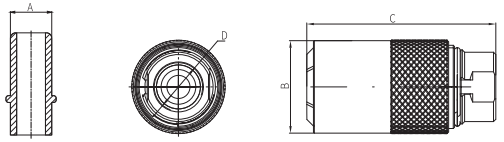


## Fuel Line Connector - Compliant with J2044


| Model | Dim. A | Body No. | Dim. B | Dim. C | Fluid Port D | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70-J063 | 6.30±0.06 | 2 | 25.4 | 75 | BSPP1/4 | 50Bar | 316 SS | NBR | SG70-J063 |
| G70-J079 | 7.89±0.06 | | | | | | | | SG70-J079 |
| G70-J095 | 9.49±0.06 | 3 | 30.4 | 80 | | | | | SG70-J095 |
| G70-J099 | 9.89±0.06 | | | | | | | | SG70-J099 |
| G70-J118 | 11.80±0.10 | | | | | | | | SG70-J118 |
| G70-J126 | 12.61±0.10 | 4 | 35.4 | 86 | BSPP3/8 | | | | SG70-J126 |
| G70-J158 | 15.82±0.10 | | | | | | | | SG70-J158 |
| G70-J189 | 18.90±0.10 | 5 | 40.4 | 87 | BSPP1/2 | | | | SG70-J189 |

# G70K Quick Connectors for the Refrigeration Industry

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |




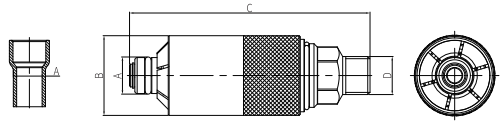


For leak testing of flared tubes in the refrigeration industry

| Model | Dim. A | Body No. | Dim. B | Dim. C | Male Thread D | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70-K095 | 9.52 | 3 | 30.4 | 90 | BSPT3/8'' | 50 Bar | 316 SS | NBR | SG70-K095 |
| G70-K127 | 12.7 | 3 | 30.4 | 90 | | | | | SG70-K127 |
| G70-K158 | 15.8 | 4 | 35.4 | 95 | | | | | SG70-K158 |
| G70-K190 | 19 | 5 | 40.4 | 110 | | | | | SG70-K190 |
| G70-K222 | 22.2 | 5 | 40.4 | 110 | | | | | SG70-K222 |
| G70-K254 | 25.4 | 6 | 46.4 | 110 | | | | | SG70-K254 |
| G70-K285 | 28.5 | 7 | 50.4 | 120 | | | | | SG70-K285 |
| G70-K353 | 35.3 | 8 | 55 | 110 | | | | | SG70-K353 |



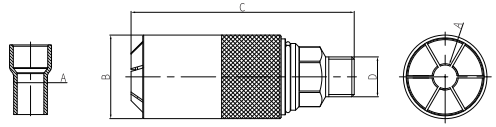


For running tests of flared tubes in the refrigeration industry

| Model | Dim. A | Body No. | Dim. B | Dim. C | Male Thread D | Max. Pressure | Material | Seal Material | Seal No. |
|---|---|---|---|---|---|---|---|---|---|
| G70KHF-095 | 9.52 | 3 | 30.4 | 90 | BSPT1/4" | 50Bar | 316 SS | NBR | SG70KHF-095 |
| G70KHF-127 | 12.7 | 3 | 30.4 | 90 | BSPT3/8" | | | | SG70KHF-127 |
| G70KHF-158 | 15.8 | 4 | 35.4 | 95 | BSPT1/2" | | | | SG70KHF-158 |
| G70KHF-190 | 19 | 5 | 40.4 | 110 | BSPT3/4" | | | | SG70KHF-190 |
| G70KHF-222 | 22.2 | 5 | 40.4 | 110 | BSPT3/4" | | | | SG70KHF-222 |

All GripSeal connectors are designed with safety built in from the start. However, users of the connectors are responsible for designing their own safety precautions, to avoid property damage caused by incorrect sizing or other reasons. Safety chains, protective nets, protective cages or dedicated fixtures are all good protective measures. GripSeal can also provide, or help customers identify, potential safety hazards.



# G80 Female Threaded Quick Connector

ONE-STOP CONNECTION

Instant | Easy | Standard | Premium |

The G80 series connector is designed for female threads and is widely used for plugging and connecting all kinds of threaded ports, such as high-pressure testing of automotive parts, leak testing and housing plugging of new energy motor controllers. Various drive options suit manual and pneumatic applications.



## Female Thread Connection Solution

* Face seal, easy to replace
* Handle lever operation, simple
* Various drive options for different scenarios
* Customisable neck length to avoid interference

## G80 Series Quick Connector Features

**1. Modular drive**
Three operation modes - pneumatic, push-button valve and lever - meet the requirements of every application.

**2. O-ring sealing**
Simple and reliable, easy to replace, low maintenance cost and a choice of O-ring material for different fluids.

**3. 316 stainless steel construction**
Excellent mechanical properties: strong and wear-resistant, greatly extending connector service life.

**4. Optional neck length**
Common models offer three neck lengths to clear obstructions and avoid interference.

**5. Standardised maintenance**
Modular internal structure, replaced as one unit, for simple repair

Selected Models



Handle Drive



Push-Button Drive



Pneumatic Drive