

The if Statement

THE FIRST OF THE TWO BRANCHING STATEMENTS in Java is the `if` statement. It takes the form

```
if (boolean-expression)
    statement-1
else
    statement-2
```

As usual, the statements inside an `if` statement can be blocks. The `if` statement represents a two-way branch. The `else` part of an `if` statement—consisting of the word "else" and the statement that follows it—can be omitted.

The Dangling else Problem

Now, an `if` statement is, in particular, a statement. This means that either **statement-1** or **statement-2** in the above `if` statement can itself be an `if` statement. A problem arises, however, if **statement-1** is an `if` statement that has no `else` part. This special case is effectively forbidden by the syntax of Java. Suppose, for example, that you type

```
if ( x > 0 )
    if (y > 0)
        System.out.println("First case");
else
    System.out.println("Second case");
```

Now, remember that the way you've indented this doesn't mean anything at all to the computer. You might think that the `else` part is the second half of your "`if (x > 0)`" statement, but the rule that the computer follows attaches the `else` to "`if (y > 0)`", which is closer. That is, the computer reads your statement as if it were formatted:

```
if ( x > 0 )
    if (y > 0)
        System.out.println("First case");
    else
        System.out.println("Second case");
```

You can force the computer to use the other interpretation by enclosing the nested `if` in a block:

```
if ( x > 0 ) {
    if (y > 0)
        System.out.println("First case");
}
else
    System.out.println("Second case");
```

These two `if` statements have different meanings: In the case when $x \leq 0$, the first statement doesn't print anything, but the second statement prints "Second case".

Multiway Branching

Much more interesting than this technicality is the case where **statement-2**, the `else` part of the `if` statement, is itself an `if` statement. The statement would look like this (perhaps without the final `else` part):

```
if (boolean-expression-1)
    statement-1
else
    if (boolean-expression-2)
        statement-2
    else
        statement-3
```

However, since the computer doesn't care how a program is laid out on the page, this is almost always written in the format:

```
if (boolean-expression-1)
    statement-1
else if (boolean-expression-2)
    statement-2
else
    statement-3
```

You should think of this as a single statement representing a three-way branch. When the computer executes this, one and only one of the three statements—**statement-1**, **statement-2**, or **statement-3**—will be executed. The computer starts by evaluating **boolean-expression-1**. If it is `true`, the computer executes **statement-1** and then jumps all the way to the end of the outer `if` statement, skipping the other two **statements**. If **boolean-expression-1** is `false`, the computer skips **statement-1** and executes the second, nested `if` statement. To do this, it tests the value of **boolean-expression-2** and uses it to decide between **statement-2** and **statement-3**.

Here is an example that will print out one of three different messages, depending on the value of a variable named `temperature`:


```
if (temperature < 50)
    System.out.println("It's cold.");
else if (temperature < 80)
    System.out.println("It's nice.");
else
    System.out.println("It's hot.");
```

If `temperature` is, say, 42, the first test is `true`. The computer prints out the message "It's cold", and skips the rest—without even evaluating the second condition. For a temperature of 75, the first test is `false`, so the computer goes on to the second test. This test is `true`, so the computer prints "It's nice" and skips the rest. If the temperature is 173, both of the tests evaluate to `false`, so the computer says "It's hot" (unless its circuits have been fried by the heat, that is).

You can go on stringing together "else-if's" to make multiway branches with any number of cases:

```
if (test-1)
    statement-1
else if (test-2)
    statement-2
else if (test-3)
    statement-3
.
. // (more cases)
.
else if (test-N)
    statement-N
else
    statement- (N+1)
```

The computer evaluates the tests, which are boolean expressions, one after the other until it comes to one that is `true`. It executes the associated statement and skips the rest. If none of the boolean expressions evaluate to `true`, then the statement in the `else` part is executed. This statement is called a multiway branch because one and only one of the statements will be executed. The final `else` part can be omitted. In that case, if all the boolean expressions are false, none of the statements are executed. Of course, each of the statements can be a block, consisting of a number of statements enclosed between `{` and `}`. Admittedly, there is lot of syntax here; as you study and practice, you'll become comfortable with it. It might be useful to look at a flow control diagram for the general "if..else if" statement shown above:

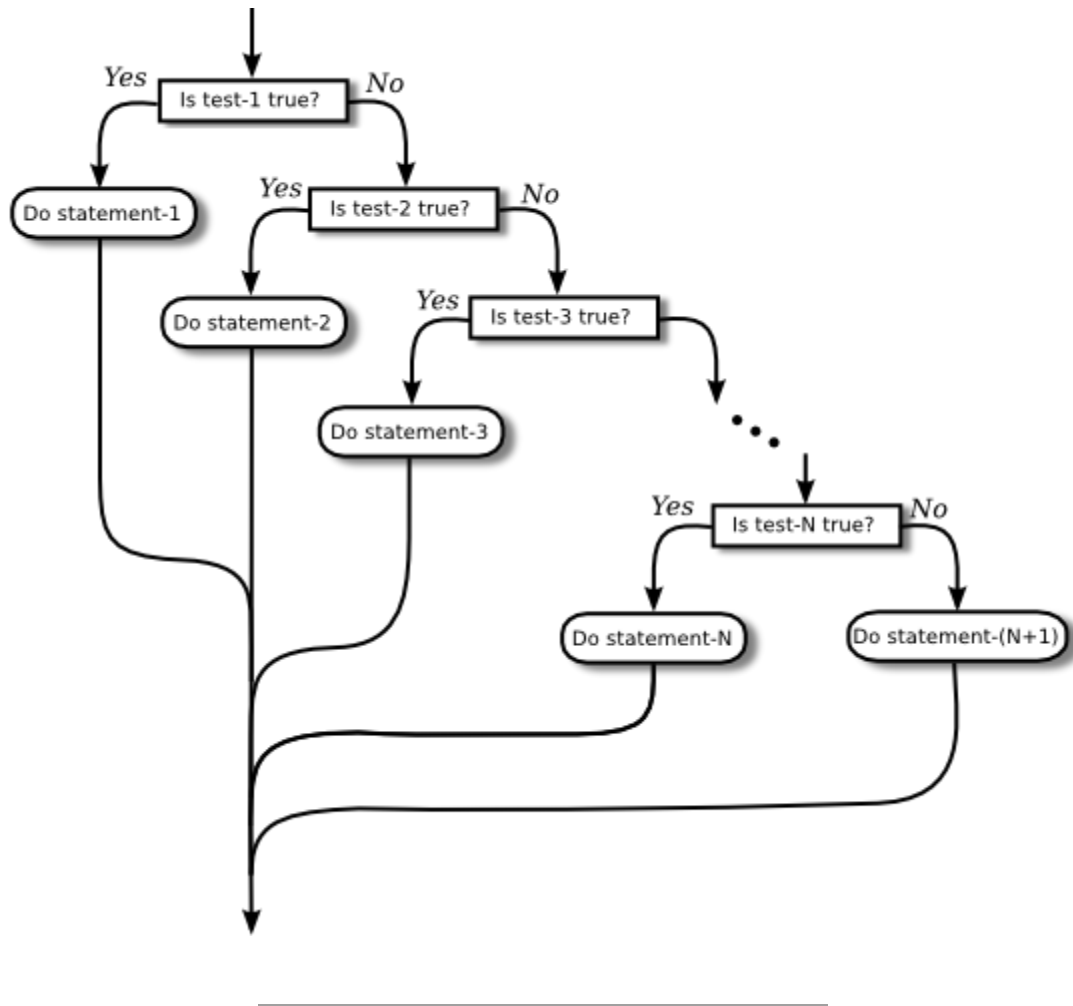

If Statement Examples

As an example of using `if` statements, let's suppose that `x`, `y`, and `z` are variables of type `int`, and that each variable has already been assigned a value. Consider the problem of printing out the values of the three variables in increasing order. For example, if the values are 42, 17, and 20, then the output should be in the order 17, 20, 42.

One way to approach this is to ask, where does `x` belong in the list? It comes first if it's less than both `y` and `z`. It comes last if it's greater than both `y` and `z`. Otherwise, it comes in the middle. We can express this with a 3-way `if` statement, but we still have to worry about the order in which `y` and `z` should be printed. In pseudocode,

```
if (x < y && x < z) {  
    output x, followed by y and z in their correct order  
}  
else if (x > y && x > z) {
```

```

        output y and z in their correct order, followed by x
    }
    else {
        output x in between y and z in their correct order
    }
}

```

Determining the relative order of y and z requires another `if` statement, so this becomes

```

if (x < y && x < z) {           // x comes first
    if (y < z)
        System.out.println( x + " " + y + " " + z );
    else
        System.out.println( x + " " + z + " " + y );
}
else if (x > y && x > z) {       // x comes last
    if (y < z)
        System.out.println( y + " " + z + " " + x );
    else
        System.out.println( z + " " + y + " " + x );
}
else {                           // x in the middle
    if (y < z)
        System.out.println( y + " " + x + " " + z );
    else
        System.out.println( z + " " + x + " " + y );
}

```

You might check that this code will work correctly even if some of the values are the same. If the values of two variables are the same, it doesn't matter which order you print them in.

Note, by the way, that even though you can say in English "if x is less than y and z," you can't say in Java "`if (x < y && z)`". The `&&` operator can only be used between boolean values, so you have to make separate tests, `x < y` and `x < z`, and then combine the two tests with `&&`.

There is an alternative approach to this problem that begins by asking, "which order should x and y be printed in?" Once that's known, you only have to decide where to stick in z. This line of thought leads to different Java code:

```

if ( x < y ) { // x comes before y
    if ( z < x ) // z comes first
        System.out.println( z + " " + x + " " + y );
    else if ( z > y ) // z comes last
        System.out.println( x + " " + y + " " + z );
    else // z is in the middle
        System.out.println( x + " " + z + " " + y );
}
else { // y comes before x

```

```

    if ( z < y )    // z comes first
        System.out.println( z + " " + y + " " + x );
    else if ( z > x )    // z comes last
        System.out.println( y + " " + x + " " + z );
    else    // z is in the middle
        System.out.println( y + " " + z + " " + x );
}

```

Once again, we see how the same problem can be solved in many different ways. The two approaches to this problem have not exhausted all the possibilities. For example, you might start by testing whether x is greater than y . If so, you could swap their values. Once you've done that, you know that x should be printed before y .

Finally, let's write a complete program that uses an `if` statement in an interesting way. I want a program that will convert measurements of length from one unit of measurement to another, such as miles to yards or inches to feet. So far, the problem is extremely under-specified. Let's say that the program will only deal with measurements in inches, feet, yards, and miles. It would be easy to extend it later to deal with other units. The user will type in a measurement in one of these units, such as "17 feet" or "2.73 miles". The output will show the length in terms of **each** of the four units of measure. (This is easier than asking the user which units to use in the output.) An outline of the process is

```

Read the user's input measurement and units of measure
Express the measurement in inches, feet, yards, and miles
Display the four results

```

The program can read both parts of the user's input from the same line by using `TextIO.getDouble()` to read the numerical measurement and `TextIO.getlnWord()` to read the unit of measure (You should be well versed with the `Scanner` class at this point and use that in place of `TextIO`). The conversion into different units of measure can be simplified by first converting the user's input into inches. From there, the number of inches can easily be converted into feet, yards, and miles. Before converting into inches, we have to test the input to determine which unit of measure the user has specified:

```

Let measurement = TextIO.getDouble()
Let units = TextIO.getlnWord()
if the units are inches
    Let inches = measurement
else if the units are feet
    Let inches = measurement * 12           // 12 inches per foot
else if the units are yards
    Let inches = measurement * 36         // 36 inches per yard
else if the units are miles

```



```

// measure.

System.out.println("Enter measurements in inches, feet,
yards, or miles.");
System.out.println("For example:  1 inch      17 feet      2.73
miles");
System.out.println("You can use abbreviations:  in  ft  yd
mi");
System.out.println("I will convert your input into the other
units");
System.out.println("of measure.");
System.out.println();

while (true) {

    /* Get the user's input, and convert units to lower case.
*/

    System.out.print("Enter your measurement, or 0 to end:
");
    measurement = TextIO.getDouble();
    if (measurement == 0)
        break; // Terminate the while loop.
    units = TextIO.getlnWord();
    units = units.toLowerCase(); // convert units to lower
case

    /* Convert the input measurement to inches. */

    if (units.equals("inch") || units.equals("inches")
        || units.equals("in")) {
        inches = measurement;
    }
    else if (units.equals("foot") || units.equals("feet")
        || units.equals("ft")) {
        inches = measurement * 12;
    }
    else if (units.equals("yard") || units.equals("yards")
        || units.equals("yd")) {
        inches = measurement * 36;
    }
    else if (units.equals("mile") || units.equals("miles")
        || units.equals("mi"))
    {
        inches = measurement * 12 * 5280;
    }
    else {
        System.out.println("Sorry, but I don't understand \""
            + units +
"\").");
        continue; // back to start of while loop
    }

    /* Convert measurement in inches to feet, yards, and
miles. */

    feet = inches / 12;

```



```

yards = inches / 36;
miles = inches / (12*5280);

/* Output measurement in terms of each unit of measure.
*/

    System.out.println();
    System.out.println("That's equivalent to:");
    System.out.printf("%14.5g inches\n", inches);
    System.out.printf("%14.5g feet\n", feet);
    System.out.printf("%14.5g yards\n", yards);
    System.out.printf("%14.5g miles\n", miles);
    System.out.println();

} // end while

System.out.println();
System.out.println("OK! Bye for now.");

} // end main()

} // end class LengthConverter

```

(Note that this program uses formatted output with the "g" format specifier. In this program, we have no control over how large or how small the numbers might be. It could easily make sense for the user to enter very large or very small measurements. The "g" format will print a real number in exponential form if it is very large or very small, and in the usual decimal form otherwise. Remember that in the format specification `%14.5g`, the 5 is the total number of significant digits that are to be printed, so we will always get the same number of significant digits in the output, no matter what the size of the number. If we had used an "f" format specifier such as `%14.5f`, the output would be in decimal form with 5 digits after the decimal point. This would print the number 0.000000000745482 as 0.00000, with no **significant** digits at all! With the "g" format specifier, the output would be 7.4549e-10.)
