



■ 1RZ AND 2RZ ENGINES

The starter of the 1RZ and 2RZ engine models for General Countries and the G.C.C. (Gulf Cooperation Council) countries has been changed from R1.0 kW to RA1.2 kW in order to improve startability.



New



Previous

258HL03

► Specifications ◀


Model	New	Previous
Rating Output	1.2 kW	1.0 kW
Rating Voltage	12 V	←
Length	144 mm (5.67 in)	166 mm (6.54 in)
Weight	3,400 g (7.49 lb)	3,850 g (8.48 lb)
Rotating of Direction*	Counterclockwise	←

*: Viewed from Pinion Side

■ 3RZ-FE ENGINE

1. General

- A thin-wall, ceramic type TWC has been adopted.
- One oxygen sensor has been newly provided in front of the TWC in order to improve the exhaust reduction performance of the TWC through feedback control to the engine ECU.

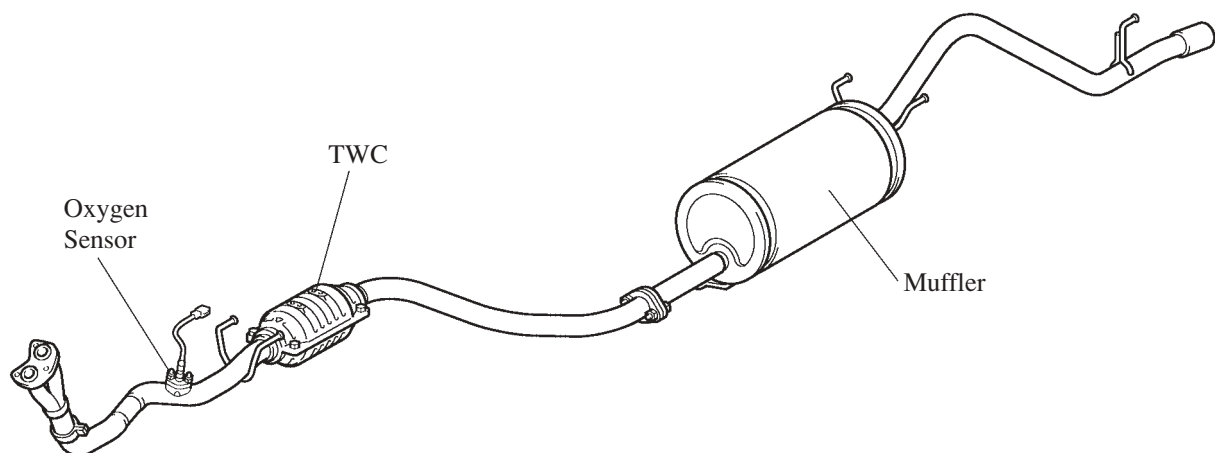

258HL01