DI088-20

DTC	P1520/95	Stop Light Switch Signal Malfunction (Only for A/T)
-----	----------	---


CIRCUIT DESCRIPTION

This signal is used to detect when the brakes have been applied. The STP signal voltage is the same as the voltage supplied to the stop lights.

The STP signal is used mainly to control the fuel cut-off engine speed (The fuel cut-off engine speed is reduced slightly when the vehicle is braking.).

DTC No.	DTC Detecting Condition	Trouble Area
D1500/05	The stop light switch does not turn off even once the vehicle is	, 5
1	driven (2 trip detection logic)	Stop light switch Engine ECU

WIRING DIAGRAM

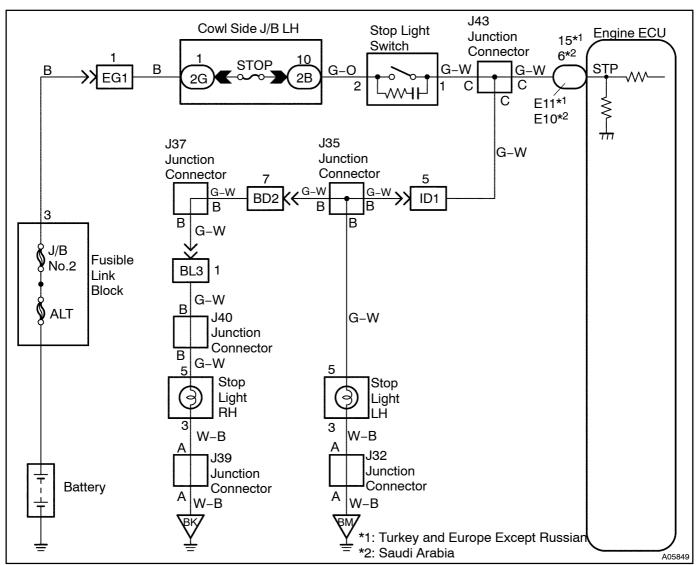

INSPECTION PROCEDURE

HINT:

Read[freeze[frame[data[using[a][hand-held[tester.]Because[freeze[frame[records[the[engine]conditions]when the malfunction[is] detected. When the model shooting, it is useful for determining whether the was funning for stopped, the engine was warmed up for hot, the air-fuel flatio was lean for flich, etc. at the time of the malfunction.

1 Check operation of stop ight.

CHECK:


Check[ift]hetstop[lightstopt]andtoffthormallytwhenthetbraketbedaltstoptatedtandteleased.

NG□

Check and repair stop light circuit.

OK

2 | Check STP signal.



When using hand-held tester:

PREPARATION:

- (a) ☐ Connect The Thand-held Tester To The TDLC3.
- (b) Turn[] he ignition switch ON and push he hand-held ester main switch ON.

CHECK:

Read the \$TP signal on the thand-held tester.

OK:

Brake[Pedal	STP[S ignal
Depressed	ON
Released	OFF

When hot using hand-held tester:

PREPARATION:

Turn he gnition witch N.

CHECK:

Check[]the[]voltage[]between[]terminal[]STP[]pf[]the[]engine[]ECU connector and body ground.

OK:

Brake Pedal	Voltage
Depressed	7.5 – 14 V
Released	Below 1.5 V

OK

Check for intermittent problems (See page DI-4).

NG

3 Check[harness[and[connector[between[engine[ECU[and[stop[]ight[switch (See[page]N-19)]]

NG

Repair [pr [replace [harness [pr [connector.

OK