

2. Major Difference (from previous model)

Item	Outline
Intake and Exhaust System	<ul style="list-style-type: none"> • Addition of TWC*¹ • Changed composition of TWC*² • Discontinuance of air cleaner warning switch*³
Engine Control System	<ul style="list-style-type: none"> • Adoption of the heated oxygen sensor*¹ • Discontinuance of variable resister*⁴
Other	Configuration and structure are the same as previous model* ³

*1: Australia Model and General Country Model (for Peru)


*2: General Country Model (for China)

*3: All Model

*4: Australia Model

3. Exhaust System

Two TWCs are used in order to comply with the European STEP II regulations.

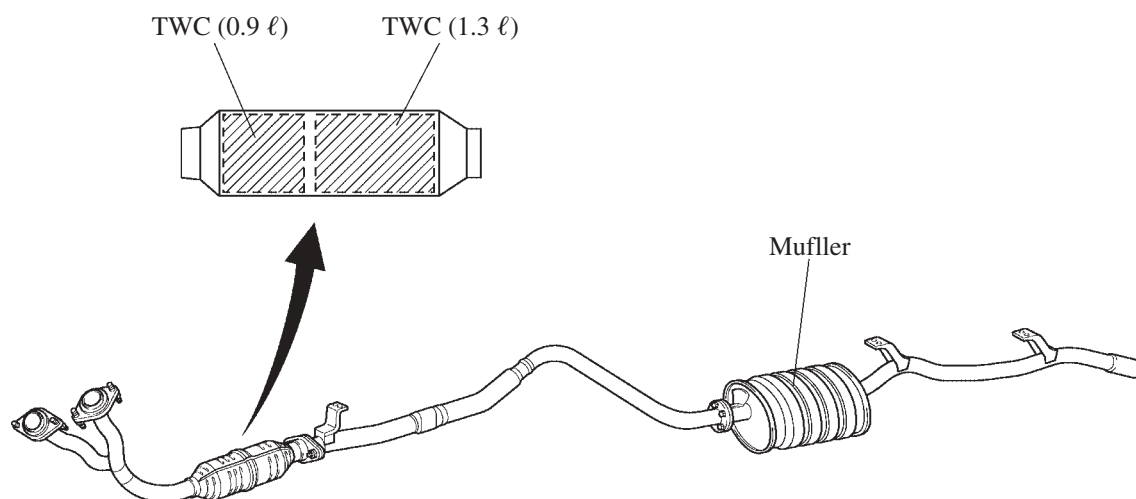

229LC02

► Specifications ◀

Location	New* ¹			Previous* ²		
	Cell Density	Volume	Material	Cell Density	Volume	Material
Front	62 cells/cm ² (400 cells/in ²)	875 cm ³ (53.4 cu. in.)	Ceramic	62 cells/cm ² (400 cells/in ²)	1291 cm ³ (78.8 cu. in.)	Ceramic
	62 cells/cm ² (400 cells/in ²)	1291 cm ³ (78.8 cu. in.)	Ceramic			

*1: Australia and General Countries Model for China and Peru

*2: General Countries Model for China