

OPUDA'S PAINT

The Complete Catalogue

2026 edition · 19 documented sites

Every colour, palette, product data sheet and real site photograph OPUDA'S PAINT publishes, bound together as one reference. Nine print products, one file.

OPUDA'S PAINT · PORT HARCOURT · NIGERIA

Digital proof. A screen or a printer cannot reproduce a paint film: colour depends on lighting, substrate, finish and application. Confirm every choice against a physical chip or a sample pot before ordering.

Contents

01 **Colour Book** p. 004
Fifty-nine colours in nine families, with the nine palettes built from them.
A5 portrait · 32 pages

02 **Room Book** p. 037
The same colours doing the actual work of a room — organised by job, not by name.
A5 portrait · 20 pages

03 **Complete Site Gallery** p. 058
Every real photograph on file, restored for print — one page per documented site.
A4 portrait · 20 pages

04 **Colour Wheel** p. 079
A single wall chart: the wheel, the full swatch grid, the library.
A4 portrait · 3 pages

05 **Specification Sheet** p. 083
The six products, by the surface they go on.
A4 landscape · 2 pages

06 **Fan Deck** p. 086
A one-page-per-family reference, the kind a painter works from on site.
A4 portrait · 19 pages

07 **Technical & Safety Data Sheets** p. 106
Coverage, cure, application and handling, grouped by product — matt, silk, primer, gloss, weathershield and screeding.
A4 portrait · 20 pages

This catalogue reproduces every page of the colour book, room book, colour wheel, specification sheet, fan deck and the twelve technical and safety data sheets exactly as each is published on its own, plus one new chapter: every real site photograph on file, restored for print. Nothing here is invented — concept artwork is labelled as a render, not a photograph, and a project with no verified colour or product record carries none.

SECTION 01 OF 07

01

Colour Book

Fifty-nine colours in nine families, with the nine palettes built from them.

A5 portrait · 32 pages



OPUDA'S PAINT

Colour Book

59 colours · nine families · 2026

Fifty-nine colours, nine families, nine palettes —
and the reasoning behind each one.

OPUDA'S PAINT · PORT HARCOURT · NIGERIA



OPUDA'S PAINT

Colour mixed in Port Harcourt.

We mix, we supply and we specify. The colour on a wall should be a decision you can defend — not a lucky guess under a shop light. This book exists to make that decision smaller.

Set in Instrument Serif and Archivo, both under the SIL Open Font License. Colours, codes, LRVs and product figures are generated from the data that serves opudapaint.com, so print and screen cannot disagree.

Contents

The book runs light to deep. Each family opens with the idea behind it and follows with the range, so a chapter can be read in the shop or handed across a counter.

00	Colour has a job to do	05
01	White & Off-White — Light, with an opinion	06
02	Warm Neutral — The quiet ground	08
03	Grey — Structure without drama	10
04	Green — The borrowed landscape	12
05	Blue — Cool that behaves	14
06	Purple & Mauve — The colour that changes its mind	16
07	Terracotta & Red — Warmth with weight	18
08	Yellow & Ochre — Light you can paint	20
09	Deep & Architectural — Rooms that hold you	22
10	Palettes that already work	24
11	On the wall	27
12	One colour, four lights	28
13	Specification	29
14	Where to start	30
15	Colours by room	31

Port Harcourt

Nine families, and the rooms each one is for.

How to read this book

Each colour carries four pieces of information. Together they are enough to choose with, and to argue with a painter about.

THE CODE

Permanent. Printed under every name and quoted when you order. A name may be revised; the code never changes, because it is what the mixing system, the dealer and your own record all point at.

THE FAMILY

The neighbourhood the colour lives in. Choosing a family first is the single biggest shortcut in this book: rooms fail when two colours from different temperatures are put next to each other without a decision.

THE UNDERTONE

Warm, cool or neutral — what the colour does beside its neighbours. Two greys can carry the same lightness and behave completely differently; the undertone is the difference.

THE LRV

Light reflectance value, 0 to 100. The higher the number, the more light the surface gives back. Below 30 a room needs more light than it did before; above 75 the wall starts to work as a reflector. Ours is estimated from the digital value, not measured from a dried film — treat it as a guide, and read it with a squint.

WHAT THIS BOOK CANNOT DO

A printer cannot reproduce a paint film, and neither can a screen. Colour depends on lighting, the substrate, the finish and the way it was applied — the same colour on ceiling plaster and on a rendered wall is two different experiences. Everything here is a printed approximation of a digital value. Confirm every choice against a physical chip or a sample pot before you buy paint. LRV figures are calculated from the digital value; they are not spectrophotometer readings of dried film.

Colour has a job to do

Most paint decisions are made in a shop, under a fluorescent tube, from a chip the size of a postage stamp. Then the colour goes onto a wall four metres wide, in a room that faces west, and everything the chip promised changes.

> *A white is never neutral. It carries a temperature, and the temperature decides the room.*

This book exists to shorten that distance. Every colour in it carries a code you can quote at a counter, a family it belongs to, an undertone that tells you what it will do next to other colours, and an estimated light reflectance value that tells you how much of the light in the room it will give back.

None of that replaces standing in the room with a sample pot. What it does is make the decision smaller. Choose the family first, then the palette, then the exact colour — in that order, the choice usually makes itself.



Every figure in this book is generated from the same data the website serves. Nothing here is transcribed by hand.

Light, with an opinion

Seven whites, no two the same temperature

A white is never neutral: every one carries a temperature, and that temperature decides whether a room reads warm or clinical. Ranging from a clean, cool white that holds its own beside steel and tile to an ivory warmed by late sun, these are the colours that do the quiet structural work of a house — ceilings, cornices, and the rooms you will repaint last.

01

RECOMMENDED AREAS

Ceilings and cornices · A whole-house base · Kitchens and bathrooms · Trim against stronger colour

ON THE WALL

Take the ceiling one step lighter than the wall. The same white on both reads flat; two whites read as depth.

PAIRS WITH WARM NEUTRAL

The range

07 COLOURS · LRV 72–91

Opuda White
OP-001 · LRV 91 · Neutral
#F8F5EE

Coconut Milk
OP-004 · LRV 85 · Warm
#F3EDE1

Stone White
OP-020 · LRV 85 · Cool
#EEEEEA

Ivory Coast
OP-012 · LRV 81 · Warm
#F0E8D6

Limestone
OP-008 · LRV 78 · Warm
#EBE4D5

Bone
OP-010 · LRV 74 · Warm
#E6DFCF

Cotton Paper
OP-016 · LRV 72 · Neutral
#E2DCD0

Take the ceiling one step lighter than the wall. The same white on both reads flat; two whites read as depth. Pairs with Warm Neutral.

The quiet ground

Sand, clay and taupe, a step lighter than you think

Neutrals do the hardest job in a house: they let the furniture, the art and the people be the subject. In this light the mistake is almost always the same — a neutral chosen to match the floor exactly, which leaves the room looking unfinished. Ours are pitched a step lighter, so they carry the daylight without turning grey.

02

RECOMMENDED AREAS

Living rooms and bedrooms · Exterior render · Hallways and stairwells · Bands and dado rails

ON THE WALL

Never match the floor. Move a step lighter or darker than the timber and the room separates itself.

PAIRS WITH GREEN

The range

09 COLOURS · LRV 21–59

Savannah Sand
OP-104 · LRV 59 · Warm
#DBC7A6

Warm Oat
OP-108 · LRV 54 · Warm
#D4C0A1

Bonny Haze
OP-136 · LRV 53 · Cool
#C2C1B8

Desert Linen
OP-116 · LRV 48 · Warm
#CCB498

Clay Beige
OP-112 · LRV 43 · Warm
#C6AA88

Pebble
OP-132 · LRV 38 · Neutral
#A8A69C

Mushroom
OP-120 · LRV 32 · Neutral
#A69788

Taupe Drift
OP-124 · LRV 29 · Warm
#A3917C

Bronze Dust
OP-128 · LRV 21 · Warm
#8F7A62

Never match the floor. Move a step lighter or darker than the timber and the room separates itself. Pairs with Green.

Structure without drama

The family that makes other colours look deliberate

Grey is the most useful colour in this book and the easiest to get wrong. Warm greys sit comfortably beside clay and timber; cool greys give a room precision but turn muddy next to a warm neutral. On joinery, piers and doors, grey is what makes a coloured wall look chosen rather than accidental.

03

RECOMMENDED AREAS

Joinery, doors and frames · Exterior piers and plinths · Studies and home offices · A quiet feature wall

ON THE WALL


Test a grey against the colour it will sit beside, never on its own. A cool grey next to a warm neutral drags both towards green.

PAIRS WITH BLUE

The range

05 COLOURS · LRV 1–61


Morning Mist
OP-709 · LRV 61 · Cool
#CACFCB



Slate Grey
OP-705 · LRV 17 · Cool
#6A7371



Graphite
OP-701 · LRV 5 · Neutral
#3A3F3C



Charcoal Wall
OP-713 · LRV 3 · Neutral
#2A2E2B



Window Black
OP-717 · LRV 1 · Neutral
#1B1D1C

Test a grey against the colour it will sit beside, never on its own. A cool grey next to a warm neutral drags both towards green. Pairs with Blue.

The borrowed landscape

Eight greens that behave like neutrals

A well-chosen green brings the garden inside without asking permission, and in a climate this green that is a real advantage. These run from a deep forest that holds a library together to a misted eucalyptus for rooms that never get direct sun. Green is also the most forgiving family under artificial light: it rarely shifts.

04

RECOMMENDED AREAS

Lower walls and dados · Studies and libraries · Garden rooms and verandas · Exterior metalwork and gates

ON THE WALL

Green reads darker on four walls than it does as a chip. On a north-facing wall, take one step lighter than the sample suggests.

PAIRS WITH WARM NEUTRAL

The range

08 COLOURS · LRV 6–66

Eucalyptus Mist
OP-229 · LRV 66 · Cool
#CED7C8



Sage Whisper
OP-225 · LRV 51 · Warm
#B9C1A7



Olive Branch
OP-221 · LRV 20 · Warm
#7D7F4E



Moss Room
OP-217 · LRV 18 · Warm
#6B7B55



Delta Emerald
OP-213 · LRV 13 · Cool
#15734F



Opuda Green
OP-201 · LRV 11 · Cool
#0C6B45



Palm Shadow
OP-209 · LRV 9 · Cool
#3E5C46



Forest Floor
OP-205 · LRV 6 · Cool
#2B4A37

Green reads darker on four walls than it does as a chip. On a north-facing wall, take one step lighter than the sample suggests. Pairs with Warm Neutral.

Cool that behaves

From a lagoon at noon to a midnight

Blue is the family most affected by the light it lives in. A deep blue reads almost black by lamplight and opens up completely in daylight, which makes it the most dramatic choice here — and the one that rewards a proper primer. The pale end is calmer: powder and harmattan sky keep a hot room from feeling hotter.

05

RECOMMENDED AREAS

A dramatic feature wall · Bedrooms · Exterior fences and boundary walls · Bathrooms and wet rooms

ON THE WALL

A deep blue over a light wall is three coats, not two. Tint the primer towards the topcoat and the third coat becomes optional.

PAIRS WITH WHITE & OFF-WHITE

The range

07 COLOURS · LRV 3–63

Powder Blue
OP-313 · LRV 63 · Cool
#C2D2DD

Harmattan Sky
OP-309 · LRV 49 · Cool
#A7BECD

Blue Fence
OP-325 · LRV 19 · Cool
#2F7FA8

Denim Room
OP-317 · LRV 15 · Cool
#566F8A

Lagoon
OP-305 · LRV 13 · Cool
#2C6E85

Atlantic Blue
OP-301 · LRV 7 · Cool
#1E4E6B

Indigo Night
OP-321 · LRV 3 · Cool
#263050

A deep blue over a light wall is three coats, not two. Tint the primer towards the topcoat and the third coat becomes optional. Pairs with White & Off-White.

The colour that changes its mind

Lilac, plum and the shades between

Purple is the family that surprises people, and it is worth knowing why: mauve and lilac carry so little colour of their own that whatever sits underneath shows through. Over a warm white primer a lilac drifts peach; over a grey one it goes cool. Prime the whole wall, not just the patches, and what you chose is what you get.

06

RECOMMENDED AREAS

Bedrooms · Alcoves and reveals · Lounges · Children's rooms

ON THE WALL

Prime the entire wall in one tint. Patch-priming is why two rooms painted the same colour come out different.

PAIRS WITH GREY

The range

06 COLOURS · LRV 4–62

Blush Room
OP-621 · LRV 62 · Warm
#E6C8C0

Lilac Room
OP-605 · LRV 56 · Cool
#D1BFD5

Mauve Linen
OP-613 · LRV 41 · Neutral
#C2A5AD

Dusty Grape
OP-617 · LRV 18 · Cool
#8C6D85

Plum Velvet
OP-609 · LRV 9 · Cool
#6B3FA3

Aubergine
OP-601 · LRV 4 · Cool
#4A2B45

Prime the entire wall in one tint. Patch-priming is why two rooms painted the same colour come out different. Pairs with Grey.

Warmth with weight

Brick, clay and the strongest accent in the book

Red advances. On a wall it shortens the distance between you and the surface, which is why it works so well in a dining room and so badly down a narrow corridor. The terracotta end is the practical half of the family: warm, earthy, and forgiving of the dust and sun that anything exterior will meet.

07

RECOMMENDED AREAS

Feature and dining walls · Exterior plinths and boundary walls · Gates and ironwork · Alcoves and reveals

ON THE WALL

Reds show a lap mark more than any other colour. Keep a wet edge, roll in one direction, and never stop in the middle of a wall.

PAIRS WITH WARM NEUTRAL

The range

07 COLOURS · LRV 9–33



Coral Dust
OP-413 · LRV 33 · Warm
#D08B72



Terracotta
OP-401 · LRV 20 · Warm
#B4654A



Clay Pot
OP-405 · LRV 15 · Warm
#A9553C



Festival Red
OP-421 · LRV 12 · Warm
#C1121F



Brick Lane
OP-409 · LRV 10 · Warm
#8C4533



Rust Ember
OP-425 · LRV 10 · Warm
#8A4A2B



Crimson Seal
OP-417 · LRV 9 · Warm
#A8101B

Reds show a lap mark more than any other colour. Keep a wet edge, roll in one direction, and never stop in the middle of a wall. Pairs with Warm Neutral.

Light you can paint

The only family that adds daylight to a room

Yellow lifts a space without a window, which makes it useful in corridors, stairwells and kitchens that face away from the sun. It is also the least forgiving family on a poor surface: colour this saturated shows every ripple in the plaster, so fill, sand and prime before committing a whole wall to it.

08

RECOMMENDED AREAS

Kitchens · Corridors and stairwells · Exterior accents and trim · Ceilings in dark rooms

ON THE WALL

Inspect the wall under a raking light before you paint. If you can see it unlit, yellow will show it twice.

PAIRS WITH WHITE & OFF-WHITE

The range

05 COLOURS · LRV 30–59

Apricot Wall
OP-517 · LRV 59 · Warm
#E8C3A1

Harmattan Sun
OP-501 · LRV 50 · Warm
#E3B45F

Golden Hour
OP-509 · LRV 47 · Warm
#DAAF69

Marigold
OP-513 · LRV 41 · Warm
#DF9F2A

Ochre
OP-505 · LRV 30 · Warm
#C58A3C

Inspect the wall under a raking light before you paint. If you can see it unlit, yellow will show it twice. Pairs with White & Off-White.

Rooms that hold you

Colours that shrink a space, on purpose

The deepest colours here are not for every room, but nothing else does what they do: a dark room, painted properly, feels deliberate and quiet rather than small. On doors, frames and joinery against a pale wall they cost almost nothing and change everything. Deep colour is judged by its edges, so the preparation matters more than the coat.

09

RECOMMENDED AREAS

Feature walls and studies · Doors, frames and joinery · Exterior joinery · Ceilings in tall rooms

ON THE WALL

Brush the last coat on a textured wall rather than rolling it: a roller leaves a stipple you will see in every raking light.

PAIRS WITH WHITE & OFF-WHITE

The range

05 COLOURS · LRV 3–18



Bronze Patina
OP-817 · LRV 18 · Warm
#6D7A62



Cocoa Brown
OP-809 · LRV 5 · Warm
#593A2B



Deep Ocean
OP-805 · LRV 4 · Cool
#1B3A50



Midnight Teal
OP-801 · LRV 3 · Cool
#14332F



Espresso
OP-813 · LRV 3 · Warm
#3A2A22

Brush the last coat on a textured wall rather than rolling it: a roller leaves a stipple you will see in every raking light. Pairs with White & Off-White.

Palettes

1 OF 3

Bonny Evening

THE DELTA EDIT

OP-301	OP-010	OP-001	OP-509
Feature wall	**Main walls**	**Ceilings & trim**	**Accent**

A river-facing living room at dusk: deep Atlantic on the wall behind the seating, bone on the remaining walls so the room still reads as light, and a single golden accent on the joinery.

Best for living rooms with west-facing glazing.

Harmattan Haze

HARMATTAN

OP-104	OP-112	OP-813	OP-001
Main walls	**Lower band**	**Trim & doors**	**Ceilings**

The whole palette of December: dust-warm sand on the walls, a deeper clay dado, espresso on the doors and pure white ceilings to keep the light bouncing.

Best for open-plan interiors with timber furniture.

Lilac Lounge

THE DELTA EDIT

OP-605	OP-617	OP-001	OP-132
Main walls	**Feature alcove**	**Ceilings & cornice**	**Floor tone reference**

Taken directly from a finished OPUDA'S job in GRA Phase 2, Port Harcourt: lilac across the main walls, a deeper grape in the recessed alcove, and white cornices doing the structural work.

Best for bedrooms and small lounges.

Palettes

2 OF 3

Peach Corridor

HARMATTAN

OP-517	OP-413	OP-004	OP-613
Corridor walls	**Recess**	**Ceilings**	**Adjoining room**

A warm corridor that borrows light from the room beyond it — apricot on the long walls, coral in the deep recess, and a mauve transition room you glimpse at the end.

Best for corridors, stairwells and circulation with no daylight.

Rain Season

RAIN SEASON

OP-209	OP-225	OP-010	OP-817
Lower walls	**Upper walls**	**Ceilings**	**External joinery**

A green that behaves like a neutral. Palm Shadow anchors the lower wall, Sage Whisper lifts the upper wall, and Bronze Patina ties the exterior metalwork to the garden.

Best for rooms with a garden view, studies and libraries.

Plum Study

THE SIGNATURE

OP-609	OP-601	OP-120	OP-001
Feature wall	**Returns & reveals**	**Adjoining walls**	**Ceilings & trim**

A study built for evening use: saturated plum on the wall you face, aubergine in the reveals so the colour continues when the door is open, and mushroom elsewhere to keep it calm.

Best for studies, media rooms and libraries.

Roles run left to right.

Palettes

3 OF 3

Terracotta Court

HARMATTAN




OP-401	OP-008	OP-409	OP-717
Main facade	**Render and trims**	**Plinth band**	**Frames & gates**

A courtyard elevation that has to work in strong sun: terracotta body, limestone bands to stop it overheating, a brick-red plinth, and black frames for crispness.

Best for facades, boundary walls and gatehouses.

Blue Fence

THE DELTA EDIT



OP-325	OP-020	OP-705	OP-717
Boundary wall	**Facade**	**Piers**	**Fence & gate**

The turquoise boundary wall seen on an estate in Rumuola, paired with stone-white render and black steel so the blue reads as a deliberate architectural decision rather than a whim.

Best for exteriors and boundary walls.

Quiet Luxury

THE SIGNATURE



OP-120	OP-124	OP-128	OP-012
Main walls	**Feature**	**Trim detail**	**Ceilings**

Four neutrals and no colour, relying entirely on depth and reflectivity. This is the palette specifiers come back to when a client says "nothing too strong".

Best for speculative developments and rentals.

Roles run left to right.

On the wall

Three jobs on this page, and the palette specified for each. Every photograph is a site we painted; the colours listed under a caption are the ones the job record specifies, which is a narrower claim than the one the picture makes.



The arched villa
GRA Phase 2, Port Harcourt · 2025
specified: OP-010 · OP-132 · OP-409 · OP-701 · OP-001




The lilac lounge
GRA Phase 2, Port Harcourt · 2024



Creek-facing facade
Woji, Port Harcourt · 2025

One colour, four lights

The same wall, from a rainy morning to a lamp at ten at night. The paint does not change; the light does, and with it the temperature you read. This is why a colour chosen at noon can feel wrong at dinner — and why the largest surfaces in a room deserve a colour you have seen at your worst hour of light, not your best.

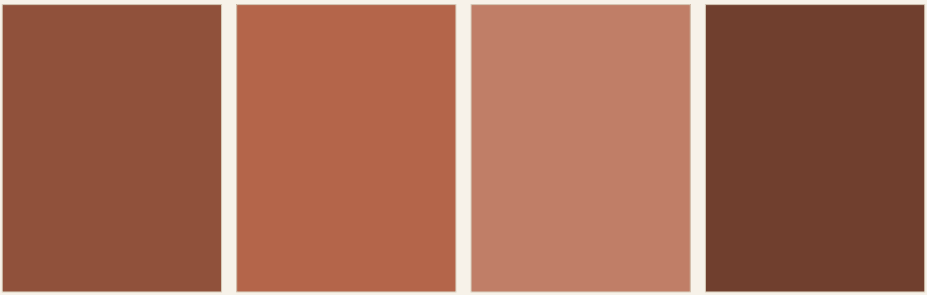

Rain, 7am
#90513B
Cool and flat. Everything loses saturation.

Harmattan noon
#B4654A
The reference. Judge the swatch here.

Late afternoon
#C07E67
Warmth arrives; undertone becomes visible.

Lamp, 9pm
#703F2E
Deepens fast. Pale colours warm, deep colours close.

WORKED EXAMPLE · TERRACOTTA OP-401

This is a demonstration of value, not a photograph: each panel is the same colour moved lighter or darker, which is what the eye does when the light changes. The order is what matters. A colour that only works in the noon panel will disappoint in the evening one.

Ask which way the room faces before you choose. East and west rooms change through the day and need a colour that survives both ends. A north-facing room is the coolest and needs the warmest step in the family. A south wall takes the steadiest light and can carry the strongest colour.

Specification

How much paint, which system, and in what order. Figures are per litre of a single coat on a sound, sealed surface; a porous or unpainted wall will always take more. Your dealer can turn a wall area into a pack list.

PRODUCT	FINISH	COVERAGE	PACKS
MATT Emulsion	Matt (flat), sheen < 5%	11 m² per litre	1L/4L/10L/20L
SILK Emulsion	Silk (soft sheen), 10-15%	12 m² per litre	1L/4L/10L/20L
Alkali-Resisting Primer	Primer (sealing coat)	10 m² per litre	4L/20L
Synthetic Gloss	Gloss, sheen 80%+	13 m² per litre	1L/4L/20L
Weathershield	Textured exterior coating	6 m² per litre	10L/20L
Screeding Compound	Filler / base coat	1.6 m² per kg at 1 mm thickness	10kg/25kg

WHERE EACH PRODUCT GOES

Interior walls	MATT · SILK · Alkali-Resisting Primer · Weathershield · Screeding Compound
Ceilings	MATT · Screeding Compound
Kitchens & bathrooms	SILK
Exterior walls	Alkali-Resisting Primer · Weathershield
Timber & metal	Synthetic Gloss
New plaster & blockwork	Alkali-Resisting Primer · Screeding Compound

HOW MUCH PAINT

Wall area ÷ coverage × coats = litres

A 4 m × 3 m wall is 12 m². Two coats of a product covering 11 m² per litre is 12 ÷ 11 × 2 = 2.2 litres, so a 4 L pack, with enough left over to cut in. Subtract doors and windows; add ten per cent for a porous or unpainted wall.

Where to start

01

Choose a family

Start with the chapter that matches the room's job, not with a colour you liked somewhere else. Every family chapter lists the rooms it suits.

02

Take a sample pot

Paint a 500 mm square on the actual wall — two coats, right to the edge — and live with it for a day. Look at it at night with the lamps on.

03

Quote the code

OP-401, not "the terracotta one". The code is what the mixing system, the dealer and this book all agree on.

04

Size the job

Measure the wall area, subtract the openings, and take the coverage figure from the specification page. Two coats, every time.

The colour on the wall is the last decision, not the first. Get the family right and the rest is arithmetic.

TRADE COUNTER

Port Harcourt · Rivers State

Colour mixing and trade sales · 0902 642 4350

Dealers nationwide · opudapaint.com/dealers

hello@opudapaint.com

Colours by room

Every colour carries the rooms it suits, the same tags the website filters by. Use this page when the room is decided and the colour is not.

LIVING · 45

Opuda White OP-001 Coconut Milk OP-004 Ivory Coast OP-012 Limestone OP-008 Bone OP-010 Savannah Sand OP-104 Apricot Wall OP-517 Warm Oat OP-108 Bonny Haze OP-136 Harmattan Sun OP-501 Desert Linen OP-116 Golden Hour OP-509 Clay Beige OP-112 Mauve Linen OP-613 Pebble OP-132 Mushroom OP-120 Ochre OP-505 Taupe Drift OP-124 Bronze Dust OP-128 Olive Branch OP-221 Terracotta OP-401 Moss Room OP-217 Dusty Grape OP-617 Bronze Patina OP-817 Slate Grey OP-705 Denim Room OP-317 Clay Pot OP-405 Delta Emerald OP-213 Lagoon OP-305 Opuda Green OP-201 Brick Lane OP-409 Rust Ember OP-425 Palm Shadow OP-209 Crimson Seal OP-417 Plum Velvet OP-609 Atlantic Blue OP-301 Forest Floor OP-205 Graphite OP-701 Cocoa Brown OP-809 Aubergine OP-601 Deep Ocean OP-805 Indigo Night OP-321 Charcoal Wall OP-713 Midnight Teal OP-801 Espresso OP-813

BEDROOM · 23

Coconut Milk OP-004 Ivory Coast OP-012 Limestone OP-008 Bone OP-010 Cotton Paper OP-016 Eucalyptus Mist OP-229 Powder Blue OP-313 Blush Room OP-621 Savannah Sand OP-104 Apricot Wall OP-517 Lilac Room OP-605 Sage Whisper OP-225 Harmattan Sky OP-309 Desert Linen OP-116 Golden Hour OP-509 Clay Beige OP-112 Mauve Linen OP-613 Coral Dust OP-413 Taupe Drift OP-124 Moss Room OP-217 Dusty Grape OP-617 Denim Room OP-317 Palm Shadow OP-209

KITCHEN · 4

Stone White OP-020 Sage Whisper OP-225 Marigold OP-513 Olive Branch OP-221

BATHROOM · 5

Stone White OP-020 Eucalyptus Mist OP-229 Powder Blue OP-313 Morning Mist OP-709 Lagoon OP-305

CHILDREN · 8

Powder Blue OP-313 Blush Room OP-621 Lilac Room OP-605 Sage Whisper OP-225 Harmattan Sun OP-501 Harmattan Sky OP-309 Marigold OP-513 Coral Dust OP-413

OFFICE · 20

Limestone OP-008 Morning Mist OP-709 Warm Oat OP-108 Bonny Haze OP-136 Pebble OP-132 Mushroom OP-120 Ochre OP-505 Delta Emerald OP-213 Opuda Green OP-201 Plum Velvet OP-609 Atlantic Blue OP-301 Forest Floor OP-205 Graphite OP-701 Cocoa Brown OP-809 Aubergine OP-601 Deep Ocean OP-805 Indigo Night OP-321 Charcoal Wall OP-713 Midnight Teal OP-801 Espresso OP-813

EXTERIOR · 22

Opuda White OP-001 Bone OP-010 Savannah Sand OP-104 Clay Beige OP-112 Pebble OP-132 Mushroom OP-120 Bronze Dust OP-128 Terracotta OP-401 Blue Fence OP-325 Bronze Patina OP-817 Slate Grey OP-705 Clay Pot OP-405 Festival Red OP-421 Opuda Green OP-201 Brick Lane OP-409 Rust Ember OP-425 Crimson Seal OP-417 Atlantic Blue OP-301 Forest Floor OP-205 Graphite OP-701 Espresso OP-813 Window Black OP-717

CEILING · 7

Opuda White OP-001 Coconut Milk OP-004 Cotton Paper OP-016 Eucalyptus Mist OP-229 Morning Mist OP-709 Bonny Haze OP-136 Harmattan Sky OP-309

A room tag is a starting point, not a specification: a colour can suit a bedroom and still be wrong for a bedroom that faces west.

OPUDA'S PAINT

Masters of the surface.

Colour mixed, specified and supplied in Port Harcourt. Dealers nationwide.

opudapaint.com
Colour library, calculator, dealers

hello@opudapaint.com
Enquiries and specification support

Port Harcourt
Rivers State, Nigeria

Printed proof. Colour shown here is an approximation of a paint film: confirm every choice against a physical chip before ordering.



SECTION 02 OF 07

02

Room Book

The same colours doing the actual work of a room — organised by job, not by name.

A5 portrait · 20 pages



OPUDA'S PAINT · VOLUME TWO

Room Book

Four methods for choosing colour by the job it has to do

2026 · PORT HARCOURT

A colour is not a scheme

A colour on a chip is a decision about paint. A scheme is a decision about a room: which surface carries the colour, which surface stays quiet, and where the light lands. The same pot of Atlantic Blue is a calm bedroom wall or an overwhelming one depending entirely on the two metres next to it.

So this book is organised by job rather than by colour. A method is a problem that shows up in almost every job we quote — the surface you cannot afford to paint twice, the cheap face, the room that is too dark, the detail that decides the whole elevation — and each one is shown on a wall we have actually painted.

> *Choose the surfaces, not the colours. The colours are the easy part.*

TWO VOLUMES

Colour Book
the library, indexed by colour — nine families, 59 colours, 9 palettes

Room Book
the library, indexed by the job the colour has to do

Set in Instrument Serif and Archivo. Plates are OPUDA'S site photographs with a wall repainted; every colour, code and LRV comes from the data that serves opudapaint.com.

Contents

Four methods, then the collections they draw from, then the order to decide in. Each method is a problem that turns up on almost every job we quote.

00 **A colour is not a scheme** 02

01 **Aperture — The colour behind the light** 05

02 **Substrate — When the surface is the problem** 08

03 **Threshold — The surface a street judges first** 11

04 **Depth — Contrast is chosen, not discovered** 14

05 **Four collections, four arguments** 17

06 **Which surface takes which method** 18

07 **The order to decide in** 19

Sixteen colourways on four real Port Harcourt sites.

How to read this book

Each method opens with the problem and what it costs to get wrong, then shows colourways on one of our own jobs. Every plate carries the same three things.

THE PLATE

A real photograph from an OPUDA'S site, with a wall repainted in the colour listed beneath it. Nothing else in the picture has been altered — not the furniture, not the sky, not the unfinished floor.

THE COLOURWAY

Three or four colours with a role each. A scheme is not a set of colours; it is an order, and the role line tells you which surface each one is for.

THE LRV

Light reflectance value, 0–100, estimated from the digital value. It is how much of the light in the room the surface gives back. Choose the darkest plane in the room last, and check its number before you commit.

WHAT A RENDERED PLATE IS NOT

A repainted photograph is a simulation of a paint film on a wall, and the simulation has limits: it cannot model the sheen of a finish at a grazing angle, the way an emulsion covers a patch, or the colour of the light at eight in the evening. It is a better decision aid than a chip and a worse record than a sample pot. Paint a 500 mm square on the actual wall, look at it at night, and then order.

The colour behind the light

Two wall colours, one room, and the difference each one makes

Almost every room we are asked to look at has one wall the light actually comes from. Paint it the same as the others and the room goes flat; paint it the darkest colour you like and the room turns into a tunnel. The wall around the opening is the one surface whose colour you will see most often and judge most quickly — from the doorway, from the corridor, in the two seconds before anyone walks in.


01

THE PRINCIPLE

Give the opening wall the second-deepest colour in the scheme, never the deepest. The deepest belongs on the feature plane the light does not touch.

Colourways

THE BEDROOM AT RUMUOKORO

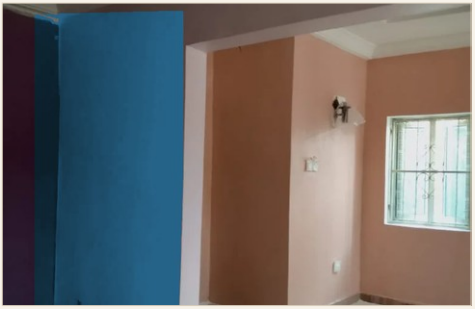


Evening Room

Atlantic Blue
OP-301 · LRV 7 · Wall beside the opening

PAIR WITH OP-004

Atlantic on the wall beside the opening; the reveal stays pale

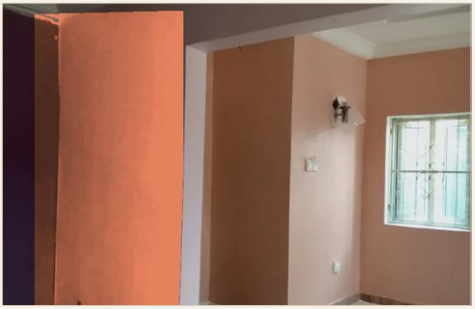


Clay Room

Terracotta
OP-401 · LRV 20 · Wall beside the opening

PAIR WITH OP-008

Terracotta warms the corridor before anyone walks in

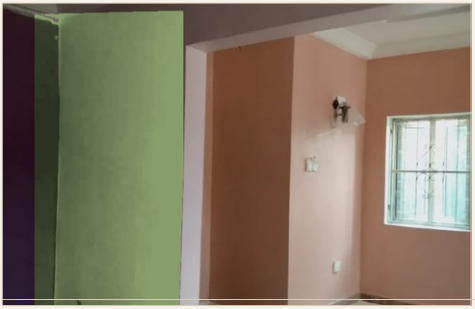

Moss Room

Moss Room
OP-217 · LRV 18 · Wall beside the opening

PAIR WITH OP-010


A green that reads as a neutral from the doorway

Give the opening wall the second-deepest colour in the scheme, never the deepest. The deepest belongs on the feature plane the light does not touch.

The plate

The bedroom at Rumuokoro

1 repaintable plane · three planes, one light source

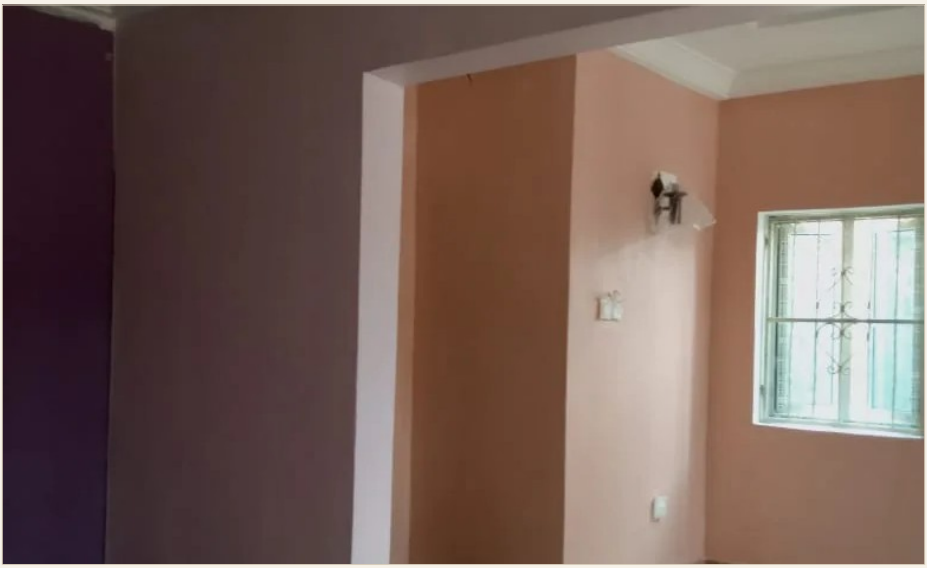

The photograph as taken. Every plate in this chapter starts from this frame.

REPAINTED

main wall

LEFT ALONE

Floors, ceilings, joinery, furniture, sky and every other surface in the frame

HOW

The wall's own luminance normalised against its mean, then multiplied by the chosen paint — so shadows, corners and highlights survive

SHARED

16.1% of the frame is repainted; nothing else is touched

When the surface is the problem

Skim, prime, or paint — decided before the colour is chosen

Plaster varies. A wall that has been skimmed twice takes colour differently from a wall built of block and rendered in one pass, and a wall that has been patched takes it differently again — the patches pull at the paint and show through a pale colour as a ghost you cannot unsee. No amount of quality in the topcoat fixes a substrate that was not sealed.


02

THE PRINCIPLE

Decide the system before the colour: one coat of alkali-resisting primer over the whole wall, not just the repairs. A tinted primer also removes the third coat that a deep colour would otherwise need.

Colourways

THE FEATURE WALL AT GRA PHASE 2

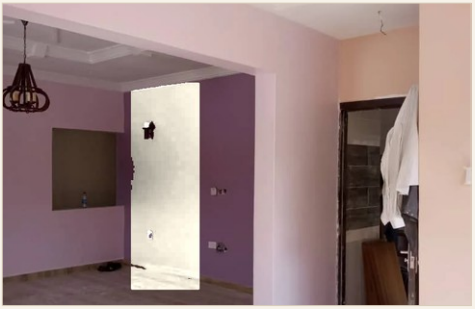


Sealed and Pale

Bone
OP-010 · LRV 74 · Feature wall

PAIR WITH OP-008

Bone over one full priming coat; no patch shows through

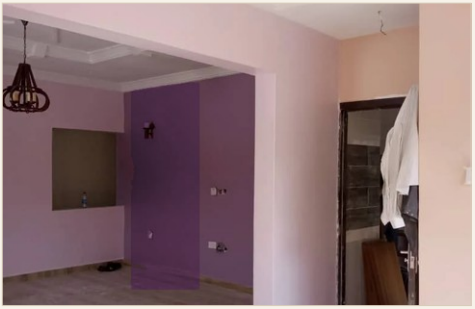


Sealed and Deep

Aubergine
OP-601 · LRV 4 · Feature wall

PAIR WITH OP-004

Aubergine after a tinted primer, so two coats finish it

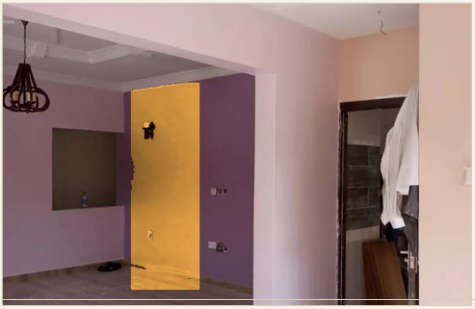

Sealed and Warm

Ochre
OP-505 · LRV 30 · Feature wall

PAIR WITH OP-020


Ochre on a wall that was skimmed in two passes

Decide the system before the colour: one coat of alkali-resisting primer over the whole wall, not just the repairs. A tinted primer also removes the third coat that a deep colour would otherwise need.

The plate

The feature wall at GRA Phase 2

1 repaintable plane · one wall changed, everything else left alone

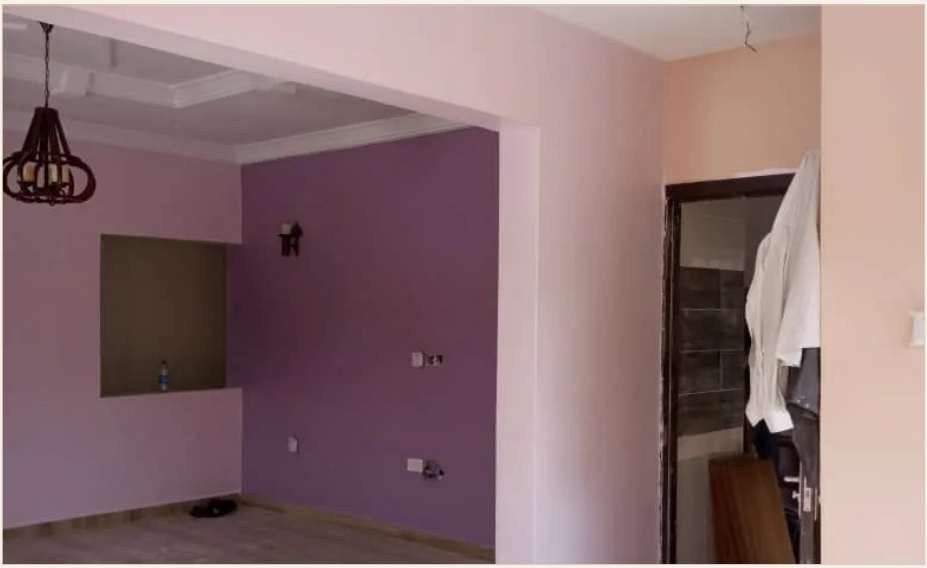

The photograph as taken. Every plate in this chapter starts from this frame.

REPAINTED

feature wall

LEFT ALONE

Floors, ceilings, joinery, furniture, sky and every other surface in the frame

HOW

The wall's own luminance normalised against its mean, then multiplied by the chosen paint — so shadows, corners and highlights survive

SHARED

4.7% of the frame is repainted; nothing else is touched

The surface a street judges first

Boundary walls, plinths and the band that separates them

A boundary wall is the largest painted surface most of our customers own and the one nobody thinks about until it is wrong. It has to work in flat light and in sun, from twenty metres and from the pavement, next to brick or stone that will not be repainted. Get the band wrong and the whole elevation looks like an afterthought; get it right and it reads as architecture.

03

THE PRINCIPLE

Two surfaces, two values. Keep the panel pale enough to throw the brick forward, and take the plinth band a full step darker than the panel so the wall stops looking like it is floating.

Colourways

THE BOUNDARY WALL AT GRA PHASE 2



Pale Ground

Opuda White
OP-001 · LRV 91 · Wall panels

Terracotta
OP-401 · LRV 20 · Plinth band

White panel, brick plinth, nothing else



Harmattan Band

Savannah Sand
OP-104 · LRV 59 · Wall panels

Brick Lane
OP-409 · LRV 10 · Plinth band

Sand panel with a deeper clay line



Delta Shadow

Bonny Haze
OP-136 · LRV 53 · Wall panels

Rust Ember
OP-425 · LRV 10 · Plinth band

A pale grey panel against red brick

Two surfaces, two values. Keep the panel pale enough to throw the brick forward, and take the plinth band a full step darker than the panel so the wall stops looking like it is floating.

The plate

The boundary wall at GRA Phase 2

2 repaintable planes · the surface a street actually judges you by



The photograph as taken. Every plate in this chapter starts from this frame.

REPAINTED

wall panels, brick base

LEFT ALONE

Floors, ceilings, joinery, furniture, sky and every other surface in the frame

HOW

The wall's own luminance normalised against its mean, then multiplied by the chosen paint — so shadows, corners and highlights survive

SHARED

13.0%, 2.7% of the frame is repainted; nothing else is touched

Contrast is chosen, not discovered

Ironwork, frames and the dark line that holds a facade together

The darkest surface on a building is usually a decision made by default — the gate is black because gates are black. But the dark line is what the eye reads as structure: it is the difference between a fence that belongs to a wall and a fence that was installed next to one. On ironwork it also decides how loudly the metalwork announces itself from the road.

04

THE PRINCIPLE

One dark accent, used consistently, and never two darks at different temperatures. If the gate is charcoal, the railings are charcoal; a warm brown gate beside a cold grey railing looks like a mistake because it is one.

Colourways

THE GATE ON A RUMUOLA BOUNDARY



Charcoal Line

Window Black
OP-717 · LRV 1 · Ironwork

PAIR WITH OP-321

One black, everywhere, including the railings



Atlantic Iron

Indigo Night
OP-321 · LRV 3 · Ironwork

PAIR WITH OP-701

A cool blue-black reads softer from the road



Deep Green

Opuda Green
OP-201 · LRV 11 · Ironwork

PAIR WITH OP-713

A green-dark that ties the gate to a garden

One dark accent, used consistently, and never two darks at different temperatures. If the gate is charcoal, the railings are charcoal; a warm brown gate beside a cold grey railing looks like a mistake because it is one.

The plate

The gate on a Rumuola boundary

1 repaintable plane · ironwork is a colour decision too



The photograph as taken. Every plate in this chapter starts from this frame.

REPAINTED

ironwork

LEFT ALONE

Floors, ceilings, joinery, furniture, sky and every other surface in the frame

HOW

The wall's own luminance normalised against its mean, then multiplied by the chosen paint — so shadows, corners and highlights survive

SHARED

27.4% of the frame is repainted; nothing else is touched

Four collections, four arguments

The library is grouped into collections. They are not seasons and they are not trend forecasts: each one is a position on how colour should behave in Nigerian light, and each is a starting point rather than a rule.

The Signature

28 COLOURS

OP-001 Opuda White | OP-004 Coconut Milk | OP-020 Stone White | OP-008 Limestone

The house range. Neutrals and deeps that will not date, specified on more of our jobs than everything else combined — which is also why they are the ones we can speak about with the most confidence.

The Delta Edit

07 COLOURS

OP-012 Ivory Coast | OP-605 Lilac Room | OP-136 Bonny Haze | OP-613 Mauve Linen

Colours taken from finished jobs around Port Harcourt: a lilac lounge in GRA, a turquoise boundary wall in Rumuola. Every one of them has been mixed for a real customer and seen on a real wall.

Harmattan

17 COLOURS

OP-313 Powder Blue | OP-621 Blush Room | OP-104 Savannah Sand | OP-517 Apricot Wall

Dust-warm. December light is flatter and cooler than the rest of the year, and these are the colours that hold their temperature in it — sand, clay, ochre, and the reds that read warm without going hot.

Rain Season

07 COLOURS

OP-229 Eucalyptus Mist | OP-225 Sage Whisper | OP-221 Olive Branch | OP-217 Moss Room

Greens and cool neutrals for the months when the light never gets above grey. In a rainy-season room a green is effectively a neutral; these are the ones that stay green instead of going grey.

Which surface takes which method

The four methods are not rooms; they are surfaces. A job usually needs two or three of them at once, and the order below is the order they should be decided in.

APERTURE

Doorway walls, reveals, corridor ends, any wall with an opening in it

SUBSTRATE

Skimmed plaster, patched walls, block and render, ceilings

THRESHOLD

Boundary walls, plinths, gatehouses, retaining walls

DEPTH

Ironwork, frames, doors, shutters, the plinth of a facade

ON A TYPICAL HOUSE

Threshold on the boundary wall and plinth; Aperture on the entrance and the walls either side of the openings; Depth on the gate, railings and shutters; Substrate on everything that has been rendered in one pass.

WHY THIS ORDER

Because a substrate decision can force a colour decision, and a colour decision can never force a substrate one. If the wall needs a tinted primer, the topcoat changes; if the topcoat changes, the primer does not.

The order to decide in

01

Surface, then colour

Decide what is being painted and how it will be sealed before choosing anything. A colour chosen before the substrate is a colour chosen twice.

02

One plane at a time

Write the scheme down as surfaces with roles — feature, main, ceiling, trim — not as a list of colours. A scheme with no roles is a palette, and a palette is not a plan.

03

Check the darkest number

The deepest colour in the scheme sets how much light the room gives back. If its LRV is under 20, plan the lighting before you plan the paint.

04

Sample on the wall

Two coats on a 500 mm square, right to the edge, and live with it for a day. Every plate in this book is a simulation; the wall is not.

The paint is the last decision. The surfaces are the first, and they are the ones that cannot be changed without sanding.

TRADE COUNTER

Port Harcourt · Rivers State

Colour mixing and trade sales · 0902 642 4350

Dealers nationwide · opudapaint.com/dealers

hello@opudapaint.com

OPUDA'S PAINT

Masters of the surface.

Volume two of the colour library: four methods for choosing paint by the job it has to do, shown on rooms we have actually painted.

THE SERIES

Colour Book
the library, indexed by colour

Room Book
the library, indexed by the job

opudapaint.com
Colour library, calculator, dealers

hello@opudapaint.com
Enquiries and specification support

Port Harcourt
Rivers State, Nigeria

Plates are OPUDA'S site photographs with a wall repainted. A repainted photograph is a simulation: confirm every choice against a physical chip before ordering.

SECTION 03 OF 07

03

Complete Site Gallery

Every real photograph on file, restored for print — one page per documented site.

A4 portrait · 20 pages

Every real photograph on file

The site's own gallery is screen resolution, compressed for a fast page load. The photographs here are the same files, decoded again and restored for print: a fixed lift in contrast, colour and sharpness, applied identically to every frame, to recover what a phone camera and a WhatsApp forward threw away. Nothing is retouched beyond that, and no photograph claims to show an exact paint colour — the disclaimer on every colour page in this file still applies.

READING THE ENTRIES

Stage	Completed, in progress, or a concept design. A concept carries a render, not a photograph.
Location	City and district level only — no estate name is published without the client's consent.
Colour & product	Shown only where a verified job sheet exists. No entry here is guessed from a photo.

EXTERIOR · COMPLETED

GRA Phase 2, Port Harcourt · 2025

The arched villa

A two-storey build with stone-clad piers and a deep arched entrance, finished in warm off-white with grey pilasters and a charcoal roof.









OP-010 OP-132 OP-409 OP-701 OP-001

Off-white plus a grey pier and a brick plinth — three colours, no more.

THE STORY

The brief was restraint: let the stone and the arch do the work, and keep the painted surfaces quiet enough to sit behind them.

The body of the house was finished in a warm off-white with the pier faces picked out in a cooler grey, so the elevation reads as two planes rather than one flat wall. The plinth and boundary pillars carry a brick-red band that ties the house to the street wall.

Because the facade faces the weather, the exterior system was built on primer plus two full coats, with the top coat applied from the top of the elevation downwards so that any lap marks fall behind the scaffold line rather than across the arch.

EXTERIOR · COMPLETED

Woji, Port Harcourt · 2025

Creek-facing facade

A cream render with strong white bands and a stone feature column, painted while the surrounding estate was still under construction.







OP-012 OP-001 OP-020 OP-705

Cut in the light bands first, then bring the body colour to them.

THE STORY

Salt air and direct afternoon sun are unforgiving on exterior colour. This elevation was specified in the Weathershield system with a primer base so that the render's varying porosity would not print through as patches.


The white bands and cornice were cut in first and allowed to cure, so the cream body colour could be brushed up to a hard, straight line without masking tape lifting the fresh film.

INTERIOR · COMPLETED

GRA Phase 2, Port Harcourt · 2024

The lilac lounge

A living room wrapped in lilac with a deeper plum alcove, white cornice and a peach corridor beyond.

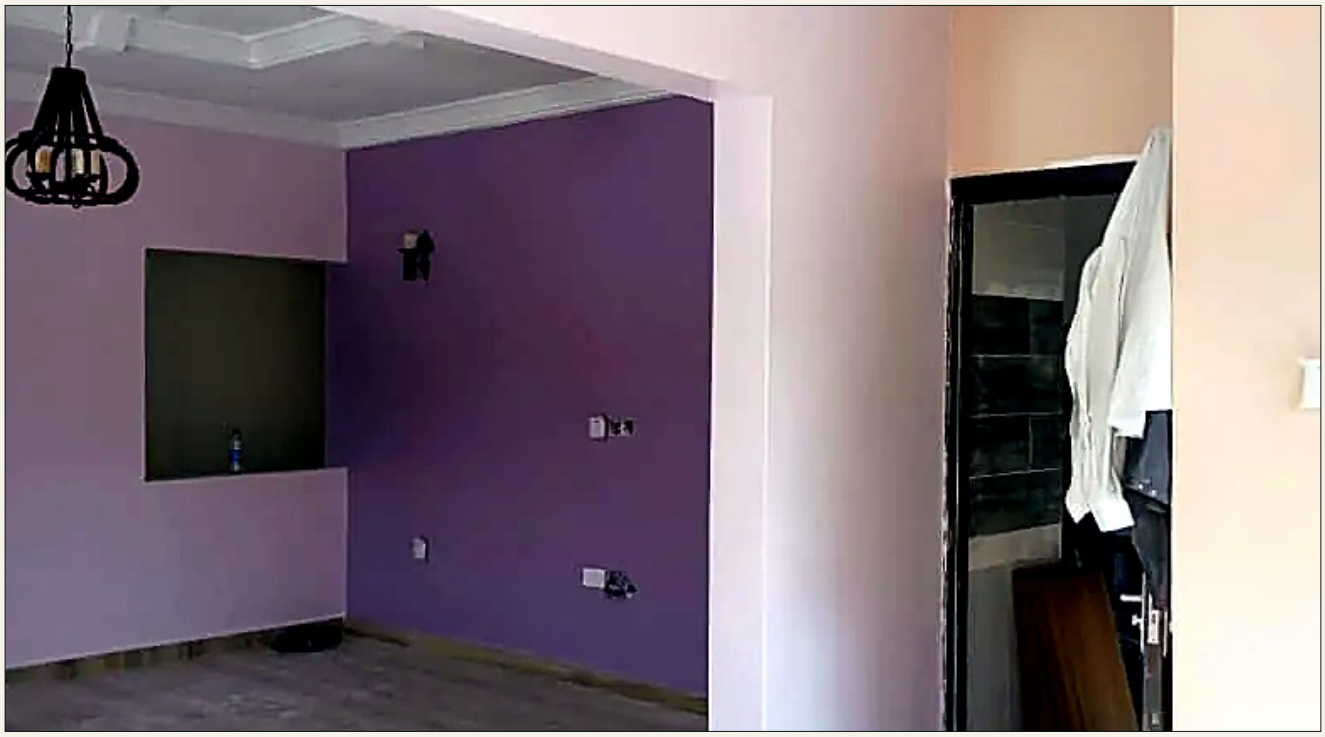

OP-605 OP-617 OP-001 OP-621

Use a deeper tone inside the recess, not on the wall beside it.

THE STORY

This is the room that gave us Lilac Room. The client wanted colour that would not date, and a half-height lilac above a deeper plum in the recessed alcove achieved depth without darkening the space.

Everything was finished in Silk rather than Matt: the room opens onto a balcony, and the washable sheen has held up to two rainy seasons of humidity without blooming.


The cornice and picture rail were kept in Opuda White so the eye reads the architecture first and the colour second.

INTERIOR · IN PROGRESS

Rumuokoro, Port Harcourt · 2024

Peach corridor

A circulation space with no daylight, treated with warm peach and a coral recess so the corridor feels lit even in the evening.

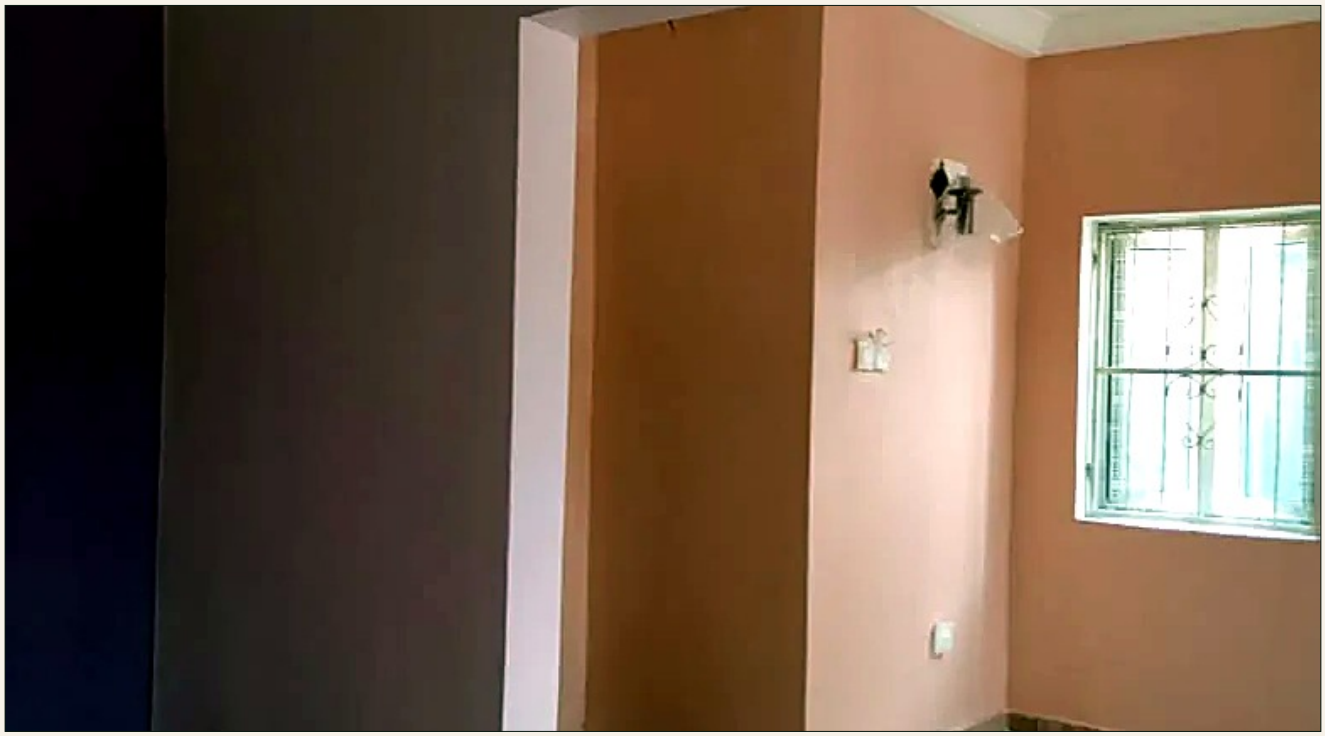

OP-517 OP-413 OP-004 OP-613

In a dark corridor, go warmer than you think you should.

THE STORY

Corridors are where warm colours earn their keep. The peach here is applied in Matt — at this distance from the eye, texture is invisible and the extra coverage matters.

The photograph was taken before the floor was cleaned and the joinery fitted: this is what a room looks like the day after the second coat, which is the honest moment to photograph a paint job.


BOUNDARY & GATE · COMPLETED

Rumuola, Port Harcourt · 2025

Blue boundary wall

A turquoise boundary wall with black steel spikes, stone-white render and rusticated brick piers.



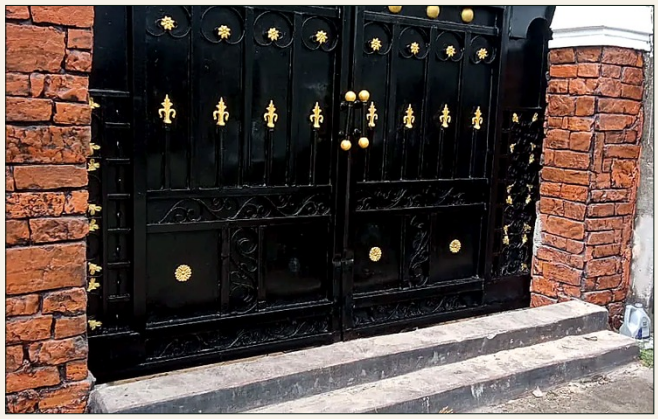



OP-325 OP-717 OP-020 OP-409

Soft black on ironwork keeps the detail; pure black loses it.

THE STORY

A boundary wall is the largest painted surface most Port Harcourt homes own, and the one most often left grey. This one was specified in a saturated outdoor blue that holds its colour under UV.

The ironwork was finished in Window Black rather than a pure black: under direct sun, pure black reads as a hole, while a soft black keeps the detail of the spikes and scrollwork visible.

CONCEPT DESIGN · CONCEPT

Concept — GRA, Port Harcourt · 2026

Modern cube study

CONCEPT RENDER

An architectural study testing how much of a contemporary facade can be carried by colour blocking alone: white, charcoal and timber.





OP-713 OP-020 OP-701

Two colours and a material will beat five colours and no logic.

THE STORY

These renders exist to answer a question we get weekly: how do you make a plain rendered house look designed?

The answer in this study is proportion, not paint: a charcoal volume floats above a white base, with timber battens providing the only warmth. The palette is two colours and a material.

Marked as a concept because no paint has been applied yet — the value here is the decision, which is exactly the point at which we like to be involved.

BOUNDARY & GATE · COMPLETED

Port Harcourt, Rivers State · 2025

Stone-brick pier wall

A boundary wall and double gate finished with a stone-effect brick cladding on the piers, white-capped and paired with a black wrought-iron gate.





No verified colour or product record on file for this site.

A stone-effect pier reads as masonry even where the rest of the wall is plain render.

THE STORY

The entrance piers carry a stone-effect brick finish in a warm red-brown, each capped with a plain white band, flanking a black double gate with scrollwork cresting. A bungalow with a white portico sits behind the gate.

A second pier a few streets away, photographed three days later, shows the same red-brick finish run alongside a plain grey rendered panel — a reminder that this stone-effect cladding is usually one material among several on a single elevation, not the whole wall.


EXTERIOR · COMPLETED

Port Harcourt, Rivers State · 2023

Scaffold to finished elevation


A two-storey elevation in white above a dusty mauve ground-floor band, photographed at four stages across one week: scaffold up, balcony detail, the gate at dusk, then the completed house.



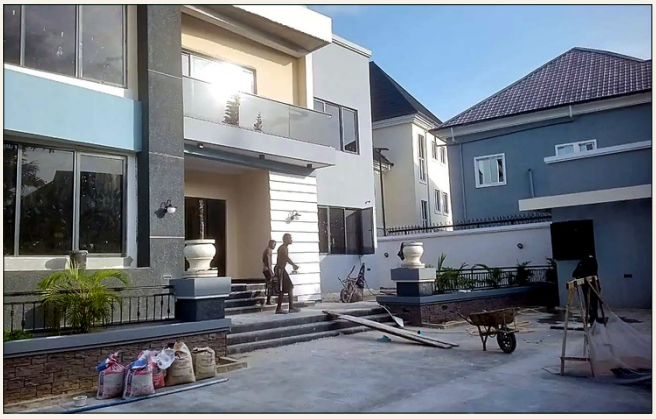





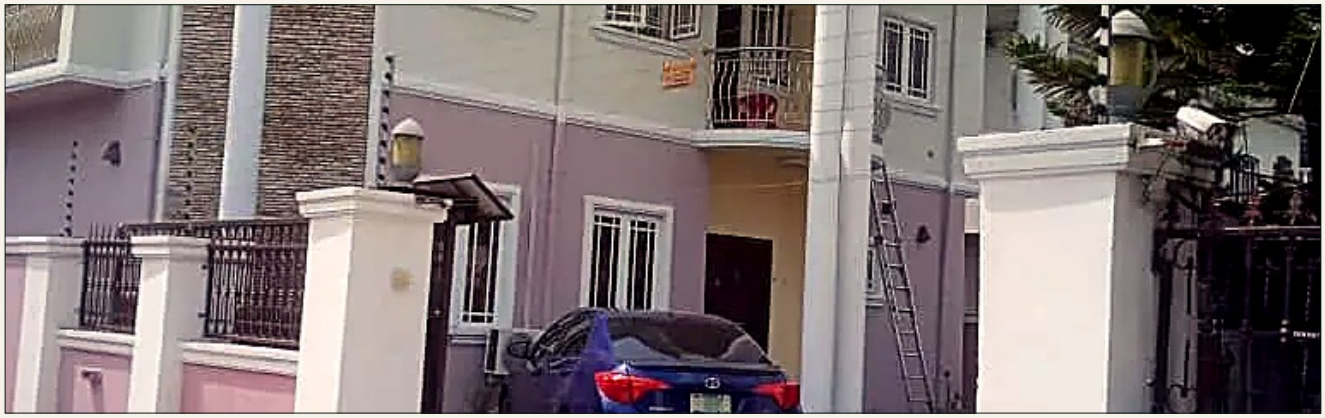

No verified colour or product record on file for this site.

Photographing the same elevation at each stage is the plainest way to show a paint job is real.

THE STORY

13 December, mid-afternoon: the scaffold is still up and a painter is working the upper storey by hand, the mauve band already laid in on the ground floor beneath him; a second, wider shot from the same afternoon shows the finished boundary wall and gate alongside the scaffold, with the household dog visible through the railing.


16 December, mid-afternoon: a closer shot of the entrance bay shows the balcony soffit and a pale cream wall still being finished, with dust sheets and a stepladder on site.


INTERIOR · COMPLETED

Port Harcourt, Rivers State · Undated

The gallery corridor

A stairwell and an adjoining hallway, both finished in plain white and hung edge to edge with framed artwork, with dark tile underfoot.

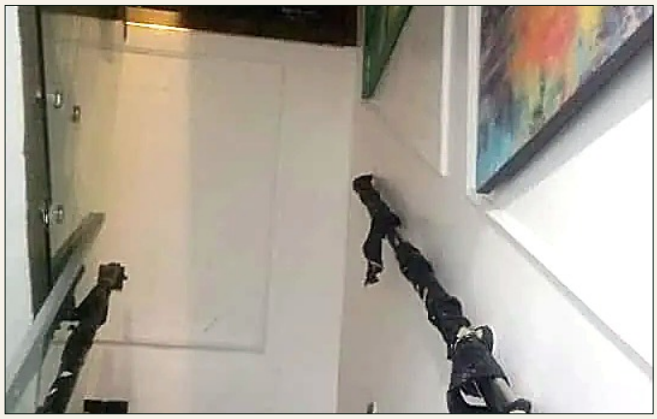

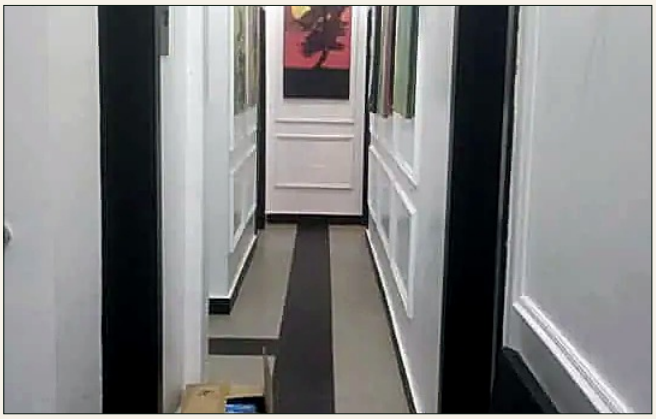

No verified colour or product record on file for this site.

Plain white walls are what let a hung collection read as a gallery rather than clutter.

THE STORY

The stairwell walls are kept flat white so a run of framed paintings reads clearly against them; the handrail is wrapped for protection, which suggests other work was still under way nearby.

The hallway continues the same white wall and dark floor strip, lined on both sides with more framed pieces — plain backgrounds doing the work of a gallery wall rather than a corridor.

EXTERIOR · IN PROGRESS

Port Harcourt, Rivers State · Undated

Commercial facade in progress

A multi-storey commercial building mid fit-out, faced in grey and white composite cladding panels with bamboo scaffold still up on the street elevation.



No verified colour or product record on file for this site.

Cladding and painted render age differently side by side — worth planning for at the design stage, not after.

THE STORY

Unlike the house projects on this page, this elevation is being finished in composite cladding panels rather than painted render — included here because it is part of the same site record and shows the scale some of this work reaches.

BOUNDARY & GATE · COMPLETED

Port Harcourt, Rivers State · 2025

Grey stone-pattern boundary wall

A boundary wall cast with a grey stone-block pattern and dark bronze-effect piers, capped in white under an arched wrought-iron gate, with the house behind faced in matching pale stone tile.





No verified colour or product record on file for this site.

Carry a textured finish past the gate and along the wall — stopping it at the piers looks unfinished.

THE STORY

Two photographs of the same wall taken minutes apart: the gate end, with the bungalowu2019s tiled gable and portico columns visible beyond it, and a second stretch of plain wall further along, still stacked with aggregate from the build.

The grey stone-block texture and dark pier finish are carried right along the boundary, not just at the entrance, which is what makes the gate feel part of the wall rather than bolted onto it.

EXTERIOR · IN PROGRESS

Port Harcourt, Rivers State · Undated

Cream elevation under scaffold

A cream rendered elevation still on bamboo scaffold, with a stone-tile accent panel being fitted beneath the windows and a charcoal roof already in place.



No verified colour or product record on file for this site.

Roof and frames go in first; the body colour is brought up to meet them, not the other way round.

THE STORY

The roof and window frames are finished first; the wall colour and the stone-tile accent strip are still being brought up to meet them, which is the usual order of work on an exterior.

EXTERIOR · COMPLETED

Port Harcourt, Rivers State · Undated

Modern grey duplex

A contemporary grey duplex with crisp white banding and a dark feature panel at first floor, electric-fence wire along the parapet, and a matching grey boundary wall with planted beds at its base.





No verified colour or product record on file for this site.

Repeating the house colour on the boundary wall is what ties a plot together from the street.

THE STORY

The body colour is a flat mid-grey, broken up by white string-courses at each floor line and a near-black composite panel at the stair window — a plain, two-tone treatment rather than a patterned one.

The boundary wall repeats the same grey and white banding at street level, with a run of young planting set into the base of the wall.


INTERIOR · IN PROGRESS

Port Harcourt, Rivers State · 2025

Pastel interior finish

An open-plan room finished in pale yellow with raised panel moulding, photographed at three stages: an early shot before the skirting was fitted, then with the marble floor still sheeted for protection, then once the glazed sliding door and skirting were in.



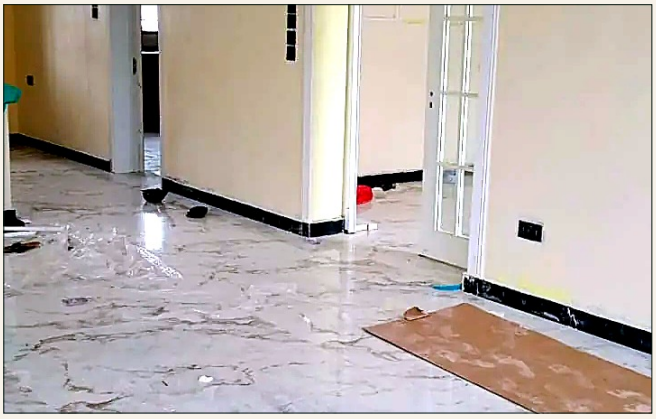



No verified colour or product record on file for this site.

Paint and moulding are usually finished well before the floor protection comes up — photograph both stages, not just the reveal.

THE STORY

6 April: the walls and ceiling cove are already finished in pale yellow and white, but the marble floor is still bare of skirting and a trestle stands in the middle of the room.

A later, undated photograph shows the floor under plastic sheeting with off-cuts from the flooring stacked against the wall — the wall colour and panel moulding are already finished at this point.

By the most recent photograph the protective sheeting is gone, a black-framed glazed sliding door has been hung on a barn-door track, and a ceiling-mounted camera has gone in — the room read as substantially finished but not yet handed over.

EXTERIOR · IN PROGRESS

Port Harcourt, Rivers State · 2025

Arched bungalow portico

A single-storey house finished in cream above a taupe plinth band, with a hipped roof and a triple-arched portico carried on fluted white columns.



No verified colour or product record on file for this site.

Painting the columns a shade lighter than the wall is what makes an arched portico read as a feature rather than a frame.

THE STORY


The body colour and plinth band are already finished, and the portico columns and arches are painted crisp white against the cream wall behind them. Two window frames are still lying on the ground beside the porch, not yet glazed and fitted.

EXTERIOR · IN PROGRESS


Port Harcourt, Rivers State · 2025

Teal-banded duplex

A contemporary duplex in white and dark charcoal with a teal band at first floor, a glazed balcony balustrade, and white stone-effect urns flanking the entrance steps.

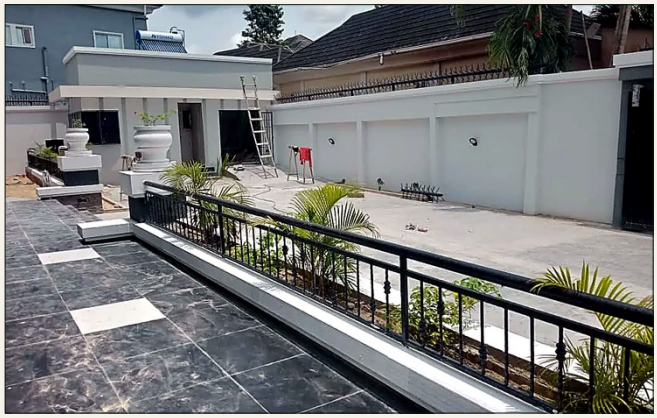



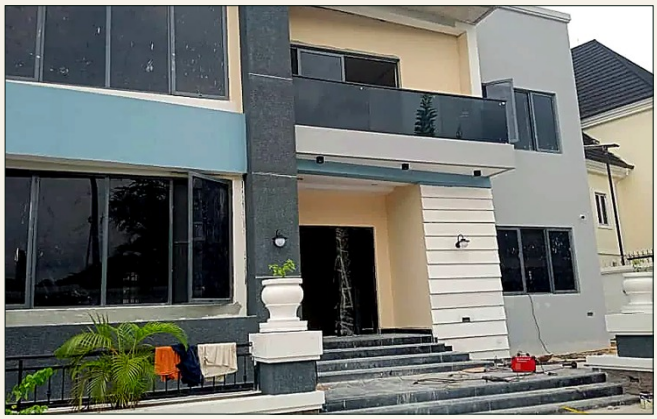



No verified colour or product record on file for this site.

A single accent band at one floor line is enough to lift a grey-and-white elevation without it looking stripy.

THE STORY

13 April: two men finish rendering the white entrance bay beside the charcoal pier, with building sand still bagged on the ground and the urns already in place either side of the steps.

24 April: the rear courtyard is paved and the garage wall across it is finished in white, though a ladder is still up against the outbuilding roof and the planting beds are freshly dug.

EXTERIOR · IN PROGRESS

Port Harcourt, Rivers State · Undated

Ornate dormer elevation

A two-storey house in pale cream with a multi-gabled dark roof, a dormer window, and a vertical stone-tile accent pier beside an arched, stone-surrounded doorway.





No verified colour or product record on file for this site.

A single stone-tile pier against a plain cream wall reads as a deliberate feature, not a patch.

THE STORY

The roof, cornice and window trims are finished, and the stone-tile pier is in; the boundary wall in front is still bare block capped with steel anti-climb spikes, and building sand is still on the ground. A near-identical tower on the plot next door is at the same stage of construction.

EXTERIOR · IN PROGRESS

Port Harcourt, Rivers State · Undated

Powder-blue portico, dressed for an occasion

A grand white portico on round columns over a powder-blue ground floor, photographed with balloon bunting strung along the upper balcony and a painter still finishing the porch ceiling from a scaffold tower.



No verified colour or product record on file for this site.

Powder-blue and white reads as celebratory without needing a stronger colour.

THE STORY

The powder-blue and white colour scheme is complete across the visible elevation; the only work still under way is a painter touching in the underside of the porch roof from a mobile scaffold, with an ornamental pine in the foreground and a high-rise under construction next door.

EXTERIOR · IN PROGRESS

Port Harcourt, Rivers State · Undated

Commercial render with glazing

A multi-storey commercial building finished in grey render with white window surrounds and blue-tinted glazing, external air-conditioning units already mounted, and bamboo scaffold still up on one corner.



No verified colour or product record on file for this site.

White trim around dark glazing is a cheap way to keep a plain grey render from reading as unfinished.

THE STORY

Unlike the composite-clad commercial block photographed separately for this site record, this building is finished in painted render rather than cladding panels — included here because it shows a different commercial finish within the same street record.

SECTION 04 OF 07

04


Colour Wheel

A single wall chart: the wheel, the full swatch grid, the library.

A4 portrait · 3 pages

The colour wheel

All 59 colours in the library, arranged as nine wedges of one ring. Each wedge is a family, each slice within it a colour, lightest to darkest working outward from the top. It is a map of the library, not a mixing wheel — the slice widths follow how many colours a family has, not hue theory.

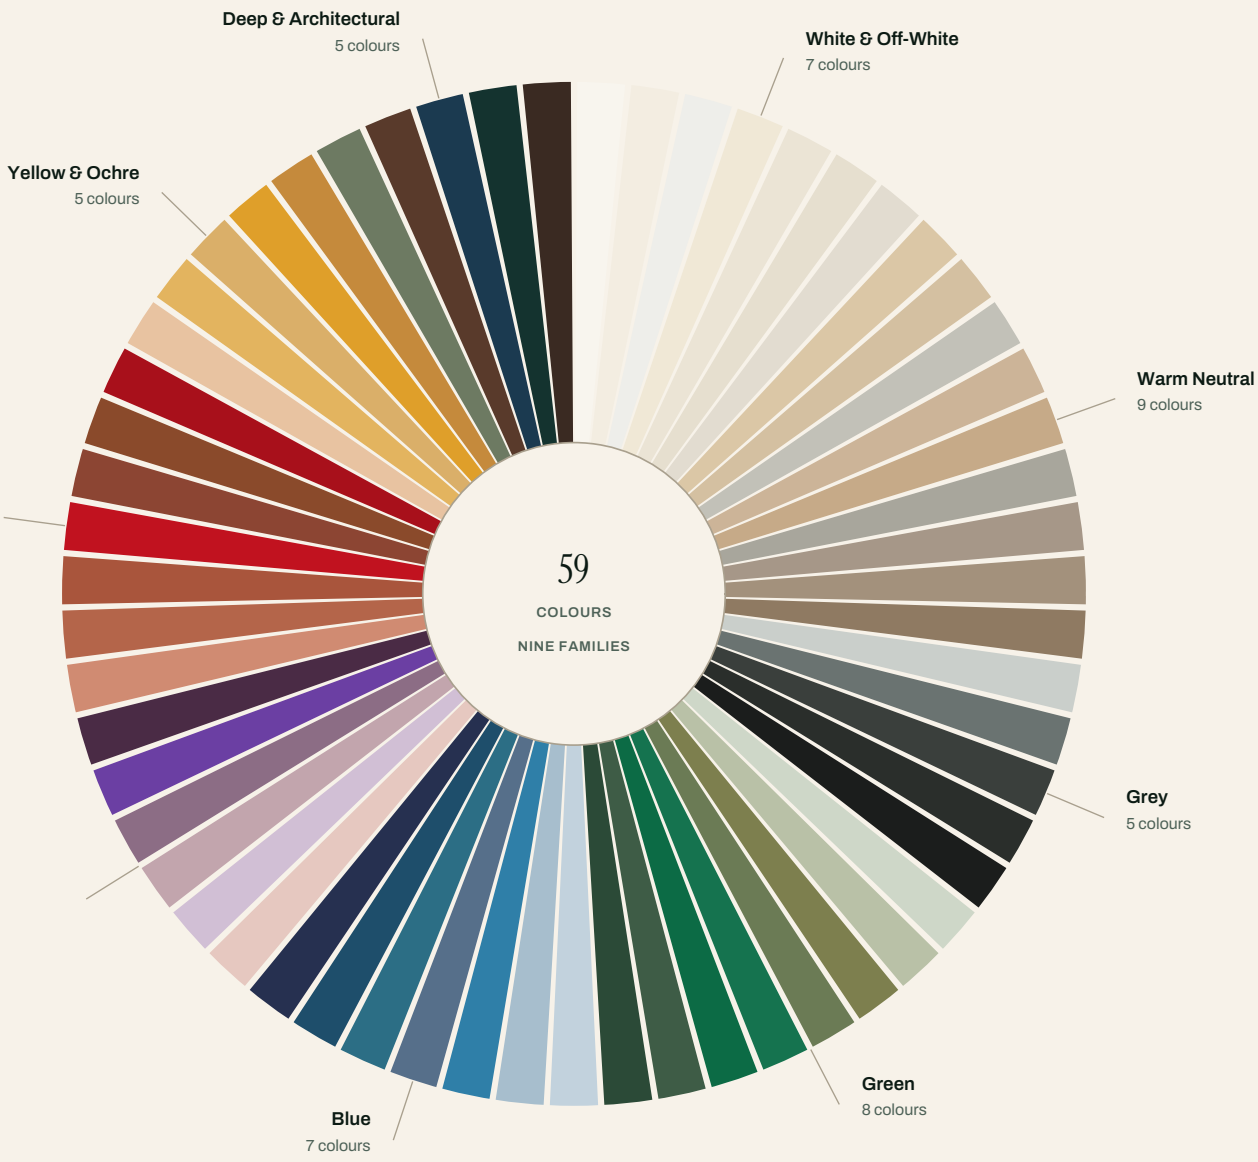

Every colour, by family

Code and name, grouped the same way as the wheel. For undertone, estimated LRV and the rooms each colour suits, see the fan deck.

WHITE & OFF-WHITE

OP-001 Opuda White
OP-004 Coconut Milk
OP-020 Stone White
OP-012 Ivory Coast
OP-008 Limestone
OP-010 Bone
OP-016 Cotton Paper

WARM NEUTRAL

OP-104 Savannah Sand
OP-108 Warm Oat
OP-136 Bonny Haze
OP-116 Desert Linen
OP-112 Clay Beige
OP-132 Pebble
OP-120 Mushroom
OP-124 Taupe Drift
OP-128 Bronze Dust

GREY

OP-709 Morning Mist
OP-705 Slate Grey
OP-701 Graphite
OP-713 Charcoal Wall
OP-717 Window Black

GREEN

OP-229 Eucalyptus Mist
OP-225 Sage Whisper
OP-221 Olive Branch
OP-217 Moss Room
OP-213 Delta Emerald
OP-201 Opuda Green
OP-209 Palm Shadow
OP-205 Forest Floor

BLUE

OP-313 Powder Blue
OP-309 Harmattan Sky
OP-325 Blue Fence
OP-317 Denim Room
OP-305 Lagoon
OP-301 Atlantic Blue
OP-321 Indigo Night

PURPLE & MAUVE

OP-621 Blush Room
OP-605 Lilac Room
OP-613 Mauve Linen
OP-617 Dusty Grape
OP-609 Plum Velvet
OP-601 Aubergine

TERRACOTTA & RED

OP-413 Coral Dust
OP-401 Terracotta
OP-405 Clay Pot
OP-421 Festival Red
OP-409 Brick Lane
OP-425 Rust Ember
OP-417 Crimson Seal

YELLOW & OCHRE

OP-517 Apricot Wall
OP-501 Harmattan Sun
OP-509 Golden Hour
OP-513 Marigold
OP-505 Ochre

DEEP & ARCHITECTURAL

OP-817 Bronze Patina
OP-809 Cocoa Brown
OP-805 Deep Ocean
OP-801 Midnight Teal
OP-813 Espresso

One library, three documents.

This card is the quick reference. Two further volumes go deeper, and both are generated from the same colour data as this card and the website, so none of the three can quietly disagree with another.

Colour Book

32 pages, A5. The full library: nine families, nine palettes, three jobs and four lights for a single colour, specification and an index by room.

/documents/opudas-colour-book.pdf

Room Book

20 pages, A5. Indexed by the job a colour has to do, with four methods shown as colourways on OPUDA'S's own site photographs.

/documents/opudas-room-book.pdf

Fan Deck

A4, every colour on its own page with code, hex, estimated LRV and recommended rooms — the one to hold next to a wall.

/documents/opudas-fan-deck.pdf

TRADE COUNTER

Port Harcourt · Rivers State

Colour mixing and trade sales · 0902 642 4350

Dealers nationwide · opudapaint.com/dealers

hello@opudapaint.com

Digital proof. A screen or a printer cannot reproduce a paint film: colour depends on lighting, substrate, finish and application. Confirm every choice against a physical chip or a sample pot before ordering.

SECTION 05 OF 07

05

Specification Sheet

The six products, by the surface they go on.

A4 landscape · 2 pages

Specification sheet

The six products in the range, by the surface they go on. Full application steps and the complete safety data are in each product's own technical and safety data sheet, linked at opudapaint.com/products.

INTERIOR WALLS & CEILINGS

MATT Emulsion

Matt (flat), sheen < 5%

— High quality, for walls and ceilings
— Smooth finish with better flow
— Extra coverage per litre

11 m² per litre

LABEL-VERIFIED

SILK Emulsion

Silk (soft sheen), 10-15%

— Washable soft-sheen film
— Resists kitchen steam and condensation
— Anti-fungi additive

12 m² per litre

LABEL-VERIFIED

EXTERIOR & BOUNDARY WALLS

Weathershield

Textured exterior coating

— Bridges hairline cracks
— UV and colour stable
— Breathable film

6 m² per litre

PENDING VERIFICATION

WOOD & METAL

Synthetic Gloss

Gloss, sheen 80%+

— Hard, impact-resistant film
— Interior and exterior joinery
— Good flow and levelling

13 m² per litre

PENDING VERIFICATION

PREPARATION & REPAIR

Alkali-Resisting Primer

Primer (sealing coat)

— Blocks alkali burn on new render
— Seals uneven porosity
— Improves topcoat coverage

10 m² per litre

PENDING VERIFICATION

Screeding Compound

Filler / base coat

— Levels uneven blockwork
— Sands to a fine finish
— Strong bond, minimal shrinkage

1.6 m² per kg at 1 mm thickness

PENDING VERIFICATION

HOW TO READ THIS PAGE

Coverage is per single coat. The status chip under each product marks whether its claims come from the physical pail (label-verified) or from the standard range a manufacturer at this scale supplies, awaiting technical sign-off (pending verification). The full comparison, including touch-dry, recoat and cure times for every product, is overleaf.

"Label-verified" claims are transcribed from the physical pail; "pending verification" claims are the standard range a manufacturer at this scale supplies and await technical sign-off.

Every figure, one table

Coverage is for a single coat on a sound, sealed surface — thin or porous substrates use more. Touch-dry and recoat times assume 25°C and 60% relative humidity; Port Harcourt's wet-season humidity will extend both.

PRODUCT	FINISH	SURFACES	COVERAGE	COATS	TOUCH DRY	RECOAT	FULL CURE	GUARANTEE	STATUS
MATT Emulsion	Matt	Interior walls and ceilings	11 m² per litre	2	1 hour	3 hours	7 days	5 years	LABEL-VERIFIED
SILK Emulsion	Silk	Interior walls, kitchens, bathrooms, corridors	12 m² per litre	2	1 hour	4 hours	7 days	5 years	LABEL-VERIFIED
Alkali-Resisting Primer	Primer	New plaster, interior and exterior walls	10 m² per litre	1	2 hours	4 hours	3 days	-	PENDING VERIFICATION
Synthetic Gloss	Gloss	Timber and metal: doors, gates, frames, railings	13 m² per litre	2	4 hours	16 hours	7 days	3 years	PENDING VERIFICATION
Weathershield	Textured exterior coating	Exterior render, facades, boundary walls, parapets	6 m² per litre	2	2 hours	6 hours	14 days	5 years	PENDING VERIFICATION
Screeding Compound	Filler / base coat	Interior walls, ceilings, new blockwork	1.6 m² per kg at 1 mm thickness	2	3 hours	4 hours	3 days	-	PENDING VERIFICATION

DILUTION AND VOC

MATT Emulsion	First coat: up to 10% clean water on porous plaster. Finish coat: undiluted. — Water-based, low VOC.
SILK Emulsion	First coat: up to 10% clean water. Finish coat: undiluted. — Water-based, low VOC, low odour.
Alkali-Resisting Primer	Up to 20% clean water on very porous render. — Water-based, low VOC.
Synthetic Gloss	Recommended solvent only, maximum 5%. Not water-thinnable. — Solvent-based. Ventilate and use appropriate PPE.
Weathershield	Do not thin. Stir thoroughly; trowel or heavy roller. — Water-based acrylic.
Screeding Compound	Mix 1 kg to approximately 0.4 L clean water; rest 10 minutes. — Cementitious, low VOC.

Wall area ÷ coverage × coats = litres

Trade sales and colour mixing · 0902 642 4350 · Port Harcourt, Rivers State · opudapaint.com/dealers

SECTION 06 OF 07

06

Fan Deck

A one-page-per-family reference, the kind a painter works from on site.


A4 portrait · 19 pages

OPUDA'S PAINT

MADE IN PORT HARCOURT

The colour library.

59 colours, each with a permanent code, a family, an undertone and an estimated light reflectance value. Grouped by family, in the order the site lists them.

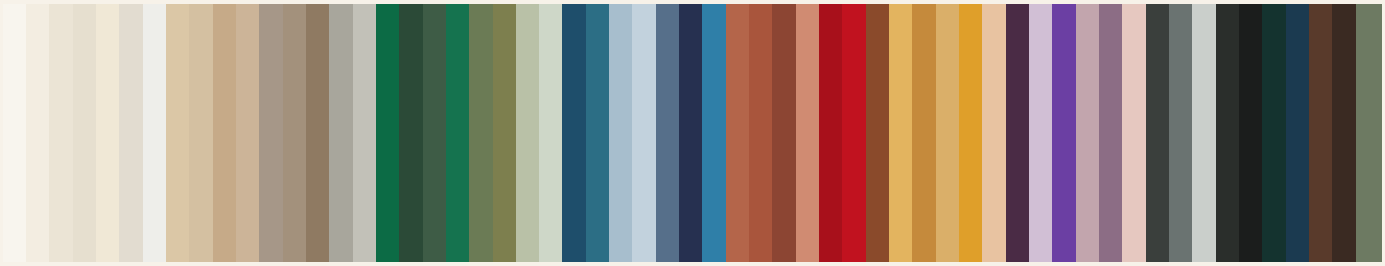

Digital proof. A screen or a printer cannot reproduce a paint film: colour depends on lighting, substrate, finish and application. Confirm every choice against a physical chip or a sample pot before ordering. LRV values are calculated from the digital value, not measured from dried paint.

0902 642 4350

Revision 2026-10

How to read this deck

Every colour has a permanent code.

OP-001 is not a catalogue number that moves between seasons. Quote it to a dealer, write it on a site instruction, or put it in a specification — it will still mean this colour next year.

LRV is the light reflectance value.

0 is absolute black, 100 is absolute white. Above 70 a wall bounces light around a room; below 30 it absorbs it. In a north-facing Port Harcourt room, a mid-tone reads darker than it looks on paper.

Undertone matters more than the family.

A warm white beside a cool white looks yellow; beside a true white it looks pink. The undertone on each card tells you what the colour will do next to its neighbours.

This deck is a digital proof.

The swatches are printed from hex values, not from paint. Printers, paper and light all shift a colour. Always confirm against a physical chip or a sample pot painted on the actual wall.

Two coats, always.

Coverage figures in the product sheets assume two coats on a sealed surface. One coat over new plaster is a patchy result, not a saving.

White & Off-White

7 colours · Cool / Neutral / Warm undertone

OP-001 #F8F5EE · LRV ~91

Opuda White

Neutral undertone

OP-004 #F3EDE1 · LRV ~85

Coconut Milk

Warm undertone

OP-008 #EBE4D5 · LRV ~78

Limestone

Warm undertone

OP-010 #E6DFCF · LRV ~74

Bone

Warm undertone

OP-012 #F0E8D6 · LRV ~81

Ivory Coast

Warm undertone

OP-016 #E2DCD0 · LRV ~72

Cotton Paper

Neutral undertone

White & Off-White (continued)

OP-020 #EEEEEA · LRV ~85

Stone White

Cool undertone

Warm Neutral

9 colours · Cool / Neutral / Warm undertone

OP-104 #DBC7A6 · LRV ~59

Savannah Sand

Warm undertone

OP-108 #D4C0A1 · LRV ~54

Warm Oat

Warm undertone

OP-112 #C6AA88 · LRV ~43

Clay Beige

Warm undertone

OP-116 #CCB498 · LRV ~48

Desert Linen

Warm undertone

OP-120 #A69788 · LRV ~32

Mushroom

Neutral undertone

OP-124 #A3917C · LRV ~29

Taupe Drift

Warm undertone

Warm Neutral (continued)



OP-128 #8F7A62 · LRV ~21

Bronze Dust

Warm undertone

Warm Neutral (continued)



OP-132 #A8A69C · LRV ~38

Pebble

Neutral undertone

Warm Neutral (continued)



OP-136 #C2C1B8 · LRV ~53

Bonny Haze

Cool undertone

Green

8 colours · Cool / Warm undertone



OP-201 #0C6B45 · LRV ~11

Opuda Green

Cool undertone



OP-205 #2B4A37 · LRV ~6

Forest Floor

Cool undertone



OP-209 #3E5C46 · LRV ~9

Palm Shadow

Cool undertone



OP-213 #15734F · LRV ~13

Delta Emerald

Cool undertone



OP-217 #6B7B55 · LRV ~18

Moss Room

Warm undertone



OP-221 #7D7F4E · LRV ~20

Olive Branch

Warm undertone

Green (continued)



OP-225 #B9C1A7 · LRV ~51

Sage Whisper

Warm undertone

Green (continued)

OP-229 #CED7C8 · LRV ~66

Eucalyptus Mist

Cool undertone

Blue

7 colours · Cool undertone

OP-301 #1E4E6B · LRV ~7

Atlantic Blue

Cool undertone

OP-305 #2C6E85 · LRV ~13

Lagoon

Cool undertone

OP-309 #A7BECD · LRV ~49

Harmattan Sky

Cool undertone

OP-313 #C2D2DD · LRV ~63

Powder Blue

Cool undertone

OP-317 #566F8A · LRV ~15

Denim Room

Cool undertone

OP-321 #263050 · LRV ~3

Indigo Night

Cool undertone

Blue (continued)



OP-325 #2F7FA8 · LRV ~19

Blue Fence

Cool undertone

Terracotta & Red

7 colours · Warm undertone



OP-401 #B4654A · LRV ~20

Terracotta

Warm undertone



OP-405 #A9553C · LRV ~15

Clay Pot

Warm undertone



OP-409 #8C4533 · LRV ~10

Brick Lane

Warm undertone



OP-413 #D08B72 · LRV ~33

Coral Dust

Warm undertone



OP-417 #A8101B · LRV ~9

Crimson Seal

Warm undertone



OP-421 #C1121F · LRV ~12

Festival Red

Warm undertone

Terracotta & Red (continued)



OP-425 #8A4A2B · LRV ~10

Rust Ember

Warm undertone

Yellow & Ochre

5 colours · Warm undertone

OP-501 #E3B45F · LRV ~50

Harmattan Sun

Warm undertone

OP-505 #C58A3C · LRV ~30

Ochre

Warm undertone

OP-509 #DAAF69 · LRV ~47

Golden Hour

Warm undertone

OP-513 #DF9F2A · LRV ~41

Marigold

Warm undertone

OP-517 #E8C3A1 · LRV ~59

Apricot Wall

Warm undertone

Purple & Mauve

6 colours · Cool / Neutral / Warm undertone



OP-601 #4A2B45 · LRV ~4

Aubergine

Cool undertone



OP-605 #D1BFD5 · LRV ~56

Lilac Room

Cool undertone



OP-609 #6B3FA3 · LRV ~9

Plum Velvet

Cool undertone



OP-613 #C2A5AD · LRV ~41

Mauve Linen

Neutral undertone



OP-617 #8C6D85 · LRV ~18

Dusty Grape

Cool undertone

OP-621 #E6C8C0 · LRV ~62

Blush Room

Warm undertone

Grey

5 colours · Cool / Neutral undertone

OP-701 #3A3F3C · LRV ~5

Graphite

Neutral undertone

OP-705 #6A7371 · LRV ~17

Slate Grey

Cool undertone

OP-709 #CACFCB · LRV ~61

Morning Mist

Cool undertone

OP-713 #2A2E2B · LRV ~3

Charcoal Wall

Neutral undertone

OP-717 #1B1D1C · LRV ~1

Window Black

Neutral undertone

Deep & Architectural

5 colours · Cool / Warm undertone



OP-801 #14332F · LRV ~3

Midnight Teal

Cool undertone



OP-805 #1B3A50 · LRV ~4

Deep Ocean

Cool undertone



OP-809 #593A2B · LRV ~5

Cocoa Brown

Warm undertone



OP-813 #3A2A22 · LRV ~3

Espresso

Warm undertone



OP-817 #6D7A62 · LRV ~18

Bronze Patina

Warm undertone

SECTION 07 OF 07

07

Technical & Safety Data Sheets

Coverage, cure, application and handling, grouped by product — matt, silk, primer, gloss, weathershield and screeding.

A4 portrait · 20 pages

Technical Data Sheet
OPUDA'S MATT Emulsion

Product code OPD-MT - Emulsion range - Revision 2026-09

This sheet states the figures used by the product page and the paint calculator on opudapaint.com. Coverage is quoted for one coat on a sound, sealed surface; porous substrates absorb more.

SPECIFICATION

Finish	Matt (flat), sheen < 5%
Coverage	11 m2 per litre, single coat, sealed surface
Recommended coats	2
Touch dry	1 hour at 25 degC / 60% RH
Recoat	3 hours
Full cure	7 days
Thinning	First coat: up to 10% clean water on porous plaster. Finish coat: undiluted.
VOC / base	Water-based, low VOC
Surfaces	Interior walls and ceilings
Pack sizes	1 L - 4 L - 10 L - 20 L
Guarantee	5 years

PRODUCT CLAIMS (AS PRINTED ON THE PAIL)

- High quality, for walls and ceilings
- Smooth finish with better flow
- Extra coverage per litre
- Anti-fungi additive for humid rooms
- Eco-friendly, low odour
- 5-year guarantee

APPLICATION

1. Prepare: scrape, fill and sand. New plaster must cure 28 days, then seal with one coat of alkali-resisting primer.
2. Prime: one coat OPUDA'S Alkali-Resisting Primer. Allow 4 hours.
3. Cut in: ceilings and corners with a 3-inch brush before rolling.
4. Coat 1: roll from a wet edge in 1 m2 sections. Thin up to 10% on porous plaster.
5. Coat 2: after 3 hours, undiluted, at right angles to the first coat.
6. Cure: do not wash or scrub for 7 days. Ventilate well.

LIMITATIONS

Do not apply when the substrate or ambient temperature is below 10 degC, or when relative humidity is above 85%. Do not apply over active damp, mould or efflorescence: correct the cause first. Do not wash the film for 7 days. Colour on a screen cannot guarantee a physical match; approve a painted sample on the actual wall before full application.

GUARANTEE

The guarantee applies to the supplied product when applied in accordance with this sheet, on a sound and correctly prepared

Digital values are approximations; physical chips are the authority.

substrate, in the specified system. It does not cover failure caused by structural movement, water ingress, inadequate preparation or application outside these instructions.

Digital values are approximations; physical chips are the authority.

Safety Data Sheet
OPUDA'S MATT Emulsion

Product code OPD-MT - Revision 2026-09 - Prepared in the four-part SDS format used in Nigeria.
Read this sheet before use. It does not replace a site-specific risk assessment.

1. IDENTIFICATION

Product as named above. Manufacturer: OPUDA'S PAINT, Port Harcourt, Nigeria. Emergency telephone: 0902 642 4350 (Monday to Saturday, 08:00-18:00 WAT).

2. HAZARDS IDENTIFICATION

Water-based products are not classified as hazardous under GHS. Solvent-based gloss contains flammable solvent: keep away from ignition sources, avoid inhalation of vapour. Wet paint is a mild eye and skin irritant. Sanding dust from cured film may be irritant.

3. COMPOSITION

Acrylic/styrene-acrylic polymer dispersion, titanium dioxide, calcium carbonate, silicate extenders, water, glycol ether coalescent, preservative and anti-fungi additive, defoamer, thickener. Exact formulation is withheld as confidential business information.

4. FIRST AID

Eyes: rinse with clean water for 15 minutes, holding the lids open. Seek medical advice if irritation persists. Skin: wash with soap and water. Inhalation: move to fresh air. Ingestion: do not induce vomiting; rinse mouth and seek medical advice.

5. FIRE FIGHTING

Water-based products are non-flammable; use media appropriate to the surrounding fire. Solvent-based gloss: foam, dry powder or CO2. Do not use a direct water jet on burning solvent.

6. ACCIDENTAL RELEASE

Contain with sand or earth; do not allow to enter drains or watercourses. Collect into a labelled container for disposal. Wash the area with water.

7. HANDLING AND STORAGE

Store between 5 degC and 35 degC, out of direct sunlight, with the lid firmly closed. Protect from frost. Keep out of reach of children. Do not store near food or drink.

8. EXPOSURE CONTROLS

Water-based: general ventilation is adequate. Solvent-based: ensure local exhaust ventilation; wear solvent-resistant gloves and eye protection. Respiratory protection if spraying.

9. PHYSICAL PROPERTIES

Appearance: pigmented liquid. Odour: low (water-based) / solvent (gloss). pH 8-9. Density approximately 1.3-1.5 g/cm3. Solubility: miscible with water before curing.

10. STABILITY AND REACTIVITY

Stable under normal conditions. Protect from freezing; freezing permanently damages the dispersion.

11. TOXICOLOGICAL INFORMATION

Digital values are approximations; physical chips are the authority.

No acute systemic toxicity expected from normal use. Prolonged skin contact may cause dermatitis in sensitised individuals.

12. ECOLOGICAL INFORMATION

Do not allow to enter drains or watercourses. Cured film is inert. Dispose of unused product through an authorised waste contractor.

13. DISPOSAL

Allow small residues to dry in the container and dispose of as household/industrial waste in accordance with local regulations. Do not pour liquid paint down drains.

14. TRANSPORT

Not classified as dangerous goods for transport in the pack sizes supplied, with the exception of solvent-based gloss above the applicable flammable liquid threshold.

15. REGULATORY INFORMATION

Classified in accordance with the GHS as adopted in Nigeria. Safety data sheet prepared in line with the four-part SDS format used in Nigeria.

16. OTHER INFORMATION

This sheet is reviewed annually. The current revision date is printed on the document footer. It does not replace a site-specific risk assessment.

Digital values are approximations; physical chips are the authority.

Technical Data Sheet
OPUDA'S SILK Emulsion

Product code OPD-SLK - Emulsion range - Revision 2026-09

This sheet states the figures used by the product page and the paint calculator on opudapaint.com. Coverage is quoted for one coat on a sound, sealed surface; porous substrates absorb more.

SPECIFICATION

Finish	Silk (soft sheen), 10-15%
Coverage	12 m2 per litre, single coat, sealed surface
Recommended coats	2
Touch dry	1 hour at 25 degC / 60% RH
Recoat	4 hours
Full cure	7 days
Thinning	First coat: up to 10% clean water. Finish coat: undiluted.
VOC / base	Water-based, low VOC, low odour
Surfaces	Interior walls, kitchens, bathrooms, corridors
Pack sizes	1 L - 4 L - 10 L - 20 L
Guarantee	5 years

PRODUCT CLAIMS (AS PRINTED ON THE PAIL)

- Washable soft-sheen film
- Resists kitchen steam and condensation
- Anti-fungi additive
- Smooth, self-levelling finish
- Weather resistant when used under cover
- 5-year guarantee

APPLICATION

1. Prepare: wash down greasy surfaces and rinse. Sand filler flush.
2. Prime: one coat of primer; two on repaired patches to equalise porosity.
3. Coat 1: medium pile sleeve, single direction, thin up to 10%.
4. Coat 2: after 4 hours, at right angles to the first coat.
5. Cure: ventilate; avoid washing for 7 days.

LIMITATIONS

Do not apply when the substrate or ambient temperature is below 10 degC, or when relative humidity is above 85%. Do not apply over active damp, mould or efflorescence: correct the cause first. Do not wash the film for 7 days. Colour on a screen cannot guarantee a physical match; approve a painted sample on the actual wall before full application.

GUARANTEE

The guarantee applies to the supplied product when applied in accordance with this sheet, on a sound and correctly prepared substrate, in the specified system. It does not cover failure caused by structural movement, water ingress, inadequate preparation or

Digital values are approximations; physical chips are the authority.

application outside these instructions.

Digital values are approximations; physical chips are the authority.

Safety Data Sheet
OPUDA'S SILK Emulsion

Product code OPD-SLK - Revision 2026-09 - Prepared in the four-part SDS format used in Nigeria.
Read this sheet before use. It does not replace a site-specific risk assessment.

1. IDENTIFICATION

Product as named above. Manufacturer: OPUDA'S PAINT, Port Harcourt, Nigeria. Emergency telephone: 0902 642 4350 (Monday to Saturday, 08:00-18:00 WAT).

2. HAZARDS IDENTIFICATION

Water-based products are not classified as hazardous under GHS. Solvent-based gloss contains flammable solvent: keep away from ignition sources, avoid inhalation of vapour. Wet paint is a mild eye and skin irritant. Sanding dust from cured film may be irritant.

3. COMPOSITION

Acrylic/styrene-acrylic polymer dispersion, titanium dioxide, calcium carbonate, silicate extenders, water, glycol ether coalescent, preservative and anti-fungi additive, defoamer, thickener. Exact formulation is withheld as confidential business information.

4. FIRST AID

Eyes: rinse with clean water for 15 minutes, holding the lids open. Seek medical advice if irritation persists. Skin: wash with soap and water. Inhalation: move to fresh air. Ingestion: do not induce vomiting; rinse mouth and seek medical advice.

5. FIRE FIGHTING

Water-based products are non-flammable; use media appropriate to the surrounding fire. Solvent-based gloss: foam, dry powder or CO2. Do not use a direct water jet on burning solvent.

6. ACCIDENTAL RELEASE

Contain with sand or earth; do not allow to enter drains or watercourses. Collect into a labelled container for disposal. Wash the area with water.

7. HANDLING AND STORAGE

Store between 5 degC and 35 degC, out of direct sunlight, with the lid firmly closed. Protect from frost. Keep out of reach of children. Do not store near food or drink.

8. EXPOSURE CONTROLS

Water-based: general ventilation is adequate. Solvent-based: ensure local exhaust ventilation; wear solvent-resistant gloves and eye protection. Respiratory protection if spraying.

9. PHYSICAL PROPERTIES

Appearance: pigmented liquid. Odour: low (water-based) / solvent (gloss). pH 8-9. Density approximately 1.3-1.5 g/cm3. Solubility: miscible with water before curing.

10. STABILITY AND REACTIVITY

Stable under normal conditions. Protect from freezing; freezing permanently damages the dispersion.

11. TOXICOLOGICAL INFORMATION

Digital values are approximations; physical chips are the authority.

No acute systemic toxicity expected from normal use. Prolonged skin contact may cause dermatitis in sensitised individuals.

12. ECOLOGICAL INFORMATION

Do not allow to enter drains or watercourses. Cured film is inert. Dispose of unused product through an authorised waste contractor.

13. DISPOSAL

Allow small residues to dry in the container and dispose of as household/industrial waste in accordance with local regulations. Do not pour liquid paint down drains.

14. TRANSPORT

Not classified as dangerous goods for transport in the pack sizes supplied, with the exception of solvent-based gloss above the applicable flammable liquid threshold.

15. REGULATORY INFORMATION

Classified in accordance with the GHS as adopted in Nigeria. Safety data sheet prepared in line with the four-part SDS format used in Nigeria.

16. OTHER INFORMATION

This sheet is reviewed annually. The current revision date is printed on the document footer. It does not replace a site-specific risk assessment.

Digital values are approximations; physical chips are the authority.

Technical Data Sheet
OPUDA'S Alkali-Resisting Primer

Product code OPD-PRM - Emulsion range - Revision 2026-09

This sheet states the figures used by the product page and the paint calculator on opudapaint.com. Coverage is quoted for one coat on a sound, sealed surface; porous substrates absorb more.

SPECIFICATION

Finish	Primer (sealing coat)
Coverage	10 m2 per litre, single coat
Recommended coats	1
Touch dry	2 hours
Recoat	4 hours
Full cure	3 days
Thinning	Up to 20% clean water on very porous render.
VOC / base	Water-based, low VOC
Surfaces	New plaster, interior and exterior walls
Pack sizes	4 L - 20 L
Guarantee	-

PRODUCT CLAIMS (AS PRINTED ON THE PAIL)

- Blocks alkali burn on new render
- Seals uneven porosity
- Improves topcoat coverage
- Quick recoat

APPLICATION

1. Allow new render to cure at least 14 days, ideally 28.
2. Brush down salt bloom; treat with a stabilising wash and dry fully.
3. One full coat by brush and roller. Do not thin unless very porous.
4. Recoat with Matt or Silk after 4 hours.

LIMITATIONS

Do not apply when the substrate or ambient temperature is below 10 degC, or when relative humidity is above 85%. Do not apply over active damp, mould or efflorescence: correct the cause first. Do not wash the film for 7 days. Colour on a screen cannot guarantee a physical match; approve a painted sample on the actual wall before full application.

GUARANTEE

The guarantee applies to the supplied product when applied in accordance with this sheet, on a sound and correctly prepared substrate, in the specified system. It does not cover failure caused by structural movement, water ingress, inadequate preparation or application outside these instructions.

Digital values are approximations; physical chips are the authority.

Safety Data Sheet
OPUDA'S Alkali-Resisting Primer

Product code OPD-PRM - Revision 2026-09 - Prepared in the four-part SDS format used in Nigeria.
Read this sheet before use. It does not replace a site-specific risk assessment.

1. IDENTIFICATION

Product as named above. Manufacturer: OPUDA'S PAINT, Port Harcourt, Nigeria. Emergency telephone: 0902 642 4350 (Monday to Saturday, 08:00-18:00 WAT).

2. HAZARDS IDENTIFICATION

Water-based products are not classified as hazardous under GHS. Solvent-based gloss contains flammable solvent: keep away from ignition sources, avoid inhalation of vapour. Wet paint is a mild eye and skin irritant. Sanding dust from cured film may be irritant.

3. COMPOSITION

Acrylic/styrene-acrylic polymer dispersion, titanium dioxide, calcium carbonate, silicate extenders, water, glycol ether coalescent, preservative and anti-fungi additive, defoamer, thickener. Exact formulation is withheld as confidential business information.

4. FIRST AID

Eyes: rinse with clean water for 15 minutes, holding the lids open. Seek medical advice if irritation persists. Skin: wash with soap and water. Inhalation: move to fresh air. Ingestion: do not induce vomiting; rinse mouth and seek medical advice.

5. FIRE FIGHTING

Water-based products are non-flammable; use media appropriate to the surrounding fire. Solvent-based gloss: foam, dry powder or CO2. Do not use a direct water jet on burning solvent.

6. ACCIDENTAL RELEASE

Contain with sand or earth; do not allow to enter drains or watercourses. Collect into a labelled container for disposal. Wash the area with water.

7. HANDLING AND STORAGE

Store between 5 degC and 35 degC, out of direct sunlight, with the lid firmly closed. Protect from frost. Keep out of reach of children. Do not store near food or drink.

8. EXPOSURE CONTROLS

Water-based: general ventilation is adequate. Solvent-based: ensure local exhaust ventilation; wear solvent-resistant gloves and eye protection. Respiratory protection if spraying.

9. PHYSICAL PROPERTIES

Appearance: pigmented liquid. Odour: low (water-based) / solvent (gloss). pH 8-9. Density approximately 1.3-1.5 g/cm3. Solubility: miscible with water before curing.

10. STABILITY AND REACTIVITY

Stable under normal conditions. Protect from freezing; freezing permanently damages the dispersion.

11. TOXICOLOGICAL INFORMATION

Digital values are approximations; physical chips are the authority.

No acute systemic toxicity expected from normal use. Prolonged skin contact may cause dermatitis in sensitised individuals.

12. ECOLOGICAL INFORMATION

Do not allow to enter drains or watercourses. Cured film is inert. Dispose of unused product through an authorised waste contractor.

13. DISPOSAL

Allow small residues to dry in the container and dispose of as household/industrial waste in accordance with local regulations. Do not pour liquid paint down drains.

14. TRANSPORT

Not classified as dangerous goods for transport in the pack sizes supplied, with the exception of solvent-based gloss above the applicable flammable liquid threshold.

15. REGULATORY INFORMATION

Classified in accordance with the GHS as adopted in Nigeria. Safety data sheet prepared in line with the four-part SDS format used in Nigeria.

16. OTHER INFORMATION

This sheet is reviewed annually. The current revision date is printed on the document footer. It does not replace a site-specific risk assessment.

Digital values are approximations; physical chips are the authority.

Technical Data Sheet
OPUDA'S Synthetic Gloss

Product code OPD-GLS - Emulsion range - Revision 2026-09

This sheet states the figures used by the product page and the paint calculator on opudapaint.com. Coverage is quoted for one coat on a sound, sealed surface; porous substrates absorb more.

SPECIFICATION

Finish	Gloss, sheen 80%+
Coverage	13 m2 per litre, single coat
Recommended coats	2
Touch dry	4 hours
Recoat	16 hours
Full cure	7 days
Thinning	Recommended solvent only, maximum 5%. Not water-thinnable.
VOC / base	Solvent-based. Ventilate and use appropriate PPE.
Surfaces	Timber and metal: doors, gates, frames, railings
Pack sizes	1 L - 4 L - 20 L
Guarantee	3 years

PRODUCT CLAIMS (AS PRINTED ON THE PAIL)

- Hard, impact-resistant film
- Interior and exterior joinery
- Good flow and levelling
- Weather resistant

APPLICATION

1. Strip loose coating, sand to a sound edge, degrease steel with a solvent wipe.
2. Prime: zinc-rich or red-oxide primer on metal; wood primer on timber, knots sealed.
3. Coat 1: brush with the grain or length of the steel. Avoid over-brushing.
4. Coat 2: after 16 hours. Thin coats always beat thick ones.

LIMITATIONS

Do not apply when the substrate or ambient temperature is below 10 degC, or when relative humidity is above 85%. Do not apply over active damp, mould or efflorescence: correct the cause first. Do not wash the film for 7 days. Colour on a screen cannot guarantee a physical match; approve a painted sample on the actual wall before full application.

GUARANTEE

The guarantee applies to the supplied product when applied in accordance with this sheet, on a sound and correctly prepared substrate, in the specified system. It does not cover failure caused by structural movement, water ingress, inadequate preparation or application outside these instructions.

Digital values are approximations; physical chips are the authority.

Safety Data Sheet
OPUDA'S Synthetic Gloss

Product code OPD-GLS - Revision 2026-09 - Prepared in the four-part SDS format used in Nigeria.
Read this sheet before use. It does not replace a site-specific risk assessment.

1. IDENTIFICATION

Product as named above. Manufacturer: OPUDA'S PAINT, Port Harcourt, Nigeria. Emergency telephone: 0902 642 4350 (Monday to Saturday, 08:00-18:00 WAT).

2. HAZARDS IDENTIFICATION

Water-based products are not classified as hazardous under GHS. Solvent-based gloss contains flammable solvent: keep away from ignition sources, avoid inhalation of vapour. Wet paint is a mild eye and skin irritant. Sanding dust from cured film may be irritant.

3. COMPOSITION

Acrylic/styrene-acrylic polymer dispersion, titanium dioxide, calcium carbonate, silicate extenders, water, glycol ether coalescent, preservative and anti-fungi additive, defoamer, thickener. Exact formulation is withheld as confidential business information.

4. FIRST AID

Eyes: rinse with clean water for 15 minutes, holding the lids open. Seek medical advice if irritation persists. Skin: wash with soap and water. Inhalation: move to fresh air. Ingestion: do not induce vomiting; rinse mouth and seek medical advice.

5. FIRE FIGHTING

Water-based products are non-flammable; use media appropriate to the surrounding fire. Solvent-based gloss: foam, dry powder or CO2. Do not use a direct water jet on burning solvent.

6. ACCIDENTAL RELEASE

Contain with sand or earth; do not allow to enter drains or watercourses. Collect into a labelled container for disposal. Wash the area with water.

7. HANDLING AND STORAGE

Store between 5 degC and 35 degC, out of direct sunlight, with the lid firmly closed. Protect from frost. Keep out of reach of children. Do not store near food or drink.

8. EXPOSURE CONTROLS

Water-based: general ventilation is adequate. Solvent-based: ensure local exhaust ventilation; wear solvent-resistant gloves and eye protection. Respiratory protection if spraying.

9. PHYSICAL PROPERTIES

Appearance: pigmented liquid. Odour: low (water-based) / solvent (gloss). pH 8-9. Density approximately 1.3-1.5 g/cm3. Solubility: miscible with water before curing.

10. STABILITY AND REACTIVITY

Stable under normal conditions. Protect from freezing; freezing permanently damages the dispersion.

11. TOXICOLOGICAL INFORMATION

Digital values are approximations; physical chips are the authority.

No acute systemic toxicity expected from normal use. Prolonged skin contact may cause dermatitis in sensitised individuals.

12. ECOLOGICAL INFORMATION

Do not allow to enter drains or watercourses. Cured film is inert. Dispose of unused product through an authorised waste contractor.

13. DISPOSAL

Allow small residues to dry in the container and dispose of as household/industrial waste in accordance with local regulations. Do not pour liquid paint down drains.

14. TRANSPORT

Not classified as dangerous goods for transport in the pack sizes supplied, with the exception of solvent-based gloss above the applicable flammable liquid threshold.

15. REGULATORY INFORMATION

Classified in accordance with the GHS as adopted in Nigeria. Safety data sheet prepared in line with the four-part SDS format used in Nigeria.

16. OTHER INFORMATION

This sheet is reviewed annually. The current revision date is printed on the document footer. It does not replace a site-specific risk assessment.

Digital values are approximations; physical chips are the authority.

Technical Data Sheet
OPUDA'S Weathershield

Product code OPD-WS - Emulsion range - Revision 2026-09

This sheet states the figures used by the product page and the paint calculator on opudapaint.com. Coverage is quoted for one coat on a sound, sealed surface; porous substrates absorb more.

SPECIFICATION

Finish	Textured exterior coating
Coverage	6 m2 per litre, single coat
Recommended coats	2
Touch dry	2 hours
Recoat	6 hours
Full cure	14 days
Thinning	Do not thin. Stir thoroughly; trowel or heavy roller.
VOC / base	Water-based acrylic
Surfaces	Exterior render, facades, boundary walls, parapets
Pack sizes	10 L - 20 L
Guarantee	5 years

PRODUCT CLAIMS (AS PRINTED ON THE PAIL)

- Bridges hairline cracks
- UV and colour stable
- Breathable film
- Rain resistant after 24 hours

APPLICATION

1. Remove efflorescence, treat mould, repair honeycombing.
2. Prime with OPUDA'S Primer, or a bonding agent on chalky render.
3. Coat 1: work from the top of the elevation downwards.
4. Coat 2: after 6 hours. Protect from rain for 24 hours.

LIMITATIONS

Do not apply when the substrate or ambient temperature is below 10 degC, or when relative humidity is above 85%. Do not apply over active damp, mould or efflorescence: correct the cause first. Do not wash the film for 7 days. Colour on a screen cannot guarantee a physical match; approve a painted sample on the actual wall before full application.

GUARANTEE

The guarantee applies to the supplied product when applied in accordance with this sheet, on a sound and correctly prepared substrate, in the specified system. It does not cover failure caused by structural movement, water ingress, inadequate preparation or application outside these instructions.

Digital values are approximations; physical chips are the authority.

Safety Data Sheet
OPUDA'S Weathershield

Product code OPD-WS - Revision 2026-09 - Prepared in the four-part SDS format used in Nigeria.
Read this sheet before use. It does not replace a site-specific risk assessment.

1. IDENTIFICATION

Product as named above. Manufacturer: OPUDA'S PAINT, Port Harcourt, Nigeria. Emergency telephone: 0902 642 4350 (Monday to Saturday, 08:00-18:00 WAT).

2. HAZARDS IDENTIFICATION

Water-based products are not classified as hazardous under GHS. Solvent-based gloss contains flammable solvent: keep away from ignition sources, avoid inhalation of vapour. Wet paint is a mild eye and skin irritant. Sanding dust from cured film may be irritant.

3. COMPOSITION

Acrylic/styrene-acrylic polymer dispersion, titanium dioxide, calcium carbonate, silicate extenders, water, glycol ether coalescent, preservative and anti-fungi additive, defoamer, thickener. Exact formulation is withheld as confidential business information.

4. FIRST AID

Eyes: rinse with clean water for 15 minutes, holding the lids open. Seek medical advice if irritation persists. Skin: wash with soap and water. Inhalation: move to fresh air. Ingestion: do not induce vomiting; rinse mouth and seek medical advice.

5. FIRE FIGHTING

Water-based products are non-flammable; use media appropriate to the surrounding fire. Solvent-based gloss: foam, dry powder or CO2. Do not use a direct water jet on burning solvent.

6. ACCIDENTAL RELEASE

Contain with sand or earth; do not allow to enter drains or watercourses. Collect into a labelled container for disposal. Wash the area with water.

7. HANDLING AND STORAGE

Store between 5 degC and 35 degC, out of direct sunlight, with the lid firmly closed. Protect from frost. Keep out of reach of children. Do not store near food or drink.

8. EXPOSURE CONTROLS

Water-based: general ventilation is adequate. Solvent-based: ensure local exhaust ventilation; wear solvent-resistant gloves and eye protection. Respiratory protection if spraying.

9. PHYSICAL PROPERTIES

Appearance: pigmented liquid. Odour: low (water-based) / solvent (gloss). pH 8-9. Density approximately 1.3-1.5 g/cm3. Solubility: miscible with water before curing.

10. STABILITY AND REACTIVITY

Stable under normal conditions. Protect from freezing; freezing permanently damages the dispersion.

11. TOXICOLOGICAL INFORMATION

Digital values are approximations; physical chips are the authority.

No acute systemic toxicity expected from normal use. Prolonged skin contact may cause dermatitis in sensitised individuals.

12. ECOLOGICAL INFORMATION

Do not allow to enter drains or watercourses. Cured film is inert. Dispose of unused product through an authorised waste contractor.

13. DISPOSAL

Allow small residues to dry in the container and dispose of as household/industrial waste in accordance with local regulations. Do not pour liquid paint down drains.

14. TRANSPORT

Not classified as dangerous goods for transport in the pack sizes supplied, with the exception of solvent-based gloss above the applicable flammable liquid threshold.

15. REGULATORY INFORMATION

Classified in accordance with the GHS as adopted in Nigeria. Safety data sheet prepared in line with the four-part SDS format used in Nigeria.

16. OTHER INFORMATION

This sheet is reviewed annually. The current revision date is printed on the document footer. It does not replace a site-specific risk assessment.

Digital values are approximations; physical chips are the authority.

Technical Data Sheet
OPUDA'S Screeding Compound

Product code OPD-SCR - Emulsion range - Revision 2026-09

This sheet states the figures used by the product page and the paint calculator on opudapaint.com. Coverage is quoted for one coat on a sound, sealed surface; porous substrates absorb more.

SPECIFICATION

Finish	Filler / base coat
Coverage	1.6 m2 per kg at 1 mm thickness
Recommended coats	2
Touch dry	3 hours
Recoat	4 hours
Full cure	3 days
Thinning	Mix 1 kg to approximately 0.4 L clean water; rest 10 minutes.
VOC / base	Cementitious, low VOC
Surfaces	Interior walls, ceilings, new blockwork
Pack sizes	10 kg - 25 kg
Guarantee	-

PRODUCT CLAIMS (AS PRINTED ON THE PAIL)

- Levels uneven blockwork
- Sands to a fine finish
- Strong bond, minimal shrinkage

APPLICATION

1. Damp down the wall so it does not pull water from the mix.
2. Pass 1: 1-2 mm with a steel trowel, tight. Allow to set.
3. Pass 2: second thin pass to close the surface. Allow 4 hours.
4. Sand with 120 grit, dust off, prime before painting.

LIMITATIONS

Do not apply when the substrate or ambient temperature is below 10 degC, or when relative humidity is above 85%. Do not apply over active damp, mould or efflorescence: correct the cause first. Do not wash the film for 7 days. Colour on a screen cannot guarantee a physical match; approve a painted sample on the actual wall before full application.

GUARANTEE

The guarantee applies to the supplied product when applied in accordance with this sheet, on a sound and correctly prepared substrate, in the specified system. It does not cover failure caused by structural movement, water ingress, inadequate preparation or application outside these instructions.

Digital values are approximations; physical chips are the authority.

Safety Data Sheet
OPUDA'S Screeding Compound

Product code OPD-SCR - Revision 2026-09 - Prepared in the four-part SDS format used in Nigeria.
Read this sheet before use. It does not replace a site-specific risk assessment.

1. IDENTIFICATION

Product as named above. Manufacturer: OPUDA'S PAINT, Port Harcourt, Nigeria. Emergency telephone: 0902 642 4350 (Monday to Saturday, 08:00-18:00 WAT).

2. HAZARDS IDENTIFICATION

Water-based products are not classified as hazardous under GHS. Solvent-based gloss contains flammable solvent: keep away from ignition sources, avoid inhalation of vapour. Wet paint is a mild eye and skin irritant. Sanding dust from cured film may be irritant.

3. COMPOSITION

Acrylic/styrene-acrylic polymer dispersion, titanium dioxide, calcium carbonate, silicate extenders, water, glycol ether coalescent, preservative and anti-fungi additive, defoamer, thickener. Exact formulation is withheld as confidential business information.

4. FIRST AID

Eyes: rinse with clean water for 15 minutes, holding the lids open. Seek medical advice if irritation persists. Skin: wash with soap and water. Inhalation: move to fresh air. Ingestion: do not induce vomiting; rinse mouth and seek medical advice.

5. FIRE FIGHTING

Water-based products are non-flammable; use media appropriate to the surrounding fire. Solvent-based gloss: foam, dry powder or CO2. Do not use a direct water jet on burning solvent.

6. ACCIDENTAL RELEASE

Contain with sand or earth; do not allow to enter drains or watercourses. Collect into a labelled container for disposal. Wash the area with water.

7. HANDLING AND STORAGE

Store between 5 degC and 35 degC, out of direct sunlight, with the lid firmly closed. Protect from frost. Keep out of reach of children. Do not store near food or drink.

8. EXPOSURE CONTROLS

Water-based: general ventilation is adequate. Solvent-based: ensure local exhaust ventilation; wear solvent-resistant gloves and eye protection. Respiratory protection if spraying.

9. PHYSICAL PROPERTIES

Appearance: pigmented liquid. Odour: low (water-based) / solvent (gloss). pH 8-9. Density approximately 1.3-1.5 g/cm3. Solubility: miscible with water before curing.

10. STABILITY AND REACTIVITY

Stable under normal conditions. Protect from freezing; freezing permanently damages the dispersion.

11. TOXICOLOGICAL INFORMATION

Digital values are approximations; physical chips are the authority.

No acute systemic toxicity expected from normal use. Prolonged skin contact may cause dermatitis in sensitised individuals.

12. ECOLOGICAL INFORMATION

Do not allow to enter drains or watercourses. Cured film is inert. Dispose of unused product through an authorised waste contractor.

13. DISPOSAL

Allow small residues to dry in the container and dispose of as household/industrial waste in accordance with local regulations. Do not pour liquid paint down drains.

14. TRANSPORT

Not classified as dangerous goods for transport in the pack sizes supplied, with the exception of solvent-based gloss above the applicable flammable liquid threshold.

15. REGULATORY INFORMATION

Classified in accordance with the GHS as adopted in Nigeria. Safety data sheet prepared in line with the four-part SDS format used in Nigeria.

16. OTHER INFORMATION

This sheet is reviewed annually. The current revision date is printed on the document footer. It does not replace a site-specific risk assessment.

Digital values are approximations; physical chips are the authority.

OPUDA'S PAINT

Colour mixing and trade sales · 0902 642 4350

Dealers nationwide · opudapaint.com/dealers

hello@opudapaint.com

This catalogue reproduces every page of the colour book, room book, colour wheel, specification sheet, fan deck and the twelve technical and safety data sheets exactly as each is published on its own, plus one new chapter: every real site photograph on file, restored for print. Nothing here is invented — concept artwork is labelled as a render, not a photograph, and a project with no verified colour or product record carries none.

Digital proof. A screen or a printer cannot reproduce a paint film: colour depends on lighting, substrate, finish and application. Confirm every choice against a physical chip or a sample pot before ordering.