
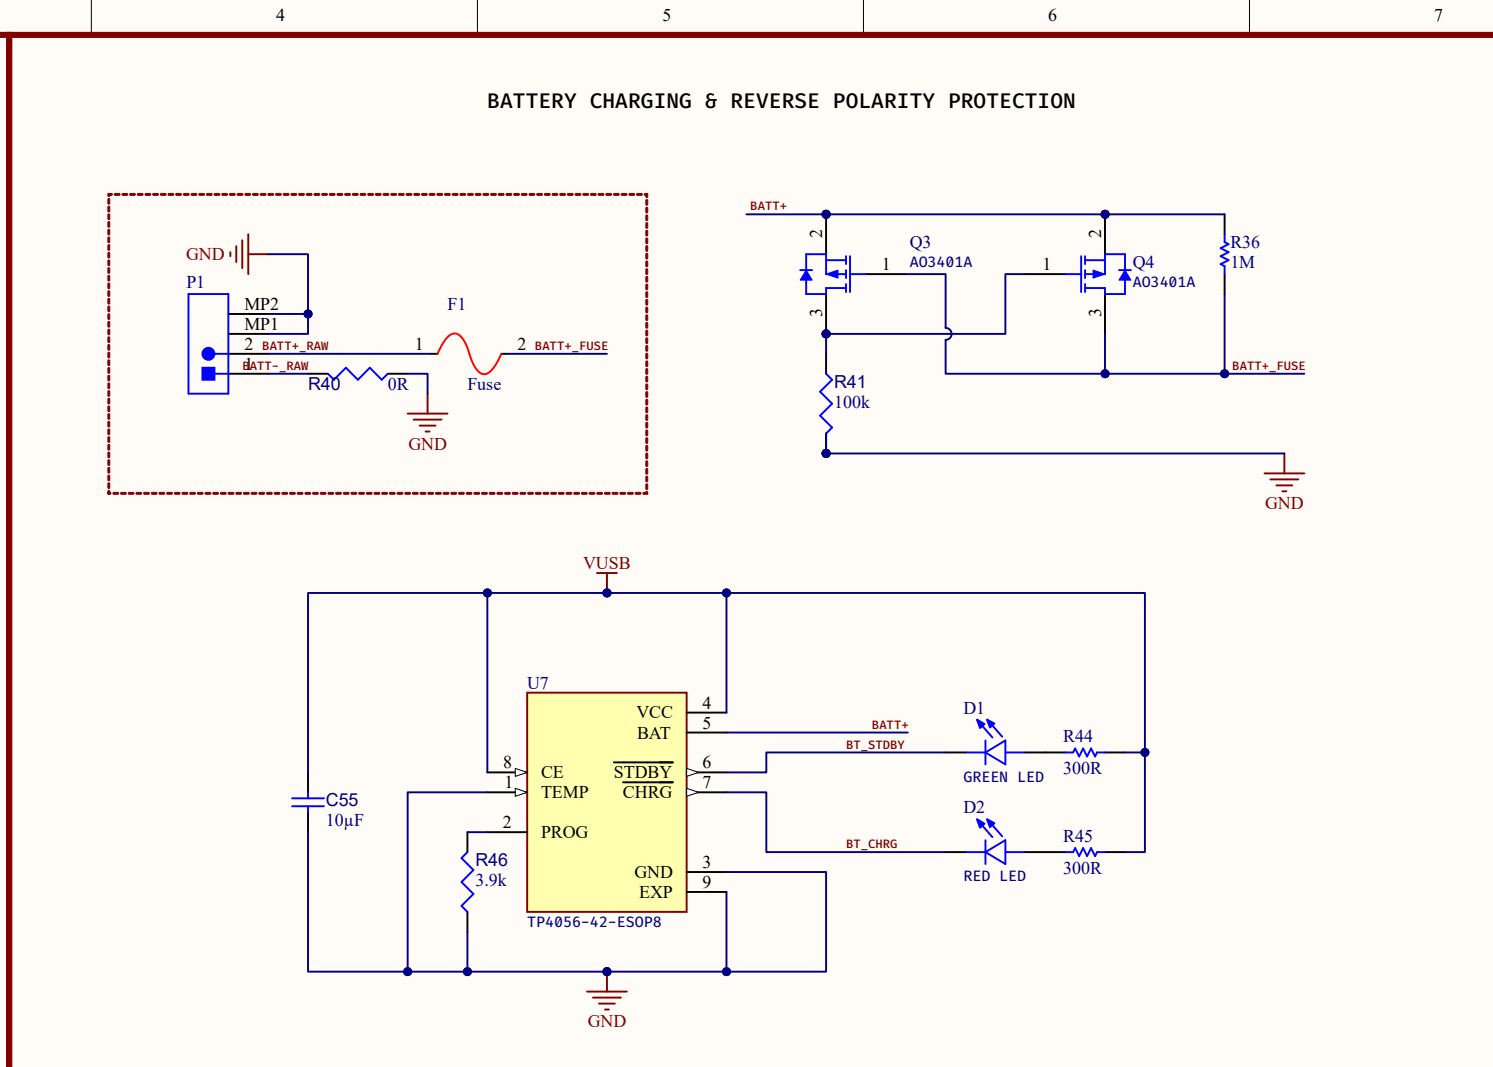
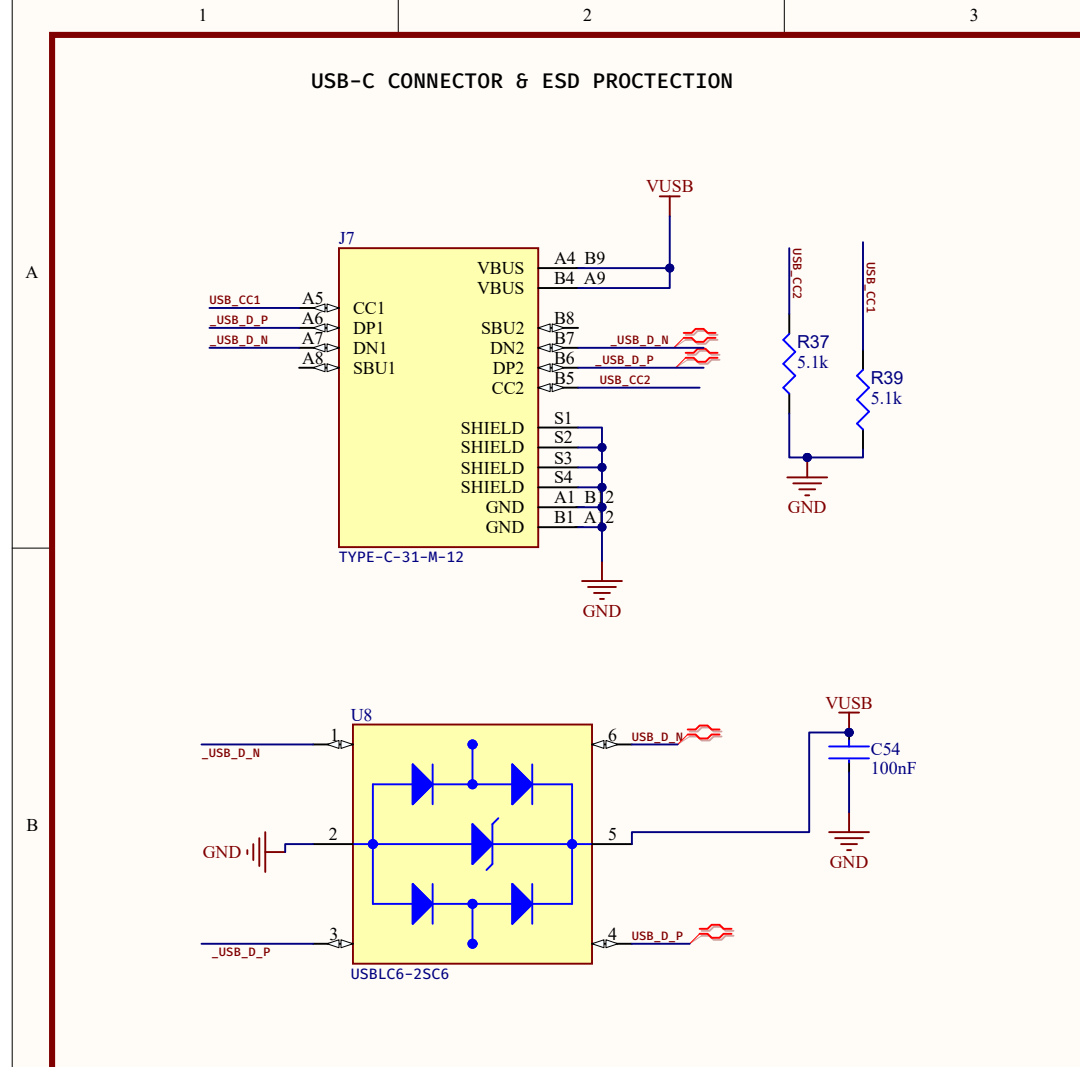
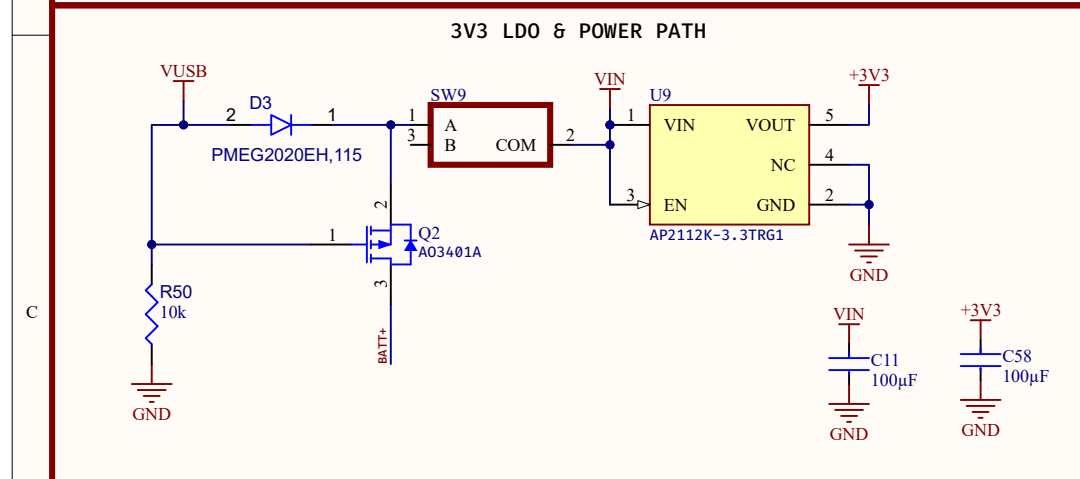




[illegible]


BATTERY MONITORING

The diagram illustrates a battery monitoring circuit. It features a vertical connection line labeled **BATT+** at the top. A resistor **R42** with a value of **1.5M** is connected to this line. Following **R42**, the circuit splits: one path goes left to a node labeled **VBATT_SENSE**, and the other path continues right to another node. This second node is connected to ground (**GND**) through resistor **R43**, which has a value of **470k**. A capacitor **C53** with a value of **100nF** is connected in parallel between the **VBATT_SENSE** line and the node between **R42** and **R43**.

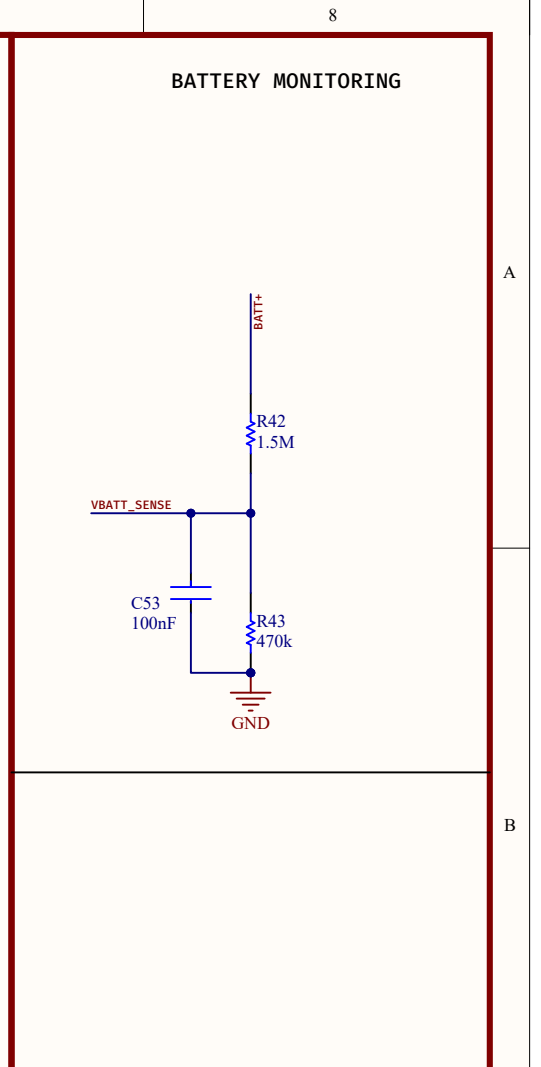

The diagram illustrates a 5V Boost Converter circuit. The input voltage V_{IN} is connected to the VIN pin (pin 3) of the TPS61023DRLR IC (U10). A 10 μ F capacitor (C59) is connected between V_{IN} and GND. A 100k resistor (R52) is connected between the BOOST EN pin (pin 2) and GND. The output voltage is +5V, connected to the SW pin (pin 5). A 1 μ H inductor (L3) is connected between the SW pin and the output. The FB pin (pin 1) is connected to the output through a voltage divider consisting of two resistors, R51 (820R) and R53 (120R), connected in series between the output and GND. The EN pin (pin 4) is connected to GND. The circuit is powered by a +5V source, which is also connected to the output through a 22 μ F capacitor (C64) and a 22 μ F capacitor (C65) in parallel, connected between the output and GND. A label "Solder-bridge-2p" is present near the input.

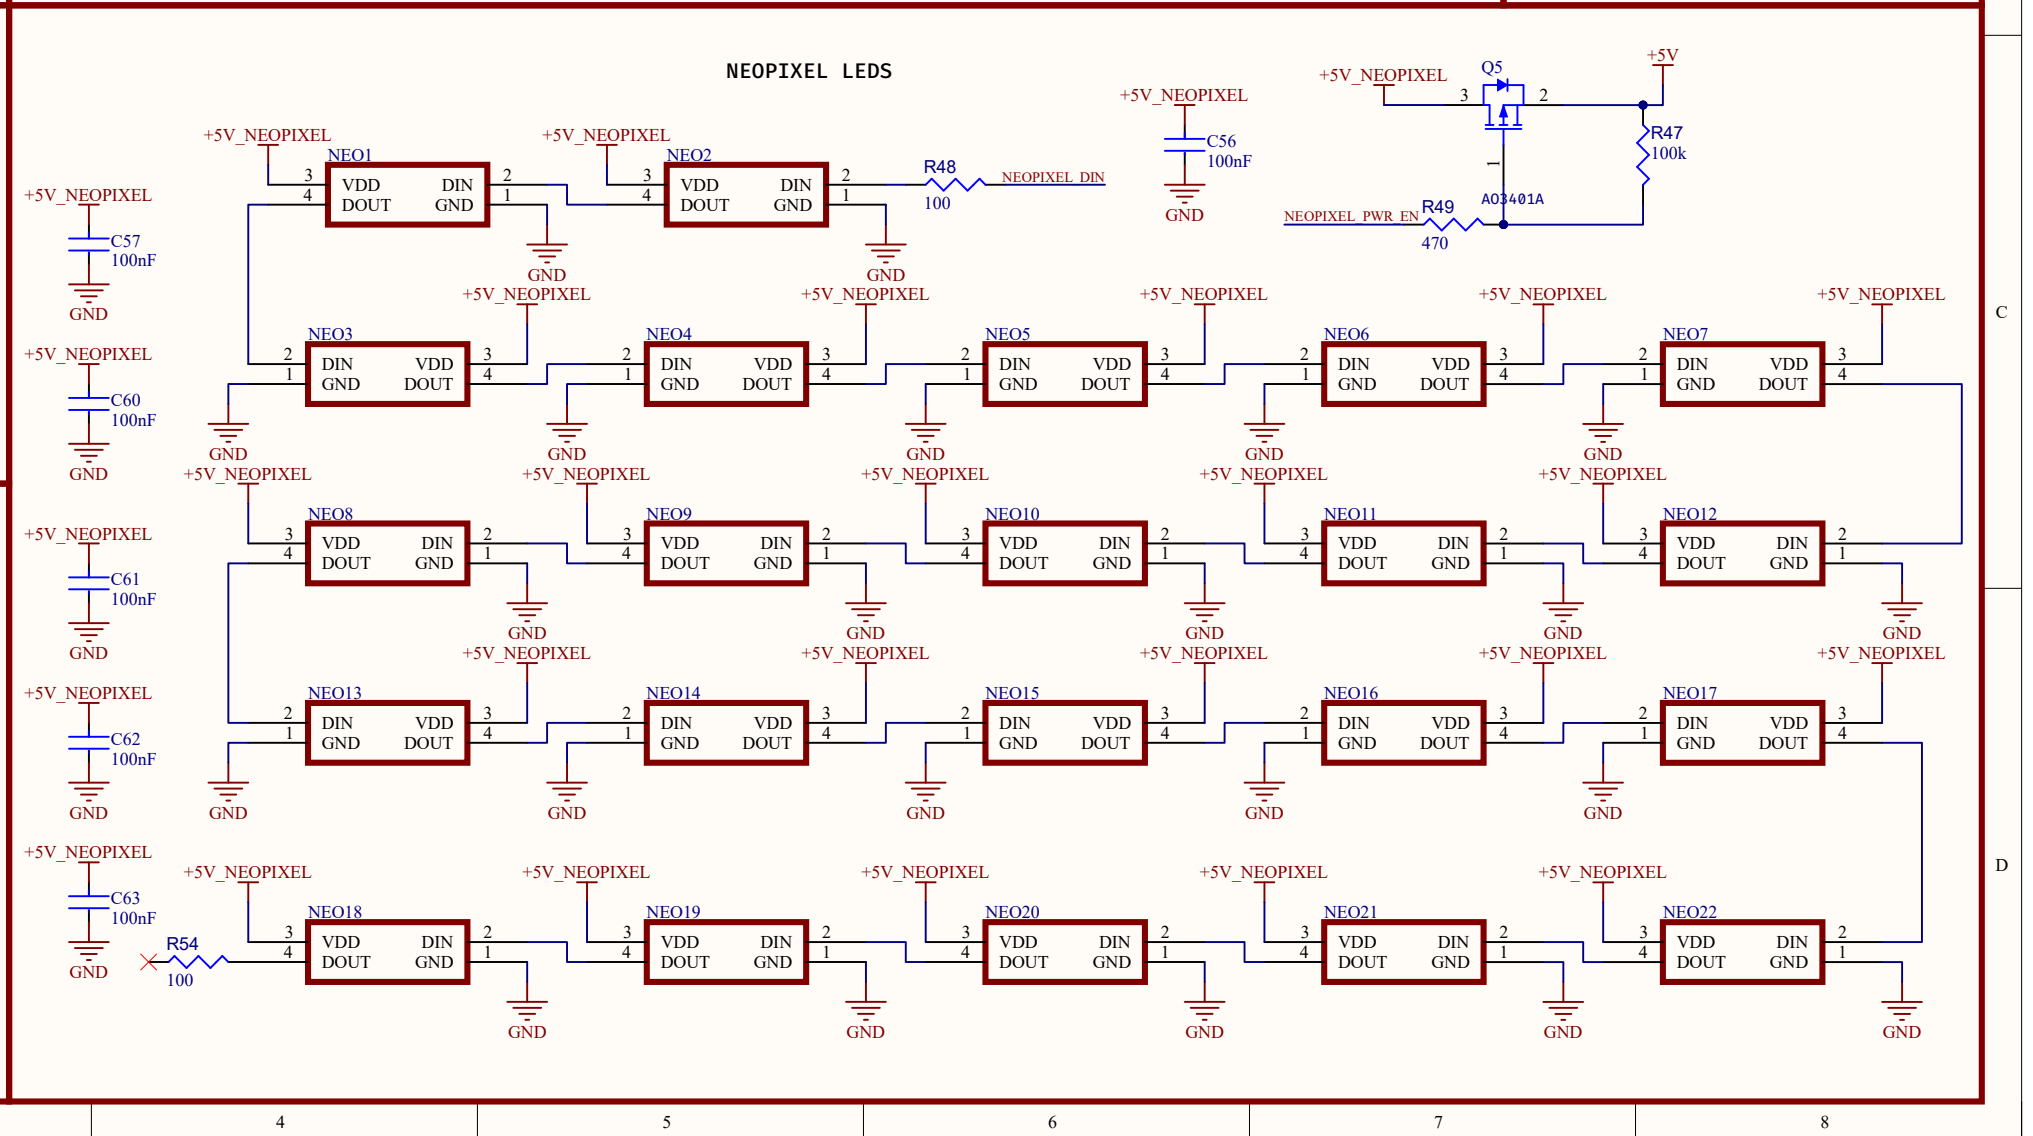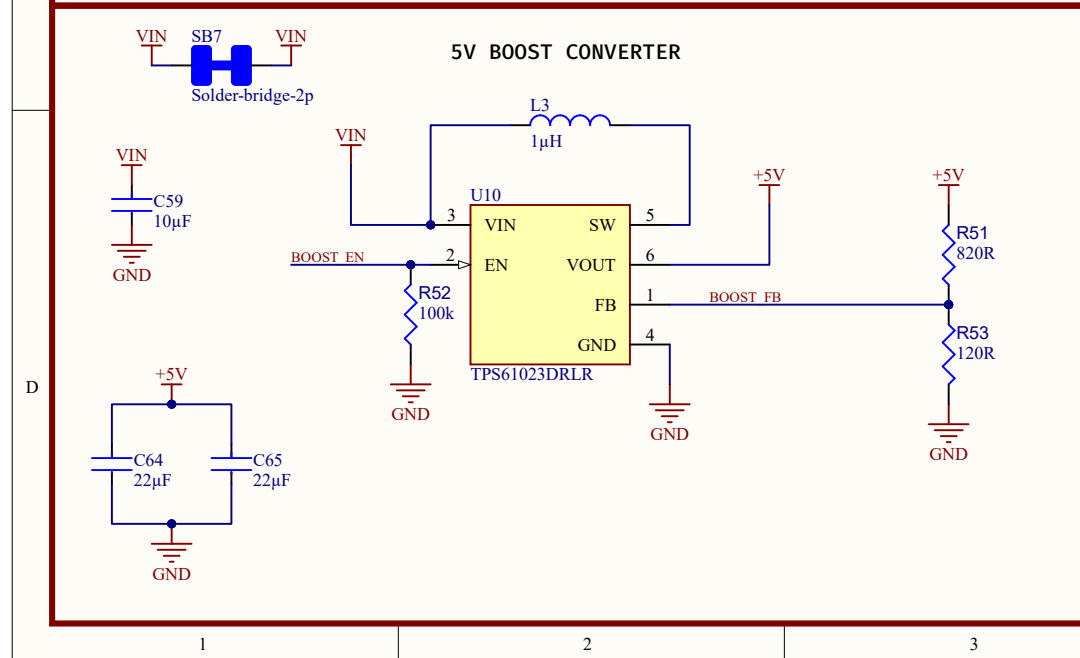

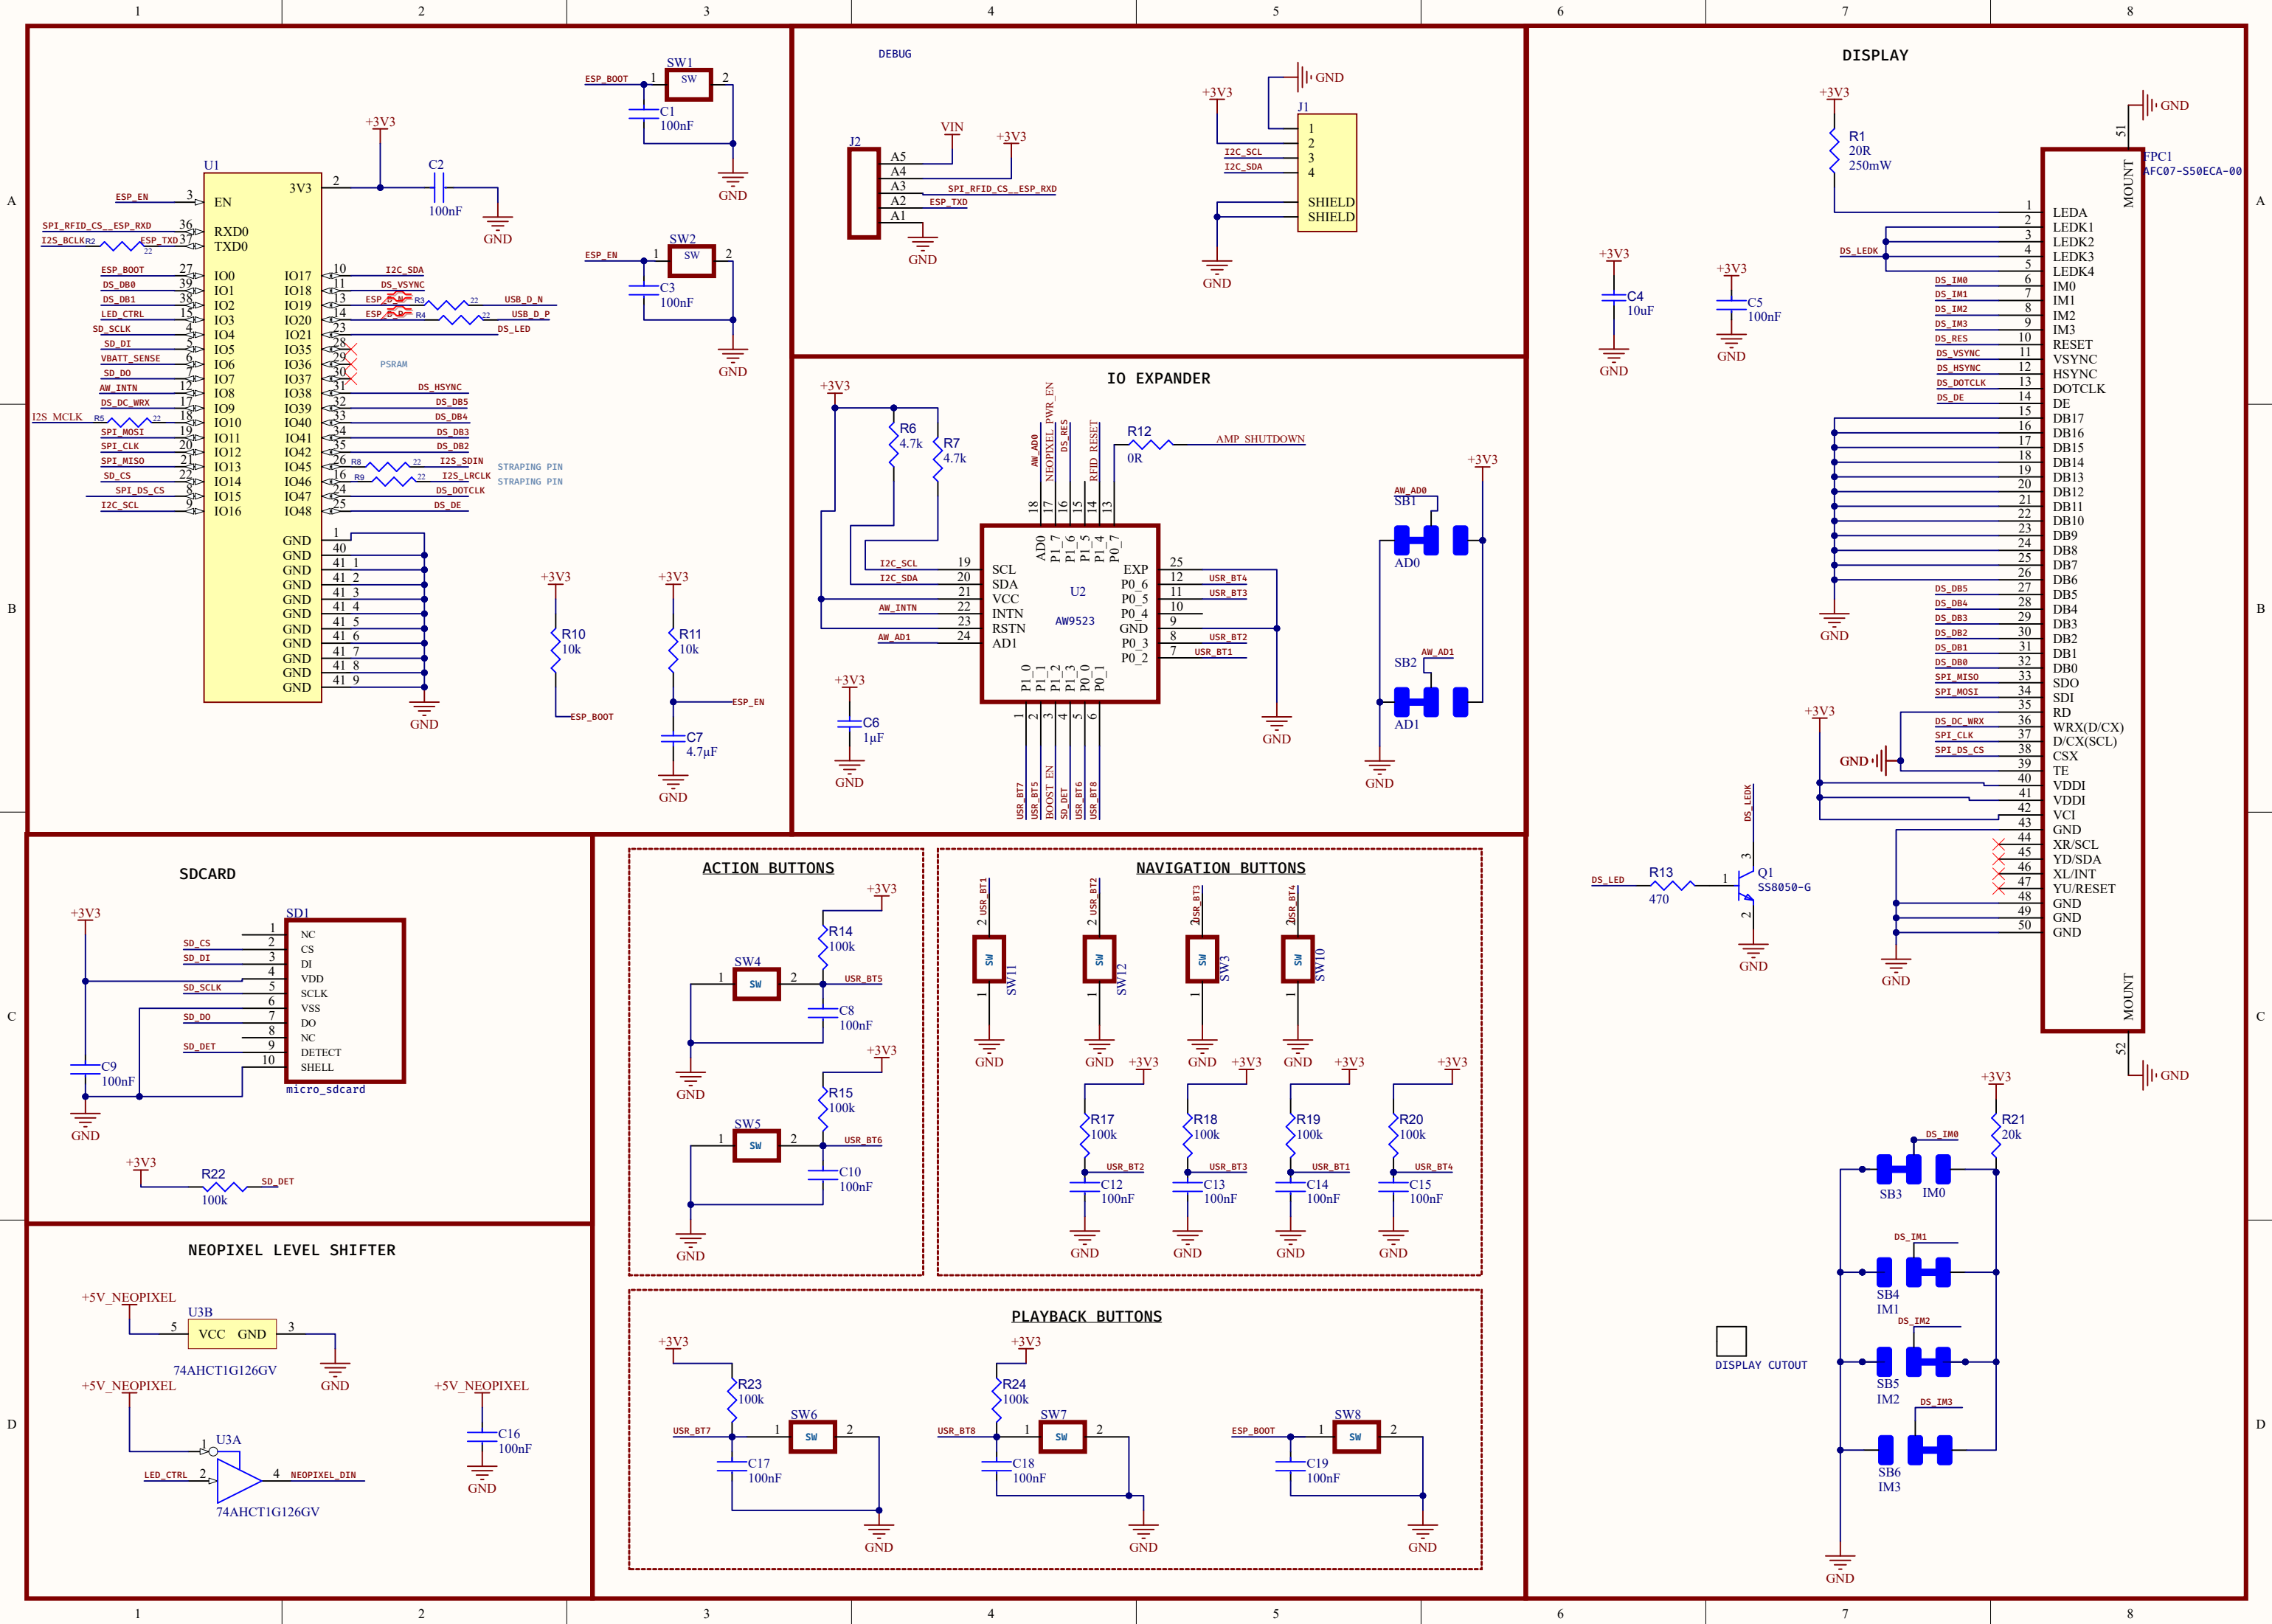

RFID Reader/Writer

A

A

B


B

C

C

D

D

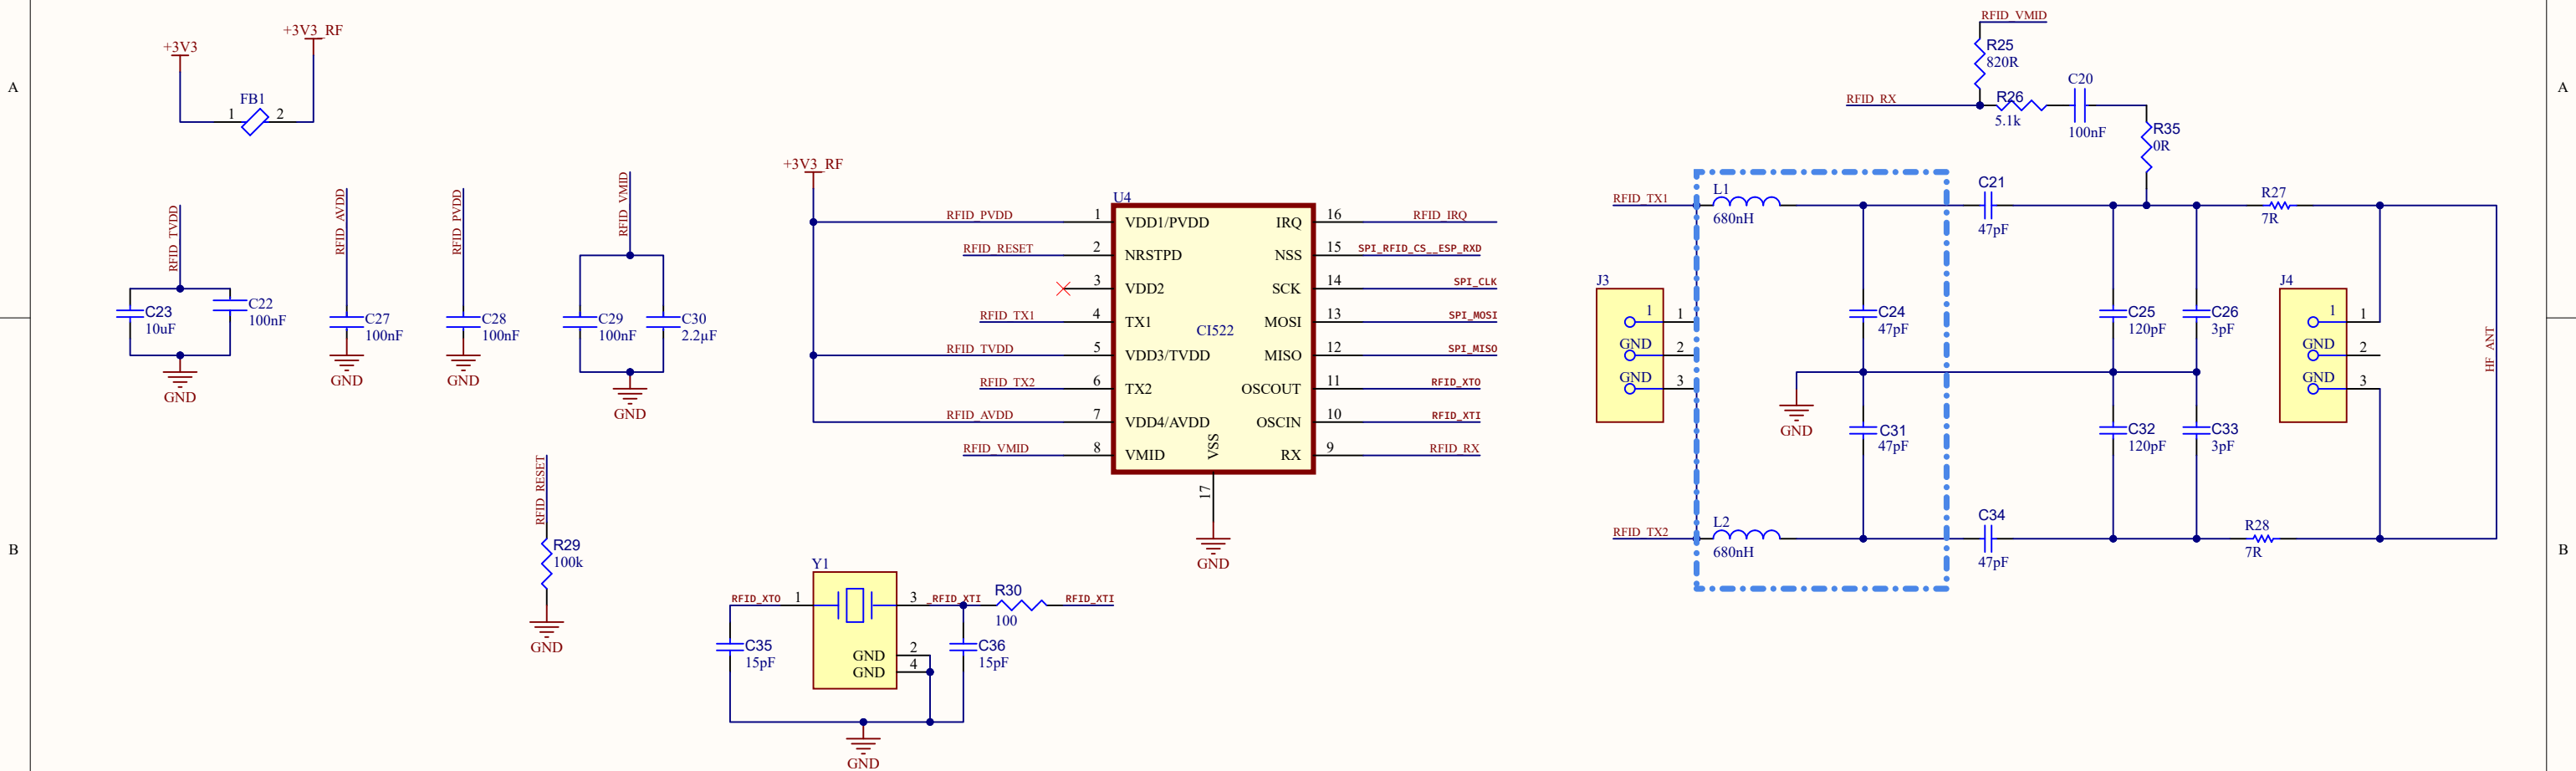

Audio

C

C

D

D

