Estimator-Based Output-Feedback Stabilization of Linear Multi-Delay Systems using SOS

Shuangshuang Wu, Matthew M. Peet, Changchun Hua

Abstract— In this paper, we investigate the estimator-based output feedback control problem of multi-delay systems. This work is an extension of recently developed operator-value LMI framework for infinite-dimensional time-delay systems. Based on the optimal convex state feedback controller and generalized Luenberger observer synthesis conditions we already have, the estimator-based output feedback controller is designed to contain the estimates of both the present state and history of the state. An output feedback controller synthesis condition is proposed using SOS method, which is expressed in a set of LMI/SDP constraints. The simulation examples are displayed to demonstrate the effectiveness and advantages of the proposed results.

I. INTRODUCTION

Time delay widely exists in natural and engineered systems, often as a source of instability. Many works have been done on the study and control of time-delay systems during the last decades [1], [2], mainly focusing on stability analysis, such as [3] and [4]. Despite the considerable advances that have been made in the area of stability analysis, the problem of stabilization of time-delay systems has been relatively neglected [2], [5]. The primary problem in feedback stabilization of time-delay systems is the bilinearity between the controller and the Lyapunov certificate of stability. This bilinearity implies that combining parameterized controllers with standard approaches to Lyapunov-Krasovskii functional construction will result in Bilinear Matrix Inequalities – a problem for which no efficient optimization algorithms exist. Faced with this bilinearity, some papers use iterative methods to alternately optimize the Lyapunov functional and then the controller as in [6], [7]. However, this iterative approach is not guaranteed to converge. Recently, however, duality-based methods have been proposed within the SOS-based operator-theoretic framework – resulting in an LMI-based solution to the problem of H_∞-optimal full-state-feedback control of multi-delay systems [8]. The primary disadvantage of the full-state feedback controllers proposed in [8] is that they assume accurate knowledge of all states of the system and moreover knowledge of the history of these states.

S. Wu is with the Institute of Electrical Engineering, Yanshan University, Qinhuangdao, 066004, China. e-mail: ssw_0538_ysu@163.com

M. Peet is with the School for the Engineering of Matter, Transport and Energy, Arizona State University, Tempe, AZ, 85298 USA. e-mail: mpeet@asu.edu

C. Hua is with the Institute of Electrical Engineering, Yanshan University, Qinhuangdao, 066004, China. e-mail: cch@ysu.edu.cn

Specifically, the controllers have the form

$$u(t) = K_0 x(t) + \sum_i^K K_{1i} x(t-\tau_i) + \sum_i^K \int_{-\tau_i}^0 K_{2i}(s) x(t+s) ds \tag{1}$$

where the H_∞-optimal controller gains K_0, K_{1i}, K_{2i} are polynomials chosen to minimize the closed-loop L_2-gain bound $\gamma_1 := \sup_{\omega \in L_2} \frac{\|z\|_{L_2}}{\|\omega\|_{L_2}}$. This formulation specifically precludes output-feedback controllers of the form $u(t) = Ky(t)$ or even $u(t) = Kx(t)$. In most practical cases such detailed measurements are not available.

The question of how to use measured outputs to reconstruct the full state is that of estimator design and is itself an area of active study (e.g. the Smith predictor can be thought of as an estimator using delayed output signals [10]). The H_∞-optimal estimator design problem for multi-delay systems was itself directly addressed in the SOS-operator framework in [9], wherein the observer is a simulated PDE running parallel to the real system which corrects both the present states and the history of the states. This observer minimizes an L_2-gain bound on the effect of disturbances on a regulated error signal.

In this paper, we propose a framework for using controllers of the form in Eqn. (1) where the controller acts not on the full state, but the state estimate derived from a dynamic estimator constructed using the algorithm proposed in [9]. Specifically, the closed-loop dynamics have the form

$$\dot{x}(t) = A_0 x(t) + \sum_i A_i x_i(t - \tau_i) + B_1 w(t) + B_2 u(t)$$

$$\dot{\hat{x}}(t) = A_0 \hat{x}(t) + \sum_i A_i \hat{\phi}_i(t, -\tau_i) + L_1 b_0(t)$$

$$+ \sum_i L_{2i} b_i(t, -\tau_i) + \sum_i \int_{-\tau_i}^0 L_{3i}(s) b_i(t, s) ds$$

$$\partial_t \hat{\phi}(t, s) = \partial_s \hat{\phi}(t, s) + L_4(s) b_0(t) + \sum_j L_{5ij} b_j(t, -\tau_j)$$

$$+ L_{6i}(s) b_i(t, s) + \sum_j \int_{-\tau_i}^0 L_{7ij}(s, \theta) b_j(t, \theta) d\theta$$

$$\hat{\phi}_i(t, 0) = \hat{x}(t) \quad b_i(t, s) = C_2 \hat{\phi}_i(t, s) - y(t + s)$$

$$b_0(t) = C_2 \hat{x}(t) - y(t)$$

$$u(t) = K_0 \hat{x}(t) + \sum_i K_{1i} \hat{x}(t - \tau_i) + \sum_i \int_{-\tau_i}^0 K_{2i}(s) \hat{x}(t + s) ds$$

$$y(t) = C_2 x(t) + D_2 w(t)$$

$$z(t) = C_{10} x(t) + \sum_i C_{1i} x_i(t - \tau_i) + D_1 w(t)$$

$$z_e(t) = C_{30} e(t) + \sum_i C_{3i} e_i(t, -\tau_i) + D_3 w(t) \tag{2}$$

where $x(t) \in \mathbb{R}^n$ is the state, $\hat{x}(t) \in \mathbb{R}^n$ is the estimate of state, $\hat{\phi}(t,s) \in \mathbb{R}^n$ is the estimate of history of state, $w \in L_2^r$ is an external disturbance input, $u(t) \in \mathbb{R}^m$ is the actuated input, $y(t) \in \mathbb{R}^q$ is the measured output, $z(t) \in \mathbb{R}^p$ is the regulated output, $z_e(t) \in \mathbb{R}^{p_1}$ is the estimated error of regulated output (not need to be $z(t)$ defined above). The delays $\tau_i > 0$ for $i \in [1, \ldots, K]$ are ordered by increasing magnitude and $A_0, A_i, B_1, B_2, C_{10}, C_{1i}, C_2, C_{30}, C_{3i}, D_1, D_2, D_3$ are constant matrices with appropriate dimensions. We assume $x(0) = \hat{x}(t) = 0$ for all $s \in [-\tau_K, 0]$. The gains K_0, K_{1i}, K_{2i} come from [8] and the gains $L_0, L_{1i}, L_{2i}, L_{3i}, L_{4i}, L_{5ij}$ come from [9]. By exploiting the properties of the gains and examining the dynamics of the closed-loop system, we show that the resulting dynamics are stable and establish a bound on the H_∞-gain of the resulting closed-loop system. We furthermore propose a scheme for real-time numerical implementation of the observer-based controller and use numerical simulation to show that the resulting closed-loop system achieves internal stabilization.

A. Notation

Shorthand notation used throughout this paper includes the Hilbert spaces $L_2^m[X] := L_2(X; \mathbb{R}^m)$ of square integrable functions from X to $\mathbb{R}^m$ and $W_2^m[X] := W^{1,2}(X; \mathbb{R}^m) = H^1(X; \mathbb{R}^m) = \{x : x, \dot{x} \in L_2^m[X]\}$. We use L_2^m, W_2^m when domains are clear from context. We also use the extensions $L_2^{n \times m}[X] := L_2(X; \mathbb{R}^{n \times m})$ and $W_2^{n \times m}[X] := W^{1,2}(X; \mathbb{R}^{n \times m})$ for matrix-valued functions. $S^n \subset \mathbb{R}^n \times n$ denotes the symmetric matrices. An operator $\mathcal{P} : Z \to Z$ is positive on a subset X of Hilbert space Z if $\langle x, \mathcal{P}x \rangle \geq 0$ for all $x \in X$. $\mathcal{P}$ is coercive on X if $\langle x, \mathcal{P}x \rangle \geq \epsilon \|x\|_Z^2$ for some $\epsilon > 0$ for all $x \in X$. Given an operator $\mathcal{P} : Z \to Z$ and a set $X \to Z$, we use the shorthand $\mathcal{P}(X)$ to denote the image of $\mathcal{P}$ on subset X. $I_n \in S^n$ denotes the identity matrix. $0_{n \times m} \in \mathbb{R}^{n \times m}$ is the matrix of zeros matrix with shorthand $0_n := 0_{n \times n}$. We will occasionally denote the intervals $T_i := [-\tau_i, 0]$. For a natural number, $K \in N$, we adopt the index shorthand notation which denotes $[K] = 1, \cdots, K$. The symmetric completion of a matrix is denoted $*^T$.

II. Previous Work on State Estimation and State-Feedback Control of DPS

In this section, we consider the a general class of distributed-parameter system (DPS) given as

$$\dot{\mathbf{x}}(t) = \mathcal{A}\mathbf{x}(t) + \mathcal{B}_1\omega(t) + \mathcal{B}_2 u(t) \quad \mathbf{x}(0) = 0$$
$$z(t) = \mathcal{C}_1\mathbf{x}(t) + \mathcal{D}_1\omega(t)$$
$$\mathbf{y}(t) = \mathcal{C}_2\mathbf{x}(t) + \mathcal{D}_2\omega(t) \tag{3}$$

where $\mathcal{A} : X \to Z$, $\mathcal{B}_1 : \mathbb{R} \to Z$, $\mathcal{B}_2 : U \to Z$, $\mathcal{C}_1 : X \to \mathbb{R}$, $\mathcal{C}_2 : X \to Y$, $\mathcal{D}_1 : \mathbb{R} \to \mathbb{R}$ and $\mathcal{D}_2 : \mathbb{R} \to Y$.

A. Full State feedback controller design

Theorem 1: [8] Suppose $\mathcal{P}_1$ is a bounded, coercive linear operator $\mathcal{P}_1 : X \to X$ with $\mathcal{P}_1(X) = X$ and which is self-adjoint with respect to the Z inner product. Then $\mathcal{P}_1^{-1}$ exists; is bounded; is self-adjoint; $\mathcal{P}_1^{-1} : X \to X$; and $\mathcal{P}_1^{-1}$ is coercive.

Theorem 2: [8] Suppose there exists a scalar $\epsilon_1 > 0$, an operator $\mathcal{P}_1 : Z \to Z$ which satisfies the conditions of Theorem 1, and an operator $\mathcal{H} : X \to U$ such that

$$\langle \mathcal{A}\mathcal{P}_1\mathbf{h}, \mathbf{h} \rangle_Z + \langle \mathbf{h}, \mathcal{A}\mathcal{P}_1\mathbf{h} \rangle_Z + \langle \mathcal{B}_2\mathcal{H}\mathbf{h}, \mathbf{h} \rangle_Z + \langle \mathbf{h}, \mathcal{B}_2\mathcal{H}\mathbf{h} \rangle_Z$$
$$+ \langle \mathcal{B}_1\omega, \mathbf{h} \rangle_Z + \langle \mathbf{h}, \mathcal{B}_1\omega \rangle_Z - \gamma_1\|\omega\|^2 - \gamma_1\|\upsilon\|^2 + \upsilon^T(\mathcal{C}_1\mathcal{P}\mathbf{h})$$
$$+ (\mathcal{C}_1\mathcal{P}\mathbf{h})^T\upsilon + \upsilon^T(\mathcal{D}_2\mathcal{H}\mathbf{h}) + (\mathcal{D}_2\mathcal{H}\mathbf{h})^T\upsilon + \upsilon^T(\mathcal{D}_1\omega)$$
$$+ (\mathcal{D}_1\omega)^T\upsilon \leq -\epsilon_1\|\mathbf{h}\|^2 \tag{4}$$

for all $\mathbf{h} \in X$, $\omega \in \mathbb{R}^r$ and $\upsilon \in \mathbb{R}^p$. Then if ω and z satisfy Eqn. (3) and $u(t) = \mathcal{K}\mathbf{x}(t)$ where $\mathcal{K} = \mathcal{H}\mathcal{P}_1^{-1}$ we have $\|z\|_{L_2} \leq \gamma_1\|\omega\|_{L_2}$.

B. Estimator design

In [9], a H_∞ optimal estimator based on the traditional Luenberger structure is given for Eqn. (3), which can correct both the present states and history of the states and give a real-time estimate of the history of states. This estimator has the following dynamics

$$\dot{\hat{\mathbf{x}}}(t) = \mathcal{A}\hat{\mathbf{x}}(t) + \mathcal{L}(\mathcal{C}_2\hat{\mathbf{x}}(t) - \mathbf{y}(t)) \tag{5}$$

for a given operator $\mathcal{L} : Y \to Z$. By defining $\mathbf{e}(t) = \hat{\mathbf{x}}(t) - \mathbf{x}(t)$, one obtains the error dynamics as

$$\dot{\mathbf{e}}(t) = (\mathcal{A} + \mathcal{L}\mathcal{C}_2)\mathbf{e}(t) - (\mathcal{B}_1 + \mathcal{L}\mathcal{D}_2)\omega(t)$$
$$z_e(t) = \mathcal{C}_3\mathbf{e}(t) + \mathcal{D}_3\omega(t) \quad \mathbf{e}(0) = 0 \tag{6}$$

where $\mathcal{C}_3 : X \to \mathbb{R}$ and $\mathcal{D}_3 : \mathbb{R} \to \mathbb{R}$.

Theorem 3: [9] Suppose there exist a scalar $\epsilon_2 > 0$ and bounded linear operators $\mathcal{P}_2 : Z \to Z$ and $\mathcal{Z} : Y \to Z$ such that $\mathcal{P}_2$ is coercive and

$$\langle (\mathcal{P}_2\mathcal{A} + \mathcal{Z}\mathcal{C}_2)\mathbf{e}, \mathbf{e} \rangle_Z + \langle \mathbf{e}, (\mathcal{P}_2\mathcal{A} + \mathcal{Z}\mathcal{C}_2)\mathbf{e} \rangle_Z$$
$$- \langle \mathbf{e}, (\mathcal{P}_2\mathcal{B}_1 + \mathcal{Z}\mathcal{D}_2)\omega \rangle_Z - \langle (\mathcal{P}_2\mathcal{B}_1 + \mathcal{Z}\mathcal{D}_2)\omega, \mathbf{e} \rangle_Z$$
$$- \gamma_2\|\omega\|^2 - \gamma_2\|\upsilon_e\|^2 + \langle \upsilon_e, \mathcal{C}_3\mathbf{e} \rangle + \langle \mathcal{C}_3\mathbf{e}, \upsilon_e \rangle$$
$$+ \langle \upsilon_e, \mathcal{D}_3\omega \rangle + \langle \mathcal{D}_3\omega, \upsilon_e \rangle \leq -\epsilon_2\|\mathbf{e}\|^2 \tag{7}$$

for all $\mathbf{e} \in X$, $\omega \in \mathbb{R}^r$ and $\upsilon_e \in \mathbb{R}^{p_1}$. Then $\mathcal{P}_2^{-1}$ is a bounded linear operator and for $\mathcal{L} = \mathcal{P}_2^{-1}\mathcal{Z}$, the solution of Eqn. (6) satisfies $\|z_e\|_{L_2} \leq \gamma_2\|\omega\|_{L_2}$.

III. Main results

In this section, we give conditions under which the dynamics of the estimator-based controller is stable and give an expression for the L_2-gain of the closed-loop system. The conditions are given in abstract form. Later, in Theorem 6, we will given LMI-based sufficient conditions under which the conditions of Theorem 4 is satisfied.

A. Estimator-Based Control for DPS

Combining Eqn. (3), Eqn. (5), and Eqn. (6) with $u(t) = \mathcal{K}\hat{\mathbf{x}}$, the closed-loop DPS dynamics are given as follows

$$\dot{\mathbf{x}}(t) = (\mathcal{A} + \mathcal{B}_2\mathcal{K})\mathbf{x}(t) + \mathcal{B}_1\omega(t) + \mathcal{B}_2\mathcal{K}\mathbf{e}(t)$$
$$\dot{\mathbf{e}}(t) = (\mathcal{A} + \mathcal{L}\mathcal{C}_2)\mathbf{e}(t) - (\mathcal{B}_1 + \mathcal{L}\mathcal{D}_2)\omega(t)$$
$$z(t) = \mathcal{C}_1\mathbf{x}(t) + \mathcal{D}_1\omega(t)$$
$$\mathbf{y}(t) = \mathcal{C}_2\mathbf{x}(t) + \mathcal{D}_2\omega(t) \tag{8}$$
$$z_e(t) = \mathcal{C}_3\mathbf{e}(t) + \mathcal{D}_3\omega(t)$$

where $\mathcal{K} : Z \to U$ and $\mathcal{L} : Y \to Z$. We assume $\mathbf{x}(0) = \mathbf{e}(0) = 0$.

Theorem 4: Suppose there exist positive scalars ϵ_1, ϵ_2, operators $\mathcal{H} : Z \to U$ and $\mathcal{P}_1 : Z \to Z$ which satisfy the conditions of Theorem 1 with γ_1, and operators $\mathcal{P}_2 : Z \to Z$, and $\mathcal{Z} : Y \to Z$ which satisfy Theorems 2 and 3 with γ_2. Then if there exists positive scalar r such that

$$\left\langle \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix}, \mathcal{M} \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix} \right\rangle \leq 0 \tag{9}$$

for all $\mathbf{h}, \mathbf{e} \in X$, where

$$\mathcal{M} = \begin{bmatrix} -\epsilon_1 I & \mathcal{B}_2 \mathcal{H} \mathcal{P}_1^{-1} \\ (\mathcal{B}_2 \mathcal{H} \mathcal{P}_1^{-1})^T & -r\epsilon_2 I \end{bmatrix}.$$

Then for any $z(t)$, $z_e(t)$ and $w(t)$ which satisfy Eqn. (8) with $\mathcal{K} = \mathcal{H}\mathcal{P}^{-1}$ and $\mathcal{L} = \mathcal{P}^{-1}\mathcal{Z}$, we have $\|z\|_{L_2} \leq \sqrt{\gamma_1(\gamma_1 + r\gamma_2)}\|\omega\|_{L_2}$ and $\|z_e\|_{L_2} \leq \gamma_2\|\omega\|_{L_2}$.

Proof: Suppose $z(t)$, $z_e(t)$, $\mathbf{y}(t)$ $w(t)$, $\mathbf{e}(t)$, $\mathbf{x}(t)$ satisfy Eqn. (8). Since $z_e(t)$ is only affected by $\omega(t)$, we have by Theorem 3 that $\|z_e\|_{L_2} \leq \gamma_2\|\omega\|_{L_2}$. Define

$$V(t) = V_1(t) + rV_2(t) \tag{10}$$

where $V_1(t) = \langle \mathbf{x}(t), \mathcal{P}^{-1}\mathbf{x}(t) \rangle_Z$ and $V_2(t) = \langle \mathbf{e}(t), \mathcal{P}_2 \mathbf{e}(t) \rangle_Z$. If we define expand $V_2(t)$ and apply Theorem 3, we have

$$\dot{V}_2(t) - \gamma_2\|\omega(t)\|^2 \leq -\epsilon_2\|\mathbf{e}(t)\|^2.$$

If we define $\mathbf{h}(t) = \mathcal{P}_1^{-1}\mathbf{x}(t) \in X$ and differentiate $V_1(t)$, we have

$$\dot{V}_1(t) = \langle \mathcal{A}\mathcal{P}_1\mathbf{h}(t), \mathbf{h}(t) \rangle_Z + \langle \mathbf{h}(t), \mathcal{A}\mathcal{P}_1\mathbf{h}(t) \rangle_Z$$
$$+ \langle \mathcal{B}_2\mathcal{H}\mathbf{h}(t), \mathbf{h}(t) \rangle_Z + \langle \mathbf{h}(t), \mathcal{B}_2\mathcal{H}\mathbf{h}(t) \rangle_Z$$
$$+ \langle \mathcal{B}_2\mathcal{H}\mathcal{P}_1^{-1}\mathbf{e}(t), \mathbf{h}(t) \rangle_Z + \langle \mathbf{h}(t), \mathcal{B}_2\mathcal{H}\mathcal{P}_1^{-1}\mathbf{e}(t) \rangle_Z$$
$$+ \langle \mathcal{B}_1\omega(t), \mathbf{h}(t) \rangle_Z + \langle \mathbf{h}(t), \mathcal{B}_1\omega(t) \rangle_Z .$$

Applying Theorem 2, if we define $\upsilon(t) = \frac{1}{\gamma_2}z(t)$, one gets

$$\dot{V}_1(t) - \gamma_1\|\omega(t)\|^2 + \gamma_1\|\upsilon(t)\|^2$$
$$\leq -\epsilon_1\|\mathbf{h}(t)\|^2 + \langle \mathcal{B}_2\mathcal{H}\mathcal{P}_1^{-1}\mathbf{e}(t), \mathbf{h}(t) \rangle_Z$$
$$+ \langle \mathbf{h}(t), \mathcal{B}_2\mathcal{H}\mathcal{P}_1^{-1}\mathbf{e}(t) \rangle_Z .$$

Combining the results above, we have

$$\dot{V}(t) - (\gamma_1 + r\gamma_2)\|\omega(t)\|^2 + \gamma_1\|\upsilon(t)\|^2$$
$$\leq -\epsilon_1\|\mathbf{h}(t)\|^2 - r\epsilon_2\|\mathbf{e}(t)\|^2$$
$$+ \langle \mathcal{B}_2\mathcal{H}\mathcal{P}_1^{-1}\mathbf{e}(t), \mathbf{h}(t) \rangle_Z + \langle \mathbf{h}(t), \mathcal{B}_2\mathcal{H}\mathcal{P}_1^{-1}\mathbf{e}(t) \rangle_Z$$
$$= \left\langle \begin{bmatrix} \mathbf{h}(t) \\ \mathbf{e}(t) \end{bmatrix}, \mathcal{M} \begin{bmatrix} \mathbf{h}(t) \\ \mathbf{e}(t) \end{bmatrix} \right\rangle .$$

Then if there exist a positive scalar r such that Eqn. (9) is satisfied, it follows

$$\dot{V}(t) - (\gamma_1 + r\gamma_2)\|\omega(t)\|^2 + \gamma_1\|\upsilon(t)\|^2 \leq 0.$$

Integrating in time and using $V(0) = 0$, we have

$$\|z\|_{L_2} \leq \sqrt{\gamma_1(\gamma_1 + r\gamma_2)}\|\omega\|_{L_2}.$$

The proof is completed. ∎

B. Expressing Multi-delay system into DPS

In this section, we apply Theorem 4 to the case of multi-delay systems. Specifically, we consider solutions to the system of equations given by Eqn. (2).

Firstly, considering $e(t) = \hat{x}(t) - x(t)$, we write Eqn. (2) into the form in Eqn. (3). Following the mathematical formalism developed in [2], define the inner-product space $Z_{m,n,K} := \{\mathbb{R}^m \times L_2^n[-\tau_1, 0] \times \cdots \times L_2^n[-\tau_K, 0]\}$ and for $\{x, \phi_1, \cdots, \phi_K\} \in Z_{m,n,K}$, we use the following notation

$$\begin{bmatrix} x \\ \phi_i \end{bmatrix} := \{x, \phi_1, \cdots, \phi_K\}$$

and we define the inner product on $Z_{m,n,K}$ as

$$\left\langle \begin{bmatrix} y \\ \psi_i \end{bmatrix}, \begin{bmatrix} x \\ \phi_i \end{bmatrix} \right\rangle_{Z_{m,n,K}} = \tau_K y^T x + \sum_{i=1}^{K} \int_{-\tau_i}^{0} \psi_i(s)^T \phi_i(s) ds.$$

We simplify the notation $Z_{m,n,k}$ when $m = n$ as $Z_{n,k}$. Then the state-space for system (8) is defined as

$$X := \left\{ \begin{bmatrix} x \\ \phi_i \end{bmatrix} \in \mathcal{Z}_{n,K} : \begin{array}{c} \phi_i \in W_2^n[-\tau_i, 0] \text{ and } \phi_i(0) = x \\ \text{for all } i \in [K] \end{array} \right\}.$$

We now represent the infinitesimal generator, $\mathcal{A} : X \to Z_{n,K}$ of Eqn. (8) as

$$\mathcal{A} \begin{bmatrix} x \\ \phi_i \end{bmatrix}(s) = \begin{bmatrix} A_0 x(t) + \sum A_i \phi_i(-\tau_i) \\ \phi_i(s) \end{bmatrix}.$$

Furthermore, $\mathcal{B}_1 : \mathbb{R}^r \to Z_{n,K}$, $\mathcal{B}_2 : \mathbb{R}^m \to Z_{n,K}$, $\mathcal{C}_1 : Z_{n,K} \to \mathbb{R}^p$, $\mathcal{C}_2 : X \to Z_{q,K}$, $\mathcal{C}_3 : Z_{n,K} \to \mathbb{R}^{p_1}$, $\mathcal{D}_1 : \mathbb{R}^r \to \mathbb{R}^p$, $\mathcal{D}_3 : \mathbb{R}^r \to Z^{p_1}$ are defined as

$$\mathcal{B}_1\omega(t) := \begin{bmatrix} B_1\omega(t) \\ 0 \end{bmatrix} \quad \mathcal{B}_2 u(t) := \begin{bmatrix} B_2 u(t) \\ 0 \end{bmatrix}$$

$$\mathcal{C}_j \begin{bmatrix} x \\ \phi_i \end{bmatrix}(s) := C_{j0} x(t) + \sum_i C_{ji}\phi_i(-\tau_i) \quad j = 1, 3$$

$$\mathcal{C}_2 \begin{bmatrix} x \\ \phi_i \end{bmatrix}(s) := \begin{bmatrix} C_2 x(t) \\ C_2\phi_i(s) \end{bmatrix} \tag{11}$$

$$\mathcal{D}_j \omega(t) := D_j \omega(t) \quad j = 1, 3.$$

Here we assume $\mathcal{D}_2 = 0$. Note for any solution $x(t)$ of Eqn. (2), using the above notation

$$(\mathbf{x}(t))(s) = \begin{bmatrix} x(t) \\ x(t+s) \end{bmatrix},$$

then $\mathbf{x}(t)$ satisfies Eqn. (8). The converse statement is also true. The same is true for $\mathbf{e}(t)$, $\mathbf{y}(t)$.

C. The operators framework

A class of operators $\mathcal{P}_{\{P,Q_i,S_i,R_{ij}\}} : Z_{m,n,K} \to Z_{m,n,K}$ is introduced which is parameterized by matrix P and matrix-valued functions $Q_i \in W_2^{m \times n}[-\tau_i, 0]$, $S_i \in W_2^{n \times n}[-\tau_i, 0]$, $R_{ij} \in W_2^{n \times n}[-\tau_i, 0] \times [-\tau_j, 0]$ as

$$\left(\mathcal{P}_{\{P,Q_i,S_i,R_{ij}\}} \begin{bmatrix} x \\ \phi_i \end{bmatrix} \right)(s) := \tag{12}$$

$$\begin{bmatrix} Px + \sum_i^K \int_{-\tau_i}^0 Q_i(s)\phi_i(s)ds \\ \tau_K Q_i^T(s) + \tau_K S_i(s)\phi_i(s) + \sum_i^K \int_{-\tau_j}^0 R_{ij}(s,\theta)\phi_j(\theta)d\theta \end{bmatrix}.$$

Lemma 5: [8] Suppose that $P \in \mathbb{R}^{n \times n}$, $S_i \in W_2^{n \times n}[T_i]$, $R_{ij} \in W_2^{n \times n}[T_i \times T_j]$ satisfying $S_i(s) = S_i^T(s)$, $R_{ij}(s, \theta) = R_{ji}^T(\theta, s)$, $P = \tau_K Q_i^T(0)$ and $Q_j(s) = R_{ij}(0, s)$ for all $i, j \in [K]$. Moreover suppose $\mathcal{P}_{\{P, Q_i, S_i, R_{ij}\}}$ is coercive on $Z_{n,K}$. Then $\mathcal{P}_{\{P, Q_i, S_i, R_{ij}\}}$ is a self-adjoint bounded linear operator with respect to the inner product defined on $Z_{n,K}$; $\mathcal{P} : X \to X$; and $\mathcal{P}_{\{P, Q_i, S_i, R_{ij}\}}(X) = X$.

Now let us turn to the operators used in Theorem 4. We define $\mathcal{P}_1 := \mathcal{P}_{\{P_1, Q_{1i}, S_{1i}, R_{1ij}\}}$ and $\mathcal{P}_2 := \mathcal{P}_{\{P_2, Q_{2i}, S_{2i}, R_{2ij}\}}$ and we parameterize the decision variable $\mathcal{H} : Z_{n,k} \to \mathbb{R}^m$ using matrices H_0, H_{1i} and functions H_{2i} as

$$\mathcal{H} \begin{bmatrix} y \\ y_i \end{bmatrix}(s) = \begin{bmatrix} H_0 y + \sum_i H_{1i} y_i(-\tau_i) + \sum_i \int_{-\tau_i}^0 H_{2i}(s) y_i(s) ds \end{bmatrix}. \tag{13}$$

Similarly, the decision variable $\mathcal{Z}$ is parameterized as

$$\mathcal{Z} \begin{bmatrix} y \\ y_i \end{bmatrix}(s) = \begin{bmatrix} Z_1 y_0 + \sum_i Z_{2i} y_i(-\tau_i) + \sum_i \int_{-\tau_i}^0 Z_{3i}(s) y_i(s) ds \\ \tau_K z_i(s) \end{bmatrix}$$

$$z_i(s) = Z_{4i}(s) y_0 + \sum_j Z_{5ij}(s) y_j(-\tau_j) + Z_{6i}(s) y_i(s)$$

$$+ \sum_j \int_{-\tau_j}^0 Z_{7ij}(s, \theta) y_j(\theta) d\theta. \tag{14}$$

In [9], it was shown that for $\mathcal{Z}$ as parameterized above, if $\mathcal{L} = \mathcal{P}_1^{-1} \mathcal{Z}$, then the error injection operator $\mathcal{L} : Z_{q,k} \to Z_{n,k}$ corresponds to the estimator structure defined in Eqn. (2). The same is true for $\mathcal{K} = \mathcal{H} \mathcal{P}_2^{-1}$.

To simplify presentation, we do not present the LMI constraints on the coefficients of $\{P, Q_i, S_i, R_{ij}\}$ which ensure $\mathcal{P}_{\{P, Q_i, S_i, R_{ij}\}} \geq 0$. Rather, we simply represent these constraints using the following notation.

$$\Xi_{d,m,n,K} :=$$
$$\left\{ \{P, Q_i, R_{ij}, S_i\} : {}^{\{P, Q_i, R_{ij}, S_i\} \text{ satisfy the conditions of Corollary 4}}_{\text{in } [9]} \right\}.$$

By Theorem 8 in [8], if $\{P - \epsilon I, Q_i, R_{ij}, S_i - \epsilon I\} \in \Xi_{d,m,n,K}$, then $\mathcal{P}_{\{P, Q_i, R_{ij}, S_i\}}$ is coercive and has an inverse of the form $\hat{\mathcal{P}} := \hat{\mathcal{P}}_{\{\hat{P}, \frac{1}{\tau_K} \hat{Q}_i, \frac{1}{\tau_K^2} \hat{S}_i, \frac{1}{\tau_K} \hat{R}_{ij}\}}$. In this paper, we do not explicitly represent the map to $\{\hat{P}, \hat{Q}_i, \hat{S}_i, \hat{R}_{ij}\}$, but rather combine it into a single map from $\{P, Q_i, S_i, R_{ij}\}$ and $\{Z_1, Z_{2i}, Z_{3i}, Z_{4i}, Z_{5ij}, Z_{6i}, Z_{7ij}\}$ (resp. $\{H_1, H_{2i}, H_{3i}\}$) to $\{L_1, L_{2i}, L_{3i}, L_{4i}, L_{5ij}, L_{6i}, L_{7ij}\}$ (resp. $\{K_0, K_{1i}, K_{2i}\}$) which we then denote using the following.

Definition of $\mathcal{L}_o$:
$$\{L_1, L_{2i}, \cdots, L_{7ij}\} = \mathcal{L}_o(\{P, Q_i, S_i, R_{ij}\}, \{Z_1, Z_2, \cdots, Z_{7ij}\})$$

to indicate that if $\{\hat{P}, \hat{Q}_i, \hat{S}_i, \hat{R}_{ij}\}$ are as defined in Theorem 8 in [8], then $\{L_1, L_{2i}, \cdots, L_{7ij}\}$, $\{\hat{P}, \hat{Q}_i, \hat{S}_i, \hat{R}_{ij}\}$, and $\{Z_1, Z_2, \cdots, Z_{7ij}\}$ satisfy Lemma 7 in [9].

Definition of $\mathcal{L}_c$: Likewise, we say

$$\{K_0, K_{1i}, K_{2i}\} = \mathcal{L}_c(\{P, Q_i, S_i, R_{ij}\}, \{H_0, H_{1i}, H_{2i}\})$$

to indicate that if $\{\hat{P}, \hat{Q}_i, \hat{S}_i, \hat{R}_{ij}\}$ are as defined in Theorem 8 in [8], then $\{K_0, K_{1i}, K_{2i}\}$, $\{\hat{P}, \hat{Q}_i, \hat{S}_i, \hat{R}_{ij}\}$, and $\{H_0, H_{1i}, H_{2i}\}$ satisfy Lemma 9 in [8].

D. Theorem 4 applied to Multi-delay systems

In this section, we formulate the conditions of Theorem 4 into multi-delay systems as a linear operator inequality where all operators are the form of Eqn. (12).

Theorem 6: Suppose there exist $d \in \mathbb{N}$, positive scalars $\epsilon, \epsilon_1, \epsilon_2, \gamma_1, \gamma_2, \{P_1, Q_{1i}, S_{1i}, R_{1ij}\}$ satisfying Lemma 5, matrices $P_2 \in \mathbb{R}^{n \times n}$, polynomials $S_{2i}, Q_{2i} \in W_2^{n \times n}[T_i]$, $R_{2ij} \in W_2^{n \times n}[T_i \times T_j]$, matrices $H_0, H_{1i} \in \mathbb{R}^{p \times n}$, polynomial $H_{2i} \in W_2^{p \times n}[T_i]$, matrices $Z_1, Z_{2i} \in \mathbb{R}^{n \times q}$, polynomials $Z_{3i}, Z_{4i}, Z_{5ij}, Z_{6i} \in W_2^{n \times q}[T_i]$ and $Z_{7ij} \in W_2^{n \times q}[T_i \times T_j]$ for all $i, j \in [K]$ such that

$$\{P_1 - \epsilon I, Q_{1i}, S_{1i}, R_{1ij}\} \in \Xi_{d,n,n,K}$$
$$-\{E_1 + \epsilon_1 \hat{I}_1, F_{1i}, N_{1i} + \epsilon_1 I, G_{1ij}\} \in \Xi_{d,m_0,n,K}$$
$$\{P_2 - \epsilon I, Q_{2i}, S_{2i}, R_{2ij}\} \in \Xi_{d,n,n,K}$$
$$-\{E_2 + \epsilon_2 \hat{I}_2, F_{2i}, N_{2i} + \epsilon_2 I, G_{2ij}\} \in \Xi_{d,m_1,n,K}$$

where

$$\{E_1, F_{1i}, H_{1i}, G_{1ij}\}$$
$$= \mathcal{L}_1(\{P_1, Q_{1i}, S_{1i}, R_{1ij}\}, \{H_0, H_{1i}, H_{2i}\})$$
$$\{E_2, F_{2i}, H_{2i}, G_{2ij}\}$$
$$= \mathcal{L}_2(\{P_1, Q_{2i}, S_{2i}, R_{2ij}\}, \{Z_0, Z_{1i}, Z_{2i}, \cdots, \})$$

and $m_0 = p + r + n(K+1)$, $m_1 = p + r + n(K+1)$, $\mathcal{L}_1$ and $\mathcal{L}_2$ are as defined in Appendix, $\hat{I}_1 = \text{diag}(0_{r+p}, I_n, 0_{nK})$ and $\hat{I}_2 = \text{diag}(0_{r+p_1}, I_n, 0_{nK})$.

Let
$$\{L_1, L_{2i}, \cdots, L_{7ij}\} = \mathcal{L}_o(\{P, Q_i, S_i, R_{ij}\}, \{Z_1, Z_2, \cdots, Z_{7ij}\})$$
and
$$\{K_0, K_{1i}, K_{2i}\} = \mathcal{L}_c(\{P, Q_i, S_i, R_{ij}\}, \{H_0, H_{1i}, H_{2i}\}).$$

Now further suppose that $r > 0$ and

$$-\{E_3 + \epsilon_3 \hat{I}_3, F_{3i}, N_{3i}, 0\} \in \Xi_{d,n(K+2),2n,K} \tag{15}$$

where

$$E_3 = \begin{bmatrix} -\frac{\epsilon_1}{\tau_K} I & B_2 K_0 & B_2 K_{11} & \dots & B_2 K_{1k} \\ *^T & -r \frac{\epsilon_2}{\tau_K} I & 0 & \dots & 0 \\ *^T & *^T & 0 & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ *^T & *^T & *^T & *^T & 0 \end{bmatrix}$$

$$F_{3i} = \begin{bmatrix} K_{2i}^T(s) B_2^T & 0 & 0 & \cdots & 0 \\ 0 & 0 & 0 & \cdots & 0 \end{bmatrix}^T$$

$$N_{3i} = \begin{bmatrix} -r \frac{\epsilon_2}{\tau_K} I & 0 \\ 0 & -\epsilon_1 I \end{bmatrix}.$$

and $\hat{I}_3 = \text{diag}(I_n, 0_n, 0_{nK})$. Then if w, z and z_e satisfy Eqn. (2) for some $\mathbf{x}$ and $\hat{\mathbf{x}}$, we have $\|z\|_{L_2} \leq \sqrt{\gamma_1(\gamma_1 + r\gamma_2)} \|\omega\|_{L_2}$ and $\|z_e\|_{L_2} \leq \gamma_2 \|\omega\|_{L_2}$.

Proof: Let $\mathcal{A}, \hat{\mathcal{B}}_1, \hat{\mathcal{B}}_2, \hat{\mathcal{C}}_1, \hat{\mathcal{D}}_1, \mathcal{C}_2, \mathcal{D}_2$ be as defined in Eqn. (11). Now define $\mathcal{L}$ as

$$\mathcal{L} \begin{bmatrix} y_0 \\ y_i \end{bmatrix}(s) = \begin{bmatrix} L_1 y_0 + \sum_i L_{2i} y_i(-\tau_i) + \sum_i \int_{-\tau_i}^0 L_{3i}(s) y_i(s) ds \\ l_i(s) \end{bmatrix}$$

$$l_i(s) = L_{4i}(s) y_0 + \sum_j L_{5ij}(s) y_j(-\tau_j) + L_{6i}(s) y_i(s)$$

$$+ \sum_j \int_{-\tau_j}^0 L_{7ij}(s, \theta) y_j(\theta) d\theta. \tag{16}$$

and $\mathcal{K}$ as

$$u(t) = \mathcal{K}\mathbf{x}(t) \tag{17}$$

$$= K_0 x(t) + \sum_i K_{1i} x(t - \tau_i) + \sum_i \int_{-\tau_i}^0 K_{2i}(s) x(t+s) ds.$$

Since $\{P_1 - \epsilon I, Q_{1i}, S_{1i} - \epsilon I, R_{1ij}\} \in \Xi_{d,n,n,K}$ and $\{P_2 - \epsilon I, Q_{2i} - \epsilon I, S_{2i}, R_{2ij}\} \in \Xi_{d,n,n,K}$, $\mathcal{P}_1 := \mathcal{P}_{\{P_1, Q_{1i}, S_{1i}, R_{1ij}\}}$ and $\mathcal{P}_2 := \mathcal{P}_{\{P_2, Q_{2i}, S_{2i}, R_{2ij}\}}$ are coercive. Let $\mathcal{Z}$ be as defined in (14) and $\mathcal{H}$ be as defined in (13). Now by Theorem 5 and Lemma 10 in [8], $\mathcal{K} = \mathcal{H}\mathcal{P}_1^{-1}$ and by Theorem 5 and Lemma 9 in [9], $\mathcal{L} = \mathcal{P}_1^{-1}\mathcal{Z}$.

Next, if we define

$$\mathcal{M} = \begin{bmatrix} -\epsilon_1 I & \mathcal{B}_2 \mathcal{H} \mathcal{P}_1^{-1} \\ (\mathcal{B}_2 \mathcal{H} \mathcal{P}_1^{-1})^* & -r\epsilon_2 I \end{bmatrix} = \begin{bmatrix} -\epsilon_1 I & \mathcal{B}_2 \mathcal{K} \\ (\mathcal{B}_2 \mathcal{K})^* & -r\epsilon_2 I \end{bmatrix}$$

and for $\mathbf{h}, \mathbf{e} \in X$, we expand the expression

$$\left\langle \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix}, \mathcal{M} \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix} \right\rangle$$

$$= \langle \mathcal{B}_2 \mathcal{K} \mathbf{e}, \mathbf{h} \rangle + \langle \mathbf{h}, \mathcal{B}_2 \mathcal{K} \mathbf{e} \rangle_Z - \epsilon_1 \|\mathbf{h}\|^2 - r\epsilon_2 \|\mathbf{e}\|^2$$

Now let

$$\mathbf{h}(s) = \begin{bmatrix} h_1 \\ h_{2i}(s) \end{bmatrix}, \mathbf{e}(s) = \begin{bmatrix} e_1 \\ e_{2i}(s) \end{bmatrix}$$

We have

$$\left\langle \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix}, \mathcal{M} \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix} \right\rangle$$

$$= 2\tau_K h_1^T (B_2 K_0 e_1 + \sum_i B_2 K_{1i} e_{2i}(-\tau_i)$$

$$+ \sum_i \int_{-\tau_K}^0 B_2 K_{2i} e_{2i}(s) ds) - \epsilon_1 h_1^T h_1 - r\epsilon_2 e_1^T e_1$$

$$- \epsilon_1 \sum_i \int_{-\tau_K}^0 h_{2i}^T(s) h_{2i}(s) ds - r\epsilon_2 \sum_i \int_{-\tau_K}^0 e_{2i}^T(s) e_{2i}(s) ds.$$

If we define $f_1 = [h_1^T, e_1^T, e_{2i}^T(-\tau_1), \cdots, e_2^T(-\tau_K)^T]^T$ and $f_{2i}(s) = [e_{2i}^T(s), h_{2i}^T(s)]^T$, then we obtain

$$\left\langle \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix}, \mathcal{M} \begin{bmatrix} \mathbf{h} \\ \mathbf{e} \end{bmatrix} \right\rangle$$

$$= \left\langle \begin{bmatrix} f_1 \\ f_2 i(s) \end{bmatrix}, \mathcal{P}_{\{E_3, F_{3i}, N_{3i}, 0\}} \begin{bmatrix} f_1 \\ f_{2i}(s) \end{bmatrix} \right\rangle_{Z_{n(K+2), 2n, K}}.$$

Since $-\{E_3 + \epsilon_3 \hat{I}_3, F_{3i}, N_{3i}, 0\} \in \Xi_{d,n(K+2),2n,K}$, we conclude that $\mathcal{M} \leq 0$ and hence all the conditions of Theorem 4 are satisfied. Finally, suppose that $y(t)$, $z(t)$, $z_e(t)$, and $x(t)$ satisfy Eqn. (2). If we define $\mathbf{y} = y$, and

$$(\mathbf{x}(t))(s) = \begin{bmatrix} x(t) \\ x(t+s) \end{bmatrix}, (\mathbf{e}(t))(s) = \begin{bmatrix} \hat{x}(t) - x(t) \\ \hat{x}(t+s) - x(t+s) \end{bmatrix},$$

then $\omega(t)$ $y(t)$, $z(t)$, $z_e(t)$, $\mathbf{e}(t)$ and $\mathbf{x}(t)$ satisfy (8) and hence by Theorem 4, we have that $\|z\| \leq \sqrt{\gamma_1(\gamma_1 + r\gamma_2)} \|\omega\|$ and $\|z_e\|_{L_2} \leq \gamma_2 \|\omega\|_{L_2}$. ∎

Theorem 7 provides a method for using LMIs to construct estimator-based output feedback controllers for systems with multiple delays, including a bound on the closed loop L_2-gain.

IV. NUMERICAL IMPLEMENTATION, TESTING, VALIDATION

The algorithms described in this paper have been implemented in Matlab within the DelayTOOLs framework, which is based on SOSTOOLS and the pvar framework. All the tools needed are available online for validation or download on Code Ocean [3].

For simulation, a fixed-step forward-difference-based discretization method is used, with a different set of states representing each delay channel. In the simulation results given below, 20 spatial discretization points are used for each delay channel.

A. Example 1

In this example, we consider the unstable system modified from the result in [12] which is in the form of Eqn. (2) with

$$A_0 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix} \quad A_1 = \begin{bmatrix} -1 & -1 \\ 0 & -0.9 \end{bmatrix} \quad B_1 = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

$$B_2 = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad C_{10} = \begin{bmatrix} 1 & 0 \end{bmatrix} \quad D_1 = \begin{bmatrix} 1 & 0 \end{bmatrix}$$

$$C_{30} = \begin{bmatrix} 1.5 & 0.5 \end{bmatrix} \quad D_3 = \begin{bmatrix} 1 & 0 \end{bmatrix} \quad C_2 = \begin{bmatrix} 1 & 0 \end{bmatrix}$$

and $\tau = 0.99$.

B. Example 2

This example is given by modifying the result from [10] which is in the form of Eqn. (2) with

$$A_0 = \begin{bmatrix} -10 & 10 \\ 0 & 1 \end{bmatrix} \quad A_1 = \begin{bmatrix} 1 & 1 \\ 1 & 1 \end{bmatrix} \quad B_1 = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

$$B_2 = \begin{bmatrix} 1 \\ 1 \end{bmatrix} u(t) \quad C_{10} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \quad C_{30} = \begin{bmatrix} 1.2 & 0 \\ 0 & 1.2 \end{bmatrix}$$

$$C_2 = \begin{bmatrix} 0 & 10 \end{bmatrix} \quad \text{and} \quad \tau = 0.3.$$

C. Example 3

This example considers the 2-delay case as a modified version of Example 1, which is in the form of Eqn. (2) with

$$A_0 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix} \quad A_i = \begin{bmatrix} -0.5 & -0.5 \\ 0 & -0.45 \end{bmatrix} \quad i = 1, 2$$

$$B_1 = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix} \quad B_2 = \begin{bmatrix} 1 \\ 1 \end{bmatrix} \quad C_{10} = \begin{bmatrix} 1 & 0 \end{bmatrix}$$

$$C_{30} = \begin{bmatrix} 1.1 & 0.2 \end{bmatrix} \quad C_2 = \begin{bmatrix} 0 & 1 \end{bmatrix}$$

and $\tau_1 = 0.5, \tau_2 = 1$.

These three numerical examples are used to validate and test the accuracy of the algorithm defined in Theorem 6. In each instance, we find a state feedback controller, an observer, and construct observer-based controller. In Table I, we find the γ_1, γ_2 obtained from Theorem 7 as compared to an H_∞ optimal output feedback controller obtained by using a 10th order Padé approximation of the delay terms in Table 1. We also give a lower bound on the real L_2 gain γ_{real} by numerically simulating the effect of a disturbance $\omega(t)$ on the L_2-norm of the regulated output $z(t)$ and comparing to the L_2-norm of the input. The closed-loop dynamics are validated in Figs. 1-6 where we see the estimator-based
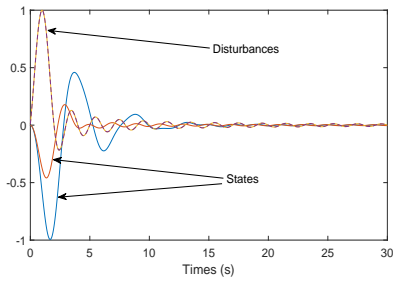
Fig. 1. Errors in the estimated state $e(t)$ in closed-loop response for a sinc disturbance for Example 1
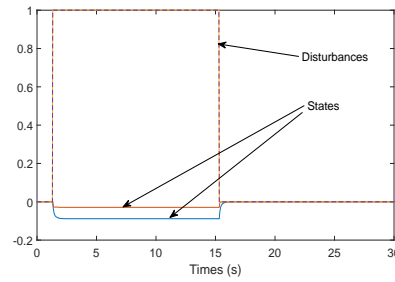

Fig. 2. Errors in the estimated state $e(t)$ in closed-loop response for a step-like disturbance for Example 2
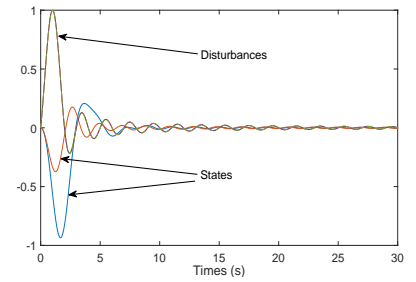

Fig. 3. Errors in the estimated state $e(t)$ in closed-loop response for a sinc disturbance for Example 3
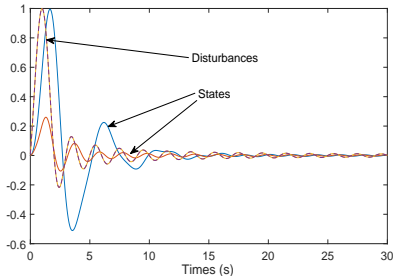

Fig. 4. State trajectory $x(t)$ in closed-loop response for a sinc disturbance for Example 1
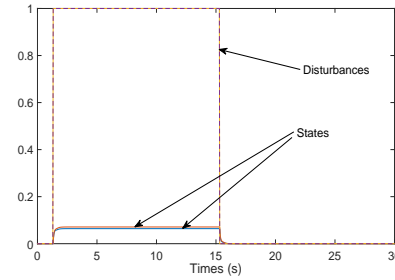

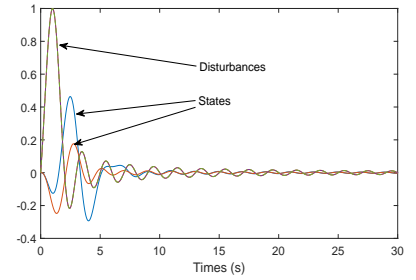Fig. 5. State trajectory $x(t)$ in closed-loop response for a step-like disturbance for Example 2

Fig. 6. State trajectory $x(t)$ in closed-loop response for a sinc disturbance for Example 3

controller is effective in stabilization of systems that are open-loop unstable.

V. CONCLUSION

In this paper, we have proposed a method for designing estimator-based output feedback controllers for systems with multiple delays. This approach combines an H_∞-optimal estimator with an H_∞-optimal full-state feedback controller and proves a bound on the L_2-norm of the resulting dynamics. These controllers are applicable to systems with multiple known delays and consider process noise, but not sensor noise. Furthermore, we have developed an efficient numerical implementation of the observer-based controller and have posted this implementation online. Numerical examples indicate that the L_2-gain of the resulting estimator-based controllers is relatively close to, but does not exactly achieve the minimum possible closed-loop L_2-gain as estimated using a Padé approximation.

	Example 1			Example 2			Example 3		
	d=1	d=2	d=4	d=1	d=2	d=4	d=1	d=2	d=4
$\gamma_{1\min}$	1.9082	1.6829	1.6359	0.1067	0.1060	0.1059	1.049	0.9892	0.9596
$\gamma_{2\min}$	4.1485	4.1425	4.1425	0.1325	0.1325	0.1325	1.4862	1.4851	1.4851
$\gamma_{\min}$	3.0450			0.1104			1.3499		
γ_{real}	0.7893			0.0738			0.6080		

TABLE I

IN THIS TABLE, $\gamma_{1\text{MIN}}$ AND $\gamma_{2\text{MIN}}$ ARE THE VALUES γ_1, γ_2 IN THEOREM 6. γ_{MIN} IS THE CALCULATED MINIMIZED L_2 GAIN BOUND ON THE EFFECT OF THE DISTURBANCE $\omega(t)$ ON THE REGULATED OUTPUT $z(t)$ OF THE CLOSED-LOOP SYSTEM (2) UNDER H_∞ OUTPUT FEEDBACK CONTROL USING A 10TH ORDER PADÉ APPROXIMATION OF THE DELAY TERMS. γ_{REAL} IS THE REAL L_2 GAIN ON THE EFFECT OF THE DISTURBANCE $\omega(t)$ ON THE REGULATED OUTPUT $z(t)$ OF THE NUMERICAL EXAMPLES UNDER THE ESTIMATOR-BASED CONTROLLER WE CONSTRUCT.

REFERENCES

[1] H. Zeng, Y. He, M. Wu, and J. She, "Free-matrix-based integral inequality for stability analysis of systems with time-varying delay," IEEE Transactions on Automatic Control, vol. 60, no. 10, pp. 2768–2772, Feb. 2015.

[2] M. M. Peet, "A Dual to Lyapanov's Second Method for Linear Systems with Multiple Delays and Implementation using SOS," IEEE Transactions on Automatic Control, vol. 64, no. 3, pp. 944–955, Mar. 2019.

[3] K. Gu, V. L. Kharitonov, and J. Chen, "Stability of time-delay systems," Boston, MA, USA: Birkhauser 2003.

[4] A. Seuret and F. Gouaisbaut, "Stability of Linear Systems With Time- Varying Delays Using Bessel legendre Inequalities," IIEEE Transactions on Automatic Control, vol. 63, no. 1, pp. 225–232, Jul. 2017.

[5] X. Li and S.Song, "Stabilization of delay systems: delay-dependent impulsive control," IEEE Transactions on Automatic Control, vol. 62, no. 1, pp.406–411, Jan. 2017.

[6] Y. S. Moon, P. Park, W. H. Kwon, and Y. S. Lee, "Delay-dependent robust stabilization of uncertain state-delayed systems," International Journal of Control, vol. 74, no. 14, pp. 1447–1455, 2001.

[7] E. Fridman and U. Shaked, "An improved stabilization method for linear time-delay systems," IEEE Transactions on Automatic Control, vol. 47, no. 11, pp. 253–270, 2002.

[8] M. M. Peet, "H_∞-Optimal Control of Systems with Multiple State Delays: Part 1," American Control Conference, in press, 2019.

[9] M. M. Peet, "H_∞-Optimal Estimation of Systems with Multiple State Delays: Part 2," American Control Conference, in press, 2019.

[10] A. Germani, C. Manes, and P. Pepe, "A new approach to state observation of nonlinear systems with delayed output," IEEE Transactions on Automatic Control, vol. 47 no. 1, pp. 96–101, 2002.

[11] M. Peet, "SOS methods for multi-delay systems: A dual form of Lyapunov-Krasovskii functional," IEEE Transactions on Automatic Control, May 2019.

[12] E. Fridman and U. Shaked, "A new H_∞ lter design for linear time delay systems," IEEE Transactions on Signal Processing, vol. 49, no. 11, pp. 2839-2843, 2001.

[13] A. Fattouh, O. Sename, and J-M. Dion. "H_∞ in observer design for time-delay systems," In Proceedings of the 37th IEEE Conference on Decision and Control (Cat. No. 98CH36171), vol. 4, pp. 4545–4546, 1998.

APPENDIX

In this appendix, we define the mappings $\mathcal{L}_1$ and $\mathcal{L}_2$ as used in Theorem 6.

Operator $\mathcal{L}_1$: We say

$$\{E_1, F_{1i}, N_{1i}, G_{1ij}\}$$
$$= \mathcal{L}_1(\{P_1, Q_{1i}, S_{1i}, R_{1ij}\}, \{H_0, H_{1i}, H_{2i}\})$$

if

$E_1 =$
$$\begin{bmatrix}
-\frac{\gamma_1}{\tau_K}I & \frac{1}{\tau_K}D_1 & E_{11} & E_{121} & \dots & E_{12K} \\
*^T & -\frac{\gamma_1}{\tau_K}I & B_1^T & 0 & \dots & 0 \\
*^T & *^T & E_{10}+E_{10}^T & E_{131} & \dots & E_{13K} \\
*^T & *^T & *^T & -S_{11}(-\tau_1) & \dots & 0 \\
\vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\
*^T & *^T & *^T & *^T & \dots & -S_{1k}(-\tau_K)
\end{bmatrix}$$

$F_{1i}(s)$
$= \dfrac{1}{\tau_K} \cdot$
$$\begin{bmatrix}
C_{10}Q_{1i}(s) + \sum_j C_{1j}R_{1ji}(-\tau_j, s) \\
0 \\
\tau_K \left(A_0 Q_{1i}(s) + \dot{Q}_{1i}(s) + \sum_{j=1}^K A_j R_{1ji}(-\tau_j, s) + B_2 H_{2i}(s) \right) \\
0 \\
\vdots \\
0
\end{bmatrix}$$

$N_{1i}(s) = \dot{S}_{1i}(s)$
$G_{1ij}(s, \theta)$
$= \dfrac{\partial}{\partial s} R_{1ij}(s, \theta) + \dfrac{\partial}{\partial \theta} R_{1ji}(s, \theta)^T, \quad i, j \in [K]$

where

$$E_{10} = A_0 P_1 + \sum_{i=1}^K \left(\tau_K A_i Q_{1i}(-\tau_i)^T + \frac{1}{2} S_{1i}(0) \right) + B_2 H_0$$
$$E_{11} = \frac{1}{\tau_K} C_{10} P_1 + \sum_i C_{1i} Q_{1i}(-\tau_i)^T$$
$$E_{12i} = C_{1i} S_{1i}(-\tau_i)$$
$$E_{13i} = \tau_K A_i S_{1i}(-\tau_i) + B_2 H_{1i}$$

Operator $\mathcal{L}_2$: We say

$$\{E_2, F_{2i}, H_{2i}, G_{2ij}\}$$
$$= \mathcal{L}_2(\{P_1, Q_{2i}, S_{2i}, R_{2ij}\}, \{Z_0, Z_{1i}, Z_{2i}, \cdots,\})$$

if

$E_2 := \mathcal{L}_5(P_2, Q_{2i}, S_{2i}, Z_1, Z_{2i})$
$$=\begin{bmatrix}
-\frac{\gamma_2}{\tau_K}I & D_3^T & -E_{20}^T & 0 & \dots & 0 \\
*^T & -\frac{\gamma_2}{\tau_K}I & \frac{C_{10}}{\tau_K} & \frac{C_{11}}{\tau_K} & \dots & \frac{C_{1K}}{\tau_K} \\
*^T & *^T & E_{210} & E_{211} & \dots & E_{21K} \\
*^T & *^T & *^T & -S_{21}(-\tau_1) & \dots & 0 \\
\vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\
*^T & *^T & *^T & *^T & \dots & -S_{2k}(-\tau_K)
\end{bmatrix}$$

$F_{2i}(s) := \mathcal{L}_6(Q_{2i}, R_{2ij}, Z_{3i}, Z_{4i}, Z_{5ij})$
$= \begin{bmatrix} -Q_{2i}^T(s)B_1 & 0 & F_{20i}(s) & F_{21i}(s) & \dots & F_{2Ki}(s) \end{bmatrix}^T$

$N_{2i}(s) := \mathcal{L}_7(S_{2i}, Z_{6i}) = \dot{S}_{2i}(s) + Z_{6i}(s)C_2 + C_2^T Z_{6i}^T(s)$

$G_{2ij}(s, \theta) := \mathcal{L}_8(R_{2ij}) = -\dfrac{\partial}{\partial s}R_{2ij}(s, \theta) - \dfrac{\partial}{\partial \theta}R_{2ij}(s, \theta)$
$\quad + \tau_K(Z_{7ij}(s, \theta)C_2 + C_2^T Z_{7ji}^T(\theta, s))$

where

$$E_{20} := P_2 B_1$$
$$E_{210} := P_2 A_0 + A_0^T P_2 + \sum_k Q_{2k}(0) + Q_{2k}^T(0) + S_{2k}(0)$$
$$\quad + Z_1 C_2 + C_2^T Z_1^T$$
$$E_{21i} = P_2 A_i - Q_{2i}(-\tau_i) + Z_{2i}C_2$$
$$F_{20i}(s) = A_0^T Q_{2i}(s) + \frac{1}{\tau_K}\sum_k R_{2ik}^T(s, 0) - \dot{Q}_{2i}(s)$$
$$\quad + Z_{4i}(s)C_2 + C_2^T Z_{3,i}^T(s)$$
$$F_{2ji}(s) = A_j^T Q_{2i}(s) + \frac{1}{\tau_K}R_{2ij}^T(s, -\tau_j) + Z_{5ij}(s)C_2.$$