


Suggested Use

400-kHz Fast I2C Bus Operation over 20 meters of wire

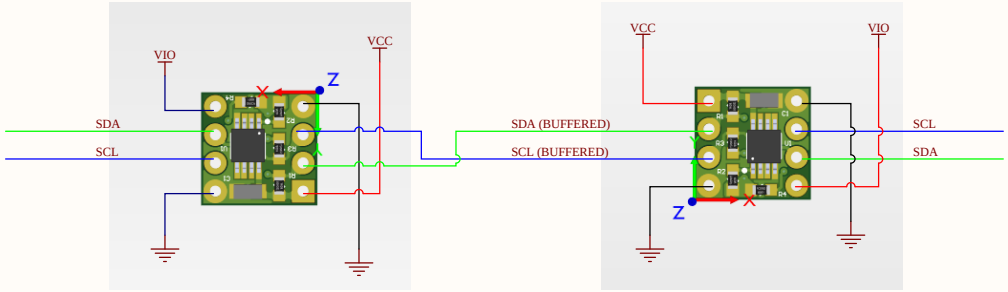



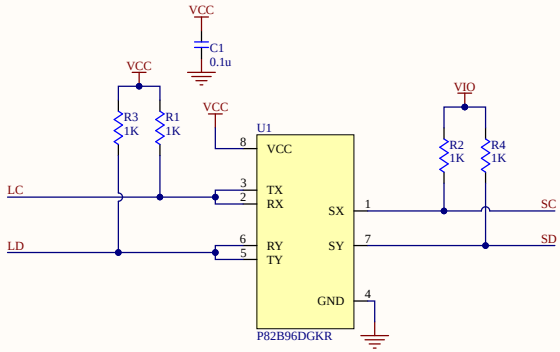

Note:

Do not connect the nets labled (BUFFERED) to any peripherals. The (BUFFERED) nets should only be connected to the I2C Buffer board.

If you do not want to use the integrated I2C pull ups with your system, then do not connect VIO. Ensure your system has integrated pull ups.

VCC must be connected to 15V max supply.

APPROVALS	DATE	Title I2C_BUFFER_REV1.0			
Dwn:DE DOOD	10/25/2026	Size: B	Cage:	Number: I2C_BUFFER_REV1.0	Rev: 1.0
Eng: DE DOOD	10/25/2026	Company: Cycle Path Engineering		Sheet1 of 1	
		Contact:			