HPS100/120/150-US

LEADING - EDGE TECHNOLOGY

Overview

Large capacity all-in-one hybrid inverter for commercial application, supporting up to 600kW system capacity

Features

- *All-in-one hybrid inverter*
- *Seamless on/off grid transfer*
- *Programmable working mode*
- *Supports remote control of DG*
- *Touchscreen LCD*
- *Quadruple capacity by paralleling 4 units*

Block Diagram

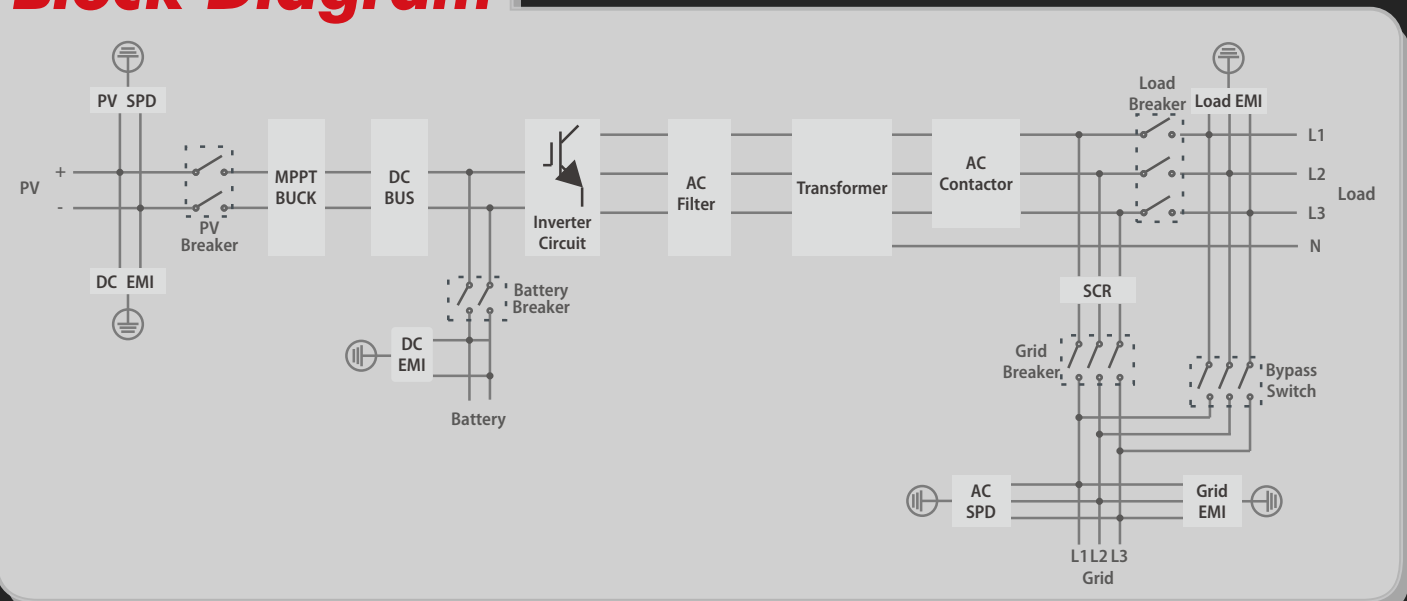

Shenzhen Atess Power Technology Co.,Ltd

1st Floor of Building 3 at Sector B and 3rd Floor of Building 9,Henglong Industrial Park, No.4 Industrial Zone, Shuitian Community, Shiyan Street, Baoan District, Shenzhen

Datasheet

AC (Grid-connected)

	HPS100-US					HPS120-US					HPS150-US				
Apparent power	110kVA					132kVA					165kVA				
Rated power	100kW					120kW					150kW				
Rated voltage	190V	200V	208V	220V	240V	190V	200V	208V	220V	240V	190V	200V	208V	220V	240V
Rated current	304A	289A	278A	262A	241A	365A	346A	333A	315A	289A	456A	433A	416A	394A	361A
Voltage range	171-209V	180-220V	187-229V	198-242V	216-264V	171-209V	180-220V	187-229V	198-242V	216-264V	171-209V	180-220V	187-229V	198-242V	216-264V
Rated frequency	50/60Hz					50/60Hz					50/60Hz				
Frequency range	45~55/55~65Hz					45~55/55~65Hz					45~55/55~65Hz				
THDI	<3%					<3%					<3%				
PF	0.8lagging~0.8leading					0.8lagging~0.8leading					0.8lagging~0.8leading				
AC connection	3/N/PE					3/N/PE					3/N/PE				
AC input	140kVA	145kVA	150kVA	150kVA	150kVA	180kVA	180kVA	180kVA	180kVA	180kVA	180kVA	190kVA	195kVA	205kVA	225kVA

AC(Off-grid)

	HPS100-US					HPS120-US					HPS150-US				
Apparent power	110kVA					132kVA					165kVA				
Rated power	100kW					120kW					150kW				
Rated voltage	190V	200V	208V	220V	240V	190V	200V	208V	220V	240V	190V	200V	208V	220V	240V
Rated current	304A	289A	278A	262A	241A	365A	346A	333A	315A	289A	456A	433A	416A	394A	361A
THDU	≤2%linear					≤2%linear					≤2%linear				
Rated frequency	50/60Hz					50/60Hz					50/60Hz				
Overload capability	110%-10 mins 120%-1 min					110%-10 mins 120%-1 min					110%-10 mins 120%-1 min				

DC (Battery and PV)

	HPS100-US	HPS120-US	HPS150-US
Max. PV open-circuit voltage	1000V DC	1000V DC	1000V DC
Max. PV power	150kWp	180kWp	225kWp
PV MPPT voltage range	480V-800V DC	480V-800V DC	480V-800V DC
Battery voltage range at Max. charge power	500V-600V	517V-600V	500V-600V
Battery voltage range	352-600V	352-600V	352-600V
Max. charge power	150kW	180kW	225kW
Max. discharge power	110kW	132kW	165kW
Max. charge current	300A	350A	450A
Max. discharge current	313A	374A	467A

General Information

	HPS100-US	HPS120-US	HPS150-US
Protection degree	IP20	IP20	IP20
Noise emission	<65dB(A)@1m	<65dB(A)@1m	<65dB(A)@1m
Operating temperature	-25 ℃~+55 ℃	-25 ℃~+55 ℃	-25 ℃~+55 ℃
Cooling	Forced-air	Forced-air	Forced-air
Relative humidity	0-95% non-condensing	0-95% non-condensing	0-95% non-condensing
Maximum altitude	6000m (derate over 3000m)	6000m (derate over 3000m)	6000m (derate over 3000m)
Dimension (W/H/D)	1200/1900/800mm	1200/1900/800mm	1200/1900/800mm
Weight	948kg	1025kg	1230kg
Build-in transformer	Yes	Yes	Yes
Transfer between on/off grid	Automatic≤10ms	Automatic≤10ms	Automatic≤10ms
Standby consumption	<30W	<30W	<30W

Communication

	HPS100-US	HPS120-US	HPS150-US
Display	Touch screen	Touch screen	Touch screen
Communication	RS485/CAN	RS485/CAN	RS485/CAN

** Battery voltage is determined by the following equation:*
*Vmin = 352 x Vn/V1 , VMax= (Vmpp - 100)*Vn/V2 , VMax<600VDC*
V1 is battery cell discharge cut-off voltage, V2 is battery cell boost charge voltage, Vn is battery cell nominal voltage.