





EMERSON™

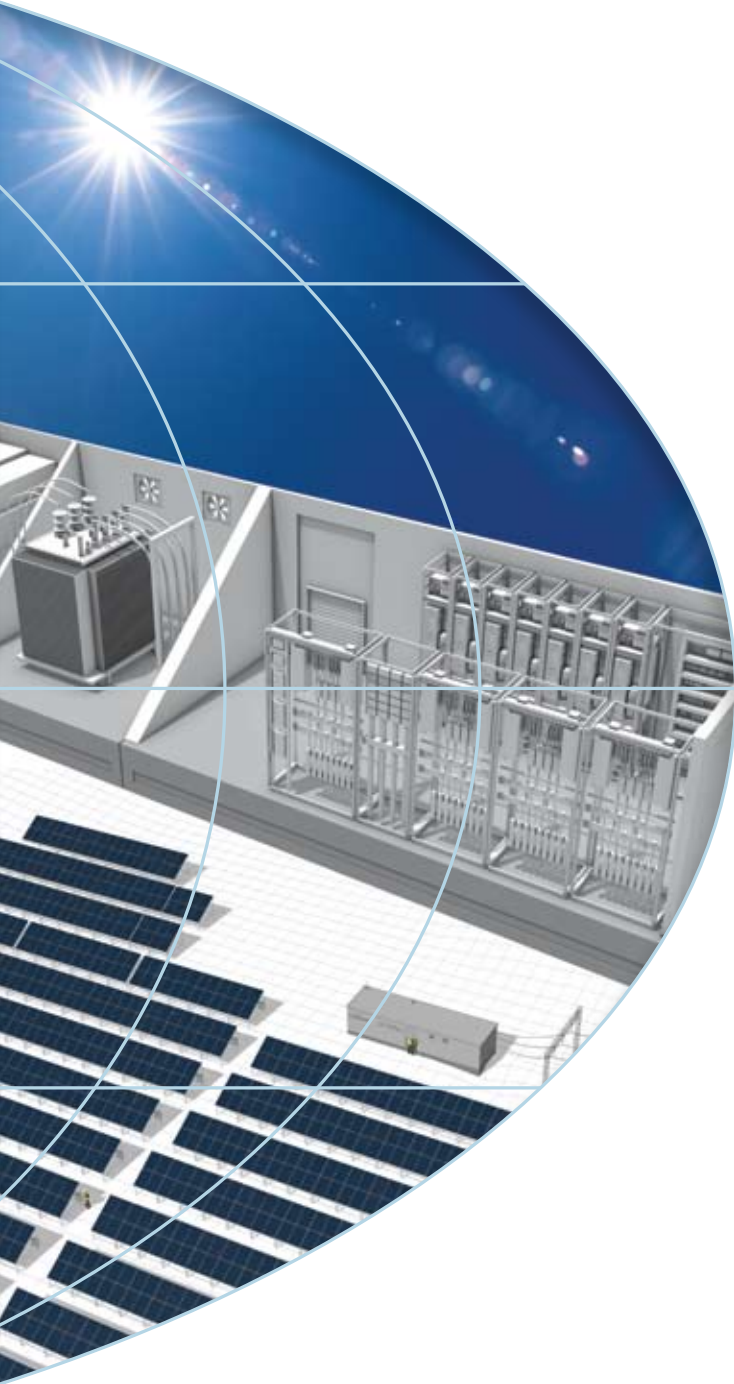

Emerson SPV

Utility scale PV inverter systems

145 kVAp - 1590 kVAp

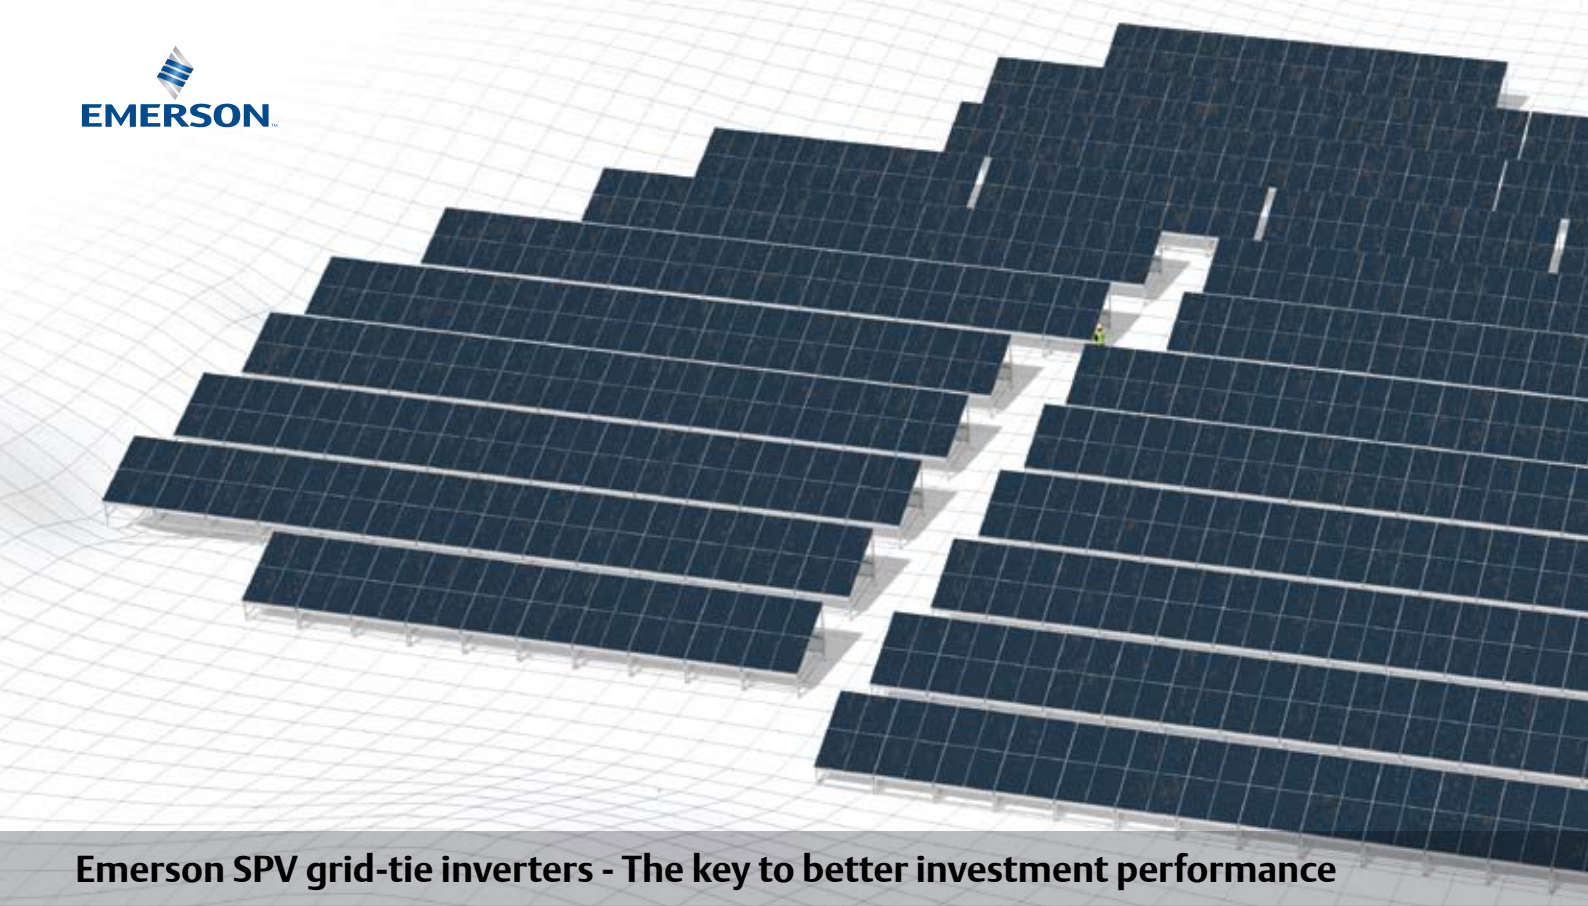

Emerson SPV grid-tie inverters - The key to better investment performance

Energy yield is about more than just efficiency, it is also about availability. Emerson PV inverter solutions enable investors to exceed their investment performance expectations through high yield inverter systems. These are designed and manufactured by our professional engineers and controlled through our dedicated project management teams, to meet your required timescales. Our SPV systems are backed by guarantees to ensure performance is maintained over the lifetime of the plant.

Emerson – your bankable partner

Emerson is a diversified global manufacturing company that brings technology and engineering together to provide innovative solutions to customers. Each of Emerson's businesses is an industry leader. With a global workforce of more than 127,700 employees, 240 manufacturing facilities and a very robust balance sheet, we are a truly bankable partner. Emerson has the infrastructure, knowledge, and experience to deliver its technology and product solutions to customers around the world.

Modular inverter systems for proven availability


Emerson SPV systems offer a range of transformerless central inverters for PV installations from 145kVAp to 1590kVAp. Each inverter is constructed using multiple standard 145kVAp or 175kVAp modules. Based on a stable design, our inverter modules are mass produced for both industrial and PV applications. Proven to be reliable and robust, Emerson inverter modules improve availability while simplifying global supply chains and minimising spares holding.

Engineering and project management solutions to meet your needs

Emerson can provide as much or as little of the PV inverter system as you need, from an inverter to a complete turnkey solution incorporating all power components. This includes string connection boxes, shelter with transformer and MV/HV switchgear, which is engineered to ensure compliance with local grid-connection codes. Integration with equipment from local and international suppliers can easily be accommodated to reduce transport costs and improve lead times.



• Emerson is a global company with a long standing reputation for high quality and excellent financial performance. •

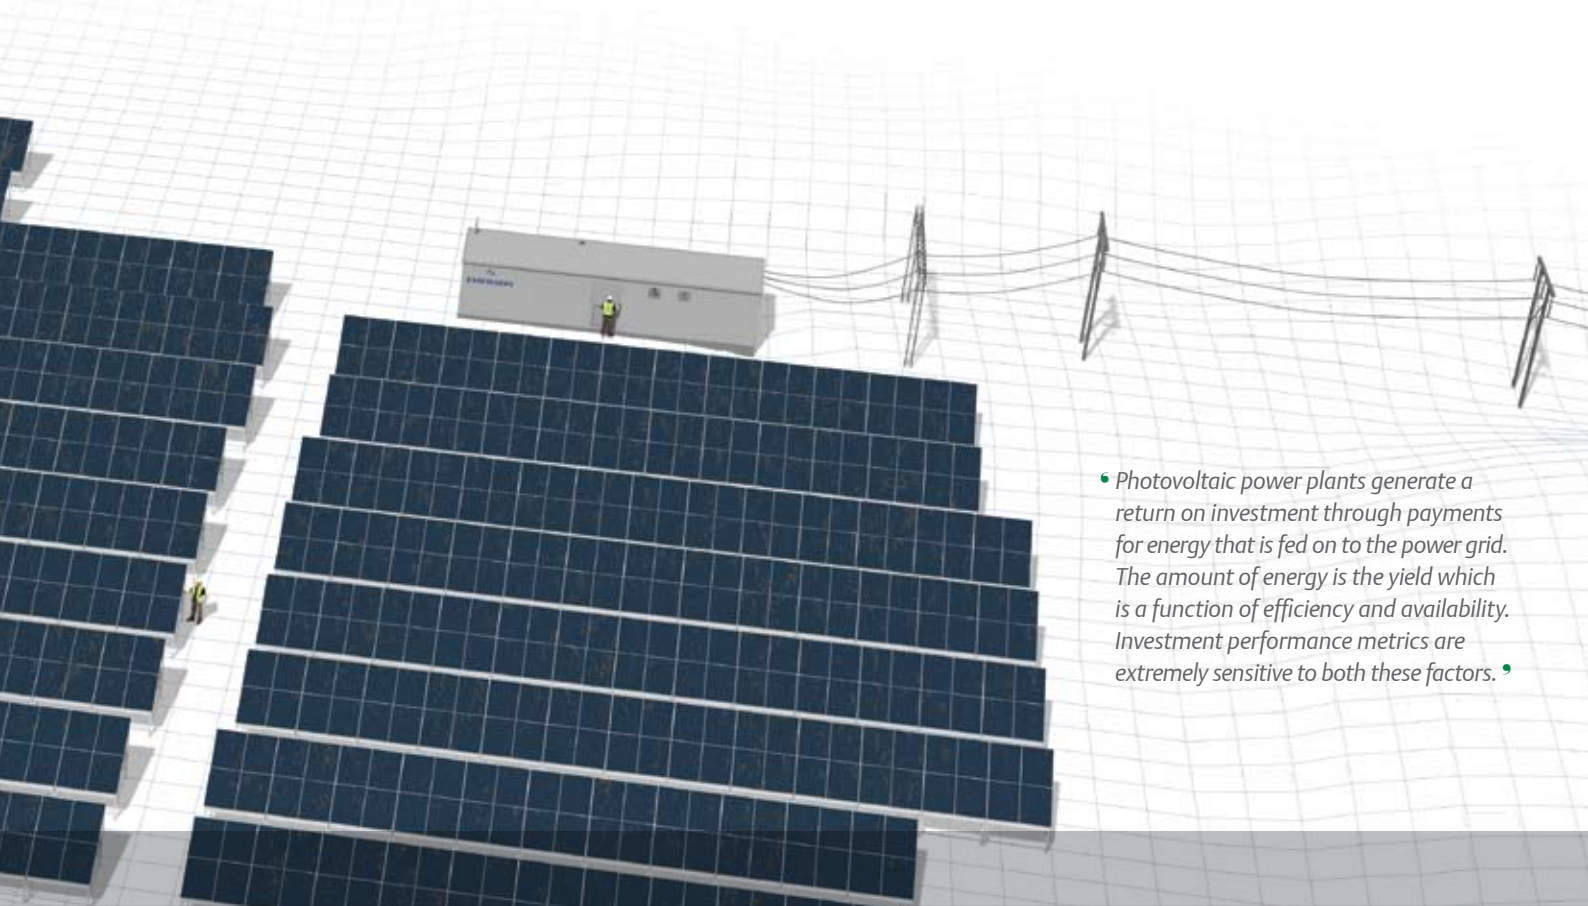


- Photovoltaic power plants generate a return on investment through payments for energy that is fed on to the power grid. The amount of energy is the yield which is a function of efficiency and availability. Investment performance metrics are extremely sensitive to both these factors. •

Intelligent Inverter Management (IIM) control to maximise yield

Emerson SPV inverter systems incorporate IIM to control the active and standby status of each inverter module. This has benefits in energy efficiency and increased reliability:

→ Adaptive power control, giving enhanced efficiency


Modularity allows the active inverter capacity to be continuously scaled to optimise energy efficiency for all conditions and allows the system to begin generating sooner in low light conditions. The result is that Emerson SPV inverters achieve up to 98.0% peak efficiency and 97.6% using the EU weighting factor. The active and standby duty for each module is rotated so that generating capacity is shared and inverter life extended.

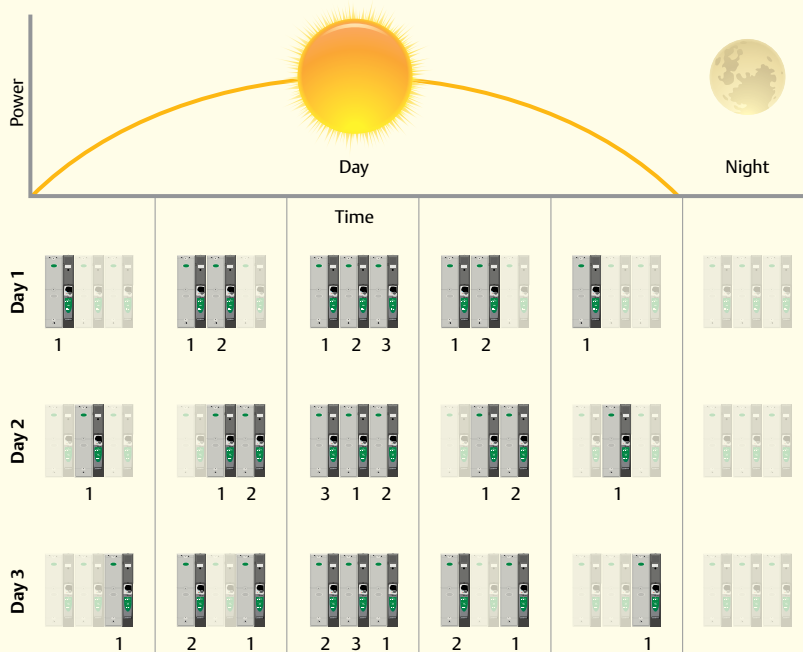

No. 1 represents the first unit to start power-up sequence of the day

→ Fault tolerant inverters, giving enhanced availability

In the event of any inverter module trip, the system automatically reconfigures to continue generating. For critical applications built-in redundancy can be incorporated within the system to maintain maximum output with minimum investment.

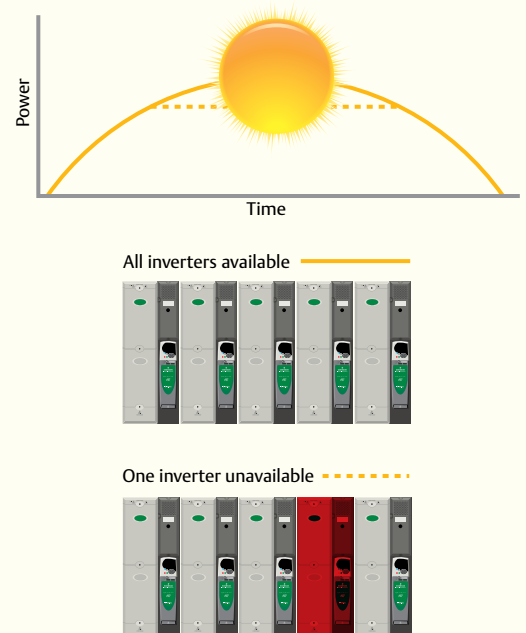

- In low solar irradiance levels, Emerson inverters start generating power sooner and with greater efficiency than conventional bulk inverter solutions with a turn-on/turn-off threshold of less than 900W. •



Emerson SPV inverter systems


Greater yield at low irradiance levels

A key differentiator of Emerson's SPV system is our ability to enhance yield at low irradiance levels as the modular inverter solution dynamically re-sizes to match generated power. The following graph demonstrates how this increases efficiency, which remains above 96% at only 3% of full load. This compares to conventional bulk inverters where the efficiency begins to reduce severely below 20% of full load. Yield at low load is particularly important in temperate climates such as northern Europe.

High accuracy MPPT algorithm

To ensure maximum power is obtained from PV arrays, Emerson's unique Maximum Power Point Tracking (MPPT) algorithm is optimised for accuracy for both crystalline and thin film solar panels. The system is able to adapt rapidly to fast moving weather conditions across a wide temperature range.

SPV1800 efficiency and power gain compared with a conventional bulk inverter

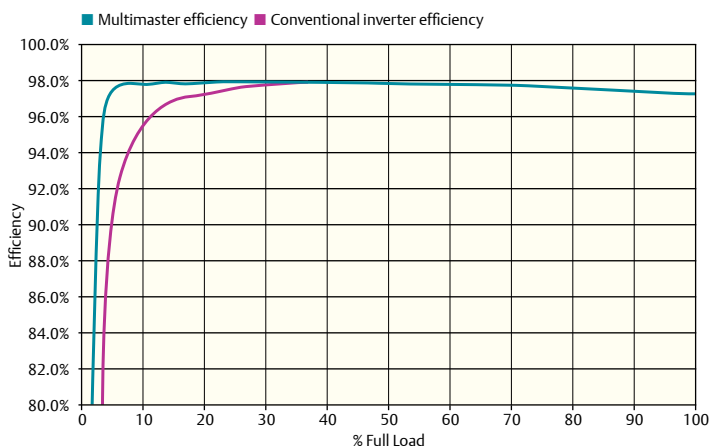


Compact and easy to manage

Each inverter module is compact and light weight so that it can be handled easily. Modularity does not impact overall dimensions, a 1000 kVAp inverter measures only 3.6 metres wide.

Core Unidrive SPMD 175kVAp inverter

Weight: 42kg (92.6lb)




Warranty and service contracts

Extended warranties and service contracts are available to ensure energy yield is maintained over the lifetime of the plant. These can be sold as part of the capital package or funded annually.




Proven success

Project:	Kublink
Output power:	1120kWp
Country:	Germany
Construction start:	September 2009
Commissioning:	November 2009

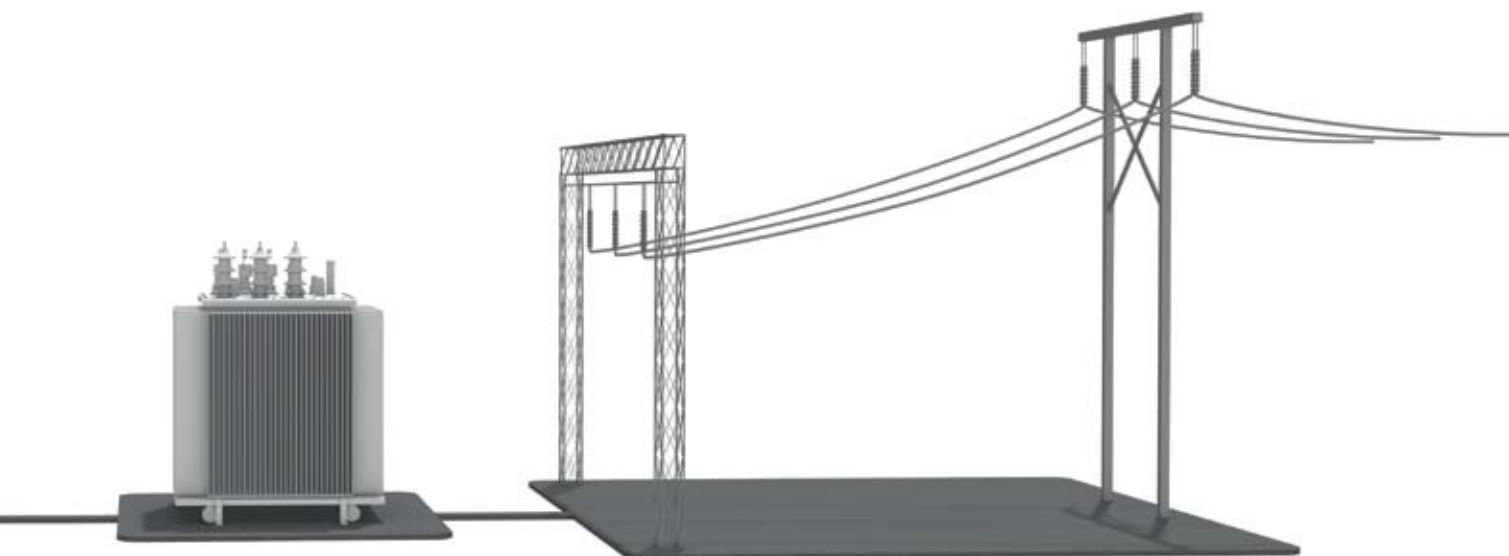

Front view of SPV1800

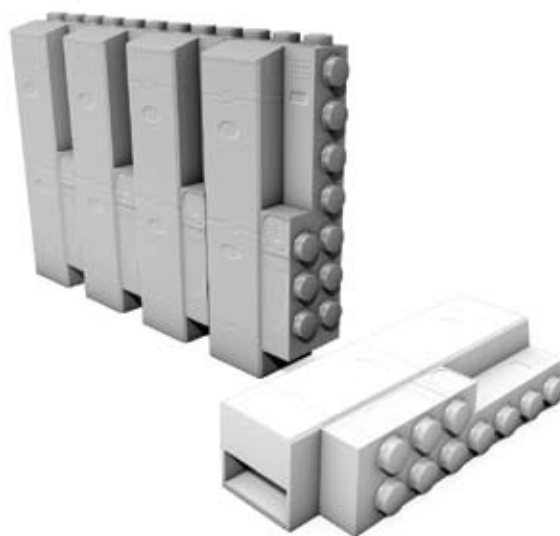

Rear view of SPV1800 DC connections



- Emerson inverters are extremely reliable, however, if one module does need maintenance, the rest keep generating. Compact modular design makes repair or replacement very easy.


Emerson SPV inverter standard features and options

Key inverter features


- High conversion efficiency, 98.0% peak, 97.6% EU factor
- Optimised for reliability and long active life
- Standard industrial mass produced inverter modules
- Power ratings of 145 kVAp, 175kVAp and increments thereafter of 175kVAp up to 1590kVAp
- Compact inverter footprint
- Low switch-on point of 900W (0.057% on 1590kVAp inverter)
- High accuracy Maximum Power Point Tracking (MPPT) over a wide voltage range
- Engineered for compliance with international grid connection codes
- Automatic reactive current and power factor control
- Anti-islanding and supply dip ride-through
- 3.3% total harmonic current distortion (ITHD) - no transformer de-rating required
- Tolerant to inverter module faults with fast automatic recovery
- Communications and PC tools for local or remote configuration and monitoring
- Standard distribution style transformer. No additional losses, dual secondaries or high dv/dt withstand requirements
- Large inverters significantly reduce balance of system costs

Options

- Built in inverter redundancy
- Communications via Ethernet (Ethernet/ IP, Modbus TCP/IP, TCP/ IP web server), Modbus RTU
- DC fusing or circuit breakers
- DC overvoltage protection (use is compulsory)
- AC side / DC side switches
- +/- DC side grounding
- Single piece or split AC side / DC side construction
- Inverter powered shelter cooling fans
- Utility interface
- Up to 1000V switch-on

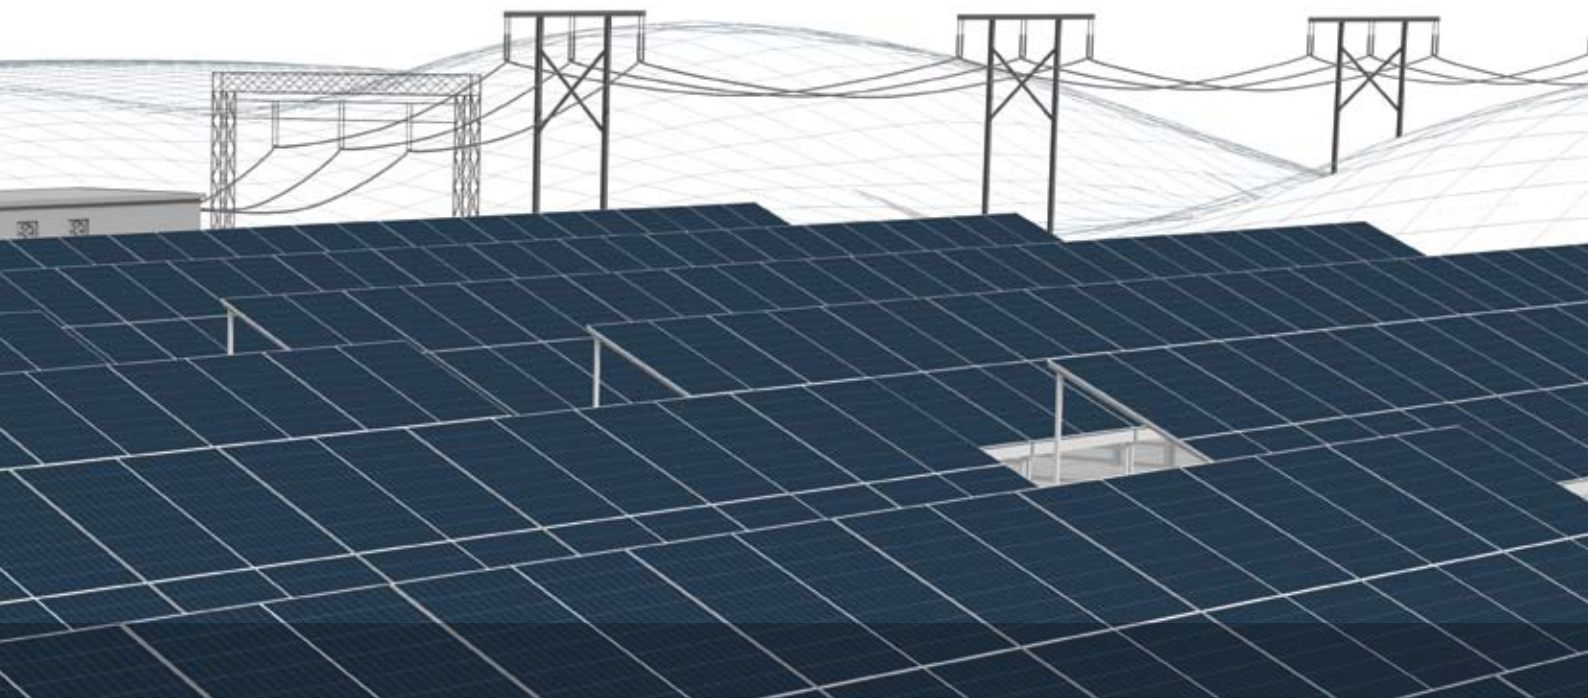


Emerson SPV inverter system diagram

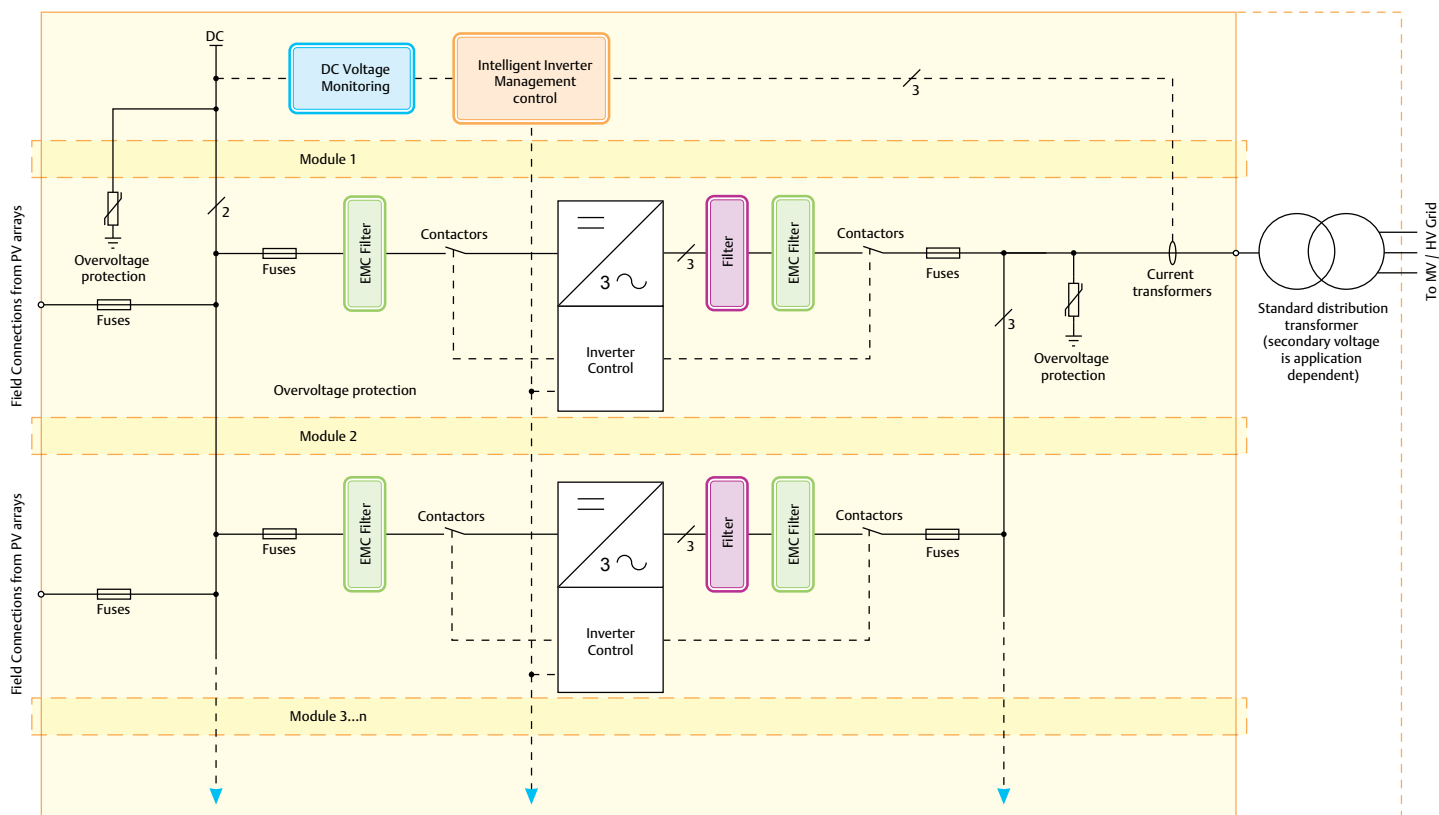

Notes:


- DC input switch and fusing/mcb are optional, but one of these protections must be fitted. If one of these options is not ordered then the protection must be fitted outside of the SPV
- SPV can be built with or without DC overvoltage protection if required. However, overvoltage protection must be fitted in the inverter enclosure
- AC output fuses are standard, switch is optional

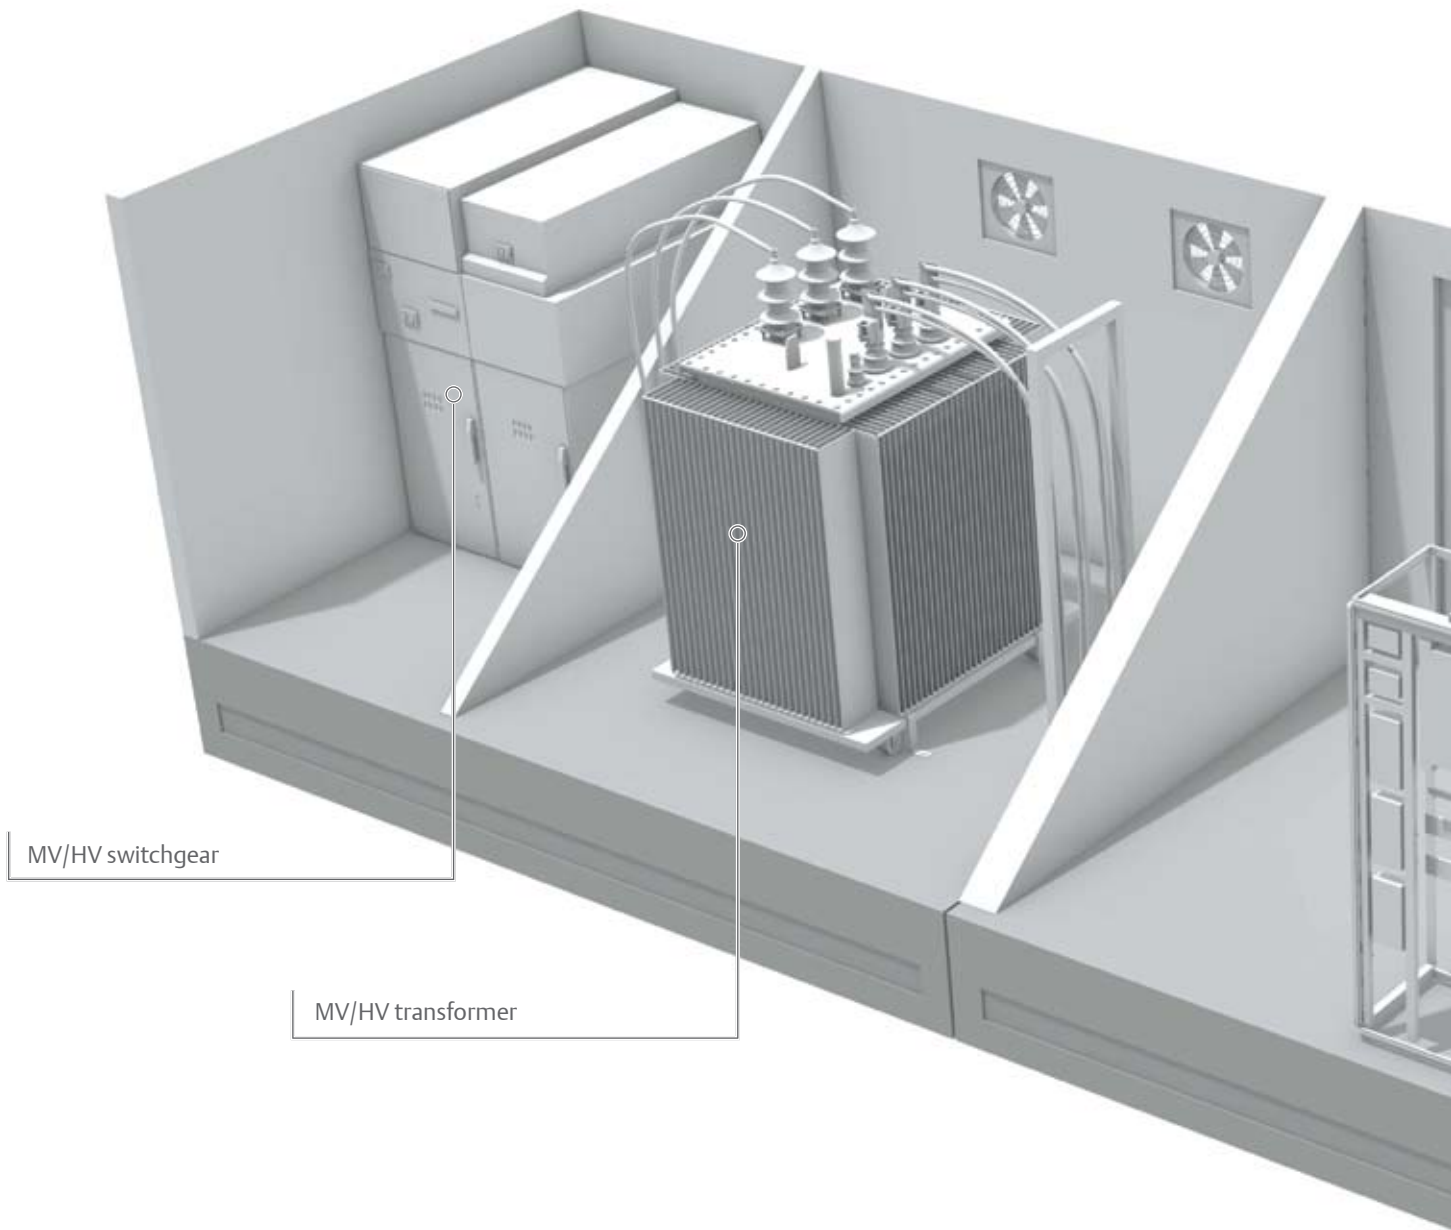


Emerson's ready-to-run shelter design

Space optimising inverter design

SPV inverters can be delivered in one piece (inverter and DC ancillary equipment in a single cabinet) or two piece as shown above to minimise shelter width.

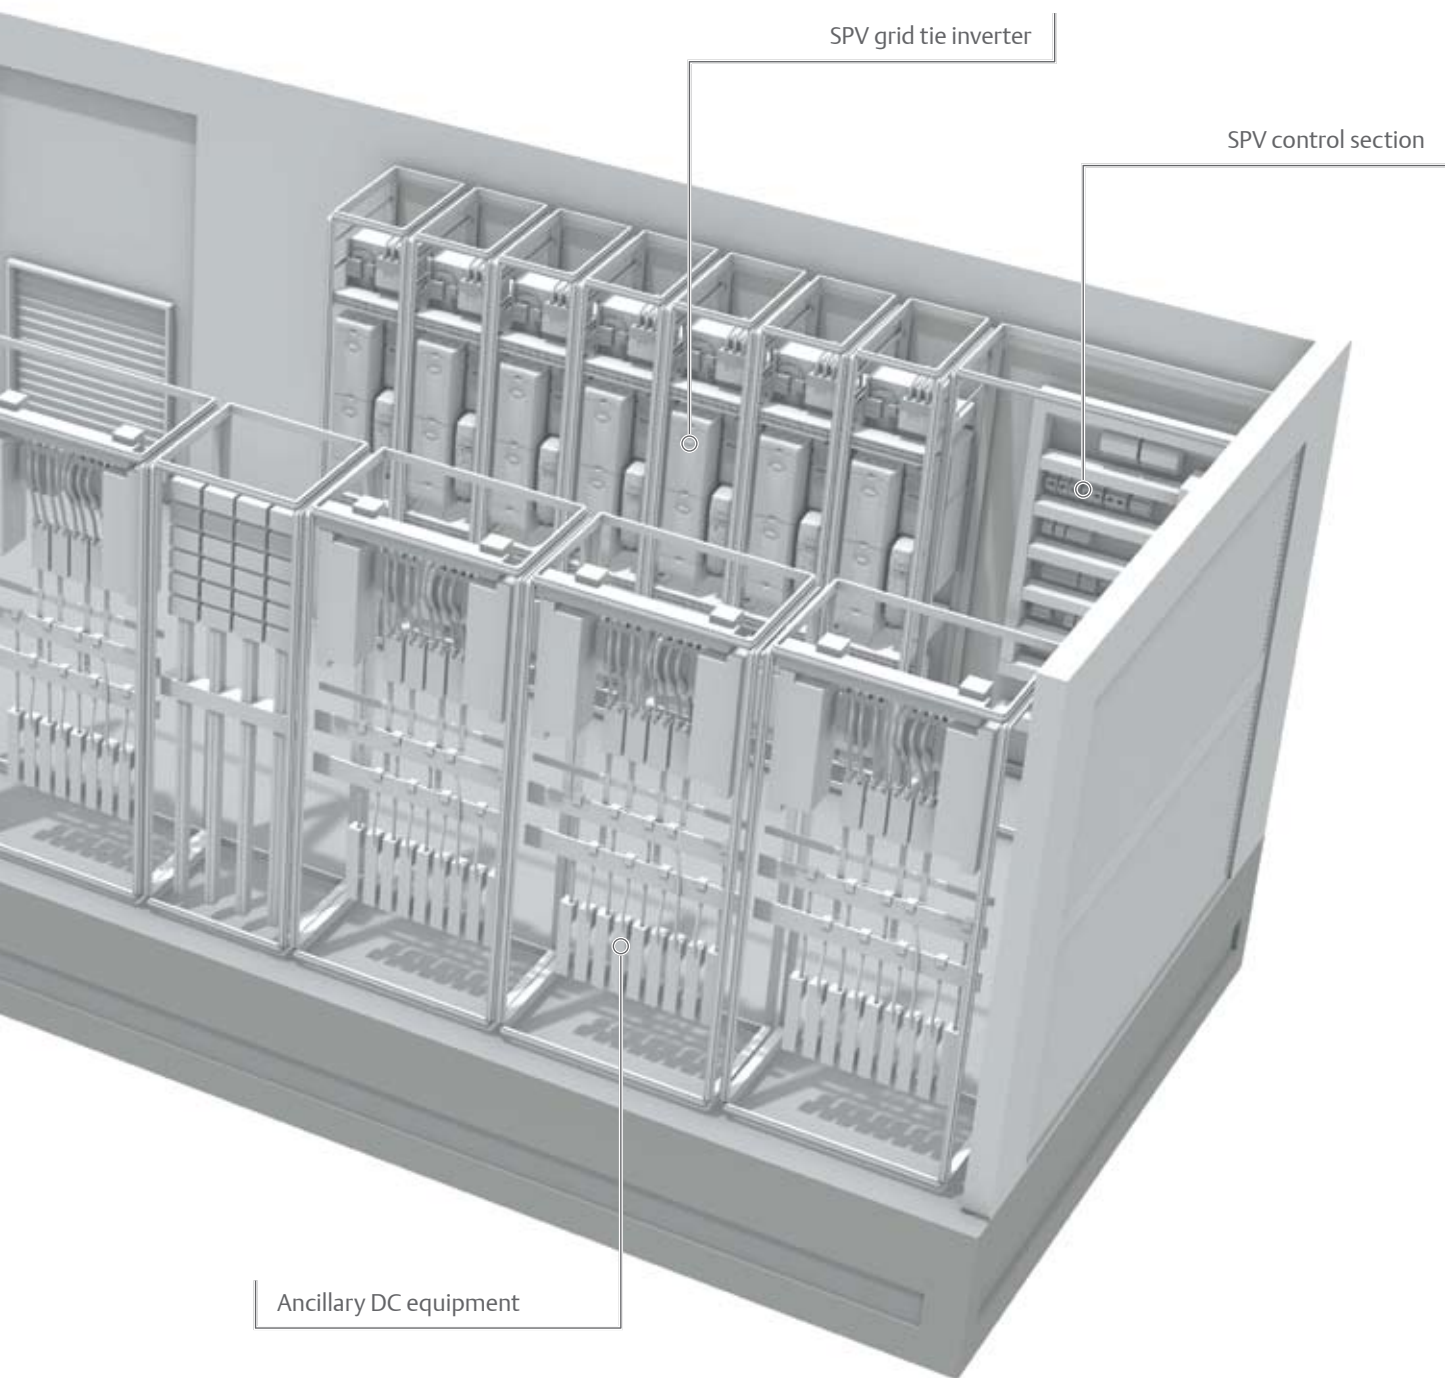

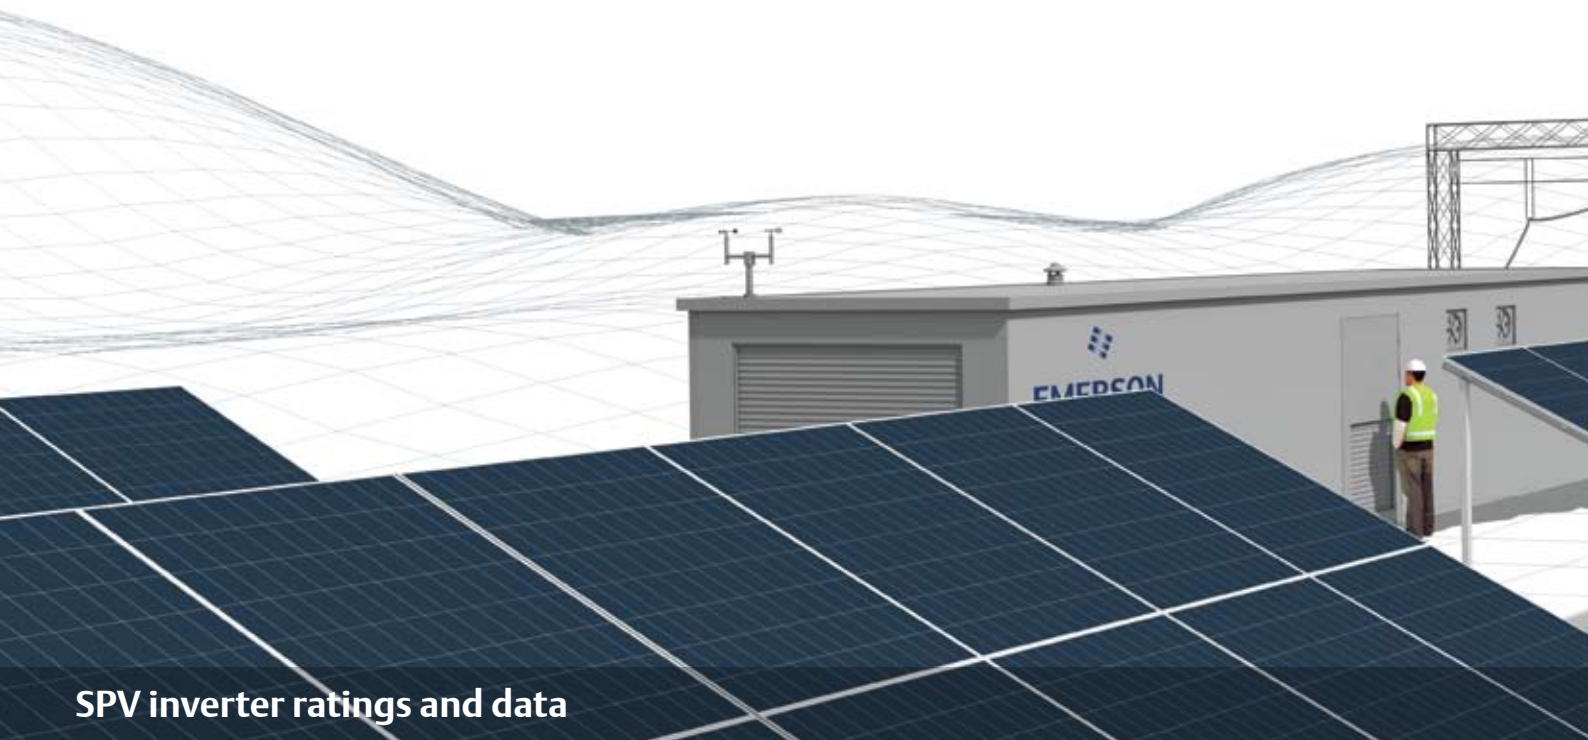

SPV inverter ratings and data

Ratings

SPV		248	300	600	900	1200	1500	1800	2100	2400	2700
AC current	A	248	300	600	900	1200	1500	1800	2100	2400	2700
DC current	A	300	350	700	1050	1400	1750	2100	2450	2800	3150
Inverter apparent power @ 340Vac	kVAp	145	175	350	530	700	880	1060	1230	1410	1590
Euro efficiency	%	97.3	97.3	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
Turn on / off power	W	<900	<900	<900	<900	<900	<900	<900	<900	<900	<900
Dimensions (single part inverter)	Width ***	mm	2000**	2000**	2000	2400	2800	3200	3600	4000	4400
	Height *	mm	2100	2100	2100	2100	2100	2100	2100	2100	2100
	Depth	mm	600	600	1000	1000	1000	1000	1000	1000	1000
Weight	kg	1150	1200	1800	2300	2800	3300	3800	4300	4800	5300
Maximum no. of internal DC landing points		2	2	6	9	12	15	18	21	24	27
Quantity of parallel inverter modules		1	1	2	3	4	5	6	7	8	9

* Height includes 100mm plinth

** Width will increase by 400mm if 1000V switch-on option selected

*** Width may vary depending on which options are selected



Proven success


Project: Kloster Veßra

Output power: 2200kWp

Country: Germany

Construction start: July 2007

Commissioning: November 2007

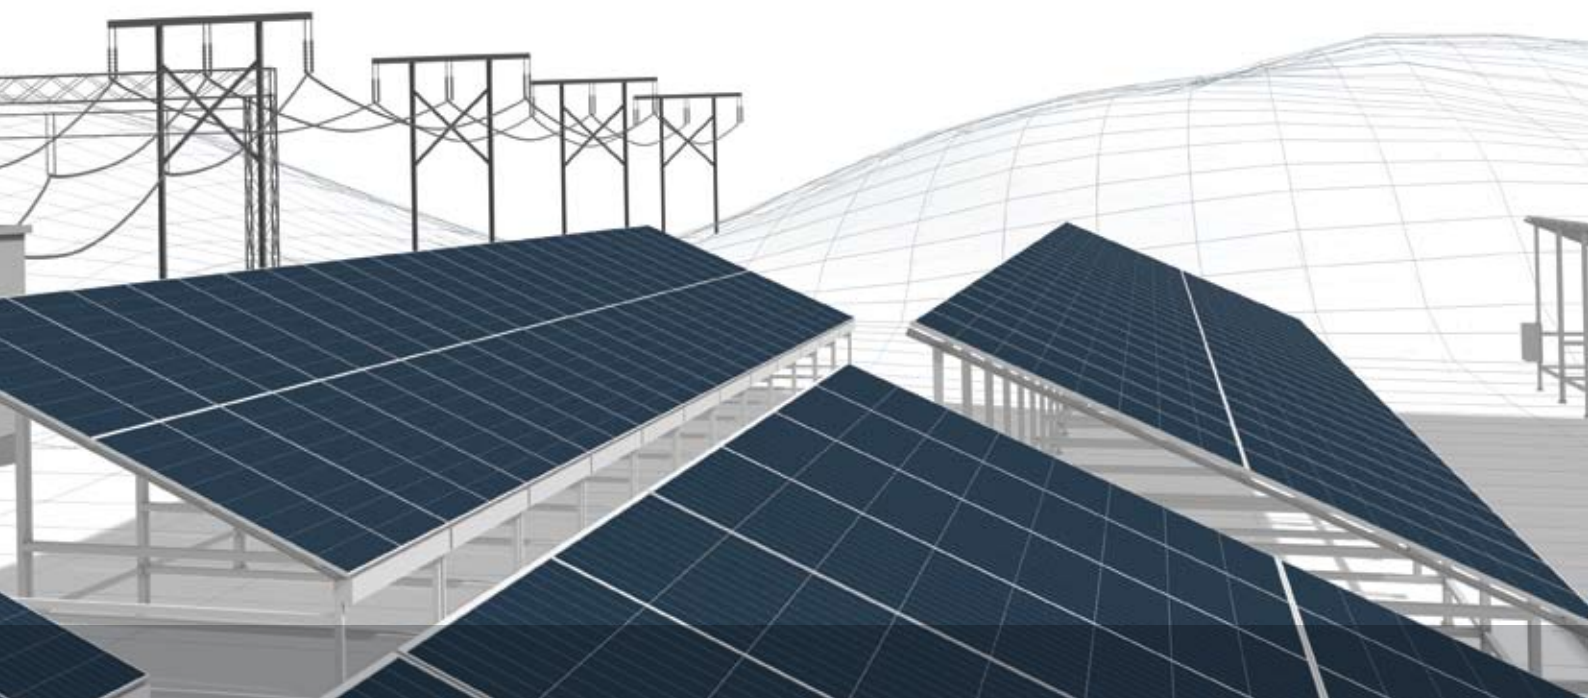

Conformance and safety

Standards	IEEE1547, UL1741 (pending), BDEW, FERC 661, Arrêté du 23 avril 2008, ERDF-NOI-RES 13E Version 2, CEI – 016 as part of the complete installation, RD1663, RD661.
Conformity	CE / UL & CEC (pending)
EMC	Immunity - IEC 61000-6-2 Emissions – IEC 61000-6-4
AC side grounding	Ungrounded floating system (IT)
DC side grounding	Floating, positive or negative legs
DC side overvoltage protection	Optional. Consult Emerson for further information
DC fusing / circuit breakers / master switch	Optional. Consult Emerson for further information

Specifications

Frequency	Hz	50-60
AC voltage range	V _{ac}	260, 300, 340 & 400 +/-10% depending on MPP range. Inverter rating is proportional to AC voltage
MPPT range	V _{dc}	400-800
Maximum DC switch on voltage with open circuit voltage clamp	V _{dc}	1000
Maximum DC voltage without open circuit voltage clamp	V _{dc}	830
Power factor		Fully controllable. Maximum reactive current is the vector difference of inverter current rating and active current. Reactive current takes precedence over real current
Power factor control		External control by analog, digital or communications bus
Total harmonic current distortion (ITHD)	%	3.3
Standby (night time) losses	W	<100
Minimum turn-on / turn-off power	W	900
Operating temperature range	°C	0 to 50 (with derating required between 45 and 50°C). Consult Emerson for further information
Storage temperature range	°C	-20 to 50 for 12 months
Altitude	m	Up to 1000. Above 1000 m consult Emerson for further information
Humidity	%	5-95 non condensing



Emerson's complete photovoltaic solution

The complete photovoltaic system

Photovoltaic inverters are part of the wider PV system which includes the string connection boxes, transformers and MV/HV switchgear. Emerson can supply the complete turnkey solution through our global engineering network located in 31 countries. We are able to work with approved local suppliers to minimise time and the costs associated with transporting equipment. Alternatively, SPV inverters can be supplied individually, engineered to work with third party supplied equipment.

• Emerson work with local suppliers to minimise time and the costs associated with transport. •



Inverter, transformer and switchgear shelters

Emerson shelters can include:

- Separate sections for the inverter, transformer and MV switch where required
- Concrete or steel construction
- Integrated transformer disconnection devices
- Can be supplied pre-wired
- Thermostatically controlled forced ventilation or air conditioning
- Anti-condensation heaters
- kVA measurement on the LV and MV side
- DC overvoltage protection
- Security equipment
- Emerson UPS system for power back-up
- Meteorological instrumentation



Proven success

Project:	Würth Solar
Output power:	10.9MWp
Country:	Spain
Construction start:	2009
Commissioning:	2010



String connection boxes and SCADA

Emerson can supply a complete package of web based SCADA, string connection boxes and meteorological instrumentation package, alternatively, SPV communications flexibility allows developers, integrators or operators to specify a system of their choice.



Transformers

Transformer and MV switch schemes are individually engineered for each project to suit grid connection, environmental, regulatory and protection requirements. They can be supplied using oil cooled, dry or cast resin transformers. UPS and LV switchboard options are available.




Solar tracking systems

Solar trackers enhance energy yield by around 30%. With drives and gearmotors, Emerson can provide a complete electro-mechanical solution for photovoltaic solar array trackers to maximise energy capture.

Custom designed flexibility



Single inverter systems

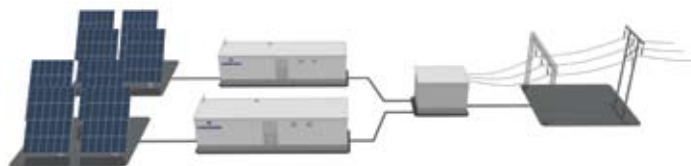


Multi inverter systems

Emerson engineers can provide systems that are designed specifically for your application, whatever the power requirements using single or multi-inverter systems.




Proven success

Project:	Eurener Italia srl
Output power:	2.7MWp
Country:	Italy
Construction start:	November 2009
Commissioning:	Summer 2010

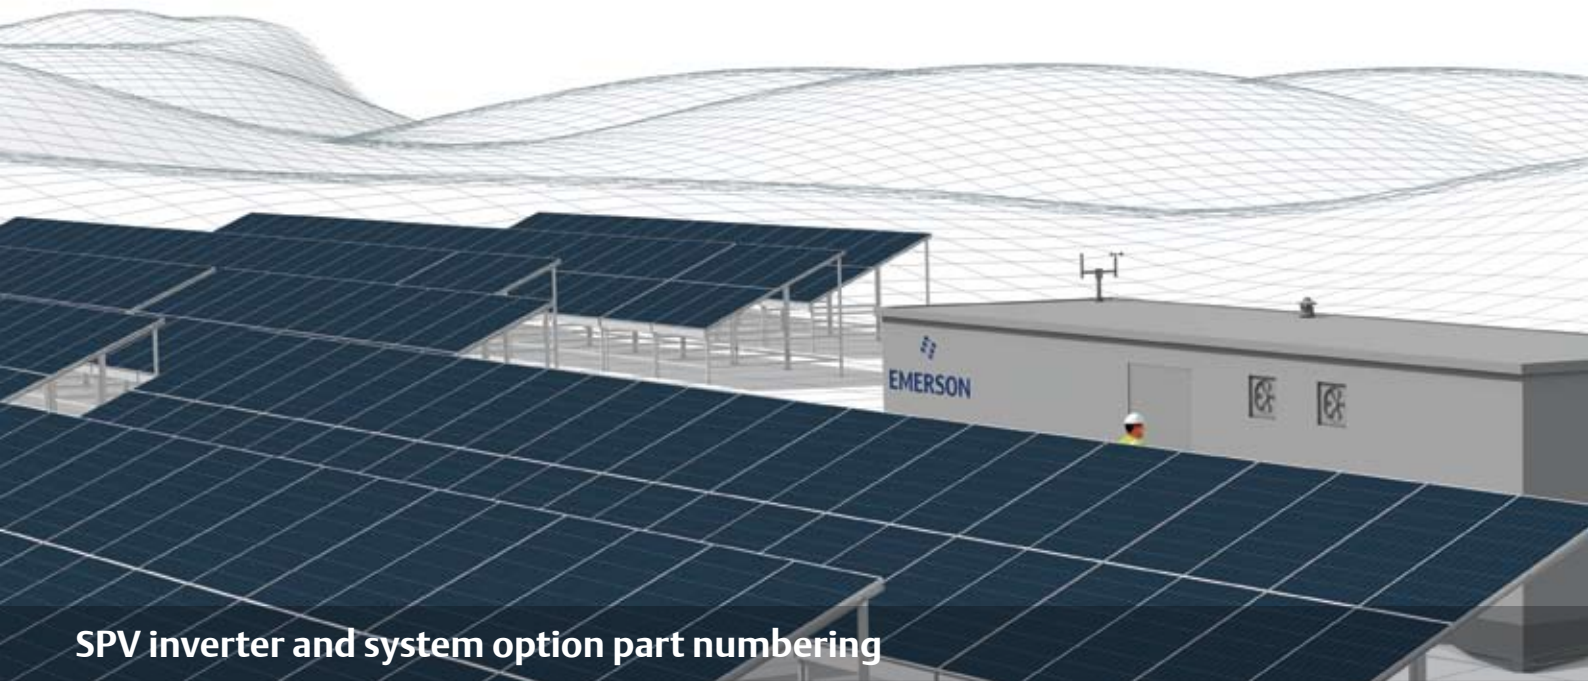

SPV inverter and system option part numbering

		SPV	0248	DE	1	1	1	-	1	1	0	1	-	1	1	1	-	1	1	1	1	1
Inverter options	Inverter type																					
	Current rating																					
	Country of end use	Use the two letter country code defined by ISO 3166-1 alpha-2: DE - Germany, FR - France, IT - Italy, ES - Spain, US - USA, CN - China, TH - Thailand, GR - Greece, CA - Canada, GB - United Kingdom, IN - India, BE - Belgium																				
	Standards and grid connection codes	1 - BDEW, 2 - FERC, 3 - RD, 4 - DK, 5 - IEEE1547, 6 - Arrêté, 7 - GB/Z 19964-2005, 8 - Australian, 9 - Other																				
	MPPT range	1 - UL, 2 - EU - 800V turn-on, 3 - EU - 1000V turn-on																				
	AC voltage	1 - 260Vac, 2 - 300Vac, 3 - 340Vac, 4 - 400Vac																				
	Construction	1 - Standard, 2 - Split																				
	Plinth	1 - 100mm (4in), 2 - 200mm (8in)																				
	Main disconnect	0 - None, 1 - AC only, 2 - DC only, 3 - AC and DC																				
	DC protection	0 - None, 1 - Fuse carriers only, 2 - Fuse + carriers, 3 - MCBs																				
	DC grounding	0 - None, 1 - Positive, 2 - Negative																				
	DC overvoltage protection	1 - Yes, 0 - No																				
	Communications interface	1 - Ethernet, 2 - Modbus																				
System options	Shelter	1 - Yes, 0 - No																				
	SCADA interface	1 - Yes, 0 - No																				
	String connection box	1 - Yes, 0 - No																				
	Transformer	1 - Yes, 0 - No																				
	MV/HV switchgear	1 - Yes, 0 - No																				

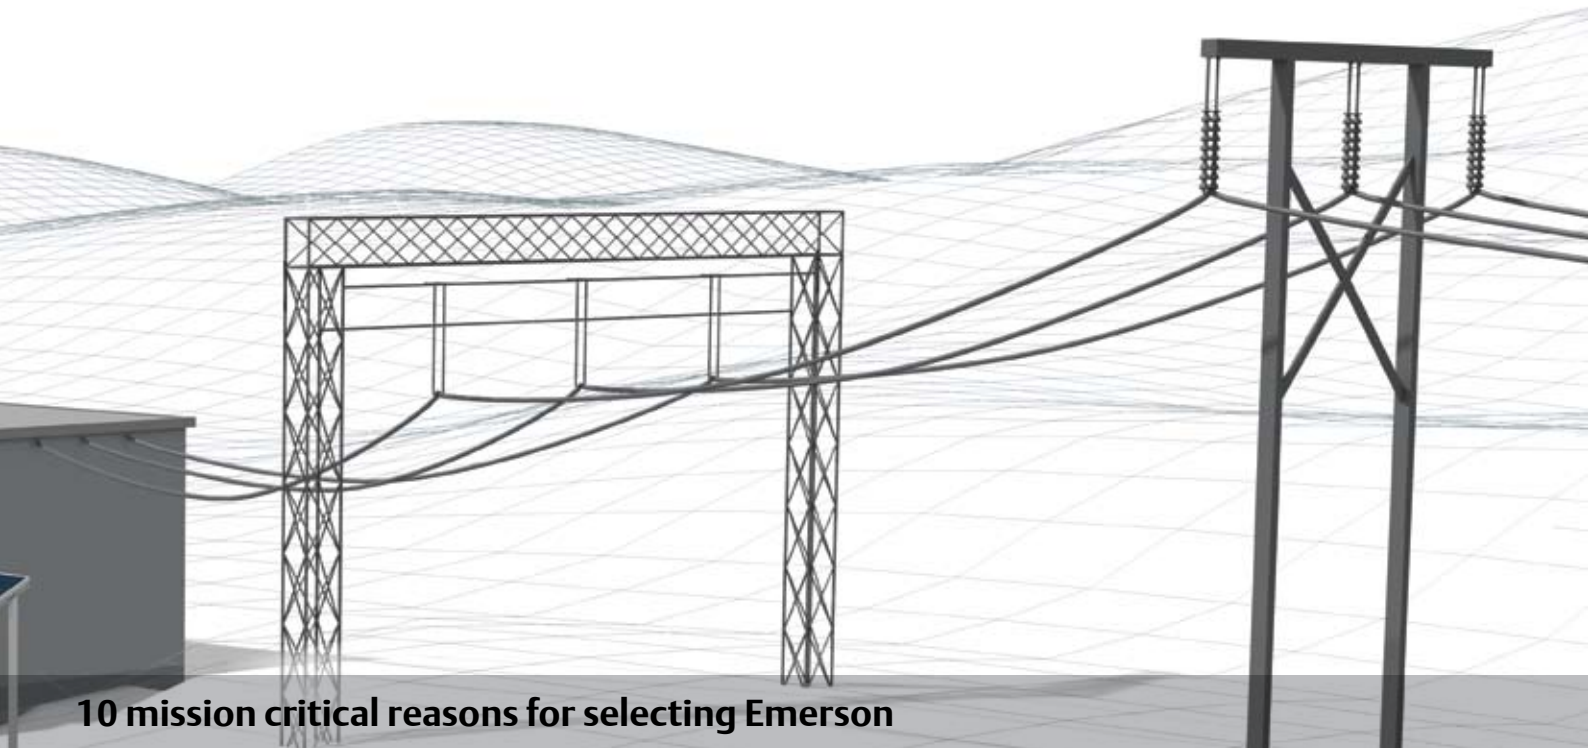

10 mission critical reasons for selecting Emerson

1. The resources to deliver on our promises

Emerson are a Fortune 500 company with outstanding bankability in the eyes of the financial community.

2. Designed for long life

Emerson use standard mass produced inverter modules that are used in both industrial and PV applications. The modules are based on a stable design that is proven to be robust.

3. Higher efficiency, more of the time

Emerson PV inverters are efficient, and because of our unique modular inverter solution, we switch on sooner and off later, efficiently generating more energy with lower irradiance levels than single inverter solutions.

4. Energised to meet your deadlines

Emerson understand the time pressures associated with PV plant installations; our project management teams work tirelessly ensuring you meet your start up deadlines.

5. Tolerant to faults

Emerson inverters are fault tolerant, in the event that an inverter module trips, the inactive module is isolated so that the system can continue generating. System redundancy can also be specified for critical applications.

6. Wherever you are, so are we

Emerson employ more than 140,000 people, the majority of which are located within engineering centres around the World, focussed on project engineering and support for our energy conversion products.

7. As much or as little as you need

Emerson can provide as much or as little of the PV inverter system as you need, from a single Inverter to a complete solution incorporating string connection boxes, transformer, shelter, medium voltage switch and SCADA .

8. Complete peace of mind

Extended warranties and service contracts to 20 years are available to ensure the highest energy yield is maintained over the lifetime of the plant.

9. Ready for PV industry growth

Emerson are geared up to massproduce standard modules with high availability to support the growth of the PV industry.

10. In service around the world

Emerson inverters are installed in many large scale PV plants around the world, with a capability of up to 58MW DC power output.



Emerson 12,000 square metre inverter manufacturing facility

Emerson SPV Engineering and Support Centres

AUSTRALIA
Melbourne Application Centre
T: +613 973 81777
controltechniques.au@emerson.com

Sydney Drive Centre
T: +61 2 9838 7222
controltechniques.au@emerson.com

AUSTRIA
Linz Drive Centre
T: +43 7229 789480
controltechniques.at@emerson.com

BELGIUM
Brussels Drive Centre
T: +32 1574 0700
controltechniques.be@emerson.com

BRAZIL
São Paulo Application Centre
T: +55 11 3618 6688
controltechniques.br@emerson.com

CANADA
Toronto Drive Centre
T: +1 905 949 3402
controltechniques.ca@emerson.com

Calgary Drive Centre
T: +1 403 253 8738
controltechniques.ca@emerson.com

CHINA
Shanghai Drive Centre
T: +86 21 5426 0668
controltechniques.cn@emerson.com

Beijing Application Centre
T: +86 10 856 31122 ext 820
controltechniques.cn@emerson.com

CZECH REPUBLIC
Brno Drive Centre
T: +420 511 180111
controltechniques.cz@emerson.com

DENMARK
Copenhagen Drive Centre
T: +45 4369 6100
controltechniques.dk@emerson.com

FRANCE
Angoulême Drive Centre
T: +33 5 4564 5454
controltechniques.fr@emerson.com

GERMANY
Bonn Drive Centre
T: +49 2242 8770
controltechniques.de@emerson.com

Chemnitz Drive Centre
T: +49 3722 52030
controltechniques.de@emerson.com

Darmstadt Drive Centre
T: +49 6251 17700
controltechniques.de@emerson.com

GREECE
Athens Application Centre
T: +0030 210 57 86086/088
controltechniques.gr@emerson.com

HOLLAND
Rotterdam Drive Centre
T: +31 184 420555
controltechniques.nl@emerson.com

HONG KONG
Hong Kong Application Centre
T: +852 2979 5271
controltechniques.hk@emerson.com

INDIA
Chennai Drive Centre
T: +91 44 2496 1123/
2496 1130/2496 1083
controltechniques.in@emerson.com

Pune Application Centre
T: +91 20 2612 7956/2612 8415
controltechniques.in@emerson.com

New Delhi Application Centre
T: +91 112 2581 3166
controltechniques.in@emerson.com

IRELAND
Newbridge Drive Centre
T: +353 45 448200
controltechniques.ie@emerson.com

ITALY
Milan Drive Centre
T: +39 02575 751
controltechniques.it@emerson.com

Reggio Emilia Application Centre
T: +39 02575 751
controltechniques.it@emerson.com

Vicenza Drive Centre
T: +39 0444 933400
controltechniques.it@emerson.com

KOREA
Seoul Application Centre
T: +82 2 3483 1605
controltechniques.kr@emerson.com

MALAYSIA
Kuala Lumpur Drive Centre
T: +603 5634 9776
controltechniques.my@emerson.com

REPUBLIC OF SOUTH AFRICA
Johannesburg Drive Centre
T: +27 11 462 1740
controltechniques.za@emerson.com

Cape Town Application Centre
T: +27 21 556 0245
controltechniques.za@emerson.com

RUSSIA
Moscow Application Centre
T: +7 495 981 9811
controltechniques.ru@emerson.com

SINGAPORE
Singapore Drive Centre
T: +65 6891 7600
controltechniques.sg@emerson.com

SLOVAKIA
EMERSON A.S.
T: +421 32 7700 369
controltechniques.sk@emerson.com

SPAIN
Barcelona Drive Centre
T: +34 93 680 1661
controltechniques.es@emerson.com

Bilbao Application Centre
T: +34 94 620 3646
controltechniques.es@emerson.com

Valencia Drive Centre
T: +34 96 154 2900
controltechniques.es@emerson.com

SWEDEN
Stockholm Application Centre
T: +468 554 241 00
controltechniques.se@emerson.com

SWITZERLAND
Lausanne Application Centre
T: +41 21 637 7070
controltechniques.ch@emerson.com

Zurich Drive Centre
T: +41 56 201 4242
controltechniques.ch@emerson.com

TAIWAN
Taipei Application Centre
T: +886 2 8161 7695
controltechniques.tw@emerson.com

THAILAND
Bangkok Drive Centre
T: +66 2962 2092 99
controltechniques.th@emerson.com

TURKEY
Istanbul Drive Centre
T: +90 216 4182420
controltechniques.tr@emerson.com

UAE
Emerson FZE
T: +971 4 8118100
ct.dubai@emerson.com

UNITED KINGDOM
Telford Drive Centre
T: +44 1952 213700
controltechniques.uk@emerson.com

USA
California Drive Centre
T: +1 562 943 0300
controltechniques.us@emerson.com

Charlotte Application Centre
T: +1 704 393 3366
controltechniques.us@emerson.com

Chicago Application Centre
T: +1 630 752 9090
controltechniques.us@emerson.com

Cleveland Drive Centre
T: +1 440 717 0123
controltechniques.us@emerson.com

Florida Drive Centre
T: +1 239 693 7200
controltechniques.us@emerson.com

Latin America Sales Office
T: +1 305 818 8897
controltechniques.us@emerson.com

Minneapolis US Headquarters
T: +1 952 995 8000
controltechniques.us@emerson.com

Oregon Drive Centre
T: +1 503 266 2094
controltechniques.us@emerson.com

Providence Drive Centre
T: +1 401 541 7277
controltechniques.us@emerson.com

Utah Drive Centre
T: +1 801 566 5521
controltechniques.us@emerson.com

Emerson SPV Distributors

ARGENTINA
Euro Techniques SA
T: +54 11 4331 7820
eurotech@eurotechsa.com.ar

BAHRAIN
Emerson FZE
T: +971 4 8118100
ct.bahrain@emerson.com

BULGARIA
BLS - Automation Ltd
T: +359 32 968 007
info@blsautomation.com

CHILE
Ingeniería Y Desarrollo
Tecnológico S.A.
T: +56 2 719 2200
rdunner@idt.cl

COLOMBIA
Sistronic LTDA
T: +57 2 555 60 00
luis.alvarez@sistronic.com.co

Redes Electricas S.A.
T: +57 1 364 7000
alvaro.rodriguez@redeselectricas.com

CROATIA
Zigg-Pro d.o.o.
T: +385 1 3463 000
zigg-pro@zg.htnet.hr

CYPRUS
Acme Industrial Electronic
Services Ltd
T: +3572 5 332181
acme@cytanet.com.cy

EGYPT
Samiram
T: +202 29703868/+202 29703869
samiramz@samiram.com

EL SALVADOR
Servielectric Industrial S.A. de C.V.
T: +503 2278 1280
aeorellana@gruposervielectric.com

FINLAND
SKS Control
T: +358 207 6461
control@sksf.fi

GUATEMALA
MICE, S.A.
T: +502 5510 2093
mice@itelgua.com

HONDURAS
Temtronics Honduras
T: +504 550 1801
temtronics@amnetn.com

HUNGARY
Control-VH Kft
T: +361 431 1160
info@controlvh.hu

ICELAND
Samey ehf
T: +354 510 5200
samey@samey.is

INDONESIA
Pt Apikon Indonesia
T: +65 6468 8979
info.my@controltechniques.com

Pt Yua Esa Sempurna Sejahtera
T: +65 6468 8979
info.my@controltechniques.com

ISRAEL
Dor Drives Systems Ltd
T: +972 3900 7595
info@dor1.co.il

KENYA
Kassam & Bros Co. Ltd
T: +254 2 556 418
kassambros@africaonline.co.ke

KUWAIT
Emerson FZE
T: +971 4 8118100
ct.kuwait@emerson.com

LATVIA
EMT
T: +371 760 2026
janis@emt.lv

LEBANON
Black Box Automation & Control
T: +961 1 443773
info@blackboxcontrol.com

LITHUANIA
Elinta UAB
T: +370 37 351 987
sales@elinta.lt

MALTA
Mekanika Limited
T: +35621 442 039
mfrancia@gasan.com

MEXICO
MELCSA S.A. de CV
T: +52 55 5561 1312
jcervera@melcsa.com

MOROCCO
Cietec
T: +212 22 354948
cietec@cietec.ma

NEW ZEALAND
Advanced Motor Control. Ph.
T: +64 (0) 274 363 067
info.au@controltechniques.com

PERU
Intech S.A.
T: +51 1 224 9493
artur.mujamed@intech-sa.com

PHILIPPINES
Control Techniques
Singapore Ltd
T: +65 6468 8979
info.my@controltechniques.com

POLAND
APATOR CONTROL Sp. z o.o.
T: +48 56 6191 207
info@acontrol.com.pl

PORTUGAL
Harker Sumner S.A.
T: +351 22 947 8090
drives.automation@harker.pt

PUERTO RICO
Motion Industries Inc.
T: +1 787 251 1550
roberto.diaz@motion-ind.com

QATAR
Emerson FZE
T: +971 4 8118100
ct.qatar@emerson.com

ROMANIA
C.I.T. Automatizari
T: +40212550543
office@citautomatizari.ro

SAUDI ARABIA
A. Abunayan Electric Corp.
T: +9661 477 9111
aec-salesmarketing@abunayanangroup.com

SERBIA & MONTENEGRO
Master Inzenjering d.o.o.
T: +381 24 551 605
office@masterinzenjering.rs

SLOVENIA
PS Logatec
T: +386 1 750 8510
ps-log@ps-log.si

TUNISIA
SIA Ben Djemaa & CIE
T: +216 1 332 923
bendjemaa@planet.tn

URUGUAY
SECOIN S.A.
T: +5982 2093815
jose.barron@secoin.com.uy

VENEZUELA
Digimex Sistemas C.A.
T: +58 243 551 1634
digimex@digimex.com.ve

VIETNAM
N.Duc Thinh
T: +84 8 9490633
infotech@nducthinh.com.vn