


CPSPV20000ETL/CPSPV30000ETL
CPSPV33000ETL



THREE-PHASE INVERTER TO GENERATE YOUR GREEN POWER



Work with
Solar Panels



High DC to AC
Energy Efficiency



Maximum Power
Point Tracking
(MPPT) Technology



Dual Independent
MPP Trackers



LCD Status
Display



IP65-rated
Waterproof
Enclosure

Intelligent 3-phase grid-tied inverter to provide solar energy and make profits by selling power


Ideal for industrial applications, the Grid-tied Inverter (3-phase) Series generates renewable electricity from solar energy. The products work with solar panel to harvest maximum solar energy, which can be sold to public grid, or used for electronic equipment. The inverters can achieve 99.5% high tracking efficiency by adopting Maximum Power Point Tracking (MPPT) technology. Suitable for outdoor use, the IP65-rated waterproof enclosure provides protection against water and dust.

APPLICATION

- Factory

SERIES FEATURES

- Work with Solar Panels
- High DC to AC Energy Efficiency
- Maximum Power Point Tracking (MPPT) Technology
- Dual Independent MPP Trackers
- LCD Status Display
- LED Status Indicator
- Compatible with Data Logger
- IP65-rated Waterproof Enclosure
- Wide Operating Temperature

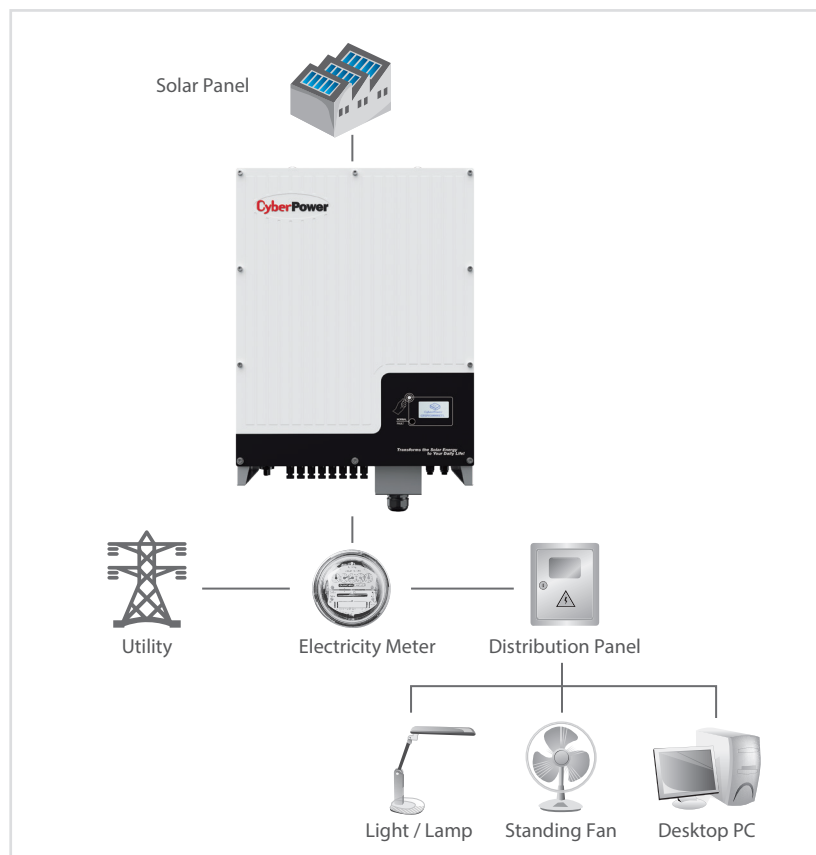



TECHNICAL SPECIFICATIONS

Model Name	CPSPV20000ETL	CPSPV30000ETL	CPSPV33000ETL
General			
Phase	Three Phase	Three Phase	Three Phase
Topology	Transformerless	Transformerless	Transformerless
PV Input			
Nominal Input Power (Watts)	20800	31300	34400
Maximum Input Voltage (Vdc)	1000	1000	1000
Maximum Input Power (Watts)	23600	35400	39000
Input Operation Voltage Range (Vdc)	300 - 1000	300 - 1000	300 - 1000
Maximum MPPT Current (A)	26/26	35/35	38/38
Input MPPT Voltage Range (Vdc)	400 - 800	460 - 800	460 - 800
Efficiency MPPT (%)	99.5%	99.5%	99.5%
Number of MPPT	2	2	2
Number of Strings per MPPT	4/4	4/4	4/4
Grid-Tied Output			
Output Voltage Range (Vac)	184 - 275	184 - 275	184 - 275
Output Frequency (Hz)	50 ± 5, 60 ± 5	50 ± 5, 60 ± 5	50 ± 5, 60 ± 5
Nominal Output Power (kW/kVA)	20/20	30/30	33/33
Maximum Output Current (A)	32	50	50
Maximum Output Power (kW/kVA)	20/20	30/30	33/33
Power Factor	0.8 Leading -0.8 Lagging	0.9 Leading -0.9 Lagging	0.9 Leading -0.9 Lagging
Harmonic Distortion	THD<3%	THD<3%	THD<3%
Performance			
Maximum Efficiency (%)	98.2%	98.2%	98.2%
Night Time Consumption (Watts)	< 0.5	< 0.5	< 0.5
Management & Communications			
LCD Panel	Yes	Yes	Yes
LED Indicators	Yes	Yes	Yes
Communication Port	RS485, RS232	RS485, RS232	RS485, RS232
Physical			
Water Resistance	IP65	IP65	IP65
Physical Size			
Dimensions (WxHxD) (mm.)	551 x 740 x 276	551 x 740 x 276	551 x 740 x 276
Weight (kg.)	61.6	61.6	61.6
Environmental			
Operating Temperature (°C)	-20 - 60	-20 - 60	-20 - 60
Operating Relative Humidity (Non-condensing) (%)	0 - 100	0 - 100	0 - 100
Operating Elevation (feet/meters)	0-6,560 feet (0-2,000 meters)	0-6,560 feet (0-2,000 meters)	0-6,560 feet (0-2,000 meters)
Storage Temperature (°C)	-25 - 70	-25 - 70	-25 - 70
Cooling Method	Fan	Fan	Fan
Certifications			
Certifications*	CE, IEC 61000-6-3, IEC 62109-1/2, UTE C 15-712-1, VDE0126-1-1 A1, EN 61000-6-2, CNS 15382, CNS 15426-1, CNS 15426-2, CNS 14674-2, CNS 14674-3		
RoHS	Yes	Yes	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.