
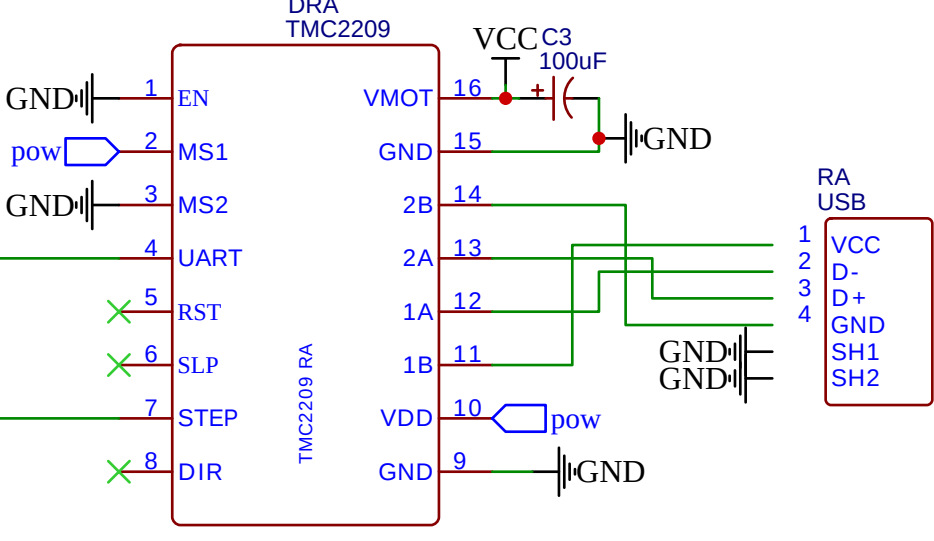
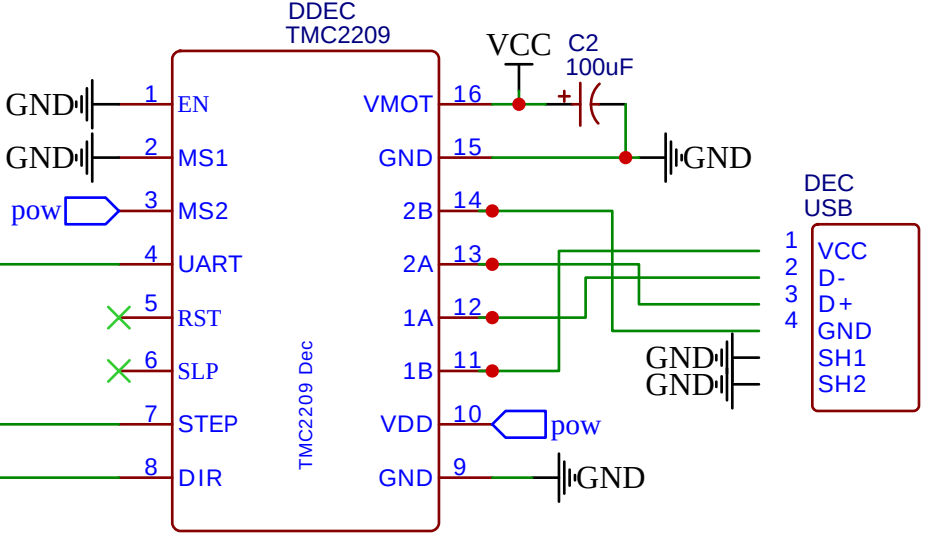
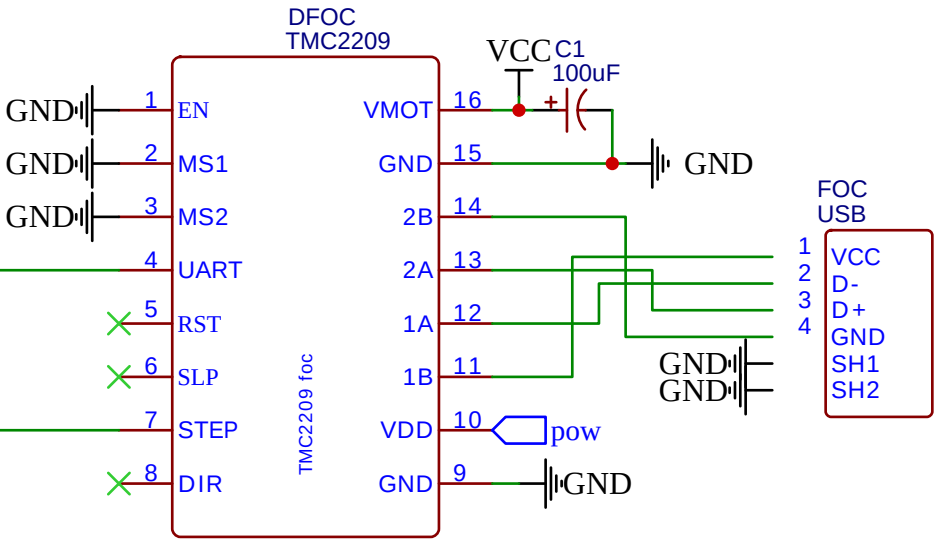

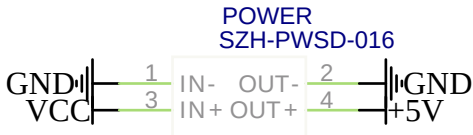


Pin9 HAS to be low, so I bridge R5 on pin21 and cut pin 9 from chip

Pin2 has a 10k pull up. so I had to remove r1 and change the values of R2 to 1.5 and R3 to 750

