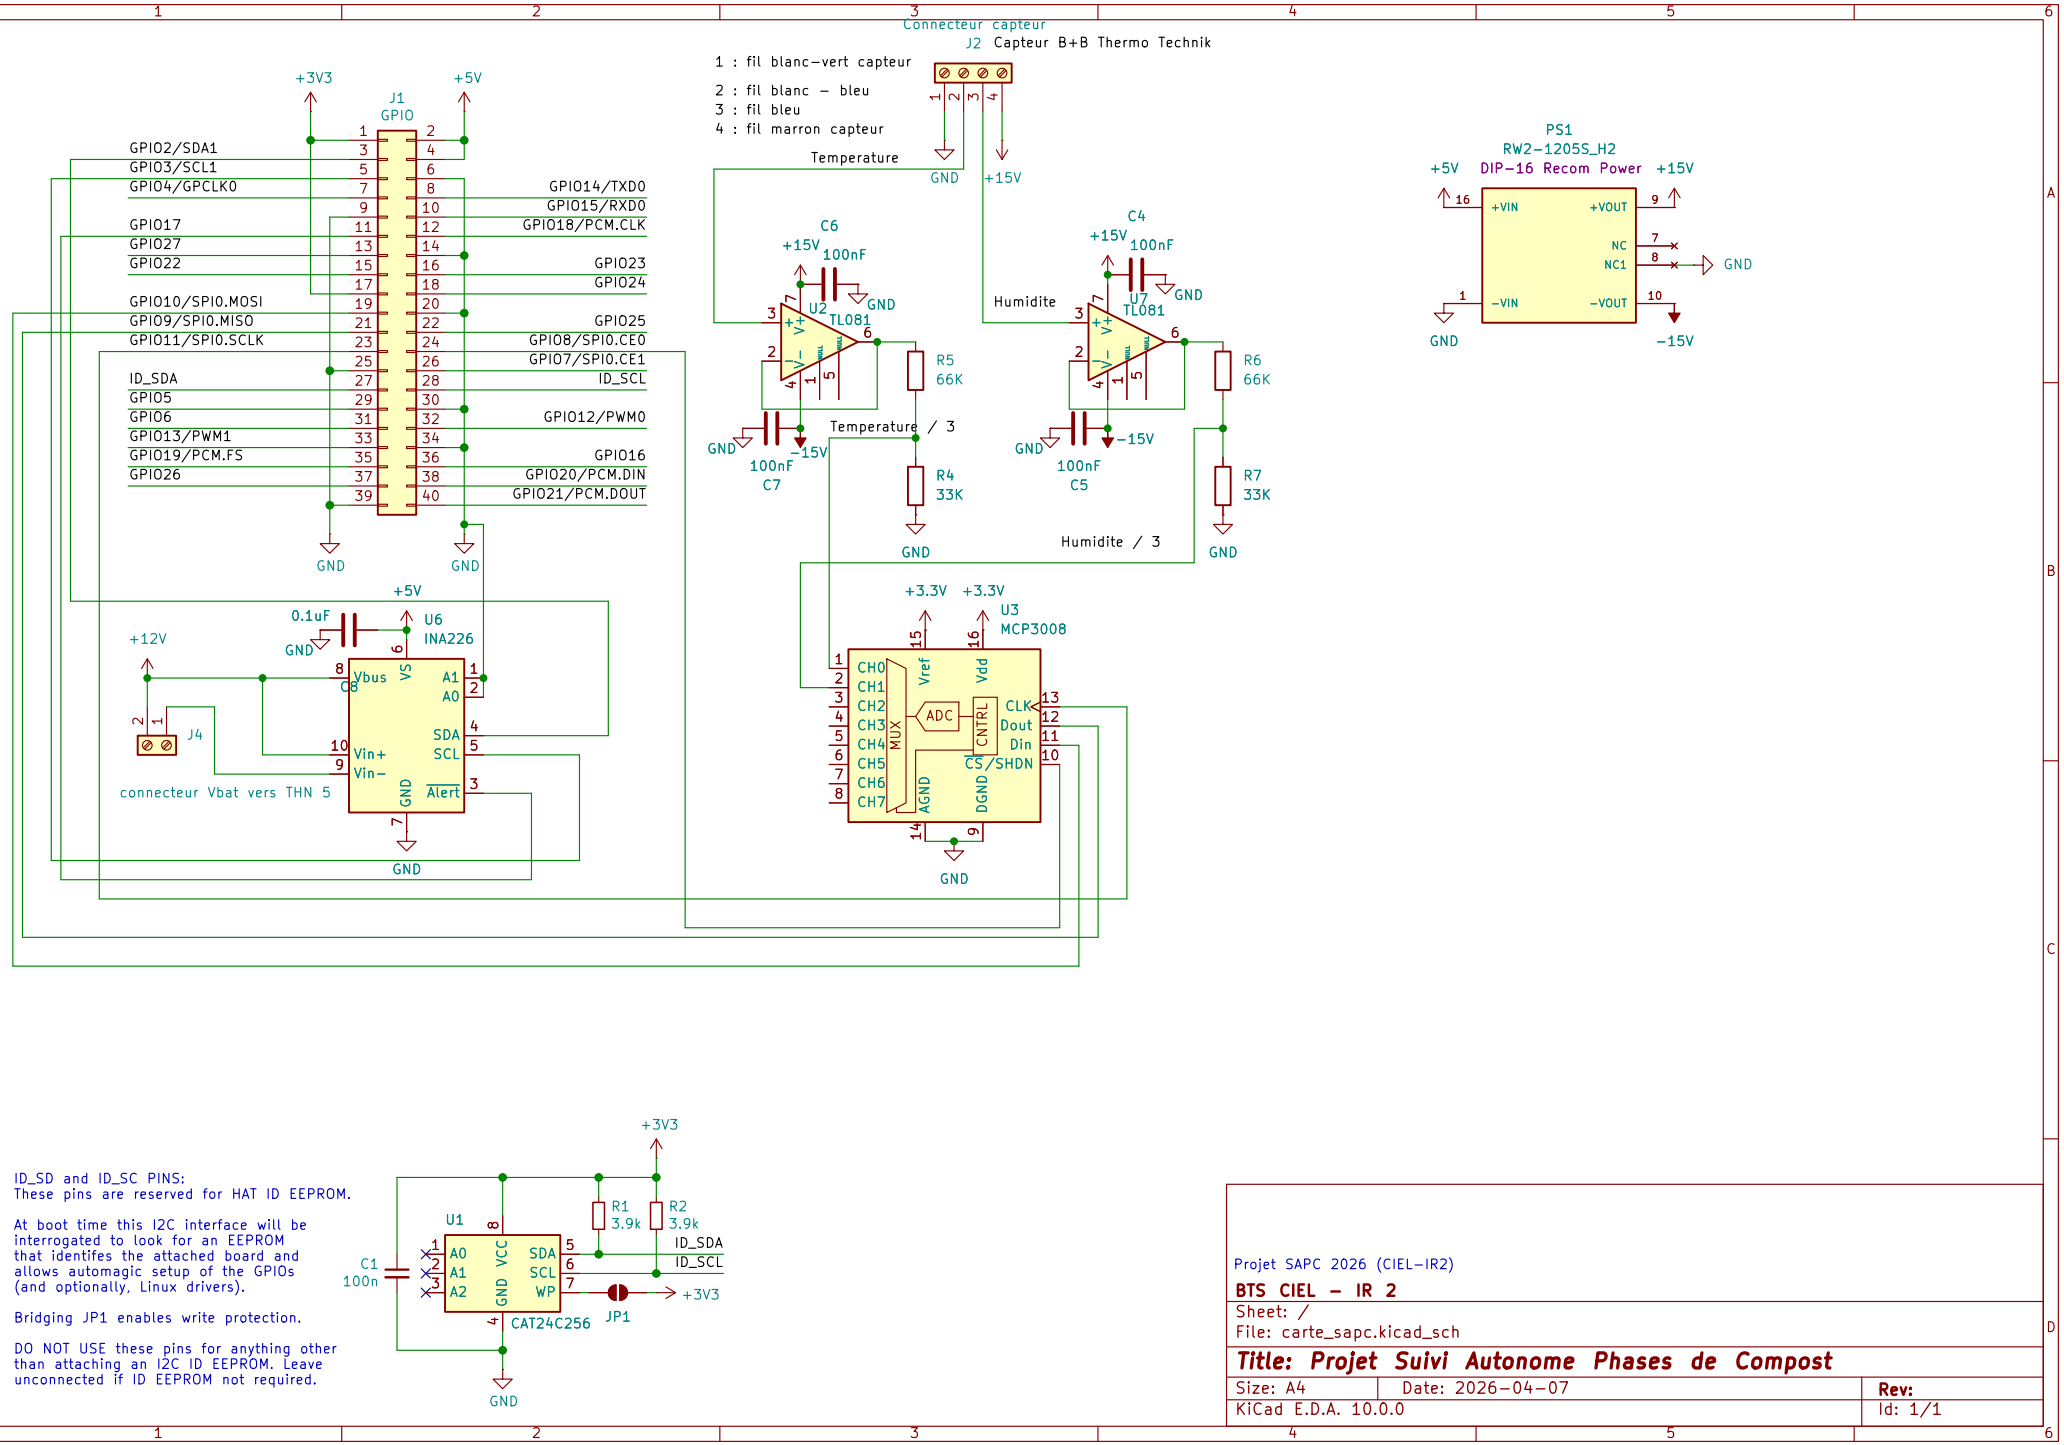
Connecteur capteur
J2 Capteur B+B Thermo Technik
1 : fil blanc-vert capteur
2 : fil blanc - bleu
3 : fil bleu
4 : fil marron capteur
Temperature
Humidite
J1
GPIO
+3V3
+5V
GND
GPIO2/SDA1
GPIO3/SCL1
GPIO4/GPCLK0
GPIO17
GPIO27
GPIO22
GPIO10/SPI0.MOSI
GPIO9/SPI0.MISO
GPIO11/SPI0.SCLK
ID_SDA
GPIO5
GPIO6
GPIO13/PWM1
GPIO19/PCM.FS
GPIO26
GPIO14/TXD0
GPIO15/RXD0
GPIO18/PCM.CLK
GPIO23
GPIO24
GPIO25
GPIO8/SPI0.CE0
GPIO7/SPI0.CE1
ID_SCL
GPIO12/PWM0
GPIO16
GPIO20/PCM.DIN
GPIO21/PCM.DOUT
C6
100nF
U2
TL081
R5
66K
R4
33K
Temperature / 3
C7
C4
U7
R6
R7
Humidite / 3
C5
PS1
RW2-1205S_H2
DIP-16 Recom Power
+VIN
-VIN
+VOUT
-VOUT
NC
NC1
-15V
U6
INA226
0.1uF
+12V
C8
J4
connecteur Vbat vers THN 5
Vbus
Vin+
Vin-
VS
SDA
SCL
Alert
A1
A0
U3
MCP3008
Vref
Vdd
CH0
CH1
CH2
CH3
CH4
CH5
CH6
CH7
MUX
ADC
CNTRL
CLK
Dout
Din
CS/SHDN
AGND
DGND
ID_SD and ID_SC PINS:
These pins are reserved for HAT ID EEPROM.
At boot time this I2C interface will be interrogated to look for an EEPROM that identifes the attached board and allows automagic setup of the GPIOs (and optionally, Linux drivers).
Bridging JP1 enables write protection.
DO NOT USE these pins for anything other than attaching an I2C ID EEPROM. Leave unconnected if ID EEPROM not required.
U1
C1
100n
R1
3.9k
R2
3.9k
A0
A1
A2
WP
CAT24C256
JP1
Projet SAPC 2026 (CIEL-IR2)
BTS CIEL - IR 2
Sheet: /
File: carte_sapc.kicad_sch
Title: Projet Suivi Autonome Phases de Compost
Size: A4
Date: 2026-04-07
Rev:
KiCad E.D.A. 10.0.0
Id: 1/1