

2 MM POWERHOUSE™ BELTS

(Compatible with PowerGrip® GT2® and PowerGrip® GT3® pitches)


Standard Widths:

3 mm, 6 mm, 9 mm

Neoprene Construction

Fiberglass Reinforcements

(Note: Custom belt widths are available upon request.)

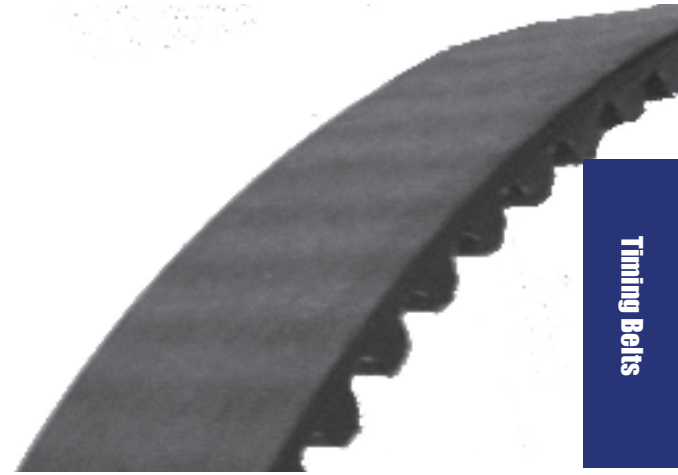

Timing Belts

Part Number	No. of Teeth	Pitch Length (mm)	Part Number	No. of Teeth	Pitch Length (mm)	Part Number	No. of Teeth	Pitch Length (mm)
54-2P	27	54.0	132-2P	66	132.0	200-2P	100	200.0
58-2P	29	58.0	134-2P	67	134.0	202-2P	101	202.0
60-2P	30	60.0	136-2P	68	136.0	204-2P	102	204.0
66-2P	33	66.0	138-2P	69	138.0	206-2P	103	206.0
72-2P	36	72.0	140-2P	70	140.0	208-2P	104	208.0
74-2P	37	74.0	142-2P	71	142.0	210-2P	105	210.0
76-2P	38	76.0	144-2P	72	144.0	212-2P	106	212.0
78-2P	39	78.0	146-2P	73	146.0	214-2P	107	214.0
80-2P	40	80.0	148-2P	74	148.0	216-2P	108	216.0
82-2P	41	82.0	150-2P	75	150.0	220-2P	110	220.0
84-2P	42	84.0	152-2P	76	152.0	224-2P	112	224.0
86-2P	43	86.0	154-2P	77	154.0	226-2P	113	226.0
88-2P	44	88.0	156-2P	78	156.0	228-2P	114	228.0
90-2P	45	90.0	158-2P	79	158.0	230-2P	115	230.0
92-2P	46	92.0	160-2P	80	160.0	232-2P	116	232.0
94-2P	47	94.0	162-2P	81	162.0	236-2P	118	236.0
96-2P	48	96.0	164-2P	82	164.0	238-2P	119	238.0
98-2P	49	98.0	166-2P	83	166.0	240-2P	120	240.0
100-2P	50	100.0	168-2P	84	168.0	242-2P	121	242.0
102-2P	51	102.0	170-2P	85	170.0	244-2P	122	244.0
106-2P	53	106.0	172-2P	86	172.0	248-2P	124	248.0
108-2P	54	108.0	174-2P	87	174.0	250-2P	125	250.0
110-2P	55	110.0	176-2P	88	176.0	252-2P	126	252.0
112-2P	56	112.0	178-2P	89	178.0	254-2P	127	254.0
114-2P	57	114.0	180-2P	90	180.0	256-2P	128	256.0
116-2P	58	116.0	182-2P	91	182.0	258-2P	129	258.0
118-2P	59	118.0	184-2P	92	184.0	260-2P	130	260.0
120-2P	60	120.0	186-2P	93	186.0	264-2P	132	264.0
122-2P	61	122.0	188-2P	94	188.0	266-2P	133	266.0
124-2P	62	124.0	190-2P	95	190.0	268-2P	134	268.0
126-2P	63	126.0	192-2P	96	192.0	270-2P	135	270.0
128-2P	64	128.0	194-2P	97	194.0	274-2P	137	274.0
130-2P	65	130.0	196-2P	98	196.0	278-2P	139	278.0

Neoprene 2 mm POWERHOUSE™ timing belt part numbers can be determined as follows:
Pitch Length Code + -2P- + Width Code

2 MM POWERHOUSE™ BELTS

(Compatible with PowerGrip® GT2® and PowerGrip® GT3® pitches)


Standard Widths:

3 mm, 6 mm, 9 mm

Neoprene Construction

Fiberglass Reinforcements

(Note: Custom belt widths are available upon request.)

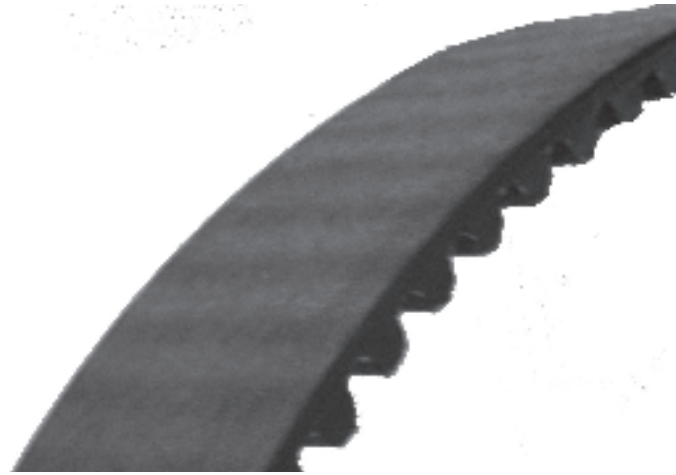

Part Number	No. of Teeth	Pitch Length (mm)
280-2P	140	280.0
282-2P	141	282.0
284-2P	142	284.0
286-2P	143	286.0
288-2P	144	288.0
290-2P	145	290.0
292-2P	146	292.0
294-2P	147	294.0
300-2P	150	300.0
302-2P	151	302.0
304-2P	152	304.0
308-2P	154	308.0
310-2P	155	310.0
314-2P	157	314.0
318-2P	159	318.0
320-2P	160	320.0
322-2P	161	322.0
324-2P	162	324.0
326-2P	163	326.0
328-2P	164	328.0
330-2P	165	330.0
332-2P	166	332.0
336-2P	168	336.0
338-2P	169	338.0
340-2P	170	340.0
342-2P	171	342.0
344-2P	172	344.0
346-2P	173	346.0
350-2P	175	350.0
352-2P	176	352.0
354-2P	177	354.0
356-2P	178	356.0
358-2P	179	358.0

Part Number	No. of Teeth	Pitch Length (mm)
360-2P	180	360.0
364-2P	182	364.0
366-2P	183	366.0
370-2P	185	370.0
372-2P	186	372.0
376-2P	188	376.0
380-2P	190	380.0
382-2P	191	382.0
386-2P	193	386.0
392-2P	196	392.0
394-2P	197	394.0
400-2P	200	400.0
406-2P	203	406.0
412-2P	206	412.0
420-2P	210	420.0
426-2P	213	426.0
428-2P	214	428.0
430-2P	215	430.0
436-2P	218	436.0
440-2P	220	440.0
444-2P	222	444.0
446-2P	223	446.0
448-2P	224	448.0
452-2P	226	452.0
456-2P	228	456.0
460-2P	230	460.0
466-2P	233	466.0
470-2P	235	470.0
474-2P	237	474.0
478-2P	239	478.0
480-2P	240	480.0
484-2P	242	484.0
486-2P	243	486.0

Part Number	No. of Teeth	Pitch Length (mm)
488-2P	244	488.0
492-2P	246	492.0
494-2P	247	494.0
500-2P	250	500.0
502-2P	251	502.0
504-2P	252	504.0
506-2P	253	506.0
516-2P	258	516.0
524-2P	262	524.0
528-2P	264	528.0
530-2P	265	530.0
534-2P	267	534.0
544-2P	272	544.0
550-2P	275	550.0
552-2P	276	552.0
558-2P	279	558.0
560-2P	280	560.0
570-2P	285	570.0
572-2P	286	572.0
576-2P	288	576.0
578-2P	289	578.0
586-2P	293	586.0
598-2P	299	598.0
600-2P	300	600.0
606-2P	303	606.0
616-2P	308	616.0
630-2P	315	630.0
634-2P	317	634.0
640-2P	320	640.0
646-2P	323	646.0
660-2P	330	660.0
670-2P	335	670.0
676-2P	338	676.0

Neoprene 2 mm POWERHOUSE™ timing belt part numbers can be determined as follows:
Pitch Length Code + -2P- + Width Code

2 MM POWERHOUSE™ BELTS

(Compatible with PowerGrip® GT2® and PowerGrip® GT3® pitches)


Standard Widths:

3 mm, 6 mm, 9 mm

Neoprene Construction

Fiberglass Reinforcements

(Note: Custom belt widths are available upon request.)

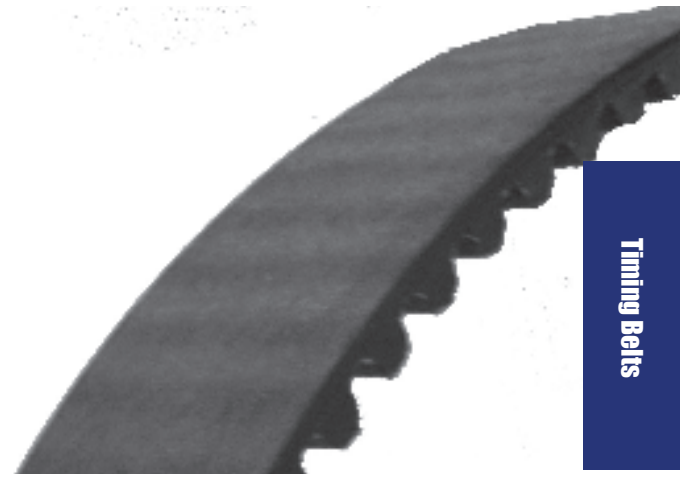

Timing Belts



Part Number	No. of Teeth	Pitch Length (mm)
690-2P	345	690.0
696-2P	348	696.0
702-2P	351	702.0
726-2P	363	726.0
742-2P	371	742.0
744-2P	372	744.0
752-2P	376	752.0
760-2P	380	760.0
772-2P	386	772.0
782-2P	391	782.0
800-2P	400	800.0
810-2P	405	810.0
816-2P	408	816.0
848-2P	424	848.0
852-2P	426	852.0
860-2P	430	860.0
866-2P	433	866.0
892-2P	446	892.0
900-2P	450	900.0

Part Number	No. of Teeth	Pitch Length (mm)
930-2P	465	930.0
950-2P	475	950.0
956-2P	478	956.0
976-2P	488	976.0
994-2P	497	994.0
1004-2P	502	1004.0
1028-2P	514	1028.0
1032-2P	516	1032.0
1066-2P	533	1066.0
1068-2P	534	1068.0
1078-2P	539	1078.0
1110-2P	555	1110.0
1140-2P	570	1140.0
1164-2P	582	1164.0
1180-2P	590	1180.0
1210-2P	605	1210.0
1228-2P	614	1228.0
1234-2P	617	1234.0
1256-2P	628	1256.0

Part Number	No. of Teeth	Pitch Length (mm)
1310-2P	655	1310.0
1320-2P	660	1320.0
1344-2P	672	1344.0
1360-2P	680	1360.0
1386-2P	693	1386.0
1434-2P	717	1434.0
1524-2P	762	1524.0
1558-2P	779	1558.0
1660-2P	830	1660.0
1688-2P	844	1688.0
1700-2P	850	1700.0
1810-2P	905	1810.0
1850-2P	925	1850.0
1860-2P	930	1860.0
1910-2P	955	1910.0

Neoprene 2 mm POWERHOUSE™ timing belt part numbers can be determined as follows:


Pitch Length Code + -2P- + Width Code



For idler pulleys,
see page 366.



For 2 mm POWERHOUSE™ pitch pulley
stock and flanges, see page 308.

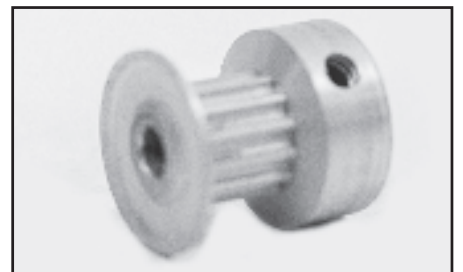


For 2 mm POWERHOUSE™ pitch timing
pulleys, see page 121.

2 MM OPEN ENDED POWERHOUSE™ BELTS

(Compatible with PowerGrip® GT2® and PowerGrip® GT3® pitches)

Standard Widths:
4 mm, 6 mm, 9 mm
Neoprene Construction
Fiberglass Reinforcements

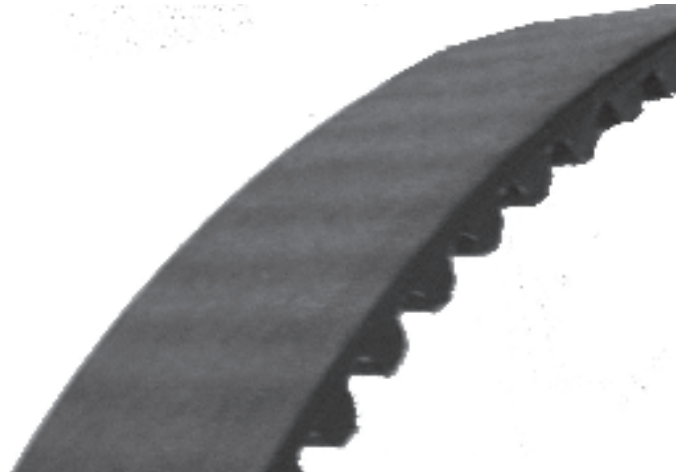


Part Number	Width	Net Weight per Foot	Maximum Continuous Length
LL2P04	4 mm	.01	300 feet
LL2P06	6 mm	.01	300 feet
LL2P09	9 mm	.02	300 feet

Open ended belting is a money-saving, low upkeep alternative to roller chain and is most effective in long length conveying and positioning applications requiring protection from grime, grease, oil, and moisture.

2 MM POWERHOUSE™ CLAMPING PLATE

Standard Widths:
3 mm, 6 mm, 9 mm
Aluminum

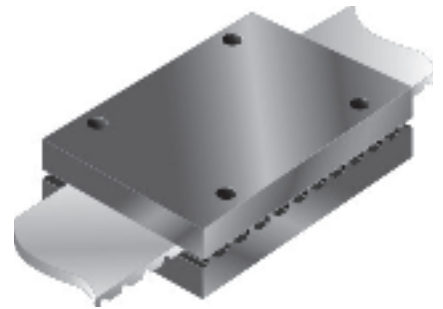

Part Number	For Belt Width (mm)
CP-2P-06	4 mm, 6 mm
CP-2P-09	9 mm



GEARED FOR SUCCESS