

承 认 书
SPECIFICATION FOR APPROVAL

客户名称: 所有客户

CUSTOMER:

品 名: 热缩套管

PART NAME:

型 号:

PART NO: 一系列

制 造 商: 四川领飞高分子材料有限公司

MANUFACTUR:

地 址: 四川省开江县经济开发区二期标准化厂房 6 号楼

ADDRESS:

电话号码: (0818)8231666

TEL.NO.:

供应商单位签章
LINFREECOUNTERSIGN



客户回签承认栏
CUSTOMER
COUNTERSIGN

规格书

阻燃、柔软、绝缘、低温收缩
材质:聚烯烃 (EVA)
收缩比率: 2: 1
纵向收缩率: ≤5%
最低收缩温度: 90℃
连续使用温度: -55℃~125℃


性能 Properties

性能 Properties		测试条件 Condition	指标 Value
物理性能 Physical	抗张强度 Tensile strength	158±1℃, 168hr	≥10. 4Mpa
	断裂伸长率 Elongation		≥200%
	老化后抗张强度 Tensile strength afrer aging		不小于老化前的 70%
	老化后断裂伸长率 Elongation after aging		≥70% of original
	热冲击 Heat shock	250℃, 1hr	无裂纹 No cracking
	冷弯曲 Cold bend	-30℃, 1hr	无裂纹 No cracking
电性能 Electrical	绝缘耐压 Insulation and voltage resistance	60sec	LFST-001=1500V 不击穿 LFST-002=2500V 不击穿
	体积电阻率 Volume resistivity		14 ≥10 Ω • cm
化学性能 Chemical	铜腐蚀 Corrosion	UL224; 158±1℃, 168hr	PASS
	铜稳定性 Copper stability	UL224; 158±1℃, 168hr	PASS
	阻燃性 Flammability	UL224	VW-1
电压等级 Voltage rating		LFST-002: 600V LFST-001: 300V	
温度等级 Temperature rating		125℃	
UL 认证号 UL APPROVAL NO.		E352366	

标准型热缩套管尺寸检验标准

产品规格	收缩前尺寸(mm)		完全收缩后尺寸(mm)		适用范围	包装长度 M
	内径(D)	壁厚(T)	内径(D)	壁厚(T)		
Φ0.8	0.9±0.2	0.15±0.08	0.50±0.2	0.30±0.06	0.3~0.5	400±2
Φ1.0	1.5±0.2	0.15±0.08	0.65±0.2	0.36±0.06	0.4~0.6	400±2
Φ1.5	2.0±0.2	0.18±0.08	0.85±0.2	0.40±0.08	0.6~0.8	400±2
Φ2.0	2.5±0.2	0.18±0.08	1.00±0.2	0.42±0.08	0.75~0.9	400±2
Φ2.5	3.0±0.2	0.18±0.08	1.25±0.2	0.42±0.08	0.95~1.4	400±2
Φ3.0	3.5±0.3	0.22±0.10	1.50±0.3	0.46±0.08	1.1~1.8	400±2
Φ3.5	4.0±0.3	0.25±0.10	1.75±0.3	0.46±0.08	1.35~2.3	400±2
Φ4.0	4.5±0.3	0.25±0.10	2.0±0.3	0.48±0.08	1.6~2.7	400±2
Φ4.5	5.0±0.3	0.25±0.10	2.25±0.3	0.50±0.10	1.85~3.2	400±1
Φ5.0	5.5±0.4	0.25±0.10	2.50±0.4	0.50±0.10	2.1~3.6	200±1
Φ6.0	6.5±0.4	0.28±0.12	3.25±0.4	0.56±0.10	2.35~4.0	200±1
Φ6.5	7.0±0.4	0.28±0.12	3.5±0.4	0.56±0.10	2.6~4.5	200±1
Φ7.0	7.5±0.4	0.28±0.12	3.75±0.4	0.58±0.10	3.1~5.4	100±1
Φ8.0	8.5±0.5	0.28±0.12	4.25±0.5	0.60±0.10	3.7~6.3	100±1
Φ9.0	9.5±0.5	0.30±0.12	4.75±0.5	0.60±0.10	4.2~7.2	100±1
Φ10	10.5±0.5	0.30±0.12	5.25±0.5	0.60±0.10	4.7~8.0	100±1
Φ11	11.8±0.5	0.30±0.12	5.9±0.5	0.60±0.10	5.2~9.0	100±1
Φ12	12.8±0.5	0.30±0.12	6.4±0.5	0.60±0.10	6.2~11	100±1
Φ13	13.8±0.5	0.35±0.12	6.9±0.5	0.65±0.12	6.7~12	100±1
Φ14	14.8±0.5	0.35±0.12	7.4±0.5	0.65±0.12	7.3~13	100±1
Φ15	15.8±0.5	0.35±0.12	7.9±0.5	0.65±0.12	7.8~14	100±1
Φ16	16.8±0.5	0.36±0.12	8.4±0.5	0.65±0.12	8.3~15	50±0.5
Φ17	18.0±0.5	0.36±0.12	9.0±0.5	0.65±0.12	8.8~16	50±0.5
Φ18	19.0±0.6	0.40±0.15	9.5±0.6	0.70±0.12	9.3~17	50±0.5
Φ20	22.0±0.6	0.40±0.15	11±0.6	0.75±0.15	10.4~19	50±0.5
Φ22	23.0±0.6	0.40±0.15	11.5±0.6	0.80±0.15	11.4~21	50±0.5
Φ25	26.0±0.7	0.40±0.15	13.0±0.7	0.90±0.15	12.8~24	50±0.5
Φ28	29.0±0.7	0.45±0.20	14.5±0.7	0.95±0.15	14.4~28	50±0.5
Φ30	31.0±0.7	0.45±0.20	15.5±0.7	0.95±0.15	16~29	50±0.5
Φ35	36.0±1.0	0.50±0.22	18.0±1.0	1.00±0.20	18~34	50±0.5
Φ40	41.0±1.0	0.55±0.25	20.5±1.0	1.10±0.25	21~39	50±0.5
Φ45	46.0±1.0	0.55±0.25	23.0±1.0	1.10±0.25	23~44	50±0.5
Φ50	51.5±1.5	0.60±0.25	25.75±1.5	1.20±0.25	26~49	50±0.5
Φ55	56.5±1.5	0.60±0.25	28.25±1.5	1.20±0.25	29~54	50±0.5
Φ60	61.5±1.5	0.60±0.25	30.75±1.5	1.20±0.25	31~59	50±0.5
Φ70	71.5±1.5	0.65±0.30	35.75±1.5	1.30±0.25	34~69	50±0.5
Φ80	81.5±1.5	0.65±0.30	40.75±1.5	1.30±0.25	39~79	50±0.5
Φ90	91.5±1.5	0.65±0.30	45.75±1.5	1.30±0.25	44~89	50±0.5
Φ100	101.5±1.5	0.65±0.30	50.75±1.5	1.30±0.25	49~99	50±0.5
...	...	...	...	...	...	...
Φ200	201.5±1.5	0.8±1.5	100±1.5	1.60±1.5	100~199	50±0.5

附产品图示:

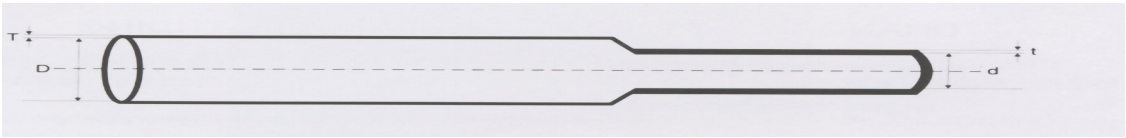

薄壁型热缩套管尺寸检验标准

产品规格	收缩前尺寸(mm)		完全收缩后尺寸(mm)		适用范围	包装长度 M
	内径(D)	壁厚(T)	内径(D)	壁厚(T)		
Φ0.6	0.8±0.2	0.12±0.05	0.4±0.2	0.22±0.06	0.4~0.6	200±2
Φ0.8	0.9±0.2	0.12±0.05	0.4±0.2	0.25±0.06	0.5~0.8	200±2
Φ1.0	1.5±0.2	0.10±0.05	0.5±0.2	0.25±0.06	0.7~1.0	200±2
Φ1.5	2.0±0.2	0.10±0.05	0.75±0.2	0.25±0.06	0.9~1.4	200±2
Φ2.0	2.5±0.2	0.13±0.06	1.00±0.2	0.28±0.06	1.1~1.8	200±2
Φ2.5	3.0±0.2	0.15±0.06	1.25±0.2	0.28±0.06	1.4~2.3	200±2
Φ3.0	3.5±0.3	0.15±0.06	1.5±0.3	0.30±0.06	1.6~2.7	200±2
Φ3.5	4.0±0.3	0.15±0.06	1.75±0.3	0.30±0.06	1.9~3.2	200±2
Φ4.0	4.5±0.3	0.15±0.06	2.0±0.3	0.30±0.06	2.1~3.6	200±2
Φ5.0	5.5±0.4	0.15±0.06	2.5±0.4	0.30±0.06	2.6~4.5	200±1
Φ6.0	6.5±0.4	0.15±0.06	3.0±0.4	0.30±0.06	3.1~5.4	200±1
Φ7.0	7.5±0.4	0.18±0.08	3.5±0.4	0.36±0.08	3.7~6.3	200±1
Φ8.0	8.5±0.5	0.18±0.08	4.0±0.5	0.36±0.08	4.2~7.2	200±1
Φ9.0	9.5±0.5	0.18±0.08	4.5±0.5	0.36±0.08	4.7~8.0	200±1
Φ10	10.5±0.5	0.18±0.08	5.0±0.5	0.36±0.08	5.2~9.0	200±1
Φ11	11.5±0.5	0.18±0.08	5.5±0.5	0.36±0.08	5.7~10	200±1
Φ12	12.5±0.5	0.18±0.08	6.0±0.5	0.36±0.08	6.2~11	100±1
Φ13	13.5±0.5	0.20±0.08	6.5±0.5	0.40±0.10	6.7~12.0	100±1
Φ14	14.5±0.5	0.20±0.08	7.0±0.5	0.40±0.10	7.3~13.0	100±1
Φ15	15.5±0.5	0.20±0.08	7.5±0.5	0.40±0.10	7.8~14.5	100±1
Φ16	16.5±0.5	0.22±0.08	8.0±0.5	0.40±0.10	8.3~15.5	100±1
Φ18	18.5±0.5	0.22±0.08	9.0±0.5	0.45±0.10	9.3~17.5	100±1
Φ20	20.5±0.5	0.22±0.08	10.0±0.5	0.45±0.10	10.3~19.5	100±1
Φ22	22.5±0.5	0.25±0.08	11.0±0.5	0.45±0.10	11.3~21.5	100±1
Φ25	25.5±0.5	0.25±0.08	12.5±0.5	0.45±0.10	12.8~24.5	100±1

注：

套管印字 (从规格 45 开始, 套管为不印字)：

LINGFREE TUBE E352366 c  us LFST-002 (001) 125℃ 600V (300V) VW-1 (Φ 9

材 质 说 明

原料名称			使用 目的	含量	CAS No.
中文	ENGLISH	分子式			
乙烯醋酸乙 烯酯	Polyolefin	$(\text{CH}_2\text{-CH}_2)_m$ $\text{-(CH}_2\text{-CH-COOCH}_3)_n$	主剂	50%	24937-78-7
氢氧化镁	Magnesium Hydroxide	Mg(OH)_2	阻燃剂	40%	1309-42-8
磷系阻燃剂	Phosphorus	$\text{P}_m\text{N}_n\text{H}_x\text{O}_y$	阻燃剂	6%	7723-14-0
色母	pigment	色粉+EVA+填充剂	着色剂	4%	

CERTIFICATE OF COMPLIANCE

Certificate Number 20180426-E352366
Report Reference E352366-20180425
Issue Date 2018-APRIL-26

Issued to: DONGGUAN LING FREE HARDWARE PLASTICS
PRODUCT CO LTD
Baihao Industrial Zone
Houjie Zhen
Dongguan
Guangdong 523000 CHINA

**This is to certify that
representative samples of**

COMPONENT - TUBING, EXTRUDED INSULATING
Flexible, Heat Shrinkable Polyolefin tubing without liner,
Models LFST-001 and LFST-002

Have been investigated by UL in accordance with the
Standard(s) indicated on this Certificate.

Standard(s) for Safety: UL 224, Extruded Electrical Tubing

Additional Information: See the UL Online Certifications Directory at
www.ul.com/database for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's
Certification and Follow-Up Service.

The UL Recognized Component Mark generally consists of the manufacturer's identification and catalog
number, model number or other product designation as specified under "Marking" for the particular
Recognition as published in the appropriate UL Directory. As a supplementary means of identifying products
that have been produced under UL's Component Recognition Program, UL's Recognized Component Mark:
 may be used in conjunction with the required Recognized Marks. The Recognized Component Mark is
required when specified in the UL Directory preceding the recognitions or under "Markings" for the individual
recognitions.

Recognized components are incomplete in certain constructional features or restricted in performance
capabilities and are intended for use as components of complete equipment submitted for investigation rather
than for direct separate installation in the field. The final acceptance of the component is dependent upon its
installation and use in complete equipment submitted to UL LLC.

Look for the UL Certification Mark on the product.



Bruce Mahlenholz, Director North American Certification Programs
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please
contact a local UL Customer Service Representative at <http://www.ul.com/contact-us>

