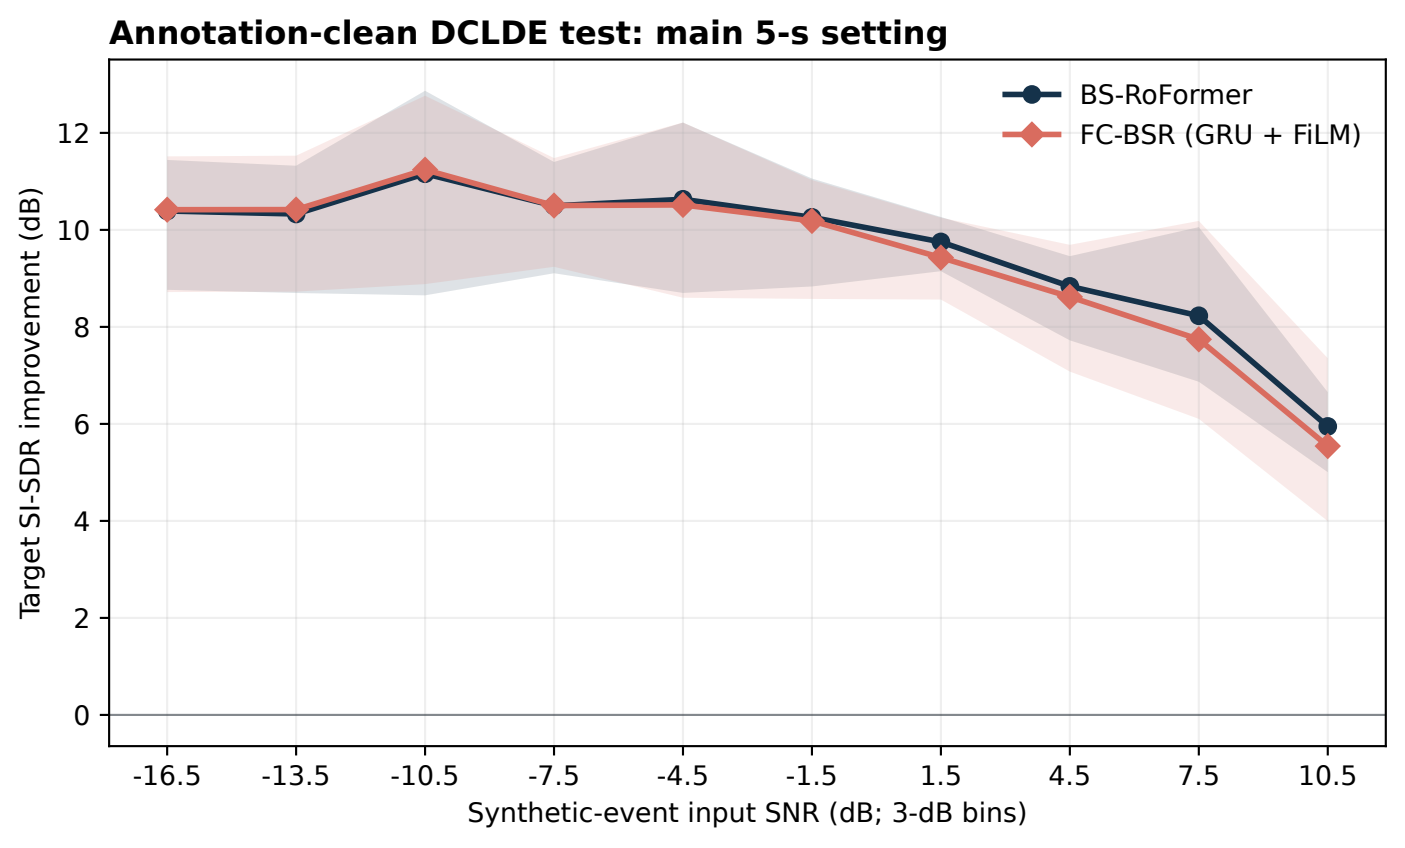
Annotation-clean DCLDE test: main 5-s setting
BS-RoFormer
FC-BSR (GRU + FiLM)
Target SI-SDR improvement (dB)
0
2
4
6
8
10
12
-16.5
-13.5
-10.5
-7.5
-4.5
-1.5
1.5
4.5
7.5
10.5
Synthetic-event input SNR (dB; 3-dB bins)