

The Geometry of Motion

Volume III: Biomechanics

From Rigid Bodies to Biological Systems



Preface

Draft Notice. This volume is under active development. Chapters 1–3 contain substantial content; Chapters 4–10 provide provisional technical treatments of joint geometry, biological dynamics, inverse problems, measurement, inference, flexible bodies and control. Worked examples verify mathematical and numerical consistency; they do not establish empirical validation of the volume’s biological models.

The preceding volumes develop geometric and control-theoretic tools using declared mechanical abstractions. This volume asks which abstractions support questions about biological movement. Rigid segments and idealized joints can remain useful; muscle states, tendon compliance, contact, or tissue deformation must be added when the intended output requires them.

Compliance enters constitutive forces and can require additional coordinates; it is not itself an inertial contribution to the mass matrix. Selecting neural excitation as the input also changes the state equations and the meaning of zero-input drift. Chapter 1 establishes these distinctions and shows why a musculoskeletal model is not automatically smooth and control-affine in excitation.

The aim is mathematics constrained by physical evidence. Validation remains specific to the model, population, task, and quantity being predicted. A match to observed motion does not validate every inferred muscle force or tissue load.

Contents

Preface	i
Nomenclature	v
1 How Biology Differs From Engineering	1
1.1 The Rigid-Body Assumption and Its Limits	1
1.2 Compliance, Timescales, and the Chosen Output	2
1.2.1 Adding Deformation Requires Adding Dynamics	2
1.2.2 A Frequency Comparison With a Checkable Meaning	2
1.3 From Excitation to Joint Power	3
1.3.1 Force Definitions and Units	3
1.3.2 Moment Arms Must Preserve Power	4
1.4 Two Different Kinds of Redundancy	4
1.5 Choosing the Model by the Question	5
1.5.1 Rigid Segments With Generalized-Load Actuators	5
1.5.2 Rigid Segments With Muscle and Tendon States	5
1.5.3 Deformation or Tissue Stress as an Output	6
1.6 Mass Properties Need Accounting and Frames	6
1.6.1 A Complete Segment Inventory	6
1.6.2 Centre of Mass and Spatial Inertia	6
1.7 When the Control-Affine Framework Applies	7
1.7.1 Choose the Input Before Splitting Drift and Control	7
1.8 Connecting the Parts of the Swing Argument	8
2 Musculoskeletal Modeling Conventions	10
2.1 Anatomical Reference Frames	10
2.1.1 The Anatomical Position	10
2.1.2 Segment Reference Frames	11
2.1.3 Connection to Screw Theory	12
2.2 Joint Coordinate Systems	12
2.2.1 The Grood–Suntay Convention for the Knee	12
2.2.2 Multi-Representation Joint Angles	13
2.3 Body Segment Parameters	14
2.3.1 Regression Equations	14
2.3.2 Computing the Mass Matrix	15
3 Muscle Models	17
3.1 The Hill-Type Muscle Model	17
3.1.1 Model Architecture	17
3.1.2 The Force-Length Relationship	18
3.1.3 A Constitutive Evaluator With Declared Inputs	19
3.1.4 The Force-Velocity Relationship	20
3.1.5 Activation Dynamics	21

3.2	Tendon Mechanics	22
3.3	Musculotendon Equilibrium	23
3.3.1	Initialization and Integration	23
3.4	From Fiber Power to Joint Mechanics	24
3.4.1	Coactivation, Equilibrium, and Stiffness	24
3.5	The Hill Model as a Coupled Dynamical System	25
4	Joint Kinematics and Soft Tissue	27
4.1	What an Ideal Joint Represents	27
4.2	The Instantaneous Screw Axis	27
4.2.1	A Reproducible Frame Example	28
4.2.2	Migration Must Be Derived From Motion	29
4.3	Biological Geometry and Model Mobility	29
4.3.1	The Knee	29
4.3.2	The Shoulder Complex	29
4.4	Ligament Force, Length and Stiffness	30
4.5	A Local Model of Spinal Compliance	31
5	Multi-Body Dynamics of Biological Chains	33
5.1	Open-Chain vs. Closed-Chain Biomechanics	33
5.1.1	Equations of Motion for Biological Chains	34
5.1.2	Bi-Articular Muscles	34
5.1.3	Co-Contraction and Joint Stiffness	35
5.2	The Mass Matrix of the Human Body	36
6	Inverse Problems in Biomechanics	38
6.1	The Inverse Dynamics Pipeline	38
6.1.1	Inverse Kinematics	39
6.1.2	Bottom-Up vs. Top-Down Inverse Dynamics	40
6.2	The Muscle Redundancy Problem	41
6.2.1	Static Optimization	41
6.2.2	Computed Muscle Control (CMC)	42
6.3	Parameter Estimation	42
6.3.1	Bayesian Framework	42
7	Experimental Methods	44
7.1	Motion Capture Systems	44
7.1.1	Marker-Based Systems	44
7.1.2	Markerless Systems	45
7.1.3	An Offline Processing Example	45
7.1.4	Soft Tissue Artifact	46
7.1.5	Low-Pass Filter Cutoff Selection	46
7.2	Electromyography (EMG)	47
7.2.1	EMG Processing and Interpretation	47
7.3	Force Plates	48
7.4	Inertial Measurement Units (IMUs)	48
7.5	Data Synchronization	49
7.6	Connecting Measurements to Swing Inference	49

8	Inference on Biological Systems	51
8.1	What the Data Can Identify	51
8.1.1	Structural and Practical Identifiability	51
8.2	Likelihood, Prior and Numerical Objective	52
8.2.1	A Checked Fixed-Covariance Listing	52
8.3	A Mode Is Not a Posterior Distribution	54
8.4	From Identification to a Testable Golf Model	54
9	Deformable Bodies and Continuum Mechanics	56
9.1	Choosing the Required Mechanical Resolution	56
9.2	A Stationary Planar Euler–Bernoulli Beam	56
9.2.1	Finite Elements and Modal Coordinates	57
9.3	Verification Before Interpreting a Shaft	58
9.3.1	Deflection, Forcing and Timescale	59
9.4	Beyond the Beam Approximation	59
10	Control Theory in Biological Systems	61
10.1	A Forward Model Must Declare Its State	61
10.2	A Reproducible Antagonist-Driven Rotor	61
10.2.1	Exact Activation, Motion and Mechanical Power	63
10.3	Prediction, Optimization and Optimality	64
10.4	What a Golf-Swing Analysis Can Conclude	64
10.5	Synthesis: Geometry to Evidence	65

Nomenclature

General Conventions

- Scalars are lowercase or Greek letters (e.g., m, t, θ).
- Vectors are bold lowercase (e.g., $\mathbf{x}, \mathbf{u}, \mathbf{q}$).
- Matrices are bold uppercase (e.g., $\mathbf{A}, \mathbf{B}, \mathbf{M}, \mathbf{J}$).
- Expected values and sets are denoted by blackboard bold or script (e.g., $\mathbb{E}, \mathcal{S}$).

These are default conventions; each chapter declares its model, frames, and any local reuse of symbols. The mechanical entries below use n independent, regular local configuration coordinates and $\mathbf{v} = \dot{\mathbf{q}}$. This convention is local: it does not identify every configuration manifold with a Euclidean space or apply unchanged to redundant representations.

State and Kinematics

$\mathbf{q} \in \mathbb{R}^n$ Configuration coordinates in the declared local chart.

$\dot{\mathbf{q}} \in \mathbb{R}^n$ Coordinate rates; the generalized velocities under the local convention above.

$\ddot{\mathbf{q}} \in \mathbb{R}^n$ Second time derivatives of these coordinates, not necessarily Cartesian point accelerations.

$\mathbf{x} \in \mathbb{R}^{n_x}$ State-vector representation with n_x components; commonly $\mathbf{x} = [\mathbf{q}^T, \dot{\mathbf{q}}^T]^T$ locally, with actuator or internal states added when needed. Redundant state representations also retain their constraints.

$\mathbf{u} \in \mathbb{R}^m$ Control input vector (e.g., joint torques, muscle activations).

$\boldsymbol{\tau} \in \mathbb{R}^n$ Generalized forces conjugate to $\mathbf{q}$, with power $\boldsymbol{\tau}^T \dot{\mathbf{q}}$; components need not all be joint torques.

$t \in \mathbb{R}$ Time.

More generally, write $\mathbf{q} \in \mathbb{R}^{n_q}$ for a configuration representation and $\mathbf{v} \in \mathbb{R}^{n_v}$ for generalized velocities, with $\dot{\mathbf{q}} = \mathbf{N}(\mathbf{q})\mathbf{v}$ on the admissible domain. A unit quaternion has four components with a norm constraint, while angular velocity has three components in a declared frame. Configuration rates and generalized velocities therefore need not have the same dimension. See [Tedrake's multibody notes](#) for this representation convention. Constraints and any time-dependent kinematics must be included in the chosen model.

Inertia and Dynamics

M(**q**) Mass (inertia) matrix. It is symmetric positive definite for independent regular velocities with strictly positive modeled kinetic energy for every nonzero velocity. Constrained, redundant, massless, or singular representations require their own treatment.

C(**q**, $\dot{\mathbf{q}}$) Coriolis/centrifugal matrix; **C** $\dot{\mathbf{q}}$ is the generalized velocity-product force in the local mechanical equation. The matrix factorization is not unique.

g(**q**) Generalized gravity term; its sign follows the side of the mechanical equation on which the chapter places it.

J(**q**) Coordinate Jacobian of a time-independent task map **p**(**q**), so $\dot{\mathbf{p}} = \mathbf{J}\dot{\mathbf{q}}$ in the stated coordinates and frames.

With $\dot{\mathbf{q}} = \mathbf{N}\mathbf{v}$, the corresponding velocity Jacobian is $\mathbf{J}_v = \mathbf{J}_q\mathbf{N}$. Force components must change with the velocity convention: $\boldsymbol{\tau}_v = \mathbf{N}^T\boldsymbol{\tau}_q$ gives $\boldsymbol{\tau}_v^T\mathbf{v} = \boldsymbol{\tau}_q^T\dot{\mathbf{q}}$. Thus the same club-point motion and mechanical power must result from consistently paired kinematic and force representations.

Control and Optimization

For the indexed entries, declare a discrete update $\mathbf{x}_{k+1} = F_k(\mathbf{x}_k, \mathbf{u}_k)$ and a nominal pair $(\bar{\mathbf{x}}_k, \bar{\mathbf{u}}_k)$. Its derivatives are evaluated at that pair. These are derivatives of the full update, including the chosen sampling or numerical integration rule, not of zero-input drift alone.

A_k = $D_x F_k$ State Jacobian of the declared discrete update at the nominal pair.

B_k = $D_u F_k$ Input Jacobian of that update at the same pair.

V(**x**) or $\mathcal{V}$ Value function or Lyapunov function.

Q State penalty matrix in LQR/DDP.

R Control penalty matrix in LQR/DDP.

K Feedback gain matrix ($\delta\mathbf{u} = -\mathbf{K}\delta\mathbf{x}$).

γ A curve with a declared parameter; for specified initial data and an input law, $\gamma(t)$ denotes a particular timed state trajectory. A solution map $\phi(t; t_0, \mathbf{x}_0)$ instead retains dependence on initial time and state, for a fixed evolution law on its domain of existence.

Continuous-time chapters define their Jacobians from the full differential equation. Some use $f(\mathbf{x}, \mathbf{u}, t)$ for that full right-hand side; the autonomous $f(\mathbf{x})$ below denotes only the declared zero-input drift. Neither convention makes a discrete input Jacobian equal to the continuous one without accounting for the sampling interval and evolution.

Affine Control and Counterfactuals

$f(\mathbf{x})$ Drift vector field: complete autonomous evolution of the declared effective plant when $\mathbf{u} = \mathbf{0}$.

$G(\mathbf{x})$ Input (control) matrix field mapping control inputs to state derivatives.

$\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$ Control-affine system equations of motion.

$\mathbf{x}^{\text{ZTCF}}(t)$ Forward Zero-Torque Counterfactual trajectory under $\mathbf{u}(t) \equiv \mathbf{0}$.

$\mathbf{a}_{\text{ZVCF}}(\mathbf{q}, \mathbf{z})$ Instantaneous Zero-Velocity Counterfactual acceleration with velocity and declared control set to zero.

$\text{DCR}_{W,\mathcal{U}}(\mathbf{x})$ Drift-Control Ratio in a declared acceleration or task-projected space:

$$\text{DCR}_{W,\mathcal{U}}(\mathbf{x}) = \frac{\|W\mathbf{a}_{\text{drift}}\|_2}{\sup_{\mathbf{u} \in \mathcal{U}} \|WB_a\mathbf{u}\|_2 + \varepsilon}.$$

Biomechanics and Motor Control

$a_i \in [0, 1]$ Muscle activation level.

ℓ_i^M Muscle fiber length.

v_i^M Muscle fiber contraction velocity.

ℓ_i^{MT} Musculotendon unit length.

$\mathbf{F}_{\text{muscle}}$ Force generated by muscles.

$\mathbf{W}$ Muscle synergy matrix (weights).

$\mathbf{c}(t)$ Muscle synergy activation vector over time.

Geometry and Manifolds

$SE(3)$ Special Euclidean group of rigid body motions.

$SO(3)$ Special Orthogonal group of 3D rotations.

$\mathfrak{se}(3)$ Lie algebra of $SE(3)$, space of spatial twists (velocities).

$\mathcal{M}$ A smooth manifold.

$T_{\mathbf{x}}\mathcal{M}$ Tangent space at point $\mathbf{x}$.

Chapter 1

How Biology Differs From Engineering

The golf swing connects neural excitation, muscle and tendon dynamics, joint motion, ground contact, and club deformation. A model can represent selected parts of this chain accurately while leaving others unresolved. Reproducing clubhead motion does not, by itself, establish which muscles generated it; reproducing net joint moments does not establish local tissue stress. This chapter develops the assumptions needed for a particular question and the corresponding tests of those assumptions.

The mathematical tools of the preceding volumes remain useful. Their application depends on the chosen state, input, constraints, and output. Biology changes those choices; it does not suspend mechanics. Numerical examples in this chapter are manufactured checks of equations, not measured human parameters or recommendations for a golfer.

1.1 The Rigid-Body Assumption and Its Limits

A rigid body has a fixed mass distribution in its own frame. A revolute joint permits one relative rotation and constrains the other five relative motions. Both are idealizations useful in biological and engineered systems. Bones deform, but their deformation need not be resolved for every movement question. Engineered shafts, transmissions, and sensors can also have compliance, backlash, noise, delay, and temperature dependence. The relevant distinction is between a declared approximation and the behavior it must explain.

For a golf model, declare the segment inventory, coordinate frames, joint constraints, and external contacts before selecting actuators. A shoulder rotation model may suffice for an endpoint-kinematics question while being inadequate for joint-contact loading. A hand-club constraint can transmit forces and moments even when its constrained coordinates are not actuated. Calling an anatomical joint “six degree of freedom” also requires care: relative pose has six components, but constraints and tissue mechanics may couple or strongly resist some motions. Coordinate count is not a count of independently controllable directions.

Biology vs. Engineering 1.1. Modeling Assumptions to Test

Structure

Choose rigid segments, compliant modes, or a continuum description according to the deformation that affects the target output.

Actuation

Specify actuator states and force, velocity, power, delay, and saturation limits where they matter.

Sensing

Identify observed quantities, error, sampling, filtering, and latency. A reconstructed state is not itself a sensor reading.

Adaptation

State the time horizon over which parameters are fixed. Fatigue, learning, and material changes require additional hypotheses.

Redundancy

Establish the rank of the relevant map and its feasible domain before claiming alternative solutions or compensation.

Motor torque can depend on speed, current dynamics, and thermal limits; muscle force can depend on activation, fibre length, velocity, and history. An ideal torque source deliberately suppresses these dependencies. It can be a useful first model of either actuator, provided conclusions remain about net loads and motion. A richer biological model should earn its added complexity through improved, independently tested predictions.

1.2 Compliance, Timescales, and the Chosen Output

1.2.1 Adding Deformation Requires Adding Dynamics

A free rigid club has six pose coordinates locally, not one grip angle. A one-angle club is a constrained planar abstraction. Flexible modes add coordinates to the selected rigid model. Write $\mathbf{z} = (\mathbf{q}, \boldsymbol{\eta})$, where $\mathbf{q} \in \mathbb{R}^n$ describes the rigid coordinates and $\boldsymbol{\eta} \in \mathbb{R}^r$ the retained deformation amplitudes. The selector $E = [0_{r \times n} \ I_r]$ gives $E\mathbf{z} = \boldsymbol{\eta}$. In a local chart with $\dot{\mathbf{z}}$ as its generalized velocity, an illustrative model is

$$M(\mathbf{z})\ddot{\mathbf{z}} + h(\mathbf{z}, \dot{\mathbf{z}}) + E^T(K\boldsymbol{\eta} + D\dot{\boldsymbol{\eta}}) = B(\mathbf{z})\boldsymbol{\tau} + J_c(\mathbf{z})^T\boldsymbol{\lambda}. \quad (1.1)$$

All terms are generalized forces in the same augmented coordinate space. M includes rigid–flexible inertial coupling; h contains remaining inertial and gravitational terms. Constant K, D describe a local linear elastic and viscous approximation, not arbitrary tissue behavior. B maps actuator loads $\boldsymbol{\tau}$ into the augmented coordinates, while J_c is the constraint Jacobian and $\boldsymbol{\lambda}$ its conjugate reaction loads. Contact equations complete the model. Adding an unprojected modal spring force to a rigid-body equation would omit both dimensions and coupling.

The shaft’s relevance depends on the output: small deformation can matter for club-face orientation while contributing little to whole-body motion. Ground contact and grip loads determine modal excitation; controller bandwidth alone does not describe that loading spectrum.

1.2.2 A Frequency Comparison With a Checkable Meaning

For a linear mode, let

$$m\ddot{\eta} + d\dot{\eta} + k\eta = F(t), \quad \omega_n = \sqrt{k/m}, \quad \zeta = \frac{d}{2\sqrt{km}}.$$

For a harmonic load of angular frequency Ω , steady-state displacement per unit force is

$$H(\Omega) = \frac{1}{k - m\Omega^2 + i d \Omega}, \quad kH(\Omega) = \frac{1}{1 - (\Omega/\omega_n)^2 + 2i\zeta\Omega/\omega_n}.$$

At low frequency, $H \simeq 1/k$: quasi-static compliance can still produce important deflection. Near resonance, damping and coupling matter. Far above the mode's frequency, inertia dominates the forced response; that does not establish rigidity during a transient with initial deformation and broadband loads.

Biomechanical Principle 1.1. The Timescale Separation Principle

Compare the relevant load spectrum and initial transients with modal frequencies and damping, then propagate omitted deformation to the output. Quasi-static reduction requires negligible dynamic error over that spectrum; a rigid approximation additionally requires negligible deformation error for the task. Neither follows from controller bandwidth alone.

For a manufactured translational mode with $m = 1$ kg, $k = 100$ N/m, and $d = 1$ N s/m, $\omega_n = 10$ rad/s and $\zeta = 0.05$. At $\Omega = 1, 10, 100$ rad/s, the amplitude relative to static compliance, $|kH|$, is approximately 1.010, 10, and 0.0101. The high-frequency response is nearly opposite in phase to the force. A constant static gain cannot reproduce all three regimes. These are illustrative parameters, not measurements of a golf shaft.

1.3 From Excitation to Joint Power

1.3.1 Force Definitions and Units

A common Hill-type idealization separates activation, normalized active force–length and force–velocity curves, and parallel passive force [19]. With positive fibre velocity denoting lengthening, write the illustrative undamped fibre force as

$$F_M = F_0 \left[a f_L(\ell_M/\ell_0) f_V(\dot{\ell}_M/v_0) + f_{PE}(\ell_M/\ell_0) \right]. \quad (1.2)$$

ℓ_M is fibre length, ℓ_0 its optimal reference length, and $a \in [0, 1]$ the activation state. F_0 is the maximum active isometric fibre-force scale at optimal length; the curve values are dimensionless. $v_0 > 0$ is a declared velocity scale, not a universal human shortening speed. The parallel-elastic term f_{PE} is scaled by the same outside factor F_0 . Other models add damping or history dependence and use different normalizations.

Fibre force is not automatically tendon force. In a massless, ideal pennated equilibrium model, $F_T = F_M \cos \alpha$, where α is the pennation angle between fibres and tendon. This relation requires a tendon constitutive law and compatible fibre–tendon geometry. A compliant tendon can change length while the whole musculotendon path length changes little. Joint angular velocity therefore does not by itself determine fibre shortening velocity. Model-specific equilibrium, slack, and regularization conditions must be checked before solving for fibre velocity.

1.3.2 Moment Arms Must Preserve Power

For differentiable, time-independent musculotendon routing $\ell_{MT}(\mathbf{q})$, define

$$R_{ji} = -\frac{\partial \ell_{MT,i}}{\partial q_j}, \quad \boldsymbol{\tau}_M = R(\mathbf{q})\mathbf{F}_T. \quad (1.3)$$

For rotational coordinates, R_{ji} has length units and the conjugate load is a moment. Translational coordinates instead have force as the conjugate load. Virtual work gives the sign-sensitive check

$$\dot{\ell}_{MT} = -R^T \dot{\mathbf{q}}, \quad \boldsymbol{\tau}_M^T \dot{\mathbf{q}} = -\mathbf{F}_T^T \dot{\ell}_{MT}.$$

A positive tensile force delivers positive skeletal power when its path shortens. Fibre power can differ from path power because tendon energy storage and other internal processes intervene. For constrained coordinates or speeds distinct from $\dot{\mathbf{q}}$, apply the velocity map before comparing power.

For a numerical check, take rotational coordinates and

$$R = \begin{bmatrix} 0.03 & -0.03 & 0 \\ 0 & 0.02 & -0.02 \end{bmatrix} \text{ m}, \quad \mathbf{F}_T = \begin{bmatrix} 100 \\ 80 \\ 60 \end{bmatrix} \text{ N}, \quad \dot{\mathbf{q}} = \begin{bmatrix} 2 \\ -1 \end{bmatrix} \text{ s}^{-1}.$$

Then $\boldsymbol{\tau}_M = (0.6, 0.4)^T$ N m and $\dot{\ell}_{MT} = (-0.06, 0.08, -0.02)^T$ m/s. Both expressions for skeletal power give 0.8 W. A moment-arm sign error can look plausible in a torque plot while failing energy accounting immediately.

Biomechanical Principle 1.2. Force-Velocity Asymmetry in Multi-Joint Tasks

Force capacity depends on each muscle's fibre state, activation, parameters, and constitutive curves. A biarticular muscle couples multiple joint motions through its routing and tendon dynamics. Evaluate those states before classifying its contraction or constructing the feasible joint-load set; joint rotation alone does not specify eccentric or concentric fibre contraction.

In a downswing, the same visible wrist motion can be compatible with different tendon strains, activation histories, and antagonist forces. Muscle modeling makes those alternatives calculable under assumptions; it does not make video sufficient to identify which alternative occurred.

1.4 Two Different Kinds of Redundancy

Let the task be $\mathbf{y} = \phi(\mathbf{q})$, with Jacobian $J_y = \partial\phi/\partial\mathbf{q}$. For n independent local configuration coordinates, infinitesimal motions preserving $\mathbf{y}$ satisfy $J_y \delta\mathbf{q} = 0$, with dimension $n - \text{rank } J_y$. A three-joint planar arm controlling a 2D endpoint position has a one-dimensional local nullspace only where the Jacobian has rank two. At singular configurations the rank changes. A finite displacement requires following the nonlinear level set, not extrapolating one tangent direction indefinitely.

Muscle-force redundancy concerns a different map. At fixed geometry, an instantaneous force-allocation model solves $R\mathbf{F}_T = \boldsymbol{\tau}_{\text{req}}$, with a linear equality solution space of

dimension $p - \text{rank } R$ when nonempty, for p muscle paths. Nonnegative tensile forces and state-dependent capacities restrict this space. In the dimensionless algebraic example

$$R = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 1 \end{bmatrix}, \quad \tau_{\text{req}} = \begin{bmatrix} 3 \\ 3 \end{bmatrix},$$

all equality solutions are $(3 - t, 3 - t, t)^T$. Bounds $0 \leq F_i \leq 3$ leave $0 \leq t \leq 3$. Other loads or capacities can leave a point or no solution. This is an allocation example, not a human moment-arm model. It shows why a nullspace count cannot guarantee compensation for a fatigued muscle. These candidate forces must still satisfy muscle dynamics: if every internal state is already fixed, a constitutive model may fix tendon force as well. An allocation equality alone does not supply a realizable excitation history.

Even equal nullity does not identify equal physical freedom. The task map $J_y = \begin{bmatrix} 1 & 1 & 0 \\ 0 & 1 & 1 \end{bmatrix}$ has null vector $(1, -1, 1)^T$, whereas the example R has null vector $(-1, -1, 1)^T$. Their domains also represent different quantities: configuration changes and muscle forces. Matching hand position does not guarantee matching velocity, joint loading, energy use, or future motion.

The uncontrolled manifold hypothesis tests whether variability is preferentially organized along directions preserving a selected task variable [27]. Its original sit-to-stand analysis supports a task-dependent interpretation of joint variability. It is not a direct measurement of a neural projection operator or proof that all task-null directions are left uncontrolled. Coordinate scaling, task choice, noise, and dynamics influence interpretation. In golf, variability preserving clubhead position at one instant can still change face orientation, impact timing, or the subsequent response to a perturbation.

1.5 Choosing the Model by the Question

1.5.1 Rigid Segments With Generalized-Load Actuators

This model examines motion, power, momentum, and net loads without resolving individual muscles. Inverse dynamics requires kinematics, inertial parameters, external loads, and constraints; it does not identify individual muscle forces from motion alone. Add actuator bounds when testing trajectory feasibility. An unconstrained optimal torque history is a mathematical result, not evidence that a golfer can execute it.

For clubhead speed, this level can clarify how mass distribution, segment motion, and external forces interact. A sensitivity calculation can ask whether plausible parameter changes or shaft deformation alter the conclusion. If they do, examine the omitted physics before interpreting the result as a mechanism of a human swing.

1.5.2 Rigid Segments With Muscle and Tendon States

This adds routing, activation, and constitutive assumptions. A forward simulation requires excitations and initial states. Estimating excitation from observed motion requires further data, a control hypothesis, or an optimization criterion. Multiple solutions may fit the same motion. Report residual forces, reserve actuators, parameter sensitivity, and objective sensitivity rather than presenting one optimum as an observed neural strategy.

OpenSim supports musculoskeletal modeling and simulation; a typical model combines rigid bodies, joints, and force elements [7]. Such a model is not automatically a finite-element

model of deforming bone or soft tissue. Joint reactions are resultant loads conditional on modeled actuators and constraints, not local stress fields.

1.5.3 Deformation or Tissue Stress as an Output

Flexible modes, continuum models, or coupled multibody–finite-element models resolve deformation when the question requires it. Local stress requires geometry, constitutive properties, boundary conditions, and loading; numerical resolution and constitutive validation are separate checks. A resultant force and moment constrain integrals of traction without uniquely determining its spatial distribution. A calculated stress field is not an injury probability without a validated injury or failure model.

These choices are not a universal fidelity ranking. Extra parameters can increase uncertainty when measurements cannot identify them. Real-time feasibility depends on model, algorithm, hardware, accuracy, and update rate; a fixed degree-of-freedom threshold cannot select the method. State an output tolerance, compare simpler and richer models against independent observations, and retain the least complexity that supports the claim.

1.6 Mass Properties Need Accounting and Frames

1.6.1 A Complete Segment Inventory

Anthropometric coefficients require a population, segmentation scheme, landmarks, and parameter conventions. De Leva’s study adjusts landmark references of Zatsiorsky–Seluyanov segment parameters [6]; it is not a generic update of Dempster cadaver coefficients. Mixing incompatible segmentations can double-count or omit mass. Scaling population estimates also does not make them subject-specific measurements.

An inconsistent inventory illustrates the danger: central fractions 0.081 and 0.497 combined with six unilateral fractions 0.0271, 0.0162, 0.0061, 0.1416, 0.0433, and 0.0137. Their one-row sum is 0.826; counting both sides gives 1.074. Neither accounts for one body. Renormalizing conceals the provenance problem. No empirical replacement table is asserted here without verification of its source, landmarks, and segment definitions.

For a synthetic accounting exercise, use central fractions 0.10, 0.40 and six paired fractions (0.05, 0.03, 0.02, 0.09, 0.04, 0.02) per side. Their bilateral sum is one. For 75 kg, the central masses are 7.5, 30 kg and each side has (3.75, 2.25, 1.50, 6.75, 3.00, 1.50) kg. This tests bookkeeping only; it provides neither human lengths nor centres of mass or inertias.

1.6.2 Centre of Mass and Spatial Inertia

Let a segment’s local centre of mass be $\mathbf{c}_i$, its local-to-world rotation matrix $Q_i \in SO(3)$, and its world origin $\mathbf{p}_i$. Then

$$\mathbf{r}_i = \mathbf{p}_i + Q_i \mathbf{c}_i, \quad \mathbf{r}_{COM} = \frac{\sum_i m_i \mathbf{r}_i}{\sum_i m_i}.$$

Body mass and height alone cannot specify these world positions. A pose and kinematic model are needed, with separate left and right instances. For masses 2, 1 kg at (0.2, 0, 0), (0.4, 0.15, 0) m, respectively, the centre is (4/15, 0.05, 0) m. Translating both positions translates the centre by the same amount, a useful frame-consistency check.

A scalar $I = m(\rho L)^2$ describes inertia about a specified axis when ρL is its radius of gyration. General 3D dynamics needs a symmetric tensor I_C about the centre of mass in declared axes. For an angular-first twist $V = (\boldsymbol{\omega}, \mathbf{v}_O)$, all expressed in one frame, let $\mathbf{c}$ point from origin O to the centre and $C = [\mathbf{c}]_\times$. Then

$$\mathcal{I}_O = \begin{bmatrix} I_C - mCC & mC \\ -mC & mI_3 \end{bmatrix}.$$

The signs follow from $\mathbf{v}_C = \mathbf{v}_O + \boldsymbol{\omega} \times \mathbf{c} = \mathbf{v}_O - C\boldsymbol{\omega}$, giving

$$\frac{1}{2}V^T \mathcal{I}_O V = \frac{1}{2}\boldsymbol{\omega}^T I_C \boldsymbol{\omega} + \frac{1}{2}m\|\mathbf{v}_O + \boldsymbol{\omega} \times \mathbf{c}\|^2.$$

Positive mass and positive-definite I_C make this form positive definite. Physical inertia tensors also satisfy principal moment triangle inequalities; positive eigenvalues alone are not a complete realizability test. Point or ideal line masses can have singular rotational inertia. Declare which case an implementation accepts.

1.7 When the Control-Affine Framework Applies

1.7.1 Choose the Input Before Splitting Drift and Control

Torque-driven and excitation-driven models describe different interventions. For a smooth fixed-contact model in independent coordinates, let $\mathbf{s}$ collect muscle states, with composite state $\mathbf{x} = (\mathbf{q}, \mathbf{v}, \mathbf{s})$. Assume M is invertible on the domain under analysis. A possible description is

$$\dot{\mathbf{q}} = N(\mathbf{q})\mathbf{v}, \quad M(\mathbf{q})\dot{\mathbf{v}} = \mathbf{f}_{\text{mech}}(\mathbf{q}, \mathbf{v}, \mathbf{s}), \quad \dot{\mathbf{s}} = h_s(\mathbf{q}, \mathbf{v}, \mathbf{s}, \mathbf{u}).$$

N accounts for representations whose coordinate derivatives differ from generalized speeds. Reactions must be solved consistently or eliminated on the constraint manifold. Here excitation acts through muscle states, with no separate direct excitation term in mechanics. Input affinity depends on h_s and any other input-dependent equations.

Biomechanical Principle 1.3. The Extended Affine Structure

A declared model is control-affine in its chosen input if

$$\dot{\mathbf{x}} = \mathbf{f}(\mathbf{x}) + \mathbf{G}(\mathbf{x})\mathbf{u}. \quad (1.4)$$

Nonlinear state dependence in $\mathbf{f}, \mathbf{G}$ is permitted. For example, $\dot{a} = (u - a)/T$ with constant $T > 0$ is affine in excitation. If remaining muscle-state equations depend on activation and mechanics but not directly on excitation, their nonlinearity does not invalidate this structure. Establish these assumptions for the selected model; do not infer them from the word “musculoskeletal.”

Consider instead the branch-dependent law documented for OpenSim’s [first-order activation model](#):

$$\dot{a} = \frac{u - a}{T(u, a)}, \quad T(u, a) = \begin{cases} T_{act}(0.5 + 1.5a), & u > a, \\ T_{deact}/(0.5 + 1.5a), & u \leq a. \end{cases}$$

For a manufactured evaluation without an activation floor, choose $a = 0.5$, $T_{act} = 0.01$ s, and $T_{deact} = 0.04$ s. The rates at $u = 0, 0.5, 1$ are $-15.625, 0, 40$ s⁻¹. An affine input map would give the midpoint rate $(-15.625 + 40)/2 = 12.1875$ s⁻¹, not zero. Each branch is affine in u for fixed state, but the full map is not. The rate is continuous at $u = a$, with generally unequal one-sided slopes. Activation floors and clamping in an implementation need their own treatment; this arithmetic does not reproduce every software variant.

Remark 1.1. Dimensional Expansion of the State Space

For n independent coordinates, p activations, and p independent fibre length states, a local state dimension is $2n + 2p$. A rigid-tendon model may omit fibre-length states; fatigue or history states increase the count. Algebraic constraints and redundant pose representations change the distinction between stored variables and independent states. Derive dimension from the equations rather than a universal number of states per muscle.

Lie-bracket calculations require appropriate smooth vector fields and a specified admissible input set. Contraction arguments also require a suitable metric, invariant domain, and the theorem's differential conditions. Input bounds, contact transitions, and nonsmooth force laws can limit conclusions. Smooth analysis within a contact mode is not a proof across impacts or changes in contact. Dimensionality is a computational challenge; validity of the mathematical hypotheses comes first.

Zero excitation does not instantly erase activation or tendon strain. With constant T , activation subsequently decays as $a(t) = a(0)e^{-t/T}$ while other states evolve. Zero-input drift can thus include force associated with prior excitation. It is not synonymous with anatomically passive force, zero joint torque, or zero power. A golf counterfactual must specify what is removed and which initial states, contacts, and feedback rules are retained.

1.8 Connecting the Parts of the Swing Argument

The choices form a chain of inference. Kinematics and external loads, with mass properties and contacts, constrain net dynamics. Routing and constitutive assumptions map candidate muscle states into those loads. Activation dynamics connect states to candidate excitations. Compliance changes both transmission and the output being controlled. Redundancy leaves alternatives that an objective or further measurement may restrict. Every added explanation introduces a corresponding test.

A claim that a golfer increases clubhead speed through a particular muscle action requires more than a faster clubhead trajectory. Test whether the conclusion persists across plausible inertial parameters, grip constraints, tendon properties, allocation objectives, and shaft models. Separate an instantaneous power identity from a finite-time causal intervention: removing one torque or excitation changes later states and may change loads supplied by feedback. Report the intervention and its uncertainty alongside the predicted effect.

The resulting explanation should distinguish measured quantities, mechanical calculations, biologically conditioned inferences, and hypotheses about control or coaching. That distinction lets a simple model provide strong insight while identifying what remains unresolved about the swing.

Exercises With Verification Targets

1. **Mass Accounting.** Reproduce both erroneous inventory sums and the synthetic 75-kg inventory. Explain why a unit sum cannot validate anatomical provenance or supply missing centre-of-mass locations.
2. **Compliance.** Reproduce the three values of $|kH|$ above. A hypothetical 5-Hz mode completes $5(0.25) = 1.25$ cycles in 0.25 s. Explain why this count supplies neither excitation amplitude nor output error and cannot decide whether shaft deformation is negligible.
3. **Power.** Verify the 0.8-W example by both routes. Identify the energy-storage terms needed to equate skeletal and contractile-element power for a compliant tendon.
4. **Redundancy.** Derive both null vectors and the interval $0 \leq t \leq 3$. For three joints and six muscle paths, state the ranks needed for task nullity one and force nullity three. Explain why neither number counts identifiable neural excitation histories.
5. **Mass Frames.** Reproduce the two-mass centre of mass and its translation covariance. With upward y and gravity magnitude g , compute $U = \sum_i m_i g y_i = 0.15g$. State the reference level and why mass fractions alone cannot determine potential energy.
6. **Spatial Inertia.** Use $m = 2$ kg and

$$\mathbf{c} = (0.1, -0.2, 0.3) \text{ m}, \quad I_C = \text{diag}(0.02, 0.03, 0.04) \text{ kg m}^2.$$

Check symmetry, positivity, principal moment inequalities, and both energy expressions for $\boldsymbol{\omega} = (1.5, -2, 0.5) \text{ s}^{-1}$ and $\mathbf{v}_O = (-1.2, 0.8, -0.4) \text{ m/s}$. Nonzero translation tests the cross-block signs.

7. **Input Affinity.** Compare the branch-dependent example with the constant- T model, $T = 0.02$ s, giving rates $(-25, 0, 25) \text{ s}^{-1}$ at the same inputs and activation. Explain why nonlinear activation dependence alone does not disprove input affinity, and why zero excitation is not an instantaneous relaxed state.
8. **Model Selection.** Specify separate evidence requirements for clubface pose, net wrist moment, individual tendon force, and local stress. For a force-velocity calculation, identify the missing curve, normalization, fibre state, activation, and tendon assumptions before assigning an eccentric-to-isometric force ratio.


Chapter 2

Musculoskeletal Modeling Conventions

The same measured motion can yield different reported angles when frame axes, calibration poses or rotation conventions differ. A useful model must connect those choices to its inertial parameters and force calculations. Consistency of coordinates is necessary for physical interpretation; it does not establish the accuracy of the measurements or identify the subject's controller.

2.1 Anatomical Reference Frames

Biomechanical analysis requires a standardized language for describing body position and motion. The International Society of Biomechanics (ISB) has published recommendations for joint coordinate systems [40, 41]. These are joint-specific recommendations, not a single universal axis assignment or angle sequence.

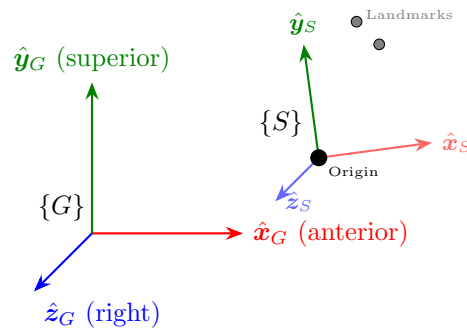

2.1.1 The Anatomical Position

The **anatomical position** provides a reference for directional terminology: the subject stands upright with arms at the sides and palms facing forward. It does not automatically define every model's zero joint configuration. Record the calibration pose, anatomical landmarks, segment-frame offsets and the convention used to report zero. A subject's measured standing pose need not coincide with an idealized anatomical neutral pose.

Definition 2.1. Global Reference Frame

For the examples here, choose a fixed global (laboratory) frame $\{G\}$ as:

- $\hat{x}_G$: anterior (forward)
- $\hat{y}_G$: superior (upward)
- $\hat{z}_G$: right

This is a right-handed coordinate system, aligned with the subject in the chosen reference pose; it does not rotate with the subject. Right is not synonymous with lateral on both limbs. Other laboratory and software systems use different conventions. **Verify handedness, axis directions, units and frame origins before combining data.**

2.1.2 Segment Reference Frames

In a rigid-segment model, a local frame is attached to each segment. Anatomical frames can be constructed from landmarks and estimated joint centers; a marker cluster's technical frame generally requires a separate anatomical calibration. Skin-mounted markers need not remain rigidly attached to the underlying bone. Report the landmark definitions and estimation method, rather than assuming that a measured technical frame is already the desired anatomical frame.

Example 2.1. The Thigh Reference Frame

Wu et al.'s femoral frame for hip reporting [40], Section 4.4, uses the following definitions:

- **Origin:** hip joint center
- $\hat{y}_T$: from the epicondyle midpoint toward the hip center
- $\hat{z}_T$: in the plane formed by the two epicondyles and the hip center, perpendicular to $\hat{y}_T$, pointing right
- $\hat{x}_T$: cross product $\hat{y}_T \times \hat{z}_T$ (anterior direction)

Normalize the axes and check that the landmarks define a nondegenerate plane. A frame located at the knee can also be useful, but its origin must be transported explicitly; it is not this attributed ISB origin.

The recommendation favors functional hip-center estimation when adequate relative motion is available and discusses predictive alternatives. Anthropometric regression, such as Harrington et al.'s MRI-based method [11], estimates a center; it does not make that center an exact observed landmark or remove calibration and population uncertainty.

2.1.3 Connection to Screw Theory

In the language of Volume 0, each segment frame $\{S_i\}$ is related to the global frame $\{G\}$ by a homogeneous transformation matrix $T_{GS_i} \in \text{SE}(3)$:

$$T_{GS_i} = \begin{bmatrix} R_{GS_i} & \mathbf{p}_{GS_i} \\ \mathbf{0}^T & 1 \end{bmatrix}, \quad (2.1)$$

where $R_{GS_i} \in \text{SO}(3)$ maps segment-coordinate vectors into global coordinates; its columns are the segment axes expressed globally. The vector $\mathbf{p}_{GS_i} \in \mathbb{R}^3$ locates the segment origin globally. Thus a point satisfies $\mathbf{x}_G = R_{GS_i} \mathbf{x}_{S_i} + \mathbf{p}_{GS_i}$.

The *relative configuration* of segment j with respect to proximal segment i is:

$$T_{S_i S_j} = T_{GS_i}^{-1} T_{GS_j}. \quad (2.2)$$

The rotation block is $R_{S_i S_j} = R_{GS_i}^T R_{GS_j}$; the translation is $R_{GS_i}^T (\mathbf{p}_{GS_j} - \mathbf{p}_{GS_i})$. A common rigid change of laboratory coordinates leaves this relative transform unchanged. Anatomical recalibration is different: changing the attached segment frames changes the reported relative coordinates and must also change any frame-dependent inertial data.

2.2 Joint Coordinate Systems

Joint-coordinate conventions relate relative orientation to anatomical terms. The chosen axes, positive directions, limb side, neutral offsets and angle branches must all be stated. An Euler/Cardan decomposition is a coordinate description of the resulting orientation, not a measured temporal sequence of three isolated motions.

2.2.1 The Grood–Suntay Convention for the Knee

The knee joint coordinate system, originally proposed by Grood and Suntay (1983) [10], decomposes knee motion into:

1. **Flexion-Extension** (α): rotation about the femoral medio-lateral axis (the “fixed” axis of the femur)
2. **Abduction-Adduction** (β): rotation about the “floating” axis (perpendicular to both the femoral and tibial body-fixed axes)
3. **Internal-External Rotation** (γ): rotation about the tibial longitudinal axis (the “body-fixed” axis of the tibia)

The floating axis is perpendicular to the two body-fixed axes; its directed cross product depends on the declared sign convention. It is undefined when those axes are parallel. With suitable segment-axis assignments, the geometric construction can be represented by a ZXY Cardan chart. The labels ZXY alone do not specify clinical signs for both limbs.

The following listing deliberately computes the *mathematical chart* in Equation (2.3). It returns active right-hand angles in degrees, with the middle angle on $(-90^\circ, 90^\circ)$ and outer angles on their principal atan2 branches. It does not automatically label those values as clinical flexion, adduction or internal rotation. Apply a documented anatomical calibration and side/sign mapping before making that interpretation. Input matrices must already be proper rotations; noisy marker data require a separately stated pose-estimation procedure.

```

1 import numpy as np
2 from numpy.typing import NDArray
3
4 def segment_zxy_angles(
5     R_proximal: NDArray[np.float64],
6     R_distal: NDArray[np.float64],
7 ) -> tuple[float, float, float]:
8     """Return chart angles; no clinical side/sign mapping is inferred."""
9     frames = []
10    for frame in (R_proximal, R_distal):
11        if np.iscomplexobj(frame):
12            raise ValueError("Expected real rotations")
13        R = np.asarray(frame, dtype=float)
14        if R.shape != (3, 3) or not np.all(np.isfinite(R)):
15            raise ValueError("Expected finite 3-by-3 rotations")
16        if not np.allclose(R.T @ R, np.eye(3), atol=1e-9, rtol=0):
17            raise ValueError("Rotation columns must be orthonormal")
18        if not np.isclose(np.linalg.det(R), 1, atol=1e-9, rtol=0):
19            raise ValueError("Rotation must be right-handed")
20        frames.append(R)
21    R = frames[0].T @ frames[1]
22    cos_beta = np.hypot(R[0, 1], R[1, 1])
23    if cos_beta < 1e-8:
24        raise ValueError("ZXY chart is singular or too ill-conditioned")
25    alpha = np.arctan2(-R[0, 1], R[1, 1])
26    beta = np.arctan2(R[2, 1], cos_beta)
27    gamma = np.arctan2(-R[2, 0], R[2, 2])
28    angles = np.degrees([alpha, beta, gamma])
29    return float(angles[0]), float(angles[1]), float(angles[2])

```

Listing 2.1: Extracting a declared active ZXY chart from segment orientations.

The singularity threshold is an illustrative numerical guard, not a sensor accuracy specification. Near the singular set, a small orientation error can produce a large angle error. Crossing an outer-angle branch cut can also create a 360° reporting jump without a comparable physical movement.

2.2.2 Multi-Representation Joint Angles

Following the multi-representation philosophy of this series, we express joint rotations and rigid displacements in complementary representations:

1. Declared Active Intrinsic ZXY Angles: Write $R_{ij} = R_{S_i S_j}$ for the distal-to-proximal coordinate map:

$$R_{ij} = R_z(\alpha) R_x(\beta) R_y(\gamma), \quad (2.3)$$

Here the three angles are mathematical coordinates with right-hand positive rotations. They require the mapping discussed above before receiving clinical names. For (60°, 5°, 10°) the listing recovers the same triple. The middle sine is the entry in row 3, column 2, written $R[2, 1]$ in Python; negating it would instead return -5°.

2. Rotation Matrix (SO(3)): Use $[a]_{\times} b = a \times b$ for the skew map:

$$R_{ij} = \exp([\omega]_{\times} \theta) \in \text{SO}(3), \quad (2.4)$$

For a rotation, ω is a unit axis and θ an angle. A matrix stores nine entries with six independent orthonormality constraints and the additional choice $\det R = +1$. It avoids an

Euler chart's gimbal lock, but its axis-angle logarithm is not globally unique; the axis is undefined at identity.

3. Unit Quaternion:

$$\mathbf{q} = (\cos \frac{\theta}{2}, \boldsymbol{\omega} \sin \frac{\theta}{2}), \quad \|\mathbf{q}\| = 1, \quad (2.5)$$

A unit quaternion avoids Euler-chart gimbal lock, but $\mathbf{q}$ and $-\mathbf{q}$ represent the same rotation. Choose consistent signs for interpolation and state angle branches when converting back. Neither a quaternion nor a matrix removes singularities of the requested clinical-angle chart.

4. Screw Axis (Primary):

$$T_{ij} = e^{[\mathcal{S}]\theta} \in \text{SE}(3), \quad \mathcal{S} = (\boldsymbol{\omega}, \mathbf{v}) \in \mathbb{R}^6, \quad (2.6)$$

For a finite displacement with nonzero rotation, normalize $\|\boldsymbol{\omega}\| = 1$; then θ is a rotation angle and $\mathbf{v}$ encodes the axis location and translation per unit angle. Here $[\mathcal{S}]$ denotes the 4×4 twist matrix with upper blocks $[\boldsymbol{\omega}]_{\times}$ and $\mathbf{v}$ and a zero bottom row. For pure translation use $\boldsymbol{\omega} = 0$, $\|\mathbf{v}\| = 1$ and a displacement parameter in units of length. Identity has no uniquely determined screw axis. Rotation alone does not determine T_{ij} : its translation must also be supplied.

Biology vs. Engineering 2.1. Why Screw Axis Theory Is Natural for Biological Joints

A biological articulation need not obey an ideal fixed revolute constraint. Relative translation and rotation can both matter, with their relationship dependent on joint geometry, loading and the modeled task. A finite screw describes the displacement between two configurations; an instantaneous screw axis describes a velocity. They need not coincide, and either can change during movement. At zero angular velocity an ordinary finite-pitch instantaneous axis is unavailable; pure translation is a distinct case.

The rigid-displacement framework in Lynch and Park's *Modern Robotics* [17] is useful for representing these motions. Representation alone supplies neither a biological joint law nor evidence that a fixed one-degree-of-freedom screw model is adequate.

2.3 Body Segment Parameters

2.3.1 Regression Equations

Body segment parameters (BSPs) include mass, center-of-mass location and the inertia tensor about a specified point and axes. A parameter table is tied to its segment boundaries, reference landmarks, measurement/modeling method and sample population. Examples illustrate why these conditions matter:

1. **de Leva (1996)** [6] adjusts the reference points of Zatsiorsky–Seluyanov parameters derived from young-adult male and female samples. This is a population-based adjustment, not direct measurement of every modeled subject or a universal gold standard.
2. **Pavol et al. (2002)** [25] describe an estimation method for older adults that incorporates body measurements and existing data sources. Its validation scope must accompany its use.

3. **Jensen (1986)** [13] studies growth-related changes in boys using a longitudinal sample and a geometric body model. Pediatric parameters should not be assumed to equal scaled adult values.

Distinguish a mean proportion from a subject-specific estimate and propagate plausible parameter uncertainty into the output of interest. Transferring a center-of-mass fraction between different segment endpoints changes its physical meaning. Likewise, a diagonal inertia tensor in principal axes need not remain diagonal in an anatomical frame. Changing coordinate axes rotates the tensor; changing its reference point additionally requires the parallel-axis theorem. These operations do not compensate for an inappropriate population or an inaccurate segment model.

2.3.2 Computing the Mass Matrix

Given segment inertial properties, the mass matrix $M(\mathbf{q}) \in \mathbb{R}^{n \times n}$ of the multi-body system is computed using the composite rigid-body algorithm (see Volume 0's recursive-dynamics treatment). Use angular-first motion vectors $V_i = (\boldsymbol{\omega}_i, \mathbf{v}_{O_i})$, where $\mathbf{v}_{O_i}$ is the segment-origin velocity expressed in that segment's frame. This is the body twist convention; a spatial twist's linear block in a fixed laboratory frame is generally not the segment-origin velocity. In the same body frame, the spatial inertia is [8]:

$$\mathcal{G}_i = \begin{bmatrix} I_i & m_i[\mathbf{c}_i]_{\times} \\ m_i[\mathbf{c}_i]_{\times}^T & m_i\mathbb{I}_3 \end{bmatrix} \in \mathbb{R}^{6 \times 6}, \quad (2.7)$$

where I_i is the 3×3 rotational inertia about the segment frame origin, m_i is the segment mass, $\mathbf{c}_i$ is the center of mass position in the segment frame directed from its origin to the COM, and $[\mathbf{c}]_{\times} \mathbf{a} = \mathbf{c} \times \mathbf{a}$. If the supplied rotational inertia is instead the central tensor I_{C_i} , first form

$$I_i = I_{C_i} + m_i(\|\mathbf{c}_i\|^2 \mathbb{I}_3 - \mathbf{c}_i \mathbf{c}_i^T). \quad (2.8)$$

Do not add that term again when I_i is already about the origin.

The off-diagonal signs follow from point transport, $\mathbf{v}_{C_i} = \mathbf{v}_{O_i} + \boldsymbol{\omega}_i \times \mathbf{c}_i$:

$$\frac{1}{2} V_i^T \mathcal{G}_i V_i = \frac{1}{2} \boldsymbol{\omega}_i^T I_{C_i} \boldsymbol{\omega}_i + \frac{1}{2} m_i \|\mathbf{v}_{O_i} + \boldsymbol{\omega}_i \times \mathbf{c}_i\|^2. \quad (2.9)$$

A symmetric positive-definite matrix alone is not sufficient verification: reversing both cross blocks is equivalent to using the opposite COM offset and can still give a positive-definite matrix. Check energy and momentum against point transport. Physical central principal moments are nonnegative and satisfy triangle inequalities; nondegenerate central inertia gives positive definiteness, while point/line idealizations can be semidefinite.

If $V_i = J_i(\mathbf{q})\dot{\mathbf{q}}$ with consistent origins and axes, summing segment energies gives $M(\mathbf{q}) = \sum_i J_i^T \mathcal{G}_i J_i$ for this rigid-segment model. Euler-angle rates are not Cartesian angular-velocity components. Generalized forces follow from power: a segment wrench F_i contributes $J_i^T F_i$, not an arbitrary selection of its Cartesian entries. For a golf swing, for example, an apparent change in joint angles or inferred moments can reflect calibration, parameter or coordinate choices as well as a change in the swing. A coordinate correction is not evidence of a different muscle or neural strategy.

Exercises

1. **Coordinate System Verification.** Verify that the declared ZXY listing returns zero for aligned frames and recovers mixed positive and negative chart angles. Premultiply both input frames by the same rotation and verify invariance. Specify the additional calibration and side/sign mapping needed for clinical labels.
2. **Euler Angle Singularity.** Identify the singular ZXY configurations and explain why they depend on the middle angle, not on flexion magnitude alone. Perturb a near-singular rotation and quantify angle sensitivity. Distinguish this chart problem from a physiological restriction; no claim about gait or squat ranges follows from the algebra alone.
3. **Multi-Representation Conversion.** Write Python functions to convert between all four representations (Euler ZXY, rotation matrix, quaternion, screw displacement) for chart angles ($60^\circ, 5^\circ, 10^\circ$) and a separately specified translation $\mathbf{p} = (0.01, 0, 0)^T$ m. State angle/logarithm branches and check reconstruction. Explain why the three angles alone are insufficient for the rigid-displacement conversion.
4. **BSP Sensitivity.** For an isolated horizontal rigid segment of mass 4 kg, compare COM distances 0.20 m and 0.22 m from a fixed support using $g = 9.81 \text{ m/s}^2$. Compute the balancing moment magnitudes and percentage change. These are manufactured parameter choices, not two published population estimates. Explain why the net support moment does not identify muscle force without moment arms and load-sharing assumptions.
5. **(Programming.)** Implement the spatial inertia matrix computation for a 3-segment leg model (thigh, shank, foot), using the companion repository's `affine_control.dynamics` function `spatial_inertia(mass, com, inertia_com)`. State its central-inertia input convention. Verify symmetry, physical central moments and kinetic energy under simultaneous rotation and translation, including a nonzero COM offset.
6. **(Programming.)** Using motion capture data (or simulated data), compute chart angles from segment orientations with the provided listing. Document calibration, units, invalid-frame treatment and branch handling. Plot a clinical flexion trace only after declaring and checking its anatomical mapping; identify simulated data as simulated.

Chapter 3

Muscle Models

A muscle is not a motor. It is a spring with a memory, a damper with an agenda, and a force generator with a personality.

3.1 The Hill-Type Muscle Model


A joint moment is not yet a muscle model. To predict how excitation becomes force, we must specify activation, fiber length and velocity, tendon stretch, and the geometry through which tension acts on the skeleton. These quantities evolve together: joint motion changes the muscle path, while muscle tension changes joint motion.

Hill's shortening experiments motivate a force-velocity relation [12]; modern Hill-type models combine phenomenological constitutive curves with selected mechanical and physiological states. They form a family, not one universal equation. We use a massless, undamped equilibrium architecture, constant-thickness pennation, and explicitly declared fiber curves. Thelen's formulation and Millard's equilibrium, damped-equilibrium and rigid-tendon alternatives make different numerical choices [36, 19]. A force evaluator is not by itself a simulation of any of these complete systems.

3.1.1 Model Architecture

The three-element network used here has the following components. The diagram shows mechanical connectivity, not literal fiber orientation:

1. **Contractile Element (CE)**: represents the active force-generating capacity of the muscle fibers. Its force depends on activation $a(t)$, fiber length ℓ^M , and fiber velocity $v^M = \dot{\ell}^M$.
2. **Parallel Elastic Element (PE)**: represents the passive elastic properties of the muscle belly (titin filaments, connective tissue). In this particular curve, passive tension begins above optimal fiber length; that threshold is a modeling assumption, not a universal resting length.
3. **Series Elastic Element (SE)**: represents the tendon, which is in series with the parallel CE-PE combination. Modeled here as a lossless nonlinear spring with a slack length ℓ_T^s .

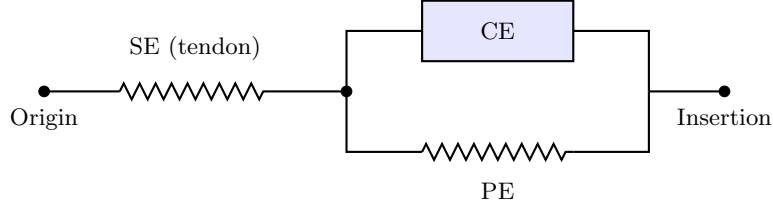

3.1.2 The Force-Length Relationship

The isometric (zero velocity) force of the contractile element depends on the normalized fiber length $\tilde{\ell} = \ell^M / \ell_0^M$, where ℓ_0^M is optimal fiber length. Let F_0 be the full-activation, optimal-length isometric *active fiber* force scale:

Definition 3.1. Active Force-Length Curve

The normalized active force-length relationship is:

$$f_L(\tilde{\ell}) = \exp\left(-\frac{(\tilde{\ell} - 1)^2}{\gamma}\right), \quad (3.1)$$

where $\gamma \approx 0.45$ [36] controls the width of the curve. Maximum force ($f_L = 1$) occurs at optimal fiber length ($\tilde{\ell} = 1$). This Gaussian is strictly positive at finite lengths. At both $\tilde{\ell} = 0.5$ and 1.5 it gives 0.574 , not nearly zero. The half-height interval is $|\tilde{\ell} - 1| < \sqrt{\gamma \ln 2}$, approximately $(0.442, 1.558)$ for this width. These are properties of the approximation, not measured anatomical operating limits.

Parameter and evidence scope. Thelen's Appendix uses $\gamma = 0.45$, $A_f = 0.25$, $k^{PE} = 5$, passive reference strain $\varepsilon_0 = 0.6$, and the activation-dependent law in (3.3) [36]. These are model parameters, not universal human constants. Millard uses separately constructed smooth curves rather than establishing these numbers as shared defaults [19].

Filament overlap helps explain length-dependent active tension. Gordon, Huxley and Julian studied tetanized single frog fibers and found a plateau and distinct ascending and descending regions [9]. That evidence supports length dependence; it does not identify this Gaussian as a microscopic law or validate its extrapolation to every human muscle.

The passive curve is

$$f_{PE}(\tilde{\ell}) = \begin{cases} 0, & 0 < \tilde{\ell} \leq 1, \\ \frac{\exp[k^{PE}(\tilde{\ell} - 1)/\varepsilon_0] - 1}{\exp(k^{PE}) - 1}, & \tilde{\ell} > 1. \end{cases} \quad (3.2)$$

It is continuous, nonnegative, and equals one at $\tilde{\ell} = 1 + \varepsilon_0$. Its derivative changes at the slack threshold. The exponential has no finite global maximum, so a force surface needs a declared length domain.

3.1.3 A Constitutive Evaluator With Declared Inputs

The listing takes fiber length and velocity as inputs and returns tendon-axis projections. It does *not* infer those inputs from joint motion or enforce tendon equilibrium. The stored tendon slack length becomes relevant when the series element and path geometry are supplied. The biceps force and length scales reproduce BIClong in the pinned OpenSim Arm26 model [23]; they do not describe both biceps heads or an individual golfer. The full-activation speed scale is explicitly chosen as $10\ell_0^M/s$ for this example.

```

1 from dataclasses import dataclass
2 import math
3
4 def finite_values(values: tuple[float, ...]) -> None:
5     """Reject nonfinite scalar inputs."""
6     if not all(math.isfinite(value) for value in values):
7         raise ValueError("Inputs must be finite.")
8
9 @dataclass(frozen=True)
10 class MuscleParameters:
11     """Fiber constitutive parameters; SI units, radians."""
12     F0: float
13     l0_M: float
14     v0: float
15     l_T_slack: float
16     alpha0: float
17     gamma: float = 0.45
18     Af: float = 0.25
19     kPE: float = 5.0
20     e0: float = 0.6
21
22     def __post_init__(self) -> None:
23         values = (self.F0, self.l0_M, self.v0,
24                 self.l_T_slack, self.gamma,
25                 self.Af, self.kPE, self.e0)
26         finite_values((*values, self.alpha0))
27         if min(values) <= 0 or not 0 <= self.alpha0 < math.pi / 2:
28             raise ValueError("Positive scales and 0 <= alpha0 < pi/2 required
29                               .")
30
31     @property
32     def v_max(self) -> float:
33         """Full-activation speed scale in fiber lengths/s."""
34         return self.v0 / self.l0_M
35
36 def force_length_active(l_tilde: float, gamma: float = 0.45) -> float:
37     """Normalized active fiber force at zero velocity."""
38     finite_values((l_tilde, gamma))
39     if l_tilde <= 0 or gamma <= 0:
40         raise ValueError("Positive length and width required.")
41     return math.exp(-(l_tilde - 1.0) ** 2) / gamma
42
43 def force_length_passive(l_tilde: float, kPE: float = 5.0,
44                         e0: float = 0.6) -> float:
45     """Passive fiber tension, normalized by F0."""
46     finite_values((l_tilde, kPE, e0))
47     if l_tilde <= 0 or kPE <= 0 or e0 <= 0:
48         raise ValueError("Positive length and shape scales required.")
49     if l_tilde <= 1.0:
50         return 0.0
51     try:

```

```

51         return math.expm1(kPE * (l_tilde - 1.0) / e0) / math.expm1(kPE)
52     except OverflowError as error:
53         raise ValueError("Constitutive extrapolation exceeds numeric range.")
54     from error
55
56 def force_velocity(v_tilde: float, a: float, Af: float = 0.25,
57                  Flen: float = 1.4) -> float:
58     """Thelen interior multiplier; v_tilde = v_M / v0."""
59     finite_values((v_tilde, a, Af, Flen))
60     if not 0 <= a <= 1 or Af <= 0 or Flen <= 1:
61         raise ValueError("Require a in [0,1], Af > 0, Flen > 1.")
62     speed = 0.25 + 0.75 * a
63     if v_tilde < -speed:
64         raise ValueError("Shortening exceeds the declared interior branch.")
65     w = v_tilde / speed
66     if w <= 0:
67         return (1.0 + w) / (1.0 - w / Af)
68     shape = (2.0 + 2.0 / Af) / (Flen - 1.0)
69     # Algebraic rearrangement avoids multiplying two large velocities.
70     return Flen - (Flen - 1.0) / (1.0 + shape * w)
71
72 def muscle_force(activation: float, l_M: float, v_M: float,
73                 params: MuscleParameters) -> tuple[float, float, float]:
74     """Tendon-axis projections for PRESCRIBED fiber state, in N.
75
76     Returns total, active and passive projections. This does not
77     solve tendon equilibrium or determine the fiber state.
78     """
79     finite_values((activation, l_M, v_M))
80     if not 0 <= activation <= 1:
81         raise ValueError("Activation must lie in [0,1].")
82     thickness = params.l0_M * math.sin(params.alpha0)
83     if l_M <= thickness:
84         raise ValueError("Require fiber length greater than thickness.")
85     cos_alpha = math.sqrt(1.0 - (thickness / l_M) ** 2)
86     length = l_M / params.l0_M
87     active = (activation * force_length_active(length, params.gamma)
88              * force_velocity(v_M / params.v0, activation, params.Af))
89     passive = force_length_passive(length, params.kPE, params.e0)
90     scale = params.F0 * cos_alpha
91     result = ((active + passive) * scale, active * scale, passive * scale)
92     finite_values(result)
93     return result
94
95 # Long-head biceps geometry/force scales from OpenSim Arm26 BIClong.
96 # v0 and curve parameters are declared teaching choices.
97 biceps = MuscleParameters(F0=624.3, l0_M=0.1157,
98                           v0=10 * 0.1157,
99                           l_T_slack=0.2723, alpha0=0.0)
100 total, active, passive = muscle_force(0.5, biceps.l0_M, 0.0, biceps)
101 print(f"Prescribed isometric fiber: {total:.2f} N "
102       f"(active {active:.2f}, passive {passive:.2f})")

```

Listing 3.1: Prescribed-Fiber Constitutive Evaluation.

3.1.4 The Force-Velocity Relationship

Let $v_0 > 0$ be the dimensional full-activation shortening-speed scale and $\tilde{v} = v^M/v_0$, with negative velocity denoting shortening. Here $A_f = 0.25$ controls the shortening branch and

$F_{\text{len}} = 1.4$ is the dimensionless lengthening asymptote used by the listing. For the interior branches obtained from Thelen's equations, define

$$c(a) = 0.25 + 0.75a, \quad w = \tilde{v}/c(a), \quad K = \frac{2 + 2/A_f}{F_{\text{len}} - 1}.$$

Solving the velocity-as-a-function-of-force relation for its multiplier gives

$$f_V(\tilde{v}, a) = \begin{cases} \frac{1 + w}{1 - w/A_f}, & -1 \leq w \leq 0, \\ \frac{1 + KF_{\text{len}}w}{1 + Kw}, & w > 0. \end{cases} \quad (3.3)$$

Thus $f_V(0, a) = 1$, unloaded shortening occurs at $v^M = -c(a)v_0$, and the lengthening branch approaches F_{len} asymptotically. At half activation the zero-force speed is $-0.625v_0$, not $-v_0$. The multiplier is continuous at zero velocity, but the right slope is twice the left slope. An optimizer must not assume a continuously differentiable join.

This evaluator rejects shortening outside its declared branch rather than returning negative active tension. The current OpenSim implementation adds continuations and state restrictions [24]; this listing is not a replacement for that solver. An inverse equilibrium calculation also requires $af_L > 0$ and an attainable force ratio below F_{len} . At zero activation the forward active force is zero, but dividing by activation to recover velocity is undefined.

Biomechanical Principle 3.1. Force, Velocity, and Power

Shortening reduces active force below its isometric value; lengthening increases the multiplier above one, at the same activation and fiber length. This does not say that eccentric force always exceeds the full-activation, optimal-length reference force F_0 . Isometric *fiber* force includes active and passive contributions. Zero fiber velocity need not mean zero joint velocity; fixed joints need not imply isometric fibers while a tendon stretches. Active mechanical output is $-F_{CE}v^M$, with F_{CE} the active fiber force,, positive during shortening and negative during lengthening. Its sign does not determine metabolic expenditure.

3.1.5 Activation Dynamics

The neural command from the central nervous system does not instantly produce muscle force. The activation dynamics models the excitation-contraction coupling:

$$\dot{a}(t) = \frac{u(t) - a(t)}{\tau(u, a)}, \quad (3.4)$$

where $u(t) \in [0, 1]$ is the neural excitation, $a(t) \in [0, 1]$ is the activation level, and τ is a time constant that differs for activation and deactivation:

$$\tau(u, a) = \begin{cases} \tau_{\text{act}}(0.5 + 1.5a) & \text{if } u > a \text{ (activation),} \\ \tau_{\text{deact}}/(0.5 + 1.5a) & \text{if } u \leq a \text{ (deactivation).} \end{cases} \quad (3.5)$$

The exercise uses $\tau_{\text{act}} = 15$ ms and $\tau_{\text{deact}} = 50$ ms, as in the young-adult parameter set of [36]. These base parameters are not observed force-rise or neural-conduction delays. At

$a = 1$ the two effective branch times are 30 and 25 ms, respectively; the base constants do not imply faster activation at every state.

The vector field is continuous at $u = a$ because both branches give zero there; its derivatives generally differ across that surface. Continuous-time trajectories preserve $[0, 1]$: the derivative points inward at its boundaries. Numerical integration still needs suitable tolerances and checked states.

With $a(0) = 0$ and a step to $u = 1$, separation of variables gives

$$t(a) = \tau_{\text{act}} \{-1.5a - 2 \ln(1 - a)\}.$$

Activation reaches 0.95 after approximately 68.50 ms. For deactivation from $a(0) = 1$ with $u = 0$,

$$t(a) = 2\tau_{\text{deact}} \ln\left(\frac{0.5 + 1.5a}{2a}\right),$$

so $a = 0.05$ occurs at approximately 174.92 ms. These are activation-state calculations; tendon force follows the coupled fiber and series-elastic dynamics.

3.2 Tendon Mechanics

The tendon connects the muscle belly to bone. It is modeled as a nonlinear elastic element with a resting (slack) length ℓ_T^s :

$$F_T(\varepsilon_T) = \begin{cases} 0 & \varepsilon_T \leq 0, \\ F_0 \cdot \frac{e^{k_T \varepsilon_T} - 1}{e^{k_T \varepsilon_{0T}} - 1} & \varepsilon_T > 0, \end{cases} \quad (3.6)$$

where ℓ_T is current tendon length and $\varepsilon_T = (\ell_T - \ell_T^s)/\ell_T^s$, $k_T > 0$ and $\varepsilon_{0T} > 0$. This single-exponential tendon is a *declared teaching choice*, not Thelen's toe-region/linear tendon or a full Millard curve. It gives $F_T = F_0$ at the reference strain for *every* k_T ; that reference point cannot identify the shape parameter. A second measurement, such as tangent stiffness, is needed:

$$\frac{dF_T}{d\ell_T} = \frac{F_0 k_T e^{k_T \varepsilon_T}}{\ell_T^s (e^{k_T \varepsilon_{0T}} - 1)} \quad (\varepsilon_T > 0).$$

For $F_T > 0$, its inverse is

$$\varepsilon_T = \frac{1}{k_T} \ln \left[1 + \frac{F_T}{F_0} (e^{k_T \varepsilon_{0T}} - 1) \right].$$

Force is continuous at slack engagement but stiffness changes there.

Biomechanical Principle 3.2. Tendons as Energy Storage Elements

The lossless teaching spring stores $U_T = \ell_T^s \int_0^{\varepsilon_T} F_T(e) de$ above slack. It returns that energy on unloading; it creates none. Biological viscoelasticity can dissipate energy and needs an additional constitutive law.

Elastic recoil can separate the timing of fiber work from joint power. Alexander's account concerns locomotor mechanisms [1]; it does not establish a metabolic saving or tendon-recoil strategy in a particular golf swing. Larger instantaneous joint power

alone cannot identify its muscular, elastic, or external source.

3.3 Musculotendon Equilibrium

Neglecting fiber and series-element inertia, the declared axial balance is

$$F_T = (F_{CE} + F_{PE}) \cos \alpha, \quad F_{CE} = a f_L f_V F_0, \quad F_{PE} = f_{PE} F_0. \quad (3.7)$$


This is a model assumption, not a claim that real accelerating muscle has no inertia. Any added damping force belongs in this balance and the energy account.

Let α be current pennation angle and α_0 its value at optimal fiber length. For constant fiber-bundle thickness $h = \ell_0^M \sin \alpha_0$ and total musculotendon path length ℓ^{MT} ,

$$x = \ell^M \cos \alpha = \sqrt{(\ell^M)^2 - h^2}, \quad \ell^{MT} = \ell_T + x, \quad \ell^M > h. \quad (3.8)$$

An impossible length is not repaired by clipping $\cos \alpha$ to zero. The limit $\ell^M = h$ is singular.

Constant-Thickness Geometry

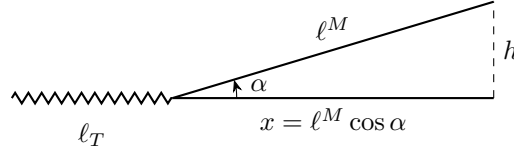

Given activation, fiber length and total path length, compute tendon length and tension, then solve for fiber velocity. Define the required active-force multiplier

$$r = \frac{F_T / (F_0 \cos \alpha) - f_{PE}}{a f_L}.$$

The independent inverse of the declared interior law is

$$\frac{v^M}{v_0} = \begin{cases} c(a) \frac{r-1}{1+r/A_f}, & 0 \leq r \leq 1, \\ c(a) \frac{(r-1)(F_{\text{len}}-1)}{(2+2/A_f)(F_{\text{len}}-r)}, & 1 < r < F_{\text{len}}. \end{cases} \quad (3.9)$$

Negative residual active-force demand, a ratio at or above the eccentric asymptote, zero activation, or zero active-length multiplier lies outside this inverse. Near the asymptote small force errors imply large velocity changes. A solver must report failure or use an explicitly different regularized model, not silently clamp the answer.

3.3.1 Initialization and Integration

Fiber length is a state. Activation and total path length alone do not determine both fiber length and velocity. Specify $a(0)$ and $\ell^M(0)$, or an explicit initialization rule. For an assumed initially isometric fiber, search for a root of (3.7) with $v^M = 0$ in an admissible interval.

The nonlinear curves may admit multiple roots or none; record the interval, residual and selected root rather than assuming uniqueness.

At each evaluation:

1. Check states and geometry; derive $\ell_T = \ell^{MT} - x$.
2. Evaluate tendon and passive-fiber forces.
3. Check $af_L \cos \alpha$ and the attainable ratio, then invert for v^M .
4. Integrate activation and fiber length with error control, monitoring the force residual and domain boundaries.

For this undamped inverse, a slack tendon with positive passive fiber tension has no admissible nonnegative active-force balance. Damped or constrained models can behave differently; their equations and state policy must be declared.

3.4 From Fiber Power to Joint Mechanics

With $v^{MT} = \dot{\ell}^{MT}$ and $v_T = \dot{\ell}_T$, differentiating the geometry gives

$$v^{MT} = v_T + \frac{v^M}{\cos \alpha}.$$

The force projection then gives $F_T(v^{MT} - v_T) = (F_{CE} + F_{PE})v^M$. Projecting force and also multiplying fiber velocity by $\cos \alpha$ would count the geometry incorrectly.

Let $\mathbf{q}$ be generalized coordinates and $\mathbf{Q}_M$ the generalized muscle load. For a frictionless path $\ell^{MT}(\mathbf{q})$, virtual work gives

$$\mathbf{Q}_M = -F_T \nabla_{\mathbf{q}} \ell^{MT}, \quad \mathbf{Q}_M^T \dot{\mathbf{q}} = -F_T v^{MT}.$$

For lossless tendon and passive fiber, let U_{PE} be passive-fiber stored energy, so $\dot{U}_{PE} = F_{PE}v^M$. Then

$$\mathbf{Q}_M^T \dot{\mathbf{q}} = -F_{CE}v^M - \dot{U}_{PE} - \dot{U}_T. \quad (3.10)$$

Active output and changing stored energy jointly produce skeletal power. A tendon can deliver power with nearly isometric fibers, or absorb power while active fibers shorten. Neither observation uniquely identifies excitation, chemical-energy use, or the cause of segment deceleration. Frictional wraps would require an additional dissipation account.

3.4.1 Coactivation, Equilibrium, and Stiffness

Index muscles by i , with tendon force F_i and path length ℓ_i^{MT} . For a joint coordinate q , define $\ell'_i = d\ell_i^{MT}/dq$ and $\ell''_i = d^2\ell_i^{MT}/dq^2$. Write joint moment as τ_q to distinguish it from the activation time scale. A declared quasistatic path-force law at fixed activation gives

$$\tau_q = -\sum_i F_i \ell'_i, \quad K_q = -\frac{d\tau_q}{dq} = \sum_i [k_i (\ell'_i)^2 + F_i \ell''_i], \quad k_i = \frac{dF_i}{d\ell_i^{MT}}.$$

Material response and changing moment arms both contribute. Define how fiber and tendon equilibrate when calculating k_i . Frozen states, quasistatic relaxation and dynamic

impedance are different experiments; activation dynamics, frequency and feedback matter to the last.

Equal excitation of unequal antagonists does not generally balance their moments. Symmetric force capacities and opposite matched moment arms can preserve equilibrium under balanced coactivation, but that is a controlled example, not a conclusion about biceps and triceps. The active descending length branch and geometric term also prevent a universal positive-stiffness guarantee.

3.5 The Hill Model as a Coupled Dynamical System

For the declared equilibrium model,

$$\dot{a} = (u - a)/\tau(u, a), \quad (3.11)$$

$$\dot{\ell}^M = v^M(a, \ell^M, \ell^{MT}), \quad (3.12)$$

using (3.9) only on its admissible domain. Pennation, tendon geometry, constitutive ranges and invertibility restrict the state space; it is not the unrestricted product $[0, 1] \times \mathbb{R}_{>0}$.

With prescribed joint motion, path length is an input signal. In forward dynamics it is $\ell^{MT}(\mathbf{q})$ inside a feedback coupling: excitation changes muscle state, tension changes skeletal loads, and motion changes muscle length. Zero net joint moment therefore does not imply inactive muscles, and identical joint trajectories can coexist with different coactivation and stored-energy histories.

Biomechanical Principle 3.3. Model Choice Follows the Question

Distinguish prescribed-fiber evaluation, compliant equilibrium simulation, damped equilibrium simulation, and rigid-tendon approximation. Each answers a different mechanical question.

Millard and colleagues compared computational behavior and force fits in particular preparations, including rat and cat soleus [19]. Those results do not rank every model for every human task. Validation should name the muscle, population, loading protocol, predicted quantity, parameter estimation and independent test data. A fit to swing kinematics cannot alone validate individual muscle force.

Exercises

1. **Force-Length Range.** Plot f_L for $\gamma \in \{0.3, 0.45, 0.6\}$ and derive the half-height interval. Explain why its endpoints are not anatomical limits. Independently check passive continuity, nonnegativity and $f_{PE}(1 + \varepsilon_0) = 1$.
2. **Velocity and Its Inverse.** Plot both branches at $a = 0.5$ and 1. Mark unloaded shortening, the isometric point and the unattained lengthening asymptote. Verify forward/inverse agreement at $r = 0.4$ and 1.2. Compare one-sided slopes at zero velocity.
3. **Activation Timing.** Use the stated 15/50 ms parameters, $a(0) = 0$, and $u = 1$ for 200 ms followed by $u = 0$. Compare integration with the analytic solutions. Measure

decay relative to the actual state at switch-off, distinguishing it from decay starting at one.

4. **Tendon Shape and Energy.** Use a synthetic teaching tendon with $\ell_T^s = 0.25$ m, $F_0 = 4000$ N, $\varepsilon_{0T} = 0.04$ and $k_T = 35$. Compute stretch at $0.5F_0$, $0.75F_0$ and F_0 , and integrate stored energy. Repeat with $k_T = 10$. Explain why both laws share the reference force but have different stiffness. These choices do not calibrate an Achilles tendon.
5. **Force Surface.** Plot active, passive and total *fiber* force over $0.5 \leq \tilde{\ell} \leq 1.6$ and $0 \leq a \leq 1$, at zero fiber velocity and zero pennation. Locate bounded-domain maxima. Explain why extrapolating the passive exponential to unbounded length gives no finite global total-force maximum.
6. **Equilibrium Simulation.** Implement the checked procedure for a prescribed path and excitation. Declare initial states, constitutive laws, root selection and domain policy. Verify force residual and power balance; report step-size convergence. Demonstrate a clear failure for an inadmissible state rather than a clipped trajectory.
7. **Antagonists and Geometry.** Begin with matched antagonists, opposite constant moment arms and a balanced equilibrium. Calculate torque and tangent stiffness as common activation changes. Then change one force capacity and introduce curved paths. Identify the symmetry assumptions needed to preserve equilibrium; distinguish tangent stiffness from impedance.
8. **Model Comparison.** Compare specified Thelen and Millard implementations using the same data and initialization. Report force error, solver cost and domain failures. Distinguish numerical regularization from physiological validation and identify evidence needed for a golf-swing claim.

Chapter 4

Joint Kinematics and Soft Tissue

Draft Notice. This chapter is a provisional modeling reference. Its manufactured examples check mechanics and numerical conventions; they do not identify a golfer's joint axes, ligament properties, tissue loads, or injury risk.

4.1 What an Ideal Joint Represents

A revolute joint admits one relative rotation about a fixed line. A spherical joint admits three relative rotations about a fixed center. These are declared model reductions, not literal descriptions of every displacement of articular surfaces. Their usefulness depends on the motion, loading and output being studied. A model sufficient for clubhead trajectory can still be inadequate for estimating joint contact or ligament loads. Conversely, adding coordinates without observations or constitutive information need not improve an estimate.

Three questions must remain distinct: what relative motion was observed, what motions the model permits, and what forces produced that motion. Joint geometry links these questions through moment arms, constraints and contact conditions, but kinematics alone does not answer the force question. Chapters 5–7 develop those links to multibody dynamics, inverse inference and measurement uncertainty.

4.2 The Instantaneous Screw Axis

Let $T(t) = (R(t), \mathbf{p}(t))$ describe one rigid segment relative to a reference segment. All following derivatives are relative to that reference frame, not absolute laboratory velocities unless the reference is stationary there. A material point with fixed moving-segment coordinates $\mathbf{X}$ has $\mathbf{x} = R\mathbf{X} + \mathbf{p}$. Define $[\boldsymbol{\omega}]_{\times} = \dot{R}R^T$ and

$$\dot{\mathbf{x}} = \mathbf{v}_s + \boldsymbol{\omega} \times \mathbf{x}, \quad \mathbf{v}_s = \dot{\mathbf{p}} - \boldsymbol{\omega} \times \mathbf{p}. \quad (4.1)$$

Thus $\mathbf{v}_s$ is the translational component of the spatial twist in the selected reference frame. It is the velocity field evaluated at that frame's origin, which need not contain an actual material point. It is generally not $\dot{\mathbf{p}}$, the velocity of the moving frame origin. A measured point velocity $\mathbf{u}_P$ at $\mathbf{r}_P$ gives $\mathbf{v}_s = \mathbf{u}_P - \boldsymbol{\omega} \times \mathbf{r}_P$. These definitions agree with $[V_s] = \dot{T}T^{-1}$; a body twist $[V_b] = T^{-1}\dot{T}$ uses a different frame representation [18].

Definition 4.1. Finite Instantaneous Screw Axis

For $\|\boldsymbol{\omega}\| > 0$, define

$$\hat{\mathbf{s}} = \frac{\boldsymbol{\omega}}{\|\boldsymbol{\omega}\|}, \quad h = \frac{\boldsymbol{\omega} \cdot \mathbf{v}_s}{\|\boldsymbol{\omega}\|^2}, \quad \mathbf{q} = \frac{\boldsymbol{\omega} \times \mathbf{v}_s}{\|\boldsymbol{\omega}\|^2}. \quad (4.2)$$

The axis is the entire line $\mathbf{q} + \lambda \hat{\mathbf{s}}$, for real λ . The chosen $\mathbf{q}$ is the point on that line nearest the reference origin: $\mathbf{q} \cdot \boldsymbol{\omega} = 0$. At every point of the line, the velocity field equals $h\boldsymbol{\omega}$. The pitch h is translation per angular displacement, in metres per radian when angular speed is expressed in radians per second.

Indeed, substituting the formula for $\mathbf{q}$ into $\mathbf{v}_s + \boldsymbol{\omega} \times \mathbf{q}$ leaves exactly the component of $\mathbf{v}_s$ parallel to $\boldsymbol{\omega}$. The axis formula applies to nonzero pitch as well as pure rotation. When $\boldsymbol{\omega} = 0$ and $\mathbf{v}_s \neq 0$, the motion is a pure translation with no unique finite screw line; its direction is still defined. When both vanish, no motion axis is identified. Near zero angular speed, axis location is sensitive to velocity errors. A numerical threshold prevents a singular calculation but does not establish a measurement's signal-to-noise ratio. A finite-displacement helical axis inferred between two poses is also not generally the instantaneous axis at either endpoint.

4.2.1 A Reproducible Frame Example

Take $\boldsymbol{\omega} = (0, 0, 2)$ rad/s, $\mathbf{q} = (0.03, -0.02, 0)$ m and $h = 0.005$ m/rad. Then $\mathbf{v}_s = (-0.04, -0.06, 0.01)$ m/s. At $\mathbf{p} = (0.10, 0.20, -0.10)$ m, the moving-origin velocity is $\dot{\mathbf{p}} = (-0.44, 0.14, 0.01)$ m/s. Recovering $\mathbf{v}_s$ first gives the correct axis. Passing $\dot{\mathbf{p}}$ directly instead gives $(-0.07, -0.22, 0)$ m: a different line. This is a reference-point mistake, not evidence of anatomical axis migration.

The listing accepts finite three-vectors in one frame and rejects motions for which it does not report a finite axis. The default angular threshold is a numerical example in rad/s; select a justified threshold from the actual measurement uncertainty before interpreting experimental axes.

```

1 import numpy as np
2
3
4 def compute_isa(
5     omega: np.ndarray,
6     v: np.ndarray,
7     angular_threshold: float = 1e-8,
8 ) -> tuple[np.ndarray, np.ndarray, float]:
9     """Return nearest axis point, direction and pitch.
10
11     omega: rad/s; v: spatial twist component in m/s.
12     Both are finite (3,) vectors in the same frame.
13     The threshold is positive, finite and in rad/s.
14     Translation, rest and subthreshold rotation raise.
15     """
16     omega = np.asarray(omega, dtype=float)
17     v = np.asarray(v, dtype=float)
18     if omega.shape != (3,) or v.shape != (3,):
19         raise ValueError("Expected two three-vectors")
20     if not np.isfinite(omega).all() or not np.isfinite(v).all():

```

```

21     raise ValueError("Twist must be finite")
22     if not np.isfinite(angular_threshold) or angular_threshold <= 0:
23         raise ValueError("Invalid angular threshold")
24     speed = np.linalg.norm(omega)
25     if not np.isfinite(speed) or speed <= angular_threshold:
26         raise ValueError("No resolved finite screw axis")
27     direction = omega / speed
28     point = np.cross(direction, v) / speed
29     pitch = float(np.dot(direction, v) / speed)
30     if not np.isfinite(point).all() or not np.isfinite(pitch):
31         raise ValueError("Axis calculation exceeds numeric range")
32     return point, direction, pitch

```

Listing 4.1: Finite Screw Axis From a Declared Spatial Twist

4.2.2 Migration Must Be Derived From Motion

For a transparent planar example, prescribe $R = R_z(\theta)$ and $\mathbf{p} = (a\theta, 0, 0)$, where a is a constant length and $\dot{\theta} \neq 0$. Then $\boldsymbol{\omega} = (0, 0, \dot{\theta})$ and $\mathbf{v}_s = (a\dot{\theta}, -a\theta\dot{\theta}, 0)$, so

$$\mathbf{q} = (a\theta, a, 0), \quad h = 0. \quad (4.3)$$

The axis migrates even though the motion has just one independent coordinate. The moving frame origin follows a different path, $(a\theta, 0, 0)$. This example is derived from a specified rigid transform; it is not a knee model and a is not a measured rolling-to-sliding ratio. A curve drawn directly as “ISA position” without its velocity field cannot establish a joint’s rolling or sliding mechanics.

4.3 Biological Geometry and Model Mobility

4.3.1 The Knee

Descriptions of tibiofemoral motion must identify which segment moves relative to which, the anatomical coordinate convention, flexion interval and loading protocol. Surface-contact location, material-point velocity and instantaneous screw-axis location are different quantities. In a contact model, rolling and sliding are assessed using the relative tangential velocities of contacting material points; the migration of a contact location alone does not separate them.

A quasistatic knee model can solve relative pose from prescribed loading, articular geometry, ligament paths and constraints. Blankevoort and Huiske’s model explicitly made such assumptions and included ligament wrapping [4]. Its assumptions and specimen geometry do not supply a universal axis path or a universal axial rotation angle during a golf swing. A changing ISA is compatible with several possible joint models and does not, by itself, identify a ligament’s force or stiffness. For this reason, this chapter does not prescribe a generic numerical screw-home curve as anatomical evidence.

4.3.2 The Shoulder Complex

The glenohumeral, acromioclavicular and sternoclavicular articulations participate in shoulder motion; scapulothoracic motion describes the scapula relative to the thorax. A model may approximate some articulations with spherical joints, but then their admitted rotations,

suppressed translations and connections must be explicit. A translation magnitude is not a count of degrees of freedom.

For a free rigid scapula with six local coordinates, one maintained frictionless point-on-surface equation $g(q) = 0$ removes one freedom if its Jacobian has rank one, leaving five locally. Two independent such equations leave four. Requiring a particular surface normal or orientation adds different conditions. These are model choices, not consequences of the phrase “surface contact.” A unilateral contact can also open; the equality describes only its maintained-contact mode. The clavicle and the rest of the shoulder chain can add further constraints.

Seth and colleagues instead parameterized scapulothoracic motion using four coordinates: two for position on an ellipsoidal surface, upward rotation and winging. Their formulation permits the medial border to lift away from the surface [34]. This is a concrete counterexample to the claim that scapulothoracic motion necessarily consists of two translations with no lift-off. It remains a particular model, not a universal anatomical mobility count.

4.4 Ligament Force, Length and Stiffness

For an elastic tensile line element, let $\ell_0 > 0$ be its zero-load length and $\varepsilon = (\ell - \ell_0)/\ell_0$. A continuous quadratic-to-linear law is

$$F(\varepsilon) = \begin{cases} 0, & \varepsilon \leq 0, \\ k\varepsilon^2/(4\varepsilon_1), & 0 < \varepsilon \leq 2\varepsilon_1, \\ k(\varepsilon - \varepsilon_1), & \varepsilon > 2\varepsilon_1, \end{cases} \quad k > 0, \quad \varepsilon_1 > 0. \quad (4.4)$$

This line-element approximation appears in the knee-model formulation of Blankevoort and Huiskes [4]. Here k has units of newtons, because strain is dimensionless. Both branches at $2\varepsilon_1$ give $F = k\varepsilon_1$ and $dF/d\varepsilon = k$; at zero both force and slope vanish. Thus the law is C^1 , although its second derivative changes at the joins. Independent coefficients in these two branches would generally destroy continuity.

The length tangent is $dF/d\ell = (dF/d\varepsilon)/\ell_0$, in N/m. For the manufactured values $k = 1000$ N, $\varepsilon_1 = 0.03$ and $\ell_0 = 0.10$ m, strains 0.03, 0.06 and 0.09 give forces 7.5, 30 and 60 N and length tangents 5000, 10000 and 10000 N/m. The number 0.03 is an example parameter, not a universal tissue transition. An anatomical reference pose may already be prestrained; its path length is not necessarily ℓ_0 .

Path geometry also matters. With $r = -d\ell/dq$ for one coordinate, the generalized ligament load is $Q = rF$. Its restoring tangent is

$$-\frac{dQ}{dq} = r^2 \frac{dF}{d\ell} - F \frac{dr}{dq}. \quad (4.5)$$

A joint stiffness therefore cannot be obtained from the material force slope alone. Wrapping changes path length and its derivatives. This connects directly to Chapter 5’s geometric stiffness term. The line-element law omits rate dependence, hysteresis, damage and distributed stress; it cannot independently predict failure.

4.5 A Local Model of Spinal Compliance

Representing adjacent vertebrae as rigid bodies permits six relative motion components; a constitutive law couples their resisting loads. This is distinct from granting six unresisted motions. An isolated disc model and a complete functional spinal unit, including other structures, require different parameters. The following is a declared local elastic abstraction, not a calibrated spine model.

About a specified reference pose and preload, choose small translational and rotational increments $\delta = (\mathbf{u}, \phi)$ in one frame and at a stated reduction point. Order the conjugate restoring wrench increment as $\Delta W = (\Delta \mathbf{f}, \Delta \mathbf{m})$ so that incremental power is $\Delta W^T \delta$. Then

$$\Delta W = -K\delta, \quad K = \begin{pmatrix} K_{uu} & K_{u\phi} \\ K_{\phi u} & K_{\phi\phi} \end{pmatrix}. \quad (4.6)$$

The minus sign describes the resisting load on the displaced segment; the external load required to hold it has the opposite sign. The block units are N/m, N/rad, Nm/m and Nm/rad, respectively. For a conservative local quadratic energy $U = \frac{1}{2} \delta^T K \delta$, K is symmetric in these conjugate coordinates; positive definiteness describes a strictly stable elastic reference for this abstraction. This need not hold for an arbitrary fitted, preloaded, nonconservative or incompletely specified model. Finite rotation increments, frame changes and shifted moment reference points require consistent transformations.

The same principles govern a golf model: select enough joint motion to address the question, declare the elastic and contact assumptions, and carry the same frames into force and power calculations. Reproducing a swing trajectory alone does not identify the tissue parameters that support it.

Exercises

1. **Frame Recovery.** Reproduce the numerical screw example. Verify the velocity at three points along its axis. Translate the reference origin by $\mathbf{c} = (0.02, 0.01, 0)$ m without rotating axes: show $\mathbf{v}'_s = \mathbf{v}_s + \boldsymbol{\omega} \times \mathbf{c}$. Compare the same geometric axis line in both frames, accounting for the new nearest-point representative.
2. **Motion and Axis Paths.** Set $a = 0.03$ m in the manufactured planar transform. Plot the origin and ISA paths for $0 \leq \theta \leq \pi/2$. Verify the computed axis using numerical derivatives of T at interior points. Explain why an axis path is neither a contact path nor evidence of a biological mechanism.
3. **Constraint Rank.** Write the scalar equation for a body-fixed point lying on a sphere of radius b . Linearize it with respect to the body's six local pose increments. State when its rank is one and why two coincident copies of the equation do not remove two freedoms.
4. **Ligament Continuity.** Derive force and strain tangent at both joins; reproduce the three numerical force/length-tangent pairs. For a varying moment arm, derive the additional geometric stiffness term and explain its sign.
5. **Local Elastic Energy.** With translations in metres and rotations in radians, take the following values in the corresponding block units:

$$K = \text{diag}(1000, 1000, 2000, 10, 10, 20),$$

$$\delta = (0, 0, 0.001, 0, 0, 0.01).$$

Compute the restoring wrench and U ; check that their mechanical powers obey $W^T \dot{\delta} = -\dot{U}$.

Chapter 5


Multi-Body Dynamics of Biological Chains

Draft Notice. This chapter is a provisional mechanical reference. Its manufactured examples check model identities; they do not identify a person’s muscle forces or validate a particular anatomical model.


A biological chain combines several kinds of coupling. Inertia couples accelerations; a muscle path distributes tension across coordinates; a contact can constrain motion; and muscle states limit how neural excitation changes force. These mechanisms must be distinguished before interpreting the golf swing as coordinated or low-dimensional.

5.1 Open-Chain vs. Closed-Chain Biomechanics

A tree of rigid segments is a useful starting model, with a floating pelvis and articulated limbs. Connecting both hands to the same rigid club can close a loop through the arms and trunk. A fixed foot constrains motion relative to the world, but one contact does not automatically create the same internal loop as a two-hand grip. Multiple supports can introduce additional loop constraints. The result depends on which bodies, joints and contact freedoms the model includes.



Open Chain



Two-Hand Loop

For a stationary holonomic constraint $\phi(q) = 0$, permissible velocities obey $J_c(q)v = 0$, and accelerations obey $J_c\dot{v} + \dot{J}_c v = 0$ in the chosen velocity coordinates. Ideal constraint reactions do no work on those permissible velocities. A frictional ground contact also requires unilateral normal force and an appropriate friction law: solving a bilateral constraint equation does not prove that the foot remains in contact or does not slip. Grip compliance and club flexibility likewise change the rigid-loop approximation.

5.1.1 Equations of Motion for Biological Chains

Let $q \in \mathbb{R}^{n_q}$ describe configuration locally or through a constrained representation, and let $v \in \mathbb{R}^{n_v}$ contain generalized speeds. Write $\dot{q} = N(q)v$; for independent local angle and translation coordinates, $N = I$ and $v = \dot{q}$. A quaternion orientation uses four entries for three rotational freedoms, so n_q and n_v need not match [35]. A declared rigid-segment model has the form

$$M(q)\dot{v} + h(q, v) = R_v(q)F_T + Q_{\text{other}} + J_c(q)^T \lambda, \quad (5.1)$$

where M is $n_v \times n_v$, h includes inertial velocity terms and gravity, $F_T \in \mathbb{R}^p$ contains tendon tensions, and Q_{other} contains additional modeled loads. These can include passive ligaments, damping or external actuators; count each contribution once. The reaction vector λ and Jacobian must be power-conjugate: $\lambda^T J_c v$ is contact power. For a spatial wrench, its force, moment, point and frame must all be declared.

If $\ell_i^{MT}(q)$ is a differentiable musculotendon path length and tension $F_{T,i} \geq 0$ pulls along that path, define

$$R_{q,ji} = -\frac{\partial \ell_i^{MT}}{\partial q_j}, \quad R_v = N^T R_q, \quad \dot{\ell}^{MT} = -R_v^T v.$$

Then the muscle contribution and its power are

$$Q_M = R_v F_T, \quad Q_M^T v = -F_T^T \dot{\ell}^{MT}. \quad (5.2)$$

These are generalized loads: angular rows give moments, while translational rows give forces. Tendon tension need not equal fiber force when pennation or other transmission geometry intervenes (Chapter 3). For a free-body description using overall pose and internal joint coordinates, internal muscle path lengths are invariant to overall rigid motion; muscle loads cannot supply an independent external base wrench.

Force is an admissible idealized input if the model explicitly assumes direct force actuation. In a muscle-driven model it instead follows from activation, contraction and tendon states and their constitutive equations [19]. Excitation, activation, fiber force and tendon tension are different quantities. Prescribing activation bypasses activation dynamics; it does not automatically specify tendon force or remove the need for contraction assumptions.

5.1.2 Bi-Articular Muscles

A muscle crossing two joints contributes one tension to two generalized loads. Engineering tendon drives can do this too. Sharing an actuator does not impose a relation $\phi(q) = 0$ between the joint angles; ordinary compliant muscle coupling therefore does not reduce the configuration dimension. An imposed fixed musculotendon length would be an additional idealized constraint. The rank and feasible image of R_v describe instantaneous force allocation, not the number of kinematic freedoms or nonlinear controllability by themselves.

Biomechanical Principle 5.1. Power Accounting Across Two Joints

For two local joint angles with moment arms r_1, r_2 , the coordinate powers are $P_1 = r_1 F_T \dot{q}_1$ and $P_2 = r_2 F_T \dot{q}_2$. Their sum is $-F_T \dot{\ell}^{MT}$. Opposite coordinate powers can cancel while tension remains nonzero. Cancellation establishes a skeletal coordinate-

power balance, not zero metabolic cost or a uniquely identified energy path between physical segments. If the musculotendon unit shortens, lengthens or stores elastic energy, its net mechanical exchange must also enter the ledger.

For a manufactured example, $r_1 = -0.03$ m, $r_2 = 0.04$ m, $F_T = 500$ N and $(\dot{q}_1, \dot{q}_2) = (2, 1.5)$ rad/s give $P_1 = -30$ W, $P_2 = 30$ W and $\dot{\ell}^{MT} = 0$. Changing the second velocity to 1 rad/s gives $\dot{\ell}^{MT} = 0.02$ m/s and net skeletal power -10 W. These numbers illustrate the signs; they are not gastrocnemius measurements. For the swing, the analogous analysis must distinguish joint-coordinate powers, segment boundary wrench powers and muscle/tendon storage before claiming proximal-to-distal energy transfer.

```

1 import numpy as np
2
3
4 def compute_joint_torques(
5     moment_arms: np.ndarray,
6     muscle_forces: np.ndarray,
7 ) -> np.ndarray:
8     """Map nonnegative tendon tensions to generalized muscle loads.
9
10    R has shape (n_coordinates, n_muscles), and R[j, i] is
11    -d(length_i)/d(q_j). Rotational rows give moments in N*m;
12    translational rows give forces in N for meter coordinates.
13    This map does not determine tension from neural excitation.
14    """
15    if np.iscomplexobj(moment_arms) or np.iscomplexobj(muscle_forces):
16        raise ValueError("Inputs must be real")
17    r = np.asarray(moment_arms, dtype=float)
18    force = np.asarray(muscle_forces, dtype=float)
19    if r.ndim != 2 or force.ndim != 1 or r.shape[1] != force.size:
20        raise ValueError("Require R:(n,p) and tension:(p,)" )
21    if not np.isfinite(r).all() or not np.isfinite(force).all():
22        raise ValueError("Inputs must be finite")
23    if np.any(force < 0):
24        raise ValueError("Tension must be nonnegative")
25    return r @ force
26
27
28 # Manufactured two-angle, four-tendon example; not anatomy data.
29 R = np.array([[0.05, 0.03, -0.025, 0.0],
30              [0.0, 0.04, -0.020, 0.03]])
31 force = np.array([200.0, 150.0, 100.0, 120.0])
32 torque = compute_joint_torques(R, force) # [12.0, 7.6] N*m

```

Listing 5.1: Mapping Tendon Tension to Generalized Muscle Loads

5.1.3 Co-Contraction and Joint Stiffness

Define restoring tangent stiffness in independent local coordinates as $K = -\partial Q_M / \partial q$, under stated activation, velocity and internal-state or equilibrium conditions. In a quasistatic model with $F_T = F_T(\ell^{MT})$ and $K_{MT} = \partial F_T / \partial \ell^{MT}$,

$$K = R_q K_{MT} R_q^T - \sum_i F_{T,i} \frac{\partial r_i}{\partial q}, \quad (5.3)$$

where r_i is column i of R_q . The first term is the material contribution; the second reflects changing moment arms. A scalar constant-arm model reduces to $K = \sum_i r_i^2 k_i$. A fiber force-length slope is not automatically the effective musculotendon stiffness or the experimentally measured short-range stiffness. For aligned, nonpennate linear muscle and tendon springs in series, $k_{MT} = (k_M^{-1} + k_T^{-1})^{-1}$; pennation, state dependence and history require their own derivation.

Matched antagonists can increase positive material stiffness while their net moment cancels. For constant moment arms $+0.03$ and -0.03 m, equal tensions cancel, and two effective stiffnesses of 1000 N/m give $K = 1.8$ N m/rad. Unequal forces or changing geometry need not preserve that balance. Muscle force-length branches and geometric terms can also change the sign of tangent stiffness. Neither a universal increase nor independent control of every impedance component follows from co-contraction alone. Impedance additionally involves inertia, damping, feedback and timescale; static tangent stiffness is only one part of it (Chapter 3).

5.2 The Mass Matrix of the Human Body

The composite rigid body algorithm applies after selecting the tree, velocity coordinates and physically admissible segment inertias. Product-of-exponentials kinematics is one compatible representation, not a compulsory preprocessing step. The kinetic energy is $T = \frac{1}{2} v^T M(q) v$. Positive definiteness requires that every nonzero modeled speed produce positive kinetic energy; redundant coordinates, singular parameterizations or massless unregularized freedoms can violate this condition. A model with 20 independent speeds has a 20×20 mass matrix, but naming body regions does not establish that count.

For constraints represented by $v = Z(q)w$, where Z spans admissible velocities, the reduced kinetic matrix is $Z^T M Z$. Constraint multipliers and reaction-force indeterminacy are separate from the positive definiteness of this reduced matrix. This distinction matters in a two-hand club model: closing the loop changes admissible motion and reactions without making the underlying segment inertias nonphysical.

Exercises

1. **Bi-Articular Power.** Reproduce both numerical power examples. Explain why zero total musculotendon length rate does not establish zero fiber work, tendon energy change or metabolic expenditure individually.
2. **Co-Contraction.** Reproduce the 1.8 N m/rad stiffness example. Then take $r_1(q) = 0.03 + 0.005q$ m and $r_2 = -0.03$ m at $q = 0$, with both tensions 100 N and both $k_{MT} = 1000$ N/m. Include the geometric term and verify $K = 1.3$ N m/rad by differentiating the local torque law.
3. **Mass Matrix.** Use a planar two-link arm with relative joint angles, link lengths 0.3 m, masses 1 kg, midpoint centers of mass and centroidal inertias $mL^2/12$. Derive $M(q)$ and inspect its eigenvalues at elbow angles 0 , $\pi/2$ and π . Report the coordinate scaling when comparing condition numbers.
4. **Algorithm Comparison.** For the same manufactured links plus a third identical link, implement or call CRBA and compare with another dynamics implementation

using identical joint frames and inertias. Check $\frac{1}{2}v^T M v$ against summed segment kinetic energies.

5. **Forward Simulation.** For the two-link arm, explicitly choose direct tendon-force inputs and use the listing's R with constant tensions. Declare gravity, initial conditions and integration tolerances. Then explain which additional equations and parameters are needed to replace prescribed forces by neural excitations; do not call the force-driven example a validated muscle-driven reach.

Chapter 6

Inverse Problems in Biomechanics

Draft Notice. This chapter is a provisional inference reference. Reproducing a prescribed motion or a synthetic example does not validate individual muscle forces, joint contact loads or a subject-specific biological explanation.

Force plates measure external wrenches; cameras and other sensors provide observations used to estimate movement. Inverse dynamics combines these data with geometry and inertia to estimate net generalized loads. Muscle-force inference adds another layer of assumptions. Keeping those layers separate is essential when interpreting a measured golf swing.

6.1 The Inverse Dynamics Pipeline

Using Chapter 5’s speed coordinates, define the generalized load still required after subtracting declared external and separately modeled loads:

$$Q_{\text{req}} = M(q)\dot{v} + h(q, v) - J_{\text{ext}}(q)^T \lambda_{\text{ext}} - Q_{\text{known}}. \quad (6.1)$$

Here λ_{ext} acts on the modeled body, so subtracting it from $M\dot{v} + h$ is the appropriate inverse-dynamics rearrangement. Q_{known} can contain an explicitly modeled passive force; omit it if that contribution is intentionally included in the net load being inferred. Do not subtract the same passive contribution again during muscle allocation. In an independent coordinate chart, $v = \dot{q}$ and $h = C(q, \dot{q})\dot{q} + g(q)$ gives the familiar expression [20].

Angular-coordinate components are moments and translational components are forces. For a floating model with unactuated overall pose, the corresponding six components should vanish when motion, inertial properties and external wrenches are dynamically consistent. Nonzero base components are residual forces and moments, not biological joint actuators. They can indicate several measurement or modeling discrepancies; neither their removal by optimization nor a small residual uniquely validates the model.

The workflow comprises observation processing, kinematic estimation, differentiation and net-load calculation, followed optionally by muscle-force inference. In a marker workflow, joint speeds and accelerations are derived from estimated motion, not directly read from the camera. Filtering, soft tissue artifact, frame calibration and timing affect the result together (Chapter 7). Net generalized loads do not uniquely specify individual muscle forces or joint contact forces.

Known per-contact wrenches can be mapped through their Jacobians. If only the combined ground wrench is known, its division between the feet is an additional unknown;

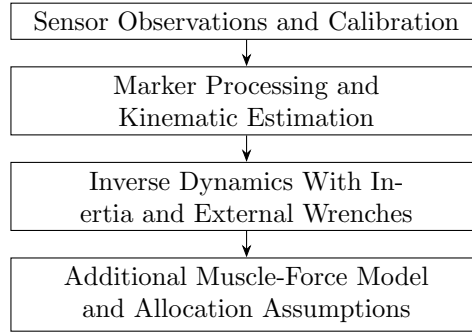


Figure 6.1: The Inverse Dynamics Pipeline and Its Additional Modeling Layers.

similarly, one resultant club wrench does not identify each hand's contribution. Closed-loop reactions require the selected constraint model and sufficient boundary data or additional allocation assumptions.

6.1.1 Inverse Kinematics

For measured marker positions m_i^{meas} in a common frame, a basic single-frame estimate minimizes

$$q^* \in \arg \min_q \sum_i w_i \|m_i^{\text{model}}(q) - m_i^{\text{meas}}\|^2, \quad (6.2)$$

with nonnegative weights and at least one positive weight. The model geometry, constraints and marker placement are part of this inference. Weights may encode confidence, but scalar weights do not describe arbitrary correlated three-dimensional measurement noise. The argmin may contain several solutions, and a numerical solver may only find a local stationary fit.

The listing is deliberately an unconstrained local-coordinate example. It rejects missing observations, invalid weights and mismatched model shapes, and reports optimizer failure rather than silently returning its last iterate. L-BFGS-B convergence has explicit numerical stopping conditions [28]; convergence does not prove identifiability or anatomical accuracy. The model callback must be deterministic and side-effect free over its declared coordinate domain. A production protocol must additionally declare joint limits, loop constraints, coordinate charts, dropout policy, initialization, residual diagnostics and continuity checks. Adding those assumptions changes the estimator.

```

1 from collections.abc import Callable
2
3 import numpy as np
4 from scipy.optimize import minimize
5
6
7 def inverse_kinematics_frame(
8     marker_positions_measured: np.ndarray,
9     marker_positions_model_func: Callable[[np.ndarray], np.ndarray],
10    q_initial: np.ndarray,
11    weights: np.ndarray | None = None,
12 ) -> np.ndarray:
13     """Fit markers locally in an unconstrained coordinate chart.
```

```

14
15     Measurements and predictions have shape (markers, 3), in meters.
16     Weights are finite, nonnegative and not all zero. Resolve missing
17     markers explicitly before calling. Success is solver convergence,
18     not anatomical accuracy, identifiability or a global optimum.
19     """
20     measured = np.asarray(marker_positions_measured, dtype=float)
21     q0 = np.asarray(q_initial, dtype=float)
22     if (
23         measured.ndim != 2
24         or measured.shape[1] != 3
25         or not len(measured)
26     ):
27         raise ValueError("Expected a nonempty (markers, 3) array")
28     if q0.ndim != 1 or not q0.size:
29         raise ValueError(
30             "Initial coordinates must be a nonempty vector"
31         )
32     if not np.isfinite(measured).all() or not np.isfinite(q0).all():
33         raise ValueError("Resolve missing/nonfinite inputs first")
34     w = (
35         np.ones(len(measured))
36         if weights is None
37         else np.asarray(weights)
38     )
39     if w.shape != (len(measured),) or not np.isfinite(w).all():
40         raise ValueError("Require one finite weight per marker")
41     if np.any(w < 0) or not np.any(w > 0):
42         raise ValueError(
43             "Weights must be nonnegative and not all zero"
44         )
45
46     def objective(q: np.ndarray) -> float:
47         predicted = np.asarray(
48             marker_positions_model_func(q), dtype=float
49         )
50         if predicted.shape != measured.shape:
51             raise ValueError(
52                 "Prediction shape must match observations"
53             )
54         if not np.isfinite(predicted).all():
55             raise ValueError("Model predictions must be finite")
56         return float(np.sum(w[:, None] * (predicted - measured) ** 2))
57
58     result = minimize(objective, q0, method="L-BFGS-B")
59     if not result.success or not np.isfinite(result.x).all():
60         raise RuntimeError(f"IK fit failed: {result.message}")
61     if not np.isfinite(objective(result.x)):
62         raise RuntimeError("IK fit has a nonfinite final residual")
63     return result.x

```

Listing 6.1: A Local Single-Frame Marker Fit With Failure Checks

6.1.2 Bottom-Up vs. Top-Down Inverse Dynamics

Newton–Euler balance propagates forces and moments from a boundary where the necessary loads are known or modeled. Lower-limb analysis often starts from measured foot–ground loads. An upper-limb calculation may start at a free hand or a measured hand–object

interface. A free endpoint is a zero-load assumption only when no appreciable external interaction occurs there. Labels such as bottom-up and top-down are anatomical descriptions, not a universal accuracy ordering or a way to avoid unknown external forces. Changing recursion direction does not add missing information. With consistent boundary conditions and conventions, equivalent balances must agree.

6.2 The Muscle Redundancy Problem

After assigning known passive loads and contact reactions, suppose muscle tensions must satisfy

$$R_v(q)F_T = Q_M, \quad 0 \leq F_T \leq F_{\max}, \quad (6.3)$$

where the bounds are part of a declared instantaneous model. The feasible load set is the image

$$\mathcal{T}(q) = \{R_v(q)F : 0 \leq F \leq F_{\max}\}.$$

It is a convex polytope for fixed finite independent bounds; with no upper bounds it is the cone generated by the columns of R_v . It is not an intersection of force-space inequalities with a load-space image. State-dependent muscle dynamics can further restrict which histories are realizable.

More muscle-force variables than load equations implies a linear nullspace, but does not guarantee a feasible nonnegative solution or more than one feasible solution at a boundary. For $R = [1 \ 1]$ and nonnegative forces, a negative target is infeasible, a zero target has the unique solution $(0, 0)$, and a positive target has multiple solutions if upper bounds permit them. For antagonistic $R = [r \ -r]$, adding equal tensions preserves net torque while changing other outputs, such as stiffness or internal loading. Thus force sharing remains an inference problem even when the net torque is known.

6.2.1 Static Optimization

One transparent instantaneous approximation declares an effective active capacity $c_i(q, v) \geq 0$ and passive tendon tension $F_{P,i}(q, v) \geq 0$, and sets $F_{T,i} = a_i c_i + F_{P,i}$ for activation $0 \leq a_i \leq 1$. The capacity may include specified force-length, force-velocity and pennation factors only when the assumed tendon and fiber kinematics justify them. For this formulation, Q_M retains both active and passive muscle contributions; Q_{known} excludes the same $R_v F_P$ term. If passive muscle load was already subtracted, instead allocate only active tension to the remaining target. The optimization then reads

$$\begin{aligned} & \min_{0 \leq a \leq 1} \sum_i a_i^p, \\ & \text{subject to } R_v(\text{diag}(c)a + F_P) = Q_M. \end{aligned} \quad (6.4)$$

Here a is the decision variable and $p > 1$ is a modeling choice. For $p = 2$ the objective is squared activation in this declared model. Normalized total force F_T/F_0 is generally not activation; passive force, length, velocity and transmission geometry prevent that identification. Changing p to three does not turn the objective into measured metabolic energy.

Framewise static optimization does not integrate activation or tendon states. OpenSim's documented workflow explicitly distinguishes this approximation from muscle dynamics and emphasizes appropriate motion, model and external loads [22]. If the target is outside

the feasible set, report failure. Reserve actuators can be introduced as explicit additional variables with declared bounds and penalties, but their fitted contribution must be reported; they do not prove that the original muscles generated the required load.

For a checkable force-sharing example, let $a_1 + 2a_2 = 1$ and $0 \leq a_i \leq 1$. Minimizing $a_1^2 + a_2^2$ gives $(a_1, a_2) = (0.2, 0.4)$. Minimizing $a_1^3 + a_2^3$ instead gives $a_1 = 1/(1 + 2\sqrt{2})$ and $a_2 = \sqrt{2}/(1 + 2\sqrt{2})$. Both reproduce the same target; the chosen cost determines the allocation.

6.2.2 Computed Muscle Control (CMC)

In a local-coordinate tracking description, proportional-derivative feedback first specifies desired acceleration:

$$\ddot{q}_{\text{des}} = \ddot{q}_{\text{ref}} + K_v(\dot{q}_{\text{ref}} - \dot{q}) + K_p(q_{\text{ref}} - q). \quad (6.5)$$

This expression produces accelerations, not muscle excitations. CMC then allocates actuator controls to approach the desired acceleration over its selected look-ahead interval, and advances the muscle and body states in forward simulation [37, 21]. The allocation and dynamics, not the PD equation alone, connect excitation to motion. Bounds, initial muscle states, reserves and solver tolerances matter. Tracking error can remain when the requested motion is infeasible or the model and observations are inconsistent. Successful tracking is not unique recovery of the person's neural commands.

6.3 Parameter Estimation

Masses, inertias, joint geometry and muscle properties may be independently measured, assigned from prior evidence or estimated from task data; they are not all intrinsically unmeasurable. Each source has a different uncertainty model. A small tracking residual can also arise when an adjustable parameter compensates for incorrect external loads, timing or other model discrepancy.

6.3.1 Bayesian Framework

For parameters θ , observations y and a declared observation model,

$$p(\theta \mid y) \propto p(y \mid \theta)p(\theta), \quad (6.6)$$

provided the posterior can be normalized. The likelihood must state what is observed and how noise, correlations and model discrepancy enter. Priors and physical bounds regularize inference but do not create new experimental information. Distinct parameter combinations can remain observationally equivalent; test sensitivity, identifiability and prediction on data outside the fitting interval.

Exercises

1. **Inverse Dynamics.** Use Chapter 5's two-link planar arm with q_1 measured counter-clockwise from horizontal and q_2 relative to link 1. Set downward gravity to 9.81 m/s^2 , no external hand load and $T = 1 \text{ s}$. For $q(t) = (\sin(\pi t/T), \pi t/(2T))$, derive velocities, accelerations and required torques; verify the total mechanical-power balance.

2. **Feasibility and Redundancy.** Reproduce the three cases for $R = [1 \ 1]$ and then impose $0 \leq F_i \leq 1$. Identify the complete feasible target interval and its boundary uniqueness.
3. **Cost-Dependent Allocation.** Derive both force-sharing examples above using a Lagrange multiplier. Verify constraints and bounds, and explain why neither result measures metabolic cost.
4. **Kinematic Inference.** Test the listing on a known rigid translation of two synthetic markers, then choose a model with an unobserved coordinate. Compare residuals and recovered coordinates. Force optimizer failure and confirm that the example reports it.


Chapter 7

Experimental Methods

Draft Notice. This chapter is a provisional methods reference. Its analytical and synthetic examples do not establish accuracy for a particular laboratory, patient population or golf-swing experiment.

A biomechanical inference links measurements to a model of the body and its environment. Camera calibration, marker-to-bone motion, filtering, force frames and clock alignment enter that link together. A small position residual does not by itself validate joint acceleration, muscle force or tissue loading. This chapter distinguishes the sensor observation from the inferred physical quantity and identifies checks needed before combining measurements.

7.1 Motion Capture Systems

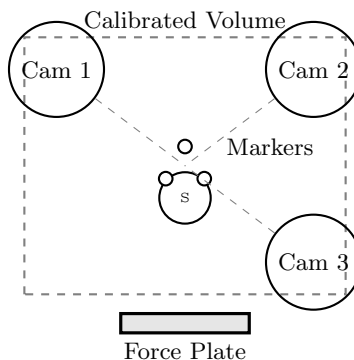

7.1.1 Marker-Based Systems

Optoelectronic systems estimate marker positions from calibrated camera images. Camera arrangement, exposure, sampling, marker identification and calibration volume determine the observation conditions [5]. Marker counts, diameters and nominal submillimeter instrument tolerances are configuration specifications, not universal biomechanical accuracy bounds. A protocol must state its anatomical landmarks, tracking clusters, occlusion handling and segment-frame construction. An instrument's sampling rate also does not determine its end-to-end latency or its ability to resolve a short impact event.

A camera tracks the visible marker rather than the underlying bone. Anatomical landmark placement, skin motion and the assumed joint geometry therefore enter the estimated

bone pose [15]. For golf, the same distinction applies to a torso marker cluster, a club-mounted marker and the particular point whose velocity is reported. A calibration check should include independent positions and motions over the intended working volume, with results expressed in the units and directions relevant to the task.

7.1.2 Markerless Systems

Video methods can estimate image keypoints, triangulated landmarks or model-based body states, depending on the camera configuration and estimator. These outputs are different objects: a visible image feature is not automatically an anatomical joint center in three dimensions. Accuracy depends on task, viewpoint, training domain, occlusion, clothing and the reference used for evaluation. A universal 10–30 mm error band or a blanket clinical-suitability judgment cannot be assigned to all markerless approaches. Validation must address the intended downstream quantity; position agreement alone does not validate differentiated accelerations or inverse-dynamics moments.

7.1.3 An Offline Processing Example

The following listing processes finite, uniformly sampled marker positions in meters; timestamps and gap handling must be established before calling it. It uses second-order filter sections for numerical stability and filters along the time axis [30, 31]. The caller supplies a cutoff rather than inheriting a universal 6 Hz choice. This is an offline forward-backward operation that uses future samples, not a causal real-time controller. At the specified single-pass Butterworth cutoff, ideal forward-backward amplitude is 1/2 (approximately –6 dB), since the single-pass magnitude is squared. The returned velocities and accelerations are finite-difference estimates, with unavailable endpoint derivatives marked as NaN rather than copied from neighbors. Padding can still affect nearby samples; record length and a justified edge-exclusion interval must be checked for each application.

```

1 import numpy as np
2 from scipy.signal import butter, sosfiltfilt
3
4
5 def process_mocap_data(
6     marker_data: np.ndarray,
7     sample_rate: float,
8     cutoff_freq: float,
9     filter_order: int = 4,
10 ) -> tuple[np.ndarray, np.ndarray, np.ndarray]:
11     """Offline example for finite, uniformly sampled positions in meters.
12
13     Input shape is (frames, markers, 3). cutoff_freq is the
14     single-pass Butterworth -3 dB frequency, not the two-pass
15     -3 dB frequency. Returned positions, velocities and accelerations
16     have the input shape and floating dtype. Endpoint derivatives
17     are NaN; additional edge exclusion needs task-specific checking.
18     Missing markers must be handled explicitly before this function.
19     """
20     if np.iscomplexobj(marker_data):
21         raise ValueError("Positions must be real-valued")
22     data = np.asarray(marker_data, dtype=float)
23     if data.ndim != 3 or data.shape[1] == 0 or data.shape[2] != 3:
24         raise ValueError("Expected shape (frames, markers, 3)")
25     if not np.isfinite(data).all():

```

```

26         raise ValueError("Resolve missing/nonfinite positions first")
27     sample_rate, cutoff_freq = float(sample_rate), float(cutoff_freq)
28     if not np.isfinite(sample_rate) or sample_rate <= 0:
29         raise ValueError("sample_rate must be positive and finite")
30     if not np.isfinite(cutoff_freq) or not 0 < cutoff_freq < sample_rate / 2:
31         raise ValueError("Require 0 < cutoff_freq < Nyquist frequency")
32     if (
33         isinstance(filter_order, (bool, np.bool_))
34         or not isinstance(filter_order, (int, np.integer))
35         or filter_order < 1
36     ):
37         raise ValueError("filter_order must be a positive integer")
38
39     padlen = 3 * (int(filter_order) + 1)
40     if data.shape[0] <= padlen + 1:
41         raise ValueError("Record too short for the declared padding")
42     sos = butter(filter_order, cutoff_freq, fs=sample_rate, output="sos")
43     positions = sosfiltfilt(sos, data, axis=0, padlen=padlen)
44     dt = 1.0 / sample_rate
45     velocities = np.full_like(positions, np.nan)
46     accelerations = np.full_like(positions, np.nan)
47     velocities[1:-1] = (positions[2:] - positions[:-2]) / (2 * dt)
48     accelerations[1:-1] = (
49         positions[2:] - 2 * positions[1:-1] + positions[:-2]
50     ) / dt**2
51     return positions, velocities, accelerations

```

Listing 7.1: Offline Marker Processing With Declared Frequency and Boundary Limits

7.1.4 Soft Tissue Artifact

Soft tissue artifact (STA) is motion of skin-mounted markers relative to bone. It can be a major source of error even when the cameras localize each marker precisely [15]. Peters and colleagues' review found reported magnitudes exceeding 30 mm on the thigh and reaching 15 mm on the tibia, with substantial variation and limitations in the included populations [26]. These are findings from lower-limb studies, not a universal interval for every marker, subject or swing.

STA can contain task-correlated motion within the frequency band of the biological signal; low-pass filtering therefore cannot generally separate it from bone movement. Cluster fitting can reduce sensitivity to some local errors but cannot remove a coherent displacement of the whole cluster relative to bone. Likewise, constrained inverse kinematics enforces a model and redistributes residuals; a smaller residual is not proof of more accurate bone motion. Report both translational and orientation uncertainty and test sensitivity of the inferred loads to plausible marker and joint-frame errors. Bone-referenced methods provide a different validation route, subject to their own calibration, field-of-view and measurement limitations.

7.1.5 Low-Pass Filter Cutoff Selection

A low cutoff can remove genuine rapid motion, while a high cutoff retains noise amplified by differentiation. In the frequency domain, differentiation multiplies a component by $i2\pi f$, and a second derivative by $-(2\pi f)^2$. It changes spectral weighting, not the frequency of a sinusoid. The need for acceleration therefore does not automatically prescribe a higher cutoff.

Winter’s residual-analysis construction compares samples x_i of one scalar coordinate trajectory with filtered samples $\hat{x}_i(f_c)$ [39, Section 3.4.4.3]:

$$R(f_c) = \sqrt{\frac{1}{N} \sum_{i=1}^N (x_i - \hat{x}_i(f_c))^2}.$$

Here N is the number of samples and f_c is the candidate cutoff frequency. If a suitable high-frequency portion of the residual curve is approximately linear, extrapolate that fitted portion to obtain an ordinate intercept R_0 . That intercept has the signal’s units, such as meters; it is not a frequency. The described compromise chooses the frequency where the residual curve intersects the horizontal level $R = R_0$. This is a conditional signal/noise heuristic, not a guaranteed global optimum or a universal walking, running or golf cutoff. State the fitted interval, filter response, endpoint treatment and sensitivity to plausible alternative choices.

Filtering must also be considered across modalities. Kristianslund and colleagues showed that changing the relationship between force and marker filtering changed inferred joint moments and participant rankings in a sidestep-cutting study [14]. A sharp force transient combined with strongly smoothed kinematics can leave incompatible terms in the equations of motion. That result motivates task-specific joint assessment of force and kinematic bandwidth; it does not establish one cutoff for every experiment. Preserve raw data and inspect event timing, derivatives and dynamic residuals after processing.

7.2 Electromyography (EMG)

EMG records electrical potentials associated with muscle-fiber activity through a particular electrode and recording arrangement. Surface EMG is affected by electrode geometry, placement, tissue conduction, crosstalk and movement artifact; it is not a direct readout of a unique neural command or muscle force. Intramuscular recordings sample differently and should not inherit a surface-electrode processing protocol without justification. An EMG-informed force estimate needs additional activation, contraction and tendon assumptions; agreement with kinematics alone does not identify those assumptions.

7.2.1 EMG Processing and Interpretation

Specify the recording bandwidth, sample rate and analog anti-aliasing before selecting digital filters. A common envelope workflow is band-pass filtering, full-wave rectification and low-pass smoothing, but each frequency setting must match the recording and question. Filter transients and smoothing alter onset and peak timing; a smooth envelope is not an instantaneous excitation measurement. Any downsampling requires its own anti-aliasing justification.

Normalization expresses an amplitude relative to a stated reference measurement, not automatically as a fraction of maximal force. The CEDE consensus distinguishes several normalization approaches, including task-specific maximal contractions, standardized contractions and within-task references [3]. Report the protocol, reference statistic, repeatability and any reason the reference effort may not represent the task. A dynamic amplitude exceeding a recorded MVC reference is not in itself a mathematical impossibility. Interpretation of comparisons between muscles, sessions or participants depends on what the chosen normalization preserves and removes.

7.3 Force Plates

A six-component force plate reports a calibrated force and moment wrench about a specified origin. Rated load, sample rate and nominal CoP accuracy must come from the actual device and calibration, including loading position and magnitude. Before combining it with motion capture, transform both force and moment into the declared laboratory frame and account for the change of moment origin.

For an explicit example, choose a right-handed frame with $+z$ upward, origin O at the wrench-reference point and contact plane $z = h$. Let $(\mathbf{F}, \mathbf{M}_O)$ denote the ground-on-person wrench in that frame, with $F_z > 0$ during loaded stance. The signed height h is positive when the reference origin lies below the surface. At the CoP, $\mathbf{r} = (x_{\text{CoP}}, y_{\text{CoP}}, h)$, assume the remaining contact couple is normal to the plane:

$$\mathbf{M}_O = \mathbf{r} \times \mathbf{F} + (0, 0, T_z)^\top.$$

Expanding this identity yields

$$x_{\text{CoP}} = \frac{hF_x - M_y}{F_z}, \quad y_{\text{CoP}} = \frac{M_x + hF_y}{F_z}, \quad (7.1)$$

and $T_z = M_z - x_{\text{CoP}}F_y + y_{\text{CoP}}F_x$. For instance, $h = 0.05$ m, $\mathbf{F} = (20, -10, 500)$ N and $\mathbf{M}_O = (-19.5, -49, 1.8)$ N m give CoP $(0.10, -0.04)$ m and free moment $T_z = 2$ N m. A different plate convention requires a consistent transformation, not a memorized sign change. In the same frame and about the same origin, negating both force and moment for action/reaction leaves the CoP coordinates unchanged and reverses the free moment.

As F_z approaches zero, these ratios become ill-conditioned; reject unloaded intervals using a threshold justified by noise and the task. CoP is not center of mass, and a shared plate under both feet does not independently identify the wrench under each foot. A valid whole-body force record also does not by itself determine individual muscle forces or joint contact loads.

7.4 Inertial Measurement Units (IMUs)

An IMU contains accelerometers and gyroscopes; a magnetometer may be added but is not intrinsic to every unit. In a local inertial approximation, let Q map sensor-frame vectors to world coordinates, and let $\mathbf{a}_s$ be the world acceleration of the sensor location. A calibrated accelerometer observation has the form

$$\mathbf{f}_m = Q^\top(\mathbf{a}_s - \mathbf{g}) + \mathbf{b}_a + \boldsymbol{\eta}_a,$$

where $\mathbf{g} = (0, 0, -g)^\top$ in the upward world frame, with $g > 0$ the gravitational acceleration magnitude, $\mathbf{b}_a$ is sensor-frame bias and $\boldsymbol{\eta}_a$ is noise. Thus the observation is specific force, not kinematic acceleration [2]. Ignoring noise, recovery requires $\mathbf{a}_s = Q(\mathbf{f}_m - \mathbf{b}_a) + \mathbf{g}$. A stationary upward-aligned accelerometer reads approximately $+g$ vertically, whereas ideal free fall has zero specific force. Orientation error consequently leaks gravity into the recovered movement acceleration.

Gyroscope bias accumulates in integrated orientation; magnetometer heading can be disturbed by the local magnetic environment. An extended Kalman or complementary filter estimates state only under its observation and disturbance assumptions. Treating

accelerometer direction as gravity requires negligible or separately modeled translational acceleration, a condition that can fail in rapid swings. If the required acceleration is at a different rigid-body point, angular acceleration and centripetal lever-arm terms must also be included. Double integration needs initial conditions and drift control; the sensor equations alone do not make absolute position observable.

7.5 Data Synchronization

A common trigger identifies an event but does not necessarily establish a shared sampling clock or remove transport and processing latency. Estimate clock offset and drift, preserve timestamps, and verify synchronization using a physical event observable in the relevant channels. Resampling into a common time base does not correct an unknown offset. Report the residual timing uncertainty together with each channel's filtering and event-detection method.

Physiological electromechanical delay is distinct from instrument delay. An EMG-to-force lag depends on the task and physiological processes and should not be removed as if it were merely a clock error. Cross-correlation can support alignment when signals share an appropriate physical event, but mechanically maximizing correlation can erase the biological lag being studied or align unrelated features. There is no universal EMG-to-motion shift for every muscle and movement.

7.6 Connecting Measurements to Swing Inference

In a swing analysis, marker geometry establishes segment frames; their differentiated motion contributes inertial terms; force-plate wrenches supply external loading; and EMG or IMUs contribute additional, differently conditioned observations. Timing and filtering determine whether those terms describe the same event and bandwidth. A mismatch can resemble a change in sequencing, joint moment or apparent energy transfer. Assess uncertainty through the full inference chain and distinguish observed movement, model-dependent net joint loads and less identifiable internal muscle or tissue forces.

Exercises

1. **Filter Selection.** Generate a known trajectory plus declared noise at a specified sample rate. Compare several cutoffs below Nyquist using position, velocity and acceleration errors; exclude and report an edge interval. Confirm the two-pass amplitude at the declared single-pass cutoff and distinguish synthetic truth from an unobservable experimental trajectory.
2. **CoP Computation.** Reconstruct the wrench from the numerical contact example above, then recover CoP and free moment. Add declared force and moment noise and examine the ratios as normal force decreases. Explain why a peak vertical force alone cannot determine a CoP trajectory.
3. **EMG Processing.** Process a synthetic amplitude-modulated signal through a declared envelope pipeline. Vary smoothing and normalization, and assess their effects

on amplitude and timing without interpreting the synthetic envelope as physiological force.

4. **IMU Interpretation.** Simulate stationary, free-fall and accelerating sensor states with known orientation. Recover acceleration from specific force, then introduce orientation and bias errors and quantify the resulting drift.

Chapter 8

Inference on Biological Systems

Draft Notice. This provisional technical treatment includes reproducible numerical examples. They verify inference under declared assumptions; they do not establish subject-specific muscle properties or neural control mechanisms.

8.1 What the Data Can Identify

Joint geometry, tissue properties, external loads and control inputs jointly shape motion. Estimating one while treating the others as known can transfer their errors into the fitted parameter. Some quantities can be measured or constrained by additional experiments; others require inference through a measurement model. A fitted parameter is conditional on the model, measurement protocol, initial state and calibration, rather than a direct reading of biological truth.

Write a forward prediction as

$$\dot{x} = f(x, u, \theta), \quad \hat{y}_k = H_k(x(t_k), \theta), \quad y_k = \hat{y}_k + \epsilon_k. \quad (8.1)$$

Here H_k includes the measured quantity, frame, sensor locations and known processing. Unknown initial conditions and calibration constants belong among the unknowns or must be propagated as uncertainty. Numerical differentiation of motion does not create an independent force measurement. Chapter 7 explains why processing and synchronization matter.

8.1.1 Structural and Practical Identifiability

For a declared input and observation experiment, structural identifiability asks whether distinct admissible parameter vectors can produce exactly the same ideal observations. Global uniqueness is stronger than uniqueness near one vector. Practical identifiability asks how reliably finite noisy data constrain those parameters. A well-conditioned optimizer is neither definition.

Consider the manufactured free decay

$$m\ddot{q} + c\dot{q} + kq = 0, \quad m > 0. \quad (8.2)$$

With known initial conditions and only $q(t)$ observed, replacing (m, c, k) by (sm, sc, sk) , $s > 0$, leaves the equation unchanged after division by m . Thus the experiment cannot identify their absolute scale. It can constrain c/m and k/m only if the trajectory is informative; a stationary zero trajectory does not even determine those ratios. A measured applied force or independently known inertia can break the scale ambiguity in a suitably designed experiment. More samples of the identical free decay cannot do so.

Stack predictions into $\hat{y}(\theta)$ and examine sensitivity $S = \partial\hat{y}/\partial\theta$. Under fixed Gaussian noise with stacked covariance Σ , $S^T\Sigma^{-1}S$ describes local data information. Null or small singular directions expose missing or weak sensitivity after sensible parameter scaling. Full local rank does not exclude distant equivalent solutions or establish that the chosen physical model is correct.

8.2 Likelihood, Prior and Numerical Objective

Assume independent d -channel errors $\epsilon_k \sim \mathcal{N}(0, R)$ with a known, fixed, symmetric positive-definite R . The Gaussian density gives

$$-\log p(y \mid \theta) = \frac{1}{2} \sum_{k=1}^N r_k^T R^{-1} r_k + \frac{Nd}{2} \log \det R + \frac{Nd}{2} \log(2\pi), \quad r_k = y_k - \hat{y}_k(\theta). \quad (8.3)$$

The normalization and covariance requirements follow the multivariate Gaussian model [29]. Only terms constant in the optimized parameters may be dropped. Estimating R , comparing model evidence, or using parameter-dependent noise requires retaining the appropriate normalization. Time-correlated errors require a joint covariance or an explicit stochastic model, rather than treating filtered samples as independent replicates. For the independent case, $\Sigma = I_N \otimes R$.

For a fixed Gaussian prior with mean μ and covariance $P \succ 0$, the negative log-posterior up to an additive constant is

$$\Phi(\theta) = \frac{1}{2} \sum_k r_k^T R^{-1} r_k + \frac{1}{2} (\theta - \mu)^T P^{-1} (\theta - \mu). \quad (8.4)$$

Minimizing this objective gives a mode candidate. A prior constrains an ambiguous fit using additional assumptions; it does not make the measurements identify an unobserved quantity. Document independent prior evidence and check sensitivity to its strength and form.

8.2.1 A Checked Fixed-Covariance Listing

The listing requires an (N, d) observation matrix and predictions of exactly the same shape. Scalar time series must be explicitly shaped $(N, 1)$. Cholesky factors whiten residuals without repeatedly constructing covariance inverses. Singular or parameter-dependent covariances need a different likelihood implementation. The forward callback must be deterministic, valid throughout the search domain, and accurate enough for numerical optimization. This listing omits an analytic gradient, so the optimizer uses finite differences; forward-solver error must be small enough to resolve those perturbations.

Optional finite box bounds describe a Gaussian prior restricted to that box; its fixed normalization does not change the mode. Bounds encode the physical domain, not a repair for an invalid model. A Gaussian on log-parameters specifies a different prior. Modes depend on parameterization: transforming a density requires its Jacobian, so exponentiating a mode in log-space need not give the physical-coordinate mode. The optimizer reports a local candidate, not a global-uniqueness certificate.

```

1 from dataclasses import dataclass
2 from typing import Callable
3 import numpy as np
4 from scipy.linalg import solve_triangular
5 from scipy.optimize import minimize
6
7 @dataclass
8 class GaussianProblem:
9     """Fixed covariances; observations have shape (samples, channels)."""
10    observations: np.ndarray
11    forward_model: Callable[[np.ndarray], np.ndarray]
12    prior_mean: np.ndarray
13    prior_cov: np.ndarray
14    noise_cov: np.ndarray
15    bounds: list[tuple[float, float]] | None = None
16
17 def covariance_factor(value, size):
18     """Require a finite symmetric positive-definite covariance."""
19     matrix = np.asarray(value, dtype=float)
20     if matrix.shape != (size, size) or not np.all(np.isfinite(matrix)):
21         raise ValueError("Invalid covariance shape or entries")
22     if not np.allclose(matrix, matrix.T, rtol=1e-12, atol=0):
23         raise ValueError("Covariance must be symmetric")
24     try:
25         return np.linalg.cholesky(matrix)
26     except np.linalg.LinAlgError as error:
27         raise ValueError("Covariance must be positive definite") from error
28
29 def gaussian_objective(problem):
30     """Factor fixed covariances once and return a checked objective."""
31     data = np.asarray(problem.observations, dtype=float)
32     mean = np.asarray(problem.prior_mean, dtype=float)
33     if data.ndim != 2 or 0 in data.shape or not np.all(np.isfinite(data)):
34         raise ValueError("Observations must be a finite nonempty matrix")
35     if mean.ndim != 1 or mean.size == 0 or not np.all(np.isfinite(mean)):
36         raise ValueError("Prior mean must be a finite nonempty vector")
37     noise = covariance_factor(problem.noise_cov, data.shape[1])
38     prior = covariance_factor(problem.prior_cov, mean.size)
39     def objective(theta):
40         predicted = np.asarray(problem.forward_model(theta), dtype=float)
41         if predicted.shape != data.shape or not np.all(np.isfinite(predicted)):
42             raise ValueError("Prediction must match observations exactly")
43         residual = solve_triangular(noise, (data - predicted).T, lower=True)
44         deviation = solve_triangular(prior, theta - mean, lower=True)
45         value = 0.5 * (np.sum(residual**2) + deviation @ deviation)
46         if not np.isfinite(value):
47             raise ValueError("Nonfinite objective")
48         return float(value)
49     return objective
50
51 def map_estimate(problem, initial):
52     """Return a local mode candidate; raise on invalid input or failure."""
53     objective = gaussian_objective(problem)
54     start = np.asarray(initial, dtype=float)
55     if start.shape != np.shape(problem.prior_mean) or not np.all(np.isfinite(
56         start)):
57         raise ValueError("Initial parameters must match prior mean")
58     if problem.bounds is not None:
59         limits = np.asarray(problem.bounds, dtype=float)

```

```

59     if limits.shape != (start.size, 2) or not np.all(np.isfinite(limits))
60     :
61         raise ValueError("Bounds must be a finite (parameters, 2) matrix")
62     )
63     if np.any(limits[:, 0] >= limits[:, 1]):
64         raise ValueError("Lower bounds must be below upper bounds")
65     if np.any(start < limits[:, 0]) or np.any(start > limits[:, 1]):
66         raise ValueError("Initial parameters must lie inside bounds")
67     objective(start)
68     result = minimize(objective, start, method="L-BFGS-B", bounds=problem.
69     bounds)
70     if not result.success:
71         raise RuntimeError(str(result.message))
72     if result.x.shape != start.shape or not np.all(np.isfinite(result.x)):
73         raise RuntimeError("Optimizer returned invalid parameters")
74     objective(result.x)
75     return result.x

```

Listing 8.1: Checked Fixed-Covariance Gaussian MAP Estimation.

8.3 A Mode Is Not a Posterior Distribution

For manufactured scalar observations $y_k = \theta + \epsilon_k$, take $y = (1, 3)$, $R = 1$, $\mu = 0$, $P = 1$. Completing the square yields

$$\Phi(\theta) = \frac{1}{2}[(1 - \theta)^2 + (3 - \theta)^2 + \theta^2] = \frac{3}{2}(\theta - 4/3)^2 + \text{constant}. \quad (8.5)$$

The exact unbounded posterior has mean and mode $4/3$, variance $1/3$. With a box $[0, 1]$, the constrained mode is instead 1 ; the unbounded Gaussian is no longer the posterior distribution. A boundary optimum need not have zero unconstrained gradient.

For nonlinear predictions, an interior mode may support a local Gaussian approximation using the Hessian of Φ , if positive definite and locally adequate. The data Hessian contains both sensitivity products and residual-weighted second derivatives of predictions. Replacing it by $S^T \Sigma^{-1} S$ is a Gauss–Newton approximation, not an identity in general. Multimodality, weak directions and boundary mass can invalidate a single Gaussian summary. Posterior sampling or other approximations also need convergence checks.

8.4 From Identification to a Testable Golf Model

Perturbation experiments can constrain effective joint impedance, but posture, feedback delay, contact and activation all affect the response. Fitting a stiffness term does not separate tendon elasticity from active feedback. Force-angle fitting may constrain combinations of force scale and moment arm. Chapter 6 explains why a net load does not uniquely allocate individual muscle forces. Report the quantities and predictions that the actual experiment supports.

A learned predictor or physics-informed loss adds modeling assumptions. A finite penalty on dynamics residuals does not enforce exact dynamics, and exact equation satisfaction would not prove correct parameters. Evaluate residuals on independent points and predictions on held-out trials or perturbations, including measurement uncertainty and differences between subjects. A useful golf comparison asks whether a changed grip, load or timing

condition distinguishes competing mechanisms, rather than whether each can fit the same swing.

Exercises

1. Reproduce the scalar posterior with observations shaped $(2, 1)$. Change prior variance from 1 to 4 and derive the new mean and variance.
2. Impose bounds $[0, 1]$. Verify the mode and evaluate the unconstrained derivative at that boundary. Explain why it need not vanish.
3. Simulate $(m, c, k) = (1, 0.4, 4)$ and $(3, 1.2, 12)$ with the same nonzero initial conditions. Design a measured-force experiment that could distinguish them; specify what else must be known.
4. For $\hat{y} = \theta^2$, derive the exact data Hessian and its Gauss–Newton approximation. State when they agree.

Chapter 9

Deformable Bodies and Continuum Mechanics

Draft Notice. This provisional treatment develops a small-deflection beam model and reproducible verification problems. It does not validate a particular club, tissue material, impact model or injury prediction.

9.1 Choosing the Required Mechanical Resolution

Rigid links can approximate gross motion while failing to describe local strain, stored elastic energy or load-dependent geometry. Whether that matters depends on the question. Clubhead orientation may require shaft bending and torsion; internal tissue stress requires appropriate constitutive laws, geometry and boundary conditions. Adding finite elements alone does not validate stress estimates, damage thresholds or biological material parameters.

A model may combine a moving rigid reference with small elastic deformation. Small local strain does not imply small overall rigid rotation. Derive the coupled kinetic energy and forces consistently: appending independent elastic oscillators to rigid-body equations generally misses inertial coupling and reactions. This connects flexible modeling to force and parameter inference in Chapters 6 and 8.

9.2 A Stationary Planar Euler–Bernoulli Beam

Let $x \in [0, L]$ follow an initially straight, stationary beam, with small transverse deflection $w(x, t)$. Plane sections remain normal to the centerline; shear deformation and cross-section rotary inertia are neglected. Let $B(x) = E(x)I(x) > 0$ be bending rigidity in N m^2 and $\mu(x) > 0$ mass per length in kg/m . For linear elasticity without damping, axial preload or initial curvature,

$$T = \frac{1}{2} \int_0^L \mu \dot{w}^2 dx, \quad U = \frac{1}{2} \int_0^L B (w'')^2 dx. \quad (9.1)$$

The weak balance against an admissible virtual displacement δw is

$$\int_0^L \mu \ddot{w} \delta w dx + \int_0^L B w'' \delta w'' dx = \int_0^L f \delta w dx, \quad (9.2)$$

with point-load work if present. Integrating twice in space gives

$$(B(x)w'')'' + \mu(x)\ddot{w} = f(x, t). \quad (9.3)$$

Here f is force per length in N/m. The constant-rigidity form $B\partial_x^4 w + \mu\ddot{w} = f$ is a special case. Weak formulations and cubic Hermite interpolation are treated in the TU Delft beam notes [38].

For a clamped root, $w(0) = w'(0) = 0$. A bare unloaded tip has $Bw''(L) = 0$ and $(Bw'')'(L) = 0$. A point mass m_t adds $\frac{1}{2}m_t\dot{w}(L)^2$ to kinetic energy and $m_t\ddot{w}(L)\delta w(L)$ to the weak balance. The resulting boundary condition is $(Bw'')'(L) = m_t\ddot{w}(L)$ under this energy convention. For $w = \phi e^{i\omega t}$ it becomes $(B\phi'')'(L) = -m_t\omega^2\phi(L)$. No offset center of mass or head rotary inertia is included in this point-mass model.

9.2.1 Finite Elements and Modal Coordinates

On an element of length h , let $\xi = x/h$ and

$$N_1 = 1 - 3\xi^2 + 2\xi^3, \quad N_2 = h(\xi - 2\xi^2 + \xi^3), \quad (9.4)$$

$$N_3 = 3\xi^2 - 2\xi^3, \quad N_4 = h(-\xi^2 + \xi^3). \quad (9.5)$$

The nodal vector is $(w_1, w'_1, w_2, w'_2)^T$; translation and slope entries have different units. Substituting $w = Nd_e$ gives

$$K_e = \int B(N'')^T N'' dx, \quad M_e = \int \mu N^T N dx. \quad (9.6)$$

The listing integrates these products exactly for constant element properties. A supplied linear rigidity taper is approximated by its midpoint value on each element. This is not exact integration of the variable-rigidity curvature product. Mass per length is independently constant. A geometry-based taper requires consistent $I(x)$ and $A(x)$ rather than assuming they vary identically.

After imposing root constraints, solve $K\phi_j = \omega_j^2 M\phi_j$ with $\phi_i^T M\phi_j = \delta_{ij}$. The symmetric generalized eigensolver uses this normalization [33]. Returned columns include the two zero root entries. Plot even rows for transverse displacement; odd rows are slopes. Mode sign is arbitrary and magnitude depends on normalization. Negative eigenvalues must not be converted into frequencies using absolute values. This positive clamped model rejects nonpositive results, which may indicate invalid assembly, numerical conditioning or a model outside the stated assumptions.

```

1 from dataclasses import dataclass
2 import numpy as np
3 from scipy.linalg import eigh
4
5 @dataclass
6 class BeamParameters:
7     """SI parameters of a stationary planar cantilever, not a full club."""
8     length: float
9     rigidity_root: float
10    rigidity_tip: float
11    mass_per_length: float
12    tip_mass: float = 0.0
13
14 def beam_matrices(parameters, n_elements):

```

```

15     """Assemble Hermite elements with piecewise-constant midpoint rigidity."""
16     values = np.array([parameters.length, parameters.rigidity_root,
17                        parameters.rigidity_tip, parameters.mass_per_length,
18                        parameters.tip_mass], dtype=float)
19     if not np.all(np.isfinite(values)) or np.any(values[:4] <= 0) or values
20     [4] < 0:
21         raise ValueError("Positive beam properties and nonnegative tip mass
22         required")
23     if isinstance(n_elements, bool) or not isinstance(n_elements, (int, np.
24     integer)):
25         raise ValueError("Element count must be an integer")
26     if n_elements < 2:
27         raise ValueError("At least two elements required")
28     length, root, tip, density, tip_mass = values
29     step = length / n_elements
30     local_k = np.array([[12, 6*step, -12, 6*step],
31                        [6*step, 4*step**2, -6*step, 2*step**2],
32                        [-12, -6*step, 12, -6*step],
33                        [6*step, 2*step**2, -6*step, 4*step**2]]) / step**3
34     local_m = density * step / 420 * np.array([
35     [156, 22*step, 54, -13*step],
36     [22*step, 4*step**2, 13*step, -3*step**2],
37     [54, 13*step, 156, -22*step],
38     [-13*step, -3*step**2, -22*step, 4*step**2]])
39     rigidity = root + (tip-root) * (np.arange(n_elements)+0.5) / n_elements
40     dofs = 2*np.arange(n_elements)[:n_elements-1, None] + np.arange(4)
41     stiffness = np.zeros((2*n_elements+2, 2*n_elements+2))
42     mass = np.zeros_like(stiffness)
43     indices = (dofs[:, :, None], dofs[:, None, :])
44     np.add.at(stiffness, indices, rigidity[:, None, None] * local_k)
45     np.add.at(mass, indices, np.broadcast_to(local_m, (n_elements, 4, 4)))
46     mass[-2, -2] += tip_mass
47     return stiffness, mass
48
49 def shaft_modal_analysis(parameters, n_elements=20):
50     """Return up to six frequencies and full nodal mass-normalized modes."""
51     stiffness, mass = beam_matrices(parameters, n_elements)
52     eigenvalues, vectors = eigh(stiffness[2:, 2:], mass[2:, 2:])
53     if not np.all(np.isfinite(eigenvalues)) or np.any(eigenvalues <= 0):
54         raise ValueError("Cantilever eigenvalues must be finite and positive")
55     count = min(6, eigenvalues.size)
56     modes = np.zeros((mass.shape[0], count))
57     modes[2:] = vectors[:, :count]
58     return np.sqrt(eigenvalues[:count]) / (2*np.pi), modes

```

Listing 9.1: Stationary Planar Cantilever With Optional Point Tip Mass.

9.3 Verification Before Interpreting a Shaft

For a uniform bare cantilever, separation and the four boundary conditions give

$$\cos \beta_j \cosh \beta_j = -1.$$

The first dimensionless roots are 1.87510407, 4.69409113, 7.85475744, so

$$f_j = \frac{\beta_j^2}{2\pi L^2} \sqrt{B/\mu}. \quad (9.7)$$

Manufactured $L = 1$ m, $B = 1$ N m² and $\mu = 1$ kg/m give approximately 0.5596, 3.5069 and 9.8194 Hz. Mesh refinement must approach these values. Multiplying B by four doubles frequencies; doubling L quarters them for a uniform beam with unchanged B, μ . These checks test more than reproduction of a single plot.

At fixed K , adding nonnegative point mass increases the mass quadratic form. The Rayleigh quotient $d^T K d / (d^T M d)$ cannot increase for any fixed admissible nonzero d ; the variational eigenvalue characterization makes ordered frequencies nonincreasing. This does not determine a universal driver frequency. Grip compliance, head inertia and offsets, bending plane, geometry, preload and shaft construction change the eigenproblem.

9.3.1 Deflection, Forcing and Timescale

For a uniform beam under static tip force F , solving the equilibrium equation with tip moment zero gives $w(L) = FL^3/(3B)$. This is a linear static benchmark, not an impact-deflection prediction. During a swing, transverse gravity components, base acceleration and rotation, head inertia and center-of-mass offsets can all contribute. Toe-down and lead/lag labels require declared club axes. Assigning droop entirely to gravity or to one inertial term without a load balance is unjustified.

With fixed boundaries, truncate $w = \sum_{j=1}^r \phi_j \eta_j$. Under an appropriate diagonal damping model, mass-normalized coordinates satisfy

$$\ddot{\eta}_j + 2\zeta_j \omega_j \dot{\eta}_j + \omega_j^2 \eta_j = Q_j. \quad (9.8)$$

For a distributed load alone, $Q_j = \int_0^L \phi_j(x) f(x, t) dx$; point loads add their modal work terms. In a finite element model, $Q_j = \phi_j^T f_{\text{nodal}}$. For sinusoidal forcing at angular frequency Ω , neglecting inertia requires $\Omega/\omega_j \ll 1$, with damping and transient terms also negligible relative to stiffness. Counting natural cycles during a downswing alone does not justify a quasi-static approximation. Initial vibration, impact and rapidly changing forcing may remain important.

9.4 Beyond the Beam Approximation

The assembled equation $M\ddot{d} + C\dot{d} + Kd = f$ describes a particular linearized model with specified damping and boundaries. Large deformation, nonlinear material response and changing contact generally produce state-dependent internal forces and possibly constraints. Mesh convergence verifies discretization of a chosen model; it cannot establish the constitutive law or supply missing measurements. Shaft compliance changes clubhead motion and interaction loads, so rigid-body inference and flexible dynamics need consistent geometry, frames and force conventions.

Exercises

1. Compute the first three uniform-beam frequencies for 4, 8, 16 and 32 elements. Compare with the analytical roots and report relative errors.
2. Add point masses 0, 0.1, 0.2 kg to the manufactured beam. Verify ordered frequencies do not increase and check $\Phi^T M \Phi = I$.
3. Recover static tip compliance by solving the clamped assembled system. Keep deflections small and distinguish this load case from a moving club.
4. Compare one damped mode for $\Omega/\omega = 0.01, 0.5$ and 1. Explain why a swing duration of 0.25 s alone is insufficient to choose a quasi-static model.

Chapter 10

Applications of Control Theory to Biological Systems

Draft Notice. This provisional chapter connects simulation, inference and control through a verified illustrative rotor. It does not implement a complete muscle model, validate a golfer, or prescribe an assistive or clinical controller.

10.1 A Forward Model Must Declare Its State

Forward simulation predicts motion conditional on a mechanical model, initial state, external loads and control law. In general coordinates,

$$\dot{q} = N(q)v, \quad M(q)\dot{v} + h(q, v) = R_v(q)F + J_c(q)^T \lambda + Q_{\text{known}}. \quad (10.1)$$

Here h contains the declared velocity and gravity terms, R_v maps muscle forces to generalized forces conjugate to v , and $J_c v$ is the velocity conjugate to contact wrench λ . Configuration dimension need not equal velocity dimension; a quaternion-based floating body is one reason to retain $N(q)$.

Activation, fiber length and other internal states require equations consistent with the force law. Rigid-tendon force models and compliant-tendon state models are different contracts. A promised muscle-force callback must enter the dynamics. Using $F_i = F_{0i}a_i$ instead is an idealized actuator law without force-length, force-velocity or tendon compliance. Chapter 3 develops those additional assumptions.

Maintained rigid contacts require compatible motion and solved reaction forces; reduced coordinates may yield a smooth ODE within a fixed contact mode. Contact creation, separation and impacts need a declared contact law and transition treatment. An unconstrained integrator does not supply those mechanics. Numerical stiffness and discontinuities determine solver choices; neither explicit nor implicit integration alone establishes physical validity.

10.2 A Reproducible Antagonist-Driven Rotor

Consider one unwrapped angle q with velocity v , constant inertia $J > 0$, equal force scales $F_0 > 0$ and opposite constant moment arms $+r, -r$. Let $b \geq 0$ be viscous damping and $\gamma \geq 0$ the coefficient of a restoring gravitational torque. Use one common activation time

$\tau_a > 0$:

$$\dot{q} = v, \quad J\dot{v} = rF_0(a_1 - a_2) - bv - \gamma \sin q, \quad (10.2)$$

$$\dot{a}_i = (u_i - a_i)/\tau_a, \quad 0 \leq u_i \leq 1. \quad (10.3)$$

Units are J in kg m^2 , r in meters, F_0 in newtons, b in N m s/rad , γ in N m and τ_a in seconds. A hanging mass distribution would impose a physical relation between J and γ ; here they are independently declared toy parameters. There is no contact, fiber state, elastic antagonist stiffness or metabolic model.

At $a = 0$ the activation derivative is nonnegative; at $a = 1$ it is nonpositive. The continuous equation preserves the interval for admissible input and initial state. This proof does not guarantee exact numerical bounds. The listing checks returned samples with a declared 10^{-8} numerical allowance and retains raw results. It uses smooth input, checks completion and returns scalar q, v, τ arrays and an $(N, 2)$ activation matrix. For discontinuous input, split integration at known switches; adaptive sampling can miss narrow input features. Solver success is a numerical status [32], not an anatomical conclusion.

```

1 from dataclasses import dataclass
2 from typing import Callable
3 import numpy as np
4 from scipy.integrate import solve_ivp
5
6 @dataclass
7 class RotorParameters:
8     """SI constants for an illustrative antagonist-driven rotor."""
9     inertia: float
10    moment_arm: float
11    force_scale: float
12    activation_time: float
13    damping: float = 0.0
14    gravity_scale: float = 0.0
15
16 def rotor_inputs(times, initial, parameters):
17     """Validate the finite time grid, state and physical parameters."""
18     grid = np.asarray(times, dtype=float)
19     state = np.asarray(initial, dtype=float)
20     values = np.array([parameters.inertia, parameters.moment_arm,
21                       parameters.force_scale, parameters.activation_time,
22                       parameters.damping, parameters.gravity_scale], dtype=float)
23     if grid.ndim != 1 or grid.size < 2 or not np.all(np.isfinite(grid)):
24         raise ValueError("Times must be a finite vector with at least two
25                             entries")
26     if np.any(np.diff(grid) <= 0):
27         raise ValueError("Times must increase strictly")
28     if state.shape != (4,) or not np.all(np.isfinite(state)):
29         raise ValueError("State must be [q, velocity, activation1,
30                             activation2]")
31     if np.any(state[2:] < 0) or np.any(state[2:] > 1):
32         raise ValueError("Initial activations must lie in [0, 1]")
33     if not np.all(np.isfinite(values)) or np.any(values[:4] <= 0) or np.any(
34         values[4:] < 0):
35         raise ValueError("Invalid rotor parameters")
36     return grid, state
37
38 def simulate_rotor(excitation: Callable, times, initial, parameters):
39     """Integrate a smooth-input toy rotor; no contact or fiber dynamics."""
40     grid, state = rotor_inputs(times, initial, parameters)

```

```

38 scale = parameters.moment_arm * parameters.force_scale
39 def dynamics(time, current):
40     control = np.asarray(excitation(time), dtype=float)
41     if control.shape != (2,) or not np.all(np.isfinite(control)):
42         raise ValueError("Excitation must be a finite two-vector")
43     if np.any(control < 0) or np.any(control > 1):
44         raise ValueError("Excitation must lie in [0, 1]")
45     position, velocity = current[:2]
46     activation = current[2:]
47     torque = scale * (activation[0] - activation[1])
48     acceleration = (torque - parameters.damping * velocity
49                   - parameters.gravity_scale * np.sin(position)) /
50     parameters.inertia
51     rate = (control - activation) / parameters.activation_time
52     return np.r_[velocity, acceleration, rate]
53     solution = solve_ivp(dynamics, (grid[0], grid[-1]), state,
54                         t_eval=grid, rtol=1e-9, atol=1e-11)
55     if not solution.success:
56         raise RuntimeError(str(solution.message))
57     if solution.y.shape != (4, grid.size) or not np.all(np.isfinite(solution.
58     y)):
59         raise RuntimeError("Incomplete or nonfinite solution")
60     activation = solution.y[2:].T
61     if np.any(activation < -1e-8) or np.any(activation > 1+1e-8):
62         raise RuntimeError("Numerical activation bounds violated")
63     return {"t": solution.t, "q": solution.y[0], "qdot": solution.y[1],
64           "a": activation, "tau": scale * (activation[:, 0] - activation[:,
65           1])}

```

Listing 10.1: Antagonist-Driven Rotor With First-Order Activation.

10.2.1 Exact Activation, Motion and Mechanical Power

For constant excitation $\bar{u}$, with elapsed time $s = t - t_0$,

$$a_i(s) = \bar{u}_i + (a_i(0) - \bar{u}_i)e^{-s/\tau_a}. \quad (10.4)$$

If $b = \gamma = 0$, set $A = rF_0/J$, $d = \bar{u}_1 - \bar{u}_2$ and $c = a_1(0) - a_2(0) - d$. Direct integration gives

$$v(s) = v_0 + A[ds + c\tau_a(1 - e^{-s/\tau_a})], \quad (10.5)$$

$$q(s) = q_0 + v_0s + A[ds^2/2 + c\tau_a\{s - \tau_a(1 - e^{-s/\tau_a})\}]. \quad (10.6)$$

These are independent trajectory benchmarks, including nonzero initial activation. For the full declared rotor, differentiate its mechanical energy:

$$E = \frac{1}{2}Jv^2 + \gamma(1 - \cos q), \quad \dot{E} = rF_0(a_1 - a_2)v - bv^2. \quad (10.7)$$

Activation is a command filter with no declared energy storage, so it is absent from E . Actuator mechanical power does not determine metabolic expenditure. Compare energy change with integrated power and refine both ODE and quadrature errors. Agreement checks model consistency, not a human energy budget.

Equal antagonist activation gives zero net torque here. It does not increase mechanical stiffness, because force scales and moment arms have no position dependence. Biological co-contraction can affect stiffness through additional force, geometry, compliance and feedback mechanisms that must be modeled. This connects to the stiffness analysis of Chapter 5.

10.3 Prediction, Optimization and Optimality

A trajectory optimization may minimize

$$J[u] = \Psi(x(T)) + \int_0^T L(x, u) dt, \quad \dot{x} = f(x, u), \quad u \in U, \quad (10.8)$$

subject to declared initial, terminal and path constraints. Tracking observations and predicting motion from a task-level cost answer different conditional questions. An effort penalty is a hypothesis, not automatically a metabolic law or the objective used by the nervous system.

Pontryagin's maximum principle supplies necessary conditions under its regularity and problem assumptions. In a normal smooth case, with maximizing convention $H = p^T f - L$, they include $\dot{x} = H_p$, $\dot{p} = -H_x$ and Hamiltonian maximization along a candidate, with appropriate endpoint conditions. Abnormal cases retain a cost multiplier; path constraints and hybrid transitions require corresponding extensions. Neither existence of an optimum nor global optimality of a computed candidate follows from these conditions alone [16]. Existence arguments and numerical convergence are separate tasks. Discretized solutions need mesh, feasibility and sensitivity checks; the method of characteristics is not a general guarantee for a constrained biological optimizer.

10.4 What a Golf-Swing Analysis Can Conclude

Coordinate count depends on the chosen segments and joints. Ground contact constrains motion and supplies external wrench; whether it creates a kinematic loop depends on the whole contact and joint graph. Shaft bending changes clubhead orientation and transmitted loads. Moment arms couple geometry to force and power. These connections prevent independent fits from automatically forming one consistent mechanical explanation.

Motion capture estimates kinematics under reconstruction assumptions. Force plates measure support wrenches under calibration and contact assignments. EMG measures electrical activity processed into a signal related to excitation; it does not measure force or mechanical activation directly. Inverse dynamics estimates net generalized loads conditional on those inputs. Muscle allocation adds capacity and objective assumptions. Forward reproduction tests consistency, but reusing a fitted trial does not provide independent predictive validation.

A wrist-release trajectory can arise from interacting active and passive terms. Demonstrating passive release in a simplified model establishes a possible mechanism under its conditions, not its exclusive cause in a golfer. Compare interventions, measured loads and out-of-sample predictions to distinguish mechanisms. For assistive devices, impedance or tracking controllers also need actuator, sensor, contact, delay and human-interaction evaluation. A simulated result does not establish suitability for a person.

10.5 Synthesis: Geometry to Evidence

Model Layer	Question Passed to the Next Layer
Geometry	Which velocities, forces and moments are conjugate?
Tissue and actuator	Which force and stiffness law is admissible?
Contact and shaft	Which constraints, deformation and reactions alter motion?
Measurement	Which state or load is observed, in which frame and bandwidth?
Inference	Which quantities are identified, and which remain prior-dependent?
Control	Which predictions distinguish mechanisms on new data?

Exercises

1. Use $J = 2$, $r = 0.1$, $F_0 = 20$, $\tau_a = 0.05$, $b = \gamma = 0$ in SI units. Start from $(q, v, a_1, a_2) = (0.3, -0.1, 0.2, 0.1)$ with input $(0.7, 0.3)$. Verify the exact trajectory through 0.5 s.
2. Add $b = 0.2$, $\gamma = 1$. Check integrated power while refining integration and output grid separately. Explain the two error sources.
3. Compare equal and unequal antagonist inputs. Explain why this listing cannot test a claim that co-contraction increases joint stiffness.
4. Specify a held-out golf experiment that could distinguish passive release from active torque. Identify measurements, nuisance parameters, competing predictions and a failure criterion before fitting.

Bibliography

- [1] R. M. Alexander. Tendon elasticity and muscle function. *Comparative Biochemistry and Physiology. Part A, Molecular and Integrative Physiology*, 133(4):1001–1011, 2002.
- [2] Analog Devices. Strapdown inertial navigation system based on an IMU and a geomagnetic sensor. <https://www.analog.com/en/resources/analog-dialogue/articles/strapdown-inertial-navigation-system-based-on-an-imu-and-a-geomagnetic-sensor.html>. Specific-force and navigation sections; accessed 2026-10-04.
- [3] Manuela Besomi, Paul W. Hodges, Edward A. Clancy, et al. Consensus for experimental design in electromyography (CEDE) project: Amplitude normalization matrix. *Journal of Electromyography and Kinesiology*, 53:102438, 2020.
- [4] L. Blankevoort and R. Huiskes. Ligament-bone interaction in a three-dimensional model of the knee. *Journal of Biomechanical Engineering*, 113(3):263–269, 1991.
- [5] Lorenzo Chiari, Ugo Della Croce, Alberto Leardini, and Aurelio Cappozzo. Human movement analysis using stereophotogrammetry. part 2: Instrumental errors. *Gait and Posture*, 21(2):197–211, 2005.
- [6] P. de Leva. Adjustments to zatsiorsky-seluyanov’s segment inertia parameters. *Journal of Biomechanics*, 29(9):1223–1230, 1996.
- [7] S. L. Delp, F. C. Anderson, A. S. Arnold, et al. Opensim: Open-source software to create and analyze dynamic simulations of movement. *IEEE Transactions on Biomedical Engineering*, 54(11):1940–1950, 2007.
- [8] Roy Featherstone. Spatial vector and rigid-body dynamics functions: Version 1, 2008. Public transform conventions and companion source for planar cross products, rigid inertia and composite-body dynamics; accessed 9 September 2026.
- [9] A. M. Gordon, A. F. Huxley, and F. J. Julian. The variation in isometric tension with sarcomere length in vertebrate muscle fibres. *The Journal of Physiology*, 184(1):170–192, 1966.
- [10] E. S. Grood and W. J. Suntay. A joint coordinate system for the clinical description of three-dimensional motions: application to the knee. *Journal of Biomechanical Engineering*, 105(2):136–144, 1983.
- [11] M. E. Harrington, A. B. Zavatsky, S. E. M. Lawson, Z. Yuan, and T. N. Theologis. Prediction of the hip joint centre in adults, children, and patients with cerebral palsy based on magnetic resonance imaging. *Journal of Biomechanics*, 40(3):595–602, 2007.
- [12] A. V. Hill. The heat of shortening and the dynamic constants of muscle. *Proceedings of the Royal Society B: Biological Sciences*, 126(843):136–195, 1938.
- [13] R. K. Jensen. Body segment mass, radius and radius of gyration proportions of children. *Journal of Biomechanics*, 19(5):359–368, 1986. Displayed PubMed abstract consulted for sample and modeling scope; the abstract is truncated and no parameter tables are reproduced.

- [14] Eirik Kristianslund, Tron Krosshaug, and Antonie J. van den Bogert. Effect of low pass filtering on joint moments from inverse dynamics: Implications for injury prevention. *Journal of Biomechanics*, 45(4):666–671, 2012.
- [15] Alberto Leardini, Lorenzo Chiari, Ugo Della Croce, and Aurelio Cappozzo. Human movement analysis using stereophotogrammetry. part 3: Soft tissue artifact assessment and compensation. *Gait and Posture*, 21(2):212–225, 2005.
- [16] Daniel Liberzon. *Calculus of Variations and Optimal Control Theory: A Concise Introduction*. Princeton University Press, 2012. Author online preliminary text, sections 4.1.1, 4.3 and 4.5. <https://liberzon.csl.illinois.edu/teaching/cvoc/node1.html>.
- [17] Kevin M. Lynch and Frank C. Park. Exponential Coordinates of Rigid-Body Motion. *Modern Robotics video transcript*. Accessed 2026-09-08.
- [18] Kevin M. Lynch and Frank C. Park. Modern Robotics: Twists, parts 1 and 2. <https://modernrobotics.northwestern.edu/nu-gm-book-resource/3-3-2-twists-part-2-of-2/>. Official transcripts; spatial/body representation and screw conventions; accessed 2026-10-04.
- [19] Matthew Millard, Thomas Uchida, Ajay Seth, and Scott L. Delp. Flexing computational muscle: Modeling and simulation of muscletendon dynamics. *Journal of Biomechanical Engineering*, 135(2):021005, 2013.
- [20] OpenSim Contributors. Getting started with inverse dynamics. <https://opensimconfluence.atlassian.net/wiki/spaces/OpenSim/pages/53090063>. Accessed 2026-10-04.
- [21] OpenSim Contributors. How CMC works. <https://opensimconfluence.atlassian.net/wiki/spaces/OpenSim/pages/53089706>. Accessed 2026-10-04.
- [22] OpenSim Contributors. Working with static optimization. <https://opensimconfluence.atlassian.net/wiki/spaces/OpenSim/pages/53085189>. Current OpenSim documentation; accessed 2026-10-04.
- [23] OpenSim Contributors. Arm26 musculoskeletal model: BIClong parameters, 2026. Repository revision d9b05d470b1a481c222372c85b75772faf8f7792; inspected 2026-10-01.
- [24] OpenSim Contributors. Thelen2003Muscle implementation, 2026. Repository revision 2aaa04b33463076edb06625693ad9bf98cf3bea4; inspected 2026-10-01.
- [25] Michael J. Pavol, Tammy M. Owings, and Mark D. Grabiner. Body segment inertial parameter estimation for the general population of older adults. *Journal of Biomechanics*, 35(5):707–712, 2002. Abstract consulted for population and estimation-method scope; no regression tables reproduced.
- [26] Alana Peters, Brook Galna, Morgan Sangeux, Meg Morris, and Richard Baker. Quantification of soft tissue artifact in lower limb human motion analysis: A systematic review. *Gait and Posture*, 31(1):1–8, 2010.

- [27] J. P. Scholz and G. Schöner. The uncontrolled manifold concept: Identifying control variables for a functional task. *Experimental Brain Research*, 126:289–306, 1999.
- [28] SciPy Developers. `minimize(method='L-BFGS-B')`: Convergence and failure conditions. <https://docs.scipy.org/doc/scipy/reference/optimize.minimize-lbfgs-b.html>. Accessed 2026-10-04.
- [29] SciPy Developers. Multivariate normal distribution. https://docs.scipy.org/doc/scipy/reference/generated/scipy.stats.multivariate_normal.html. Official API documentation; density and covariance conditions; accessed 2026-10-04.
- [30] SciPy Developers. `scipy.signal.butter`: Butterworth filter design. <https://docs.scipy.org/doc/scipy/reference/generated/scipy.signal.butter.html>. Accessed 2026-10-04.
- [31] SciPy Developers. `scipy.signal.sosfiltfilt`: Forward–backward filtering. <https://docs.scipy.org/doc/scipy/reference/generated/scipy.signal.sosfiltfilt.html>. Accessed 2026-10-04.
- [32] SciPy Developers. Solve an initial value problem for a system of ordinary differential equations. https://docs.scipy.org/doc/scipy/reference/generated/scipy.integrate.solve_ivp.html. Official API documentation; solver result and status contract; accessed 2026-10-04.
- [33] SciPy Developers. Symmetric generalized eigenvalue problems: `Eigh`. <https://docs.scipy.org/doc/scipy/reference/generated/scipy.linalg.eigh.html>. Official API documentation; generalized eigenproblem and normalization; accessed 2026-10-04.
- [34] Ajay Seth, Ricardo Matias, António P. Veloso, and Scott L. Delp. A biomechanical model of the scapulothoracic joint to accurately capture scapular kinematics during shoulder movements. *PLOS ONE*, 11(1):e0141028, 2016. Model and Methods: four-coordinate definition and mobilizer formulation consulted.
- [35] Simbody Developers. `SimbodyMatterSubsystem`: Generalized coordinates and mobilities. https://simbody.github.io/3.7.0/classSimTK_1_1SimbodyMatterSubsystem.html. Version 3.7 API; coordinate and speed mapping sections; accessed 2026-10-04.
- [36] D. G. Thelen. Adjustment of muscle mechanics model parameters to simulate dynamic contractions in older adults. *Journal of Biomechanical Engineering*, 125(1):70–77, 2003.
- [37] Darryl G. Thelen, Frank C. Anderson, and Scott L. Delp. Generating dynamic simulations of movement using computed muscle control. *Journal of Biomechanics*, 36(3):321–328, 2003.
- [38] TU Delft. Euler–bernoulli beam elements. https://interactivetextbooks.citg.tudelft.nl/computational-modelling/structural_linear/euler_bernoulli.html. Computational Modelling; strong and weak forms and Hermite interpolation; accessed 2026-10-04.
- [39] David A. Winter. *Biomechanics and Motor Control of Human Movement*. John Wiley & Sons, Hoboken, NJ, 4th edition, 2009.

-
- [40] G. Wu, S. Siegler, P. Allard, et al. Isb recommendation on definitions of joint coordinate system of various joints for the reporting of human joint motion—part i: ankle, hip, and spine. *Journal of Biomechanics*, 35(4):543–548, 2002.
- [41] G. Wu, F. C. T. van der Helm, H. E. J. Veeger, et al. Isb recommendation on definitions of joint coordinate systems of various joints for the reporting of human joint motion — part ii: shoulder, elbow, wrist and hand. *Journal of Biomechanics*, 38(5):981–992, 2005.