

Tangent-Space Methods for Nonlinear Control and Biomechanics

*Tangent-Space Methods for Nonlinear
Dynamics and Control*

*A unified treatment of how exact local linearity,
contraction metrics, and optimal control
share a common geometric foundation.*

*“Every nonlinear system is locally linear—not approximately, but exactly.
The art of control is navigating between these exact local pictures.”*

— The Tangent Hyperplane Manifesto

Preface

This book grew from a simple observation that proved surprisingly difficult to articulate cleanly: *superposition is exact in tangent spaces*. Not approximately true. Not “good enough for small perturbations.” Exact—by the definition of what a tangent space is.

That observation is not new mathematics. Calculus established it centuries ago. What is new is the insistence that control theory, dynamics, and engineering practice should fully internalize what calculus already proved. When we linearize a nonlinear system, we are not making an approximation. We are computing the exact infinitesimal structure of the dynamics at a point. The approximation enters only when we step away from that point—and even then, the error is not sloppiness but geometry: the curvature of the manifold.

This book develops that perspective systematically. We show that contraction theory, trajectory optimization (LQR, DDP, MPC), and the decomposition of motion into drift and control all rest on the same geometric foundation: *tangent-space dynamics with a metric*.

The treatment is aimed at graduate students and practicing engineers who have encountered linearization, Lyapunov stability, and optimal control as separate topics and want to see them unified. We assume familiarity with linear algebra, multivariable calculus, and ordinary differential equations. Differential geometry is introduced as needed, always paired with physical intuition.

Every chapter follows a consistent structure: a qualitative framing of why the material matters, a plain-language explanation, a geometric intuition box, and then the formal development. This is deliberate. The mathematics must be rigorous, but the reader should always know *why* a calculation is being done before seeing *how*.

A word on notation: we are deliberately explicit. Every matrix dimension, every smoothness assumption, every domain restriction is stated. This is not pedantry—it is the scaffolding that prevents the subtle errors that plague “hand-wavy” treatments of linearization and superposition.

February 2026

Contents

Preface	ii
Nomenclature	xi
1 Foundations: Tangent Spaces and Exactness	1
1.1 Motivation: Why Geometry Matters for Control	1
1.2 Historical Context: From Newton to Modern Differential Geometry	2
1.2.1 Newton, Leibniz, and the Birth of the Infinitesimal	2
1.2.2 Cauchy, Weierstrass, and the Rigorous Foundation	2
1.2.3 Riemann’s Vision of Intrinsic Geometry	2
1.2.4 From Approximation to Exact Structure	3
1.2.5 The Conceptual Shift	3
1.3 Smooth Dynamical Systems	3
1.4 The Fréchet Derivative: Linearization as Exact Structure	3
1.4.1 Definition and Uniqueness	3
1.4.2 Proof of Uniqueness	4
1.4.3 Relationship to the Gâteaux Derivative	4
1.4.4 Worked Example: The Pendulum Jacobian	5
1.4.5 The Input Jacobian	6
1.5 Tangent Spaces as Vector Spaces	6
1.5.1 Abstract Definition	6
1.5.2 Isomorphism With Directional Derivatives	6
1.5.3 Why Tangent Spaces Are the Natural Home of Superposition	6
1.5.4 Coordinate Representation	7
1.6 Residuals: Geometry, Not Error	7
1.6.1 Residual Scaling: A Concrete Example	7
1.6.2 Two Perspectives on Linearization	8
1.7 Manifold Examples: From Theory to Application	8
1.7.1 SO(3): Rotations and Attitude Dynamics	9
1.7.2 SE(3): Rigid Body Transformations	9
1.7.3 The Double Pendulum Configuration Manifold	10
1.8 Nonlinearity Re-Enters Through Transport	11
1.8.1 Transport as Curved Geometry	11
1.8.2 State Transition Matrix and Variational Equations	11
1.8.3 Christoffel Symbols and Parallel Transport (Intuitive Picture)	11
1.8.4 Connection to Differential Dynamic Programming	11
1.9 Scope of Exactness: When the Tangent-Space Picture Breaks Down	12
1.9.1 Discontinuities and Piecewise-Smooth Systems	12
1.9.2 Chattering and Sliding Modes	12
1.9.3 Zeno Behavior and Accumulation of Events	12
1.9.4 Singular Configurations on Manifolds	12
1.9.5 Summary: Boundaries of the Theory	13
1.10 The Five Axioms: A Summary	13
1.11 Scope and Limitations	13
1.11.1 When to Use This Framework	14
1.11.2 Important Distinction: Linearization vs. Linear Approximation	14
1.11.3 Looking Ahead	14
1.12 Preview: Why These Ideas Matter for the Golf Swing	14
1.12.1 The Golfer’s Tangent Space	15

1.12.2	Curvature as a Diagnostic	15
1.12.3	Transport and the Kinematic Chain	15
2	Variational Dynamics and the Moving Frame	17
2.1	First Variation Along a Feasible Motion	17
2.1.1	State, Input and Reference	17
2.1.2	A Family of Nearby Solutions	17
2.1.3	The Taylor Remainder and Its Mixed Term	18
2.2	The State Transition Matrix	18
2.2.1	Definition and Composition	18
2.2.2	Liouville's Identity	19
2.3	Time Ordering and the Peano–Baker Series	19
2.4	Variation of Constants and Outcome Sensitivity	20
2.4.1	Derivation of the Forced Solution	20
2.4.2	Impact Time Is an Additional Variable	20
2.5	Finite Error and the Limits of Linear Prediction	20
2.6	Discrete Flow and Its Derivative	21
2.6.1	Zero-Order-Held Inputs	21
2.6.2	A Singular-Safe Linear Formula	21
2.7	A Checked Pendulum Example	22
2.7.1	Model and Analytic Transition	22
2.7.2	Numbers, Units and Impulse Interpretation	22
2.8	Parameter Sensitivity and Adjoint Gradients	23
2.8.1	Forward Sensitivities	23
2.8.2	Derivation of the Adjoint	23
2.8.3	A Boundary-Term Check	23
2.8.4	Discrete Adjoint and Backpropagation	24
2.9	Volume, Distance and Stability Are Different	24
2.9.1	Which Divergence?	24
2.9.2	Growth in a Declared Metric	24
2.10	Control Authority Over a Horizon	25
2.11	Moving Frames and Geometric Meaning	25
2.12	Reliable Numerical Computation	26
2.12.1	Integrating What the Task Requires	26
2.12.2	Matrix Exponentials and Conditioning	26
2.12.3	Stiffness Is Not the Same as Loss of Information	26
2.12.4	QR Propagation With Correct Product Order	26
2.13	Structure-Preserving Integration	27
2.13.1	Symplectic Structure and Energy	27
2.13.2	Rotations and Variational Integrators	27
2.14	Reproducible Checks	28
2.15	What This Establishes for the Swing	29
3	Superposition: From Linear to Affine	31
3.1	Three Meanings of Addition	31
3.1.1	Tangent Vectors and First Variations	31
3.1.2	Exact Input Increments at One State	31
3.1.3	Finite Trajectories and the Evolving Baseline	32
3.2	Mechanical Origins of the Affine Map	32
3.2.1	Kinetic Energy and a Regular Mass Matrix	32
3.2.2	Force, Acceleration, and Connection Coefficients	32
3.2.3	Virtual Work Explains the Force Map	33
3.3	One Arm, Three Consistent Formulations	33
3.3.1	A Fully Specified Uniform-Rod Model	33

3.3.2	Newton–Euler Balances Recover the Same Efforts	34
3.3.3	Spatial Vectors Preserve the Same Constraints	34
3.4	Power, Work, and Intersegment Transfer	35
3.5	Constraints Preserve an Affine Map Within a Regular Mode	35
3.5.1	Reaction Forces Depend on the Input	35
3.5.2	Reduced Coordinates and Contact Feasibility	36
3.6	A Pendulum Example That Can Be Reproduced	36
3.6.1	Frozen-State Arithmetic	36
3.6.2	Trajectories Under Constant Torques	37
3.7	Passivity, Dissipation, and Contraction Are Different Claims	38
3.7.1	An Energy Inequality at a Declared Port	38
3.7.2	Port-Hamiltonian Structure and Its Limits	38
3.7.3	A Differential Certificate Must Be Checked Separately	39
3.8	Actuator Limits and the Choice of Input	39
3.8.1	Feasible Sets Do Not Erase Affinity	39
3.8.2	Voltage, Current, and Torque	39
3.8.3	Nonsmoothness Is a Separate Modeling Issue	40
3.9	Lie Brackets, Coupling, and Reachability	40
3.9.1	The Order of Motions Can Matter	40
3.9.2	Accessibility Is Not Controllability	40
3.10	Feedback Linearization Has a Local Domain of Validity	41
3.11	What This Establishes for the Golf Swing	41
3.12	Reproducible Verification	42
3.13	Exercises	43
4	Induced Acceleration Analysis: Superposition in the Biomechanics Literature	45
4.1	Historical Context and Motivation	45
4.2	The Formal Framework	46
4.2.1	Equations of Motion and the Forward Problem	46
4.2.2	Induced Acceleration Decomposition	46
4.3	Instantaneous Effects, Cumulative Effects, and the Drift Field	47
4.3.1	Instantaneous Effects	47
4.3.2	Cumulative Effects	47
4.3.3	Mapping to the Drift-Control Decomposition	47
4.4	Applications of Induced Acceleration Analysis	47
4.4.1	Walking: The Zajac–Neptune Framework	47
4.4.2	Overarm Throwing: The Hirashima Framework	48
4.4.3	Postural Control and the Induced Acceleration Index	48
4.4.4	Clinical Applications	49
4.5	Methodological Considerations	49
4.5.1	Ground Contact and Constraint Forces	49
4.5.2	Model Dependence	49
4.6	Synthesis: Two Communities, One Mathematical Structure	49
5	Contraction Theory and Metric Certificates	51
5.1	Historical Context and the Shift to Trajectory Stability	51
5.1.1	From Lyapunov Point Stability to Trajectory Convergence	51
5.1.2	The Lohmiller–Slotine Framework (1998)	51
5.1.3	Demidovich’s Condition (1961): An Historical Precursor	52
5.1.4	Connection to Modern Research	52
5.2	From Equilibrium Stability to Trajectory Stability	52
5.3	The Contraction Condition	52
5.4	Complete Proof of Exponential Convergence	53
5.5	The Identity Metric: Symmetric Jacobian Condition	55

5.6	Worked Example: A Simple Linear System	55
5.6.1	Problem Setup	55
5.6.2	Checking the Symmetric Jacobian	55
5.6.3	Finding the Contraction Metric via the Lyapunov Equation	56
5.7	Partial Contraction: Hierarchical Structure	56
5.7.1	When Not All Directions Contract	56
5.7.2	The Hierarchical Contraction Theorem	56
5.8	Control Contraction Metrics: Design and Duality	57
5.8.1	Feedback Design Under Contraction	58
5.8.2	The Dual Formulation: $W = M^{-1}$	58
5.8.3	Pointwise LMI for Feedback Synthesis	58
5.8.4	Computational Approaches	58
5.9	Discrete-Time Contraction	59
5.9.1	Discrete Contraction Condition	59
5.9.2	Connection to Riccati Analysis	59
5.10	Numerical Example: Van der Pol Oscillator	60
5.10.1	System Description	60
5.10.2	Metric Synthesis via Parameterization	60
5.10.3	Solution Strategy	60
5.11	Robustness Margins From Contraction	61
5.11.1	Disturbance Attenuation via Contraction Rate	61
5.11.2	Practical Implications	62
5.12	Incremental Input-to-State Stability (ISS)	62
5.12.1	ISS vs. Contraction	62
5.13	Extended Lyapunov Comparison	62
5.13.1	Unified Perspective	62
5.13.2	Formal Relationships	62
5.14	Contraction in Biomechanical Systems	63
5.14.1	Why Biological Motor Systems Are Naturally Contracting	63
5.14.2	Partial Contraction in Sequential Motion	63
5.14.3	Contraction and the Drift-Dominated Phase	64
5.15	Stochastic Contraction	64
5.15.1	Systems With Brownian Perturbations	64
5.15.2	The Stochastic Contraction Condition	65
5.15.3	Connection to Uncertainty Propagation	65
5.16	Contraction Tubes and Funnel Control	65
5.16.1	The Contraction Tube	65
5.16.2	Funnel Control	65
5.17	Chapter Summary	66
6	Local Optimal Control: LQR, DDP, and Riccati	68
6.1	Bellman and Pontryagin: Two Views of the Same Objective	68
6.2	A Dimensionally Consistent Local Model	69
6.3	The Discrete Riccati Recursion	69
6.4	Controllability, Finite Cost, and Stabilization	70
6.5	Differential Dynamic Programming and iLQR	70
6.6	What Local Convergence Requires	71
6.7	A Reproducible Pendulum Example	71
6.8	Constraints and the Meaning of the Cost	72
6.9	Continuous-Time Riccati and a Counterexample	72
6.10	Model Predictive Control and Terminal Guarantees	72
6.11	Connecting the Calculation to the Golf Swing	73

7	Stability–Optimality Duality	74
7.1	What the Quadratic Problem Assumes	74
7.1.1	State, Port and Objective	74
7.1.2	Existence and Positive Definiteness	74
7.2	The Continuous-Time Identity	75
7.2.1	Completing the Square	75
7.2.2	A Value Rate Is Twice a Norm Rate	75
7.3	The Discrete-Time Identity	76
7.3.1	Bellman Completion and the Riccati Equation	76
7.3.2	Discrete Norm and Value Factors	76
7.4	Finite Horizons and Moving References	76
7.4.1	The Terminal Condition Matters	76
7.4.2	Impact Objectives and Remaining Control Authority	77
7.5	A Reproducible Discrete Example	77
7.5.1	Model and Numerical Authority	77
7.5.2	Computed Matrices and Decay Bound	77
7.5.3	Actual Trajectory Versus Its Bound	78
7.6	Geometry Without Overclaiming	78
7.6.1	When a Value Defines a Metric	78
7.6.2	Optimal Paths Are Not Generally Geodesics	79
7.6.3	Conditioning Is Not Controllability	79
7.7	The Exact Scope of LQR Robustness	79
7.7.1	A Common Input-Gain Margin	79
7.7.2	The Return-Difference Disk Is Not a Pole Disk	80
7.7.3	Saturation and Estimation Change the Question	80
7.8	Dissipativity and Disturbance Attenuation	80
7.8.1	Storage Depends on the Supply Rate	80
7.8.2	A Normalized Full-State H-Infinity Problem	81
7.9	Control and Estimation Duality	81
7.9.1	The Kalman–Bucy Model	81
7.9.2	Covariance and the Differential Metric	82
7.9.3	Nonlinear Observers Need Their Full Jacobian	82
7.9.4	Observability Requires a Sensor Model	82
7.10	Separation, Coupling and the Swing	83
7.10.1	What Linear Separation Proves	83
7.10.2	A Technically Defensible Golf Argument	83
7.11	Reproducible Counterexamples	83
7.12	Summary and Further Reading	85
7.13	Exercises	85
8	Forward Dynamics, Counterfactuals, and Drift	87
8.1	The Causal Structure of Control-Affine Systems	87
8.2	The Zero-Torque Counterfactual (ZTCF) Family	87
8.2.1	Mathematical Foundations: Existence, Uniqueness, and Smoothness	88
8.2.2	The Flow Map and Properties	88
8.2.3	Mathematical Justification	89
8.3	The Zero Velocity Counterfactual (ZVCF)	89
8.4	Decomposition of the Drift for Mechanical Systems	89
8.4.1	Superposition of Drift Components	90
8.4.2	Magnitude Scaling	90
8.4.3	Worked Decomposition Table: Double Pendulum Example	90
8.5	The Drift–Control Ratio	91
8.5.1	Velocity Scaling	91
8.6	Forward Dynamics as a Thought Experiment Engine	91

8.6.1	Attribution Analysis	92
8.6.2	Sensitivity Counterfactuals	92
8.7	Attribution Methodology: A Formal Procedure	92
8.8	Sensitivity Counterfactuals: Detailed Mathematics	93
8.8.1	Single Actuator Failure	93
8.8.2	Parameter Perturbation	93
8.8.3	Gravity Modification	93
8.8.4	Mass Redistribution	93
8.9	Data-Driven Drift Estimation	93
8.9.1	The Regression Approach	94
8.9.2	Identification Condition: Input Variation	94
8.9.3	Practical Considerations	94
8.9.4	Connection to System Identification	94
8.10	Contraction Analysis of the Drift	95
8.10.1	Drift Jacobian and Eigenvalue Analysis	95
8.10.2	Contraction Implies Low Control Authority	95
8.10.3	Proof via Optimal Control	95
8.11	Energy Interpretation of Counterfactuals	96
8.11.1	Energy of the ZTCF	96
8.11.2	Conservative Drift: Energy Conservation	96
8.11.3	Dissipative Drift: Energy Decay	96
8.11.4	Control Energy Input	96
8.11.5	Energy Comparison Counterfactual	97
8.12	Worked Example: Underactuated Double Pendulum	97
8.12.1	System Parameters and Equations	97
8.12.2	Mass Matrix	97
8.12.3	Coriolis Matrix	98
8.12.4	Gravitational Vector	98
8.12.5	Drift Components	98
8.12.6	Input Matrix	98
8.12.7	Numerical Simulation	98
8.12.8	Results: ZTCF vs. Actual Trajectory	99
8.12.9	Decomposition: Gravity vs. Coriolis	99
8.12.10	Drift–Control Ratio Evolution	100
8.12.11	ZTCF Trajectory	100
8.13	Connection to Contraction and Optimal Control (Detailed Proofs)	100
8.13.1	Contraction of Drift via Lyapunov Methods	100
8.13.2	Minimal Intervention in Drift-Dominated Regimes	101
8.13.3	Stability Without Control	101
8.14	Summary Table: Key Concepts and Relationships	101
8.15	Example: Counterfactual Analysis of a Multisegment Swing	101
8.15.1	Qualitative ZTCF Structure	102
8.15.2	Structural Argument: Why Active Torque Is Negligible at Impact	102
8.16	Chapter Summary	103
9	Applications: Biomechanics, Robotics, and Beyond	105
9.1	What a Shared Mathematical Language Can Explain	105
9.2	A Mechanically Consistent Golf Teaching Model	105
9.2.1	Coordinates, States, and Rigid-Body Inertia	105
9.2.2	A Flexible Appendage Must Contribute All Its Kinetic Energy	106
9.2.3	Eliminate Accelerations Without Losing the Bias Terms	107
9.2.4	A Rigid Counterfactual Is a Different Model	108
9.3	From Drift Decomposition to a Testable Golf Argument	108
9.3.1	Declare the Intervention and the Quantity Being Compared	108

9.3.2	Acceleration Sequences Are Not Energy-Transfer Measurements	109
9.3.3	Shaft Recovery Depends on Phase and on the Moving Grip	109
9.3.4	Carry Uncertainty Through the Impact Event	110
9.4	Robotics: Reachability, Redundancy, and a Verifiable Controller	111
9.4.1	Check the Reference Before Designing Its Controller	111
9.4.2	A Position Pullback Has a Nullspace	111
9.4.3	An Exact Local Example With Its Assumptions Exposed	112
9.4.4	Finite-Horizon and Sampled Certificates Need Their Own Equations	112
9.5	Spacecraft: Respect the Orbit and the Meaning of the Cost	112
9.5.1	Relative Motion About a Circular Chief Orbit	112
9.5.2	Quadratic Effort Is Not Propellant Consumption	113
9.6	Vehicles: Input Coordinates and Speed Change the Argument	113
9.6.1	An Exact Affine Bicycle Model	113
9.6.2	A Speed Schedule Requires Its Own Dynamics	114
9.7	Reproducible Computation and Evidence	114
9.7.1	Check an Equation Before Interpreting Its Output	114
9.7.2	Separate Verification, Calibration, and Validation	115
9.8	Exercises That Test the Argument	115
10	Parallel Mechanisms, Constrained Dynamics, and Geometric Control	117
10.1	What the Geometry Explains	117
10.2	Configuration, Constraints, and Regularity	117
10.2.1	Configuration Is Different From State	117
10.2.2	A Movable Planar Closed Chain	118
10.2.3	A Revolute Joint and Its Frames	118
10.2.4	Integrability Needs More Than a Derivative Test	118
10.3	Mass Metric, Forces, and Inertial Terms	118
10.3.1	Vectors and Covectors Have Different Roles	118
10.3.2	Constructing the Mass Matrix	119
10.3.3	Coriolis Loads and the Energy Identity	119
10.4	Eliminating Reactions Without Losing Their Input Dependence	119
10.5	Three Different Forms of Redundancy	120
10.5.1	Constraint Freedom, Task Freedom, and Input Freedom	120
10.5.2	Minimum-Energy Velocity and Muscle Allocation	121
10.6	Twists, Wrenches, and a Two-Hand Grip	121
10.6.1	Consistent Frame Transformations	121
10.6.2	Different Contact Points Have Different Velocities	121
10.6.3	Singular Values Need Physical Scaling	122
10.7	Ground Contact, Momentum, and Power	122
10.7.1	Count the Floating Base Before Subtracting Constraints	122
10.7.2	Center of Pressure and Reference-Point Conventions	122
10.7.3	Inverse Dynamics With All Loads Declared	123
10.7.4	Support Can Redirect Motion Without Supplying Work	123
10.8	Reachability and Optimal Control	123
10.8.1	Instantaneous Rank Does Not Decide Finite-Time Motion	123
10.8.2	Necessary Conditions in Independent State Coordinates	124
10.8.3	Value Functions and Local Numerical Methods	124
10.9	What Measurements Can Identify	124
10.10	Symmetry, Mechanical Connections, and Geometric Phase	125
10.10.1	Momentum Conservation Has a Boundary Condition	125
10.10.2	Separate Dynamic and Geometric Contributions	125
10.11	Numerical Methods That Preserve the Stated Problem	126
10.12	Connecting the Pieces in a Golf Investigation	126
10.12.1	Exercises and Reproducible Checks	127

Glossary of Important Concepts	128
Further Reading and References	131
Index	132
Notation Reference	133
Differential Geometry Primer	134
.1 Smooth Manifolds	134
.2 Tangent Spaces and Tangent Bundles	134
.3 Vector Fields and Flows	134
.4 Riemannian Metrics	134
.5 Lie Groups and Lie Algebras	135
.6 Exponential and Logarithmic Maps	135
.7 Adjoint Representation	135
.8 Fiber Bundles	136
.9 Connections and Parallel Transport	136
.10 Curvature and Trajectory Sensitivity	136
Linear Algebra for Control	137
.11 Matrix Inequalities and the Loewner Order	137
.12 Schur Complement	137
.13 Singular Value Decomposition	137
.14 Matrix Exponential	137
.15 Kronecker Products	138
.16 Matrix Calculus	138
.17 Generalized Eigenvalue Problems	138
.18 Perturbation Theory and Pseudospectra	138
.19 Sparse Matrix Methods	138
.20 LMI Fundamentals	138

Nomenclature

General Conventions

- Scalars are lowercase or Greek letters (e.g., m, t, θ).
- Vectors are bold lowercase (e.g., $\mathbf{x}, \mathbf{u}, \mathbf{q}$).
- Matrices are bold uppercase (e.g., $\mathbf{A}, \mathbf{B}, \mathbf{M}, \mathbf{J}$).
- Expected values and sets are denoted by blackboard bold or script (e.g., $\mathbb{E}, \mathcal{S}$).

State and Kinematics

$\mathbf{q} \in \mathbb{R}^n$ Joint configuration vector (generalized coordinates).

$\dot{\mathbf{q}} \in \mathbb{R}^n$ Joint velocity vector (generalized velocities).

$\ddot{\mathbf{q}} \in \mathbb{R}^n$ Joint acceleration vector.

$\mathbf{x} \in \mathbb{R}^{n_x}$ System state vector; commonly $\mathbf{x} = [\mathbf{q}^T, \dot{\mathbf{q}}^T]^T$ for mechanical systems.

$\mathbf{u} \in \mathbb{R}^m$ Control input vector (e.g., joint torques, muscle activations).

$\boldsymbol{\tau} \in \mathbb{R}^n$ Generalized forces/torques acting on the joints.

$t \in \mathbb{R}$ Time.

Inertia and Dynamics

$\mathbf{M}(\mathbf{q})$ Mass (inertia) matrix, symmetric positive definite.

$\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})$ Coriolis and centrifugal force matrix.

$\mathbf{g}(\mathbf{q})$ Gravity vector.

$\mathbf{J}(\mathbf{q})$ Jacobian matrix relating joint velocities to task-space velocities ($\dot{\mathbf{p}} = \mathbf{J}(\mathbf{q})\dot{\mathbf{q}}$).

Control and Optimization

$\mathbf{A}_k = \frac{\partial f}{\partial \mathbf{x}}$ Local Jacobian matrix of the state dynamics.

$\mathbf{B}_k = \frac{\partial f}{\partial \mathbf{u}}$ Local Jacobian matrix of the control input.

$V(\mathbf{x})$ or $\mathcal{V}$ Value function or Lyapunov function.

$\mathbf{Q}$ State penalty matrix in LQR/DDP.

$\mathbf{R}$ Control penalty matrix in LQR/DDP.

$\mathbf{K}$ Feedback gain matrix ($\delta \mathbf{u} = -\mathbf{K}\delta \mathbf{x}$).

γ A trajectory or flow, mapping time and initial conditions to states.

Affine Control and Counterfactuals

$f(\mathbf{x})$ Drift vector field: complete autonomous evolution of the declared effective plant when $\mathbf{u} = \mathbf{0}$.

$G(\mathbf{x})$ Input (control) matrix field mapping control inputs to state derivatives.

$\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$ Control-affine system equations of motion.

$\mathbf{x}^{\text{ZTCF}}(t)$ Forward Zero-Torque Counterfactual trajectory under $\mathbf{u}(t) \equiv \mathbf{0}$.

$\mathbf{a}_{\text{ZVCF}}(\mathbf{q}, \mathbf{z})$ Instantaneous Zero-Velocity Counterfactual acceleration with velocity and declared control set to zero.

$\text{DCR}_{W,\mathcal{U}}(\mathbf{x})$ Drift-Control Ratio in a declared acceleration or task-projected space: $\frac{\|W\mathbf{a}_{\text{drift}}\|_2}{\sup_{\mathbf{u} \in \mathcal{U}} \|W\mathbf{B}_a\mathbf{u}\|_2 + \varepsilon}$.

Biomechanics and Motor Control

$a_i \in [0, 1]$ Muscle activation level.

ℓ_i^M Muscle fiber length.

v_i^M Muscle fiber contraction velocity.

ℓ_i^{MT} Musculotendon unit length.

$\mathbf{F}_{\text{muscle}}$ Force generated by muscles.

$\mathbf{W}$ Muscle synergy matrix (weights).

$\mathbf{c}(t)$ Muscle synergy activation vector over time.

Geometry and Manifolds

$SE(3)$ Special Euclidean group of rigid body motions.

$SO(3)$ Special Orthogonal group of 3D rotations.

$\mathfrak{se}(3)$ Lie algebra of $SE(3)$, space of spatial twists (velocities).

$\mathcal{M}$ A smooth manifold.

$T_{\mathbf{x}}\mathcal{M}$ Tangent space at point $\mathbf{x}$.

Chapter 1


Foundations: Tangent Spaces and Exactness

In Plain Language 1.1. Zooming in on the Map

Every curved surface, no matter how complex, has a flat patch touching it at each point. On that flat patch, the familiar rules of addition and scaling work perfectly. This chapter establishes that these flat patches—tangent spaces—are not approximations of the surface. They *are* the exact infinitesimal structure of the surface, by the very definition of what “smooth” means.

1.1 Motivation: Why Geometry Matters for Control

Nonlinear dynamics are often described as systems in which superposition does not apply. Students learn early that while linear systems permit the combination of solutions—if $\mathbf{x}_1(t)$ and $\mathbf{x}_2(t)$ are solutions, then so is $\alpha\mathbf{x}_1(t) + \beta\mathbf{x}_2(t)$ —nonlinear systems deny this convenience. The narrative typically stops there, leaving the impression that nonlinearity and superposition are fundamentally incompatible.

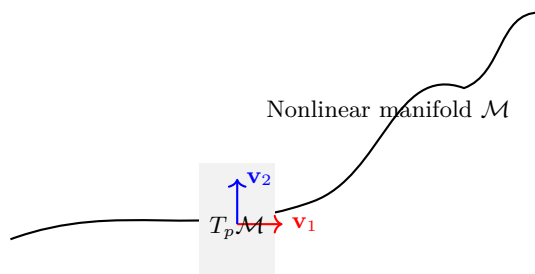

The key insight of this chapter is that while trajectories cannot be superposed on the manifold itself, *infinitesimal perturbations* live in the tangent space $T_p \mathcal{M}$, where superposition holds exactly.

That impression is incomplete. It is true that *trajectories* in a nonlinear system do not generally superpose. But at each point in state space, there exists a tangent space that is a genuine vector space, and within that vector space, superposition holds exactly. Not approximately. Not “for small enough perturbations.” *Exactly*, by the axioms of linear algebra.

The purpose of this book is to take that geometric fact seriously and trace its consequences through contraction theory, optimal control, and the practical decomposition of complex motions into interpretable components.

Geometric Intuition

A trajectory is a curve on a state-space manifold. At each point on that curve, there is a tangent plane capturing first-order motion of nearby trajectories. All local stability and local optimality calculations happen in these moving tangent planes. A metric is a local ruler; changing the metric changes which perturbation directions count as “large” or “small.”

Remark 1.1 (Lie Brackets and Nonlinear Coupling). While vector fields are added and scaled linearly in the tangent space, their composition via the flow map is nonlinear. The *Lie bracket* $[\mathbf{f}, \mathbf{g}]$ of two vector fields

measures this nonlinear coupling: it quantifies how the order of application matters. Formally, for vector fields $\mathbf{f}$ and $\mathbf{g}$ on a manifold $\mathcal{M}$,

$$[\mathbf{f}, \mathbf{g}] = \frac{\partial \mathbf{g}}{\partial \mathbf{x}} \mathbf{f} - \frac{\partial \mathbf{f}}{\partial \mathbf{x}} \mathbf{g}. \quad (1.1)$$

As Agrachev and Sachkov detail in [AS04, Ch. 1–2], the Lie bracket is the fundamental tool for understanding how infinitesimal perturbations in different directions interact. In control theory, brackets $[\mathbf{g}_i, \mathbf{g}_j]$ between input vector fields characterize what motions can be generated through iterated applications of controls—the foundation of controllability analysis via the Lie algebra rank condition, discussed in Chapter 3.

1.2 Historical Context: From Newton to Modern Differential Geometry

To appreciate the force of the tangent-space framework, it helps to understand how it emerged from the practical concerns of mechanics and the rigorous formalization of analysis.

1.2.1 Newton, Leibniz, and the Birth of the Infinitesimal

The modern concept of tangent space originates in the Newton–Leibniz calculus of the late 17th century [GPS02, Arn89]. Newton’s method of “fluxions” (rates of change) and Leibniz’s differential notation dx both captured an intuitive idea: at each point on a smooth curve, there is a direction of motion, a “tangent line.” For a curve $y = f(x)$ in the plane, the tangent line at $(x_0, f(x_0))$ has slope $f'(x_0)$ and can be written as

$$y - f(x_0) = f'(x_0)(x - x_0). \quad (1.2)$$

This is purely one-dimensional geometry. But the insight—that the tangent line is the “best linear approximation” to the curve at that point—proved far more general than the original calculus allowed.

1.2.2 Cauchy, Weierstrass, and the Rigorous Foundation

By the 19th century, Cauchy and especially Weierstrass placed the derivative on a rigorous footing [GPS02]. The limit definition

$$f'(x_0) := \lim_{h \rightarrow 0} \frac{f(x_0 + h) - f(x_0)}{h} \quad (1.3)$$

made the tangent line precise: it is the unique linear function whose error vanishes faster than the perturbation itself.

The power of this formulation is that it is *coordinate-free*: it depends only on the behavior of f in a neighborhood of x_0 , not on the choice of coordinates. A function is differentiable at x_0 if and only if the above limit exists, regardless of whether we write the function as $y = f(x)$ or in any other smooth parameterization.

1.2.3 Riemann’s Vision of Intrinsic Geometry

Bernhard Riemann’s 1854 paper *Über die Hypothesen, welche der Geometrie zu Grunde liegen* (On the Hypotheses Which Lie at the Foundations of Geometry) was the pivotal moment [dC92]. Riemann observed that just as Newton and Leibniz could construct a local approximation (the tangent line) at each point of a curve, one could construct a local vector space (the tangent space) at each point of any smooth manifold, even if the manifold itself were curved, high-dimensional, or not embedded in Euclidean space.

Riemann’s innovation—and its modern development by Élie Cartan, Hermann Weyl, and others [dC92, Arn89]—fundamentally separated two ideas:

1. The *manifold itself*: a geometric object that may be curved.
2. The *tangent space at a point*: a vector space, always flat and linear.

This separation is conceptually important. Curvature is not a failure of linearity; it is the nonlinearity of how tangent spaces connect as you move through the manifold.

1.2.4 From Approximation to Exact Structure

For most of the 20th century, even when differential geometry was fully developed [AM78, Arn89], the relationship between a nonlinear dynamical system and its tangent-space (linearized) dynamics remained framed as an *approximation* [Kha02]. Textbooks would write:

To study the qualitative behavior of a nonlinear system $\dot{\mathbf{x}} = f(\mathbf{x})$ near an equilibrium $\bar{\mathbf{x}}$, we linearize: $\delta\dot{\mathbf{x}} = \mathbf{A} \delta\mathbf{x}$ where $\mathbf{A} = \frac{\partial f}{\partial \mathbf{x}}|_{\bar{\mathbf{x}}}$. This linear system is “close” to the original system for small perturbations.

The language—“linearize,” “approximate,” “close to”—suggests that the tangent space is a crutch, a convenience for analysis. But this framing obscures the true mathematical situation.

1.2.5 The Conceptual Shift

The recognition that linearization is *exact* at the infinitesimal level, not an approximation, came from careful attention to the definition of the Fréchet derivative. If we define smoothness via the condition

$$f(\bar{\mathbf{x}} + \delta\mathbf{x}) = f(\bar{\mathbf{x}}) + \mathbf{A} \delta\mathbf{x} + o(\|\delta\mathbf{x}\|), \quad (1.4)$$

then there is *exactly one* matrix $\mathbf{A}$ satisfying this property (at the infinitesimal scale). The matrix $\mathbf{A}$ is not an approximation; it is the *definition* of what smoothness means at that point.

This modern viewpoint—which permeates contemporary differential geometry [dC92], control theory [Kha02, Sas99], and optimization (especially gradient-based learning)—is the foundation of this book. We do not linearize for convenience and accept error. We recognize that linearization *is* the exact infinitesimal description, and we use this exactness as a structural principle for analyzing and controlling nonlinear systems.

1.3 Smooth Dynamical Systems

Consider a dynamical system

$$\dot{\mathbf{x}} = f(\mathbf{x}, \mathbf{u}), \quad \mathbf{x} \in \mathbb{R}^n, \quad \mathbf{u} \in \mathbb{R}^m, \quad (1.5)$$

where $\mathbf{x}$ is the state vector and $\mathbf{u}$ is the control input. We impose the following standing assumption throughout this book.

Assumption 1.2 (Smoothness). The vector field $f : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$ is continuously differentiable (C^1) in both arguments. Where higher-order residual bounds are needed, we assume C^2 smoothness.

This assumption is minimal yet physically reasonable. Virtually all systems derived from classical mechanics—Newtonian, Lagrangian, or Hamiltonian—produce smooth vector fields. The C^1 requirement is the bare mathematical condition for derivatives to exist.

Common Misconception

Systems with impacts, Coulomb friction, switching controllers, or hard state constraints violate C^1 smoothness. Extensions to such hybrid systems exist (saltation matrices, Filippov solutions, complementarity formulations) but lie outside the scope of this treatment. We address smooth systems exclusively and note hybrid extensions where relevant.

1.4 The Fréchet Derivative: Linearization as Exact Structure

1.4.1 Definition and Uniqueness

At a fixed operating point $(\bar{\mathbf{x}}, \bar{\mathbf{u}})$, the **Jacobian** of the vector field with respect to the state is the matrix

$$\mathbf{A} := \frac{\partial f}{\partial \mathbf{x}} \bigg|_{(\bar{\mathbf{x}}, \bar{\mathbf{u}})} \in \mathbb{R}^{n \times n}, \quad (1.6)$$

defined as the unique linear map satisfying the Fréchet derivative condition:

$$f(\bar{\mathbf{x}} + \delta\mathbf{x}, \bar{\mathbf{u}}) = f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) + \mathbf{A} \delta\mathbf{x} + o(\|\delta\mathbf{x}\|). \quad (1.7)$$

The notation $o(\|\delta\mathbf{x}\|)$ denotes a remainder that vanishes faster than $\|\delta\mathbf{x}\|$ as $\|\delta\mathbf{x}\| \rightarrow 0$:

$$\lim_{\|\delta\mathbf{x}\| \rightarrow 0} \frac{\|f(\bar{\mathbf{x}} + \delta\mathbf{x}, \bar{\mathbf{u}}) - f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) - \mathbf{A} \delta\mathbf{x}\|}{\|\delta\mathbf{x}\|} = 0. \quad (1.8)$$

1.4.2 Proof of Uniqueness

Proposition 1.3 (Uniqueness of the Fréchet Derivative). *If a linear map $\mathbf{A}$ satisfies Eq. (1.7) at $\bar{\mathbf{x}}$, then $\mathbf{A}$ is unique.*

Proof. Suppose two matrices $\mathbf{A}$ and $\mathbf{A}'$ both satisfy

$$f(\bar{\mathbf{x}} + \delta\mathbf{x}, \bar{\mathbf{u}}) = f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) + \mathbf{A} \delta\mathbf{x} + o(\|\delta\mathbf{x}\|), \quad (1.9)$$

$$f(\bar{\mathbf{x}} + \delta\mathbf{x}, \bar{\mathbf{u}}) = f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) + \mathbf{A}' \delta\mathbf{x} + o(\|\delta\mathbf{x}\|). \quad (1.10)$$

Subtracting these equations gives

$$(\mathbf{A} - \mathbf{A}') \delta\mathbf{x} = o(\|\delta\mathbf{x}\|). \quad (1.11)$$

For any nonzero vector $\mathbf{v} \in \mathbb{R}^n$, set $\delta\mathbf{x} = t\mathbf{v}$ where $t > 0$ is small. Then

$$(\mathbf{A} - \mathbf{A}')\mathbf{v} = \frac{o(t\|\mathbf{v}\|)}{t} = t \cdot \frac{o(t\|\mathbf{v}\|)}{t \cdot \|\mathbf{v}\|} \cdot \|\mathbf{v}\|. \quad (1.12)$$

As $t \rightarrow 0^+$, the term $\frac{o(t\|\mathbf{v}\|)}{t \cdot \|\mathbf{v}\|} \rightarrow 0$ by definition of $o(\cdot)$. Therefore, $(\mathbf{A} - \mathbf{A}')\mathbf{v} = 0$ for all $\mathbf{v}$, implying $\mathbf{A} = \mathbf{A}'$. $\square$

This uniqueness is the cornerstone of the book's philosophy. There is exactly one candidate for “the infinitesimal structure” of f at $\bar{\mathbf{x}}$, and it is $\mathbf{A}$.

Principle 1: The Derivative is Exact The linear map $\mathbf{A}$ is not an approximation to f . It *is* the exact infinitesimal structure of f at $\bar{\mathbf{x}}$. There is no “better” first-order description— $\mathbf{A}$ is unique by the definition of the Fréchet derivative.

This distinction is the conceptual foundation of the entire book. The standard narrative—“we linearize for convenience and accept some error”—conflates two distinct operations:

1. **Computing the derivative** (exact, by definition);
2. **Using the linear model for finite perturbations** (introduces residuals proportional to curvature).

1.4.3 Relationship to the Gâteaux Derivative

The Fréchet derivative is stronger than the more permissive Gâteaux derivative. The **Gâteaux derivative** of f at $\bar{\mathbf{x}}$ in direction $\mathbf{v}$ is

$$D_{\mathbf{v}}f(\bar{\mathbf{x}}) := \lim_{t \rightarrow 0} \frac{f(\bar{\mathbf{x}} + t\mathbf{v}) - f(\bar{\mathbf{x}})}{t}, \quad (1.13)$$

provided the limit exists. If f is Fréchet-differentiable at $\bar{\mathbf{x}}$ with derivative $\mathbf{A}$, then the Gâteaux derivative in any direction $\mathbf{v}$ exists and equals $\mathbf{A}\mathbf{v}$.

However, the converse is false: a function can have all Gâteaux derivatives in all directions (even linearly) without being Fréchet-differentiable. The Fréchet condition is uniform in all directions; the remainder $o(\|\delta\mathbf{x}\|)$ must be small relative to $\|\delta\mathbf{x}\|$ for *all* perturbations $\delta\mathbf{x}$, not just along specific rays.

For the purposes of this book, we always assume Fréchet differentiability (part of the C^1 assumption), which ensures the robust infinitesimal linearization on which all subsequent theory depends.

1.4.4 Worked Example: The Pendulum Jacobian

Consider a simple pendulum with friction and torque input:

$$\dot{\theta} = \omega, \quad \dot{\omega} = -g \sin(\theta) - b\omega + u, \quad (1.14)$$

where θ is angle, ω is angular velocity, g is gravitational acceleration, b is friction, and u is applied torque. The state is $\mathbf{x} = (\theta, \omega)$ and control is $\mathbf{u} = u$.

The vector field is

$$f(\mathbf{x}, u) = \begin{pmatrix} \omega \\ -g \sin \theta - b\omega + u \end{pmatrix}. \quad (1.15)$$

At an equilibrium $(\bar{\theta}, \bar{\omega}) = (\bar{\theta}, 0)$ (the pendulum at rest), with input $\bar{u} = g \sin \bar{\theta}$ (input compensating gravity), the Jacobians are:

$$\mathbf{A} = \left. \frac{\partial f}{\partial \mathbf{x}} \right|_{(\bar{\theta}, 0)} = \begin{pmatrix} 0 & 1 \\ -g \cos \bar{\theta} & -b \end{pmatrix}, \quad (1.16)$$

$$\mathbf{B} = \left. \frac{\partial f}{\partial u} \right|_{(\bar{\theta}, 0)} = \begin{pmatrix} 0 \\ 1 \end{pmatrix}. \quad (1.17)$$

Now, consider a perturbation $\delta \mathbf{x} = (\delta \theta, \delta \omega)$ from the equilibrium. The Fréchet property says

$$f(\bar{\theta} + \delta \theta, 0 + \delta \omega, \bar{u}) \approx f(\bar{\theta}, 0, \bar{u}) + \mathbf{A} \delta \mathbf{x} \quad (1.18)$$

for small $\delta \mathbf{x}$. Let us verify this numerically.

Numerical Verification

Take $g = 10 \text{ m/s}^2$, $b = 0.1 \text{ s}^{-1}$, and $\bar{\theta} = \pi/6$ (30 degrees). Then $\cos(\pi/6) = \sqrt{3}/2 \approx 0.866$, so

$$\mathbf{A} = \begin{pmatrix} 0 & 1 \\ -10 \times 0.866 & -0.1 \end{pmatrix} = \begin{pmatrix} 0 & 1 \\ -8.66 & -0.1 \end{pmatrix}. \quad (1.19)$$

Consider perturbations of increasing size. At equilibrium, $f(\bar{\theta}, 0, \bar{u}) = (0, 0)$.

For $\delta \mathbf{x} = (0.01, 0)$ (small angle perturbation):

$$\text{True: } f(\bar{\theta} + 0.01, 0, \bar{u}) = \begin{pmatrix} 0 \\ -g(\sin(\pi/6 + 0.01) - \sin(\pi/6)) \end{pmatrix} \quad (1.20)$$

$$= \begin{pmatrix} 0 \\ -10(0.5087 - 0.5) \end{pmatrix} = \begin{pmatrix} 0 \\ -0.0867 \end{pmatrix}, \quad (1.21)$$

$$\text{Linear: } \mathbf{A} \delta \mathbf{x} = \begin{pmatrix} 0 & 1 \\ -8.66 & -0.1 \end{pmatrix} \begin{pmatrix} 0.01 \\ 0 \end{pmatrix} = \begin{pmatrix} 0 \\ -0.0866 \end{pmatrix}, \quad (1.22)$$

$$\text{Residual: } r(\delta \mathbf{x}) = \begin{pmatrix} 0 \\ -0.0001 \end{pmatrix}, \quad \|r(\delta \mathbf{x})\| \approx 4.3 \times 10^{-4}, \quad \frac{\|r(\delta \mathbf{x})\|}{\|\delta \mathbf{x}\|} = 0.043. \quad (1.23)$$

For $\delta \mathbf{x} = (0.001, 0)$ (one-tenth the size):

$$\text{Residual: } \|r(\delta \mathbf{x})\| \approx 4.3 \times 10^{-6}, \quad \frac{\|r(\delta \mathbf{x})\|}{\|\delta \mathbf{x}\|} = 0.0043. \quad (1.24)$$

For $\delta \mathbf{x} = (0.0001, 0)$:

$$\text{Residual: } \|r(\delta \mathbf{x})\| \approx 4.3 \times 10^{-8}, \quad \frac{\|r(\delta \mathbf{x})\|}{\|\delta \mathbf{x}\|} = 0.00043. \quad (1.25)$$

The ratio $\|r(\delta \mathbf{x})\| / \|\delta \mathbf{x}\|$ decreases approximately as $\|\delta \mathbf{x}\|$ (i.e., $o(\|\delta \mathbf{x}\|)$ behavior), confirming the Fréchet property. For a mixed perturbation like $\delta \mathbf{x} = (0.01, 0.01)$, we would see this same scaling: the residual is dominated by the quadratic term (curvature) in the sin function, which is $O(\|\delta \mathbf{x}\|^2)$.

1.4.5 The Input Jacobian

Similarly, the Jacobian with respect to the input is

$$\mathbf{B} := \left. \frac{\partial f}{\partial \mathbf{u}} \right|_{(\bar{\mathbf{x}}, \bar{\mathbf{u}})} \in \mathbb{R}^{n \times m}, \quad (1.26)$$

satisfying

$$f(\bar{\mathbf{x}}, \bar{\mathbf{u}} + \delta \mathbf{u}) = f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) + \mathbf{B} \delta \mathbf{u} + o(\|\delta \mathbf{u}\|). \quad (1.27)$$

Together, the pair $(\mathbf{A}, \mathbf{B})$ encodes the complete first-order sensitivity of the dynamics at $(\bar{\mathbf{x}}, \bar{\mathbf{u}})$. These are the objects that every subsequent chapter will build upon.

1.5 Tangent Spaces as Vector Spaces

1.5.1 Abstract Definition

Definition 1.4 (Tangent Space). Let $\mathcal{M}$ be a smooth manifold and $p \in \mathcal{M}$. The **tangent space** $T_p \mathcal{M}$ is the vector space of all tangent vectors at p —equivalently, the space of all velocity vectors of smooth curves passing through p .

More formally, two smooth curves $\gamma_1, \gamma_2 : (-\epsilon, \epsilon) \rightarrow \mathcal{M}$ with $\gamma_1(0) = \gamma_2(0) = p$ are said to be *equivalent at order one* if they have the same velocity vector at $t = 0$:

$$\dot{\gamma}_1(0) = \dot{\gamma}_2(0). \quad (1.28)$$

The tangent space $T_p \mathcal{M}$ is the set of equivalence classes of such curves, where the equivalence relation is having the same velocity. Vector addition and scalar multiplication are defined by concatenating velocities: if $[\gamma_1]$ and $[\gamma_2]$ are two tangent vectors (equivalence classes), then $[\gamma_1] + [\gamma_2]$ is the equivalence class of the curve that travels at velocity $\dot{\gamma}_1(0) + \dot{\gamma}_2(0)$. This makes $T_p \mathcal{M}$ a vector space.

For systems evolving in $\mathbb{R}^n$, the tangent space at any point is isomorphic to $\mathbb{R}^n$ itself. The distinction becomes non-trivial on curved manifolds (e.g., $\text{SO}(3)$ for rotational dynamics), where the tangent space is a genuinely different object from the manifold. More fundamentally, the control-affine structure defines a *distribution*—a linear subspace of the tangent bundle whose closure under Lie brackets determines what states are reachable by the control system (see Agrachev and Sachkov [AS04, Ch. 3]). manifold.

1.5.2 Isomorphism With Directional Derivatives

There is another perspective on tangent vectors: as directional derivatives of functions on the manifold. A tangent vector $v_p \in T_p \mathcal{M}$ can be viewed as a linear functional on the space of smooth functions $f : \mathcal{M} \rightarrow \mathbb{R}$, defined by

$$v_p(f) := \left. \frac{d}{dt} \right|_{t=0} f(\gamma(t)), \quad (1.29)$$

where γ is any curve representing v_p . This definition is independent of the choice of curve (by equivalence), and it gives a derivation: a linear map that satisfies the Leibniz rule $v_p(fg) = f(p)v_p(g) + g(p)v_p(f)$.

Conversely, every derivation at p arises from a unique tangent vector. This isomorphism between geometric tangent vectors (equivalence classes of curves) and algebraic derivations is fundamental to modern differential geometry and will underlie our treatment of variational equations in Chapter 2.

1.5.3 Why Tangent Spaces Are the Natural Home of Superposition

Principle 2: Superposition Lives in Tangent Spaces Vector addition $\delta \mathbf{x}_1 + \delta \mathbf{x}_2$ is only defined in vector spaces. Tangent spaces are vector spaces *by construction*. Therefore, superposition of infinitesimal perturbations is exact—not because the nonlinear system is “approximately linear,” but because tangent spaces are *inherently* linear.

When one says “superposition fails in nonlinear systems,” the precise meaning is: *you cannot add trajectories in state space*. But you *can* add infinitesimal variations in the tangent space. This is not an approximation—it is the definition of the tangent space as a vector space.

1.5.4 Coordinate Representation

In local coordinates $\mathbf{x} = (x_1, \dots, x_n)$ on a chart of $\mathcal{M}$, a tangent vector $\delta\mathbf{x} \in T_{\bar{\mathbf{x}}}\mathcal{M}$ is represented by its components $(\delta x_1, \dots, \delta x_n) \in \mathbb{R}^n$. The Jacobian $\mathbf{A}$ then acts as a linear map $\mathbf{A} : T_{\bar{\mathbf{x}}}\mathcal{M} \rightarrow T_{\bar{\mathbf{x}}}\mathcal{M}$, sending one tangent vector to another.

Under a smooth coordinate change $\mathbf{z} = \phi(\mathbf{x})$ with Jacobian $\mathbf{T} = \partial\phi/\partial\mathbf{x}$, tangent vectors transform as

$$\delta\mathbf{z} = \mathbf{T} \delta\mathbf{x}, \quad (1.30)$$

and the Jacobian transforms as

$$\mathbf{A}_z = \mathbf{T} \mathbf{A} \mathbf{T}^{-1} + \dot{\mathbf{T}} \mathbf{T}^{-1}, \quad (1.31)$$

so the extra $\dot{\mathbf{T}}\mathbf{T}^{-1}$ term must be retained whenever the coordinate chart varies along the trajectory. For a time-independent coordinate change, $\dot{\mathbf{T}} = 0$ and the transformation is a similarity transform, so the eigenvalues of $\mathbf{A}$ are unchanged. For a time-dependent coordinate change, the instantaneous eigenvalues of $\mathbf{A}_z$ need not match those of $\mathbf{A}$; invariant statements must instead be made about the underlying geometric dynamics, such as stability conclusions, Lyapunov exponents, or contraction rates.

1.6 Residuals: Geometry, Not Error

When we use the linear model $\mathbf{A}\delta\mathbf{x}$ to predict the evolution of a *finite* perturbation, a residual appears:

$$f(\bar{\mathbf{x}} + \delta\mathbf{x}, \bar{\mathbf{u}}) - f(\bar{\mathbf{x}}, \bar{\mathbf{u}}) - \mathbf{A}\delta\mathbf{x} = r(\delta\mathbf{x}), \quad (1.32)$$

where $\|r(\delta\mathbf{x})\| = o(\|\delta\mathbf{x}\|)$ by the Fréchet property. If f is C^2 , a sharper bound holds via the mean-value form of Taylor’s theorem:

$$\|r(\delta\mathbf{x})\| \leq \frac{1}{2} \sup_{\xi \in [\bar{\mathbf{x}}, \bar{\mathbf{x}} + \delta\mathbf{x}]} \left\| \frac{\partial^2 f}{\partial \mathbf{x}^2}(\xi, \bar{\mathbf{u}}) \right\| \cdot \|\delta\mathbf{x}\|^2. \quad (1.33)$$

Principle 3: Residuals Are Geometry, Not Error The residual $r(\delta\mathbf{x})$ measures how far the true dynamics deviate from the tangent-space prediction. This deviation comes from *manifold curvature* (second-order geometry), not from “our approximation being bad.” A large residual at a point means the manifold is sharply curved there—it is a geometric signal, not a failure of the method.

1.6.1 Residual Scaling: A Concrete Example

To illustrate the $O(\|\delta\mathbf{x}\|^2)$ scaling of the residual, consider the one-dimensional function

$$f(x) = \sin(x). \quad (1.34)$$

At $\bar{x} = 0$, the derivative is $f'(0) = \cos(0) = 1$. The linear approximation is $\hat{f}(\delta x) = \delta x$. The residual is

$$r(\delta x) = \sin(\delta x) - \delta x. \quad (1.35)$$

Table 1.1: Residual scaling for $f(x) = \sin(x)$ at $\bar{x} = 0$ with linear approximation $\hat{f} = x$. Because $f''(0) = -\sin(0) = 0$, the residual is $O(\delta x^3)$, not $O(\delta x^2)$.

δx	$\sin(\delta x)$	Linear: δx	Residual r	$r/(\delta x)^2$	$r/(\delta x)^3$
0.1	0.0998334	0.1	-1.666×10^{-4}	-0.01666	-0.1666
0.01	0.0099998	0.01	-1.667×10^{-7}	-0.001667	-0.1667
0.001	0.001000	0.001	-1.667×10^{-10}	-0.000167	-0.1667
0.0001	0.000100	0.0001	-1.667×10^{-13}	-0.0000167	-0.1667

Common Misconception

This example is deliberately instructive. The function $\sin(x)$ has $f''(0) = -\sin(0) = 0$, so the second-order residual bound $\|r(\delta \mathbf{x})\| \leq \frac{1}{2} C_H \|\delta \mathbf{x}\|^2$ (Eq. (1.33)) still holds—it is simply a loose bound in this case. The *actual* residual is $r(\delta x) = -(\delta x)^3/6 + O(\delta x^5)$ from the Taylor series $\sin(\delta x) = \delta x - (\delta x)^3/6 + \dots$.

The column $r/(\delta x)^3 \rightarrow -1/6 \approx -0.1667$ confirms cubic scaling. The column $r/(\delta x)^2 \rightarrow 0$ shows that the $O(\delta x^2)$ bound is satisfied but not tight. This illustrates a general principle: *the Fréchet property guarantees $o(\|\delta \mathbf{x}\|)$ residuals; the actual rate depends on the local curvature tensor*. When curvature vanishes (flat directions), the residual shrinks even faster than the bound suggests.

For a function with nonzero second derivative—such as $f(x) = \cos(x)$ at $\bar{x} = 0$, where $f''(0) = -1$ —the residual *is* quadratic: $r(\delta x) = -(\delta x)^2/2 + O(\delta x^4)$, and the ratio $r/(\delta x)^2 \rightarrow -1/2$ exactly. The general bound (1.33) is tight whenever $f''(\bar{x}) \neq 0$.

The practical lesson: the residual quantifies curvature. Zero residual at second order means the manifold is locally “flatter than expected”—which happens precisely at inflection points and other geometrically special configurations.

1.6.2 Two Perspectives on Linearization

Table 1.2: Two Perspectives on the Linearization Residual.

	Standard View	Tangent-Space View
Residual is...	Approximation error	Manifold curvature
Strategy	Minimize error	Measure and exploit curvature
Linearization is...	“Good enough”	Exact at the infinitesimal limit
Goal	Better approximation	Navigate the tangent bundle

In the standard view, we apologize for the residual: “Yes, the linear model is wrong for finite perturbations, but for small perturbations it is good enough.” In the tangent-space view, the residual is information: it tells us about the curvature of the state-space manifold, and this information is essential for understanding transport and nonlinear phenomena.

1.7 Manifold Examples: From Theory to Application

The abstract theory of tangent spaces becomes concrete and powerful when applied to specific manifolds that arise in dynamics and control. Three examples are essential.

1.7.1 SO(3): Rotations and Attitude Dynamics

The special orthogonal group $\text{SO}(3)$ is the set of all 3×3 orthogonal matrices with determinant $+1$:

$$\text{SO}(3) = \{\mathbf{R} \in \mathbb{R}^{3 \times 3} : \mathbf{R}^T \mathbf{R} = \mathbf{I}, \det(\mathbf{R}) = 1\}. \quad (1.36)$$

$\text{SO}(3)$ is a 3-dimensional Lie group: it is a smooth manifold that is also a group under matrix multiplication. At the identity, the tangent space is the space of skew-symmetric matrices, called the Lie algebra $\mathfrak{so}(3)$:

$$T_{\mathbf{I}}\text{SO}(3) = \mathfrak{so}(3) = \{\mathbf{S} \in \mathbb{R}^{3 \times 3} : \mathbf{S} + \mathbf{S}^T = 0\}. \quad (1.37)$$

At an arbitrary rotation $\mathbf{R}$, the tangent space is the left translation of that Lie algebra:

$$T_{\mathbf{R}}\text{SO}(3) = \{\mathbf{R}\mathbf{S} : \mathbf{S} \in \mathfrak{so}(3)\} = \mathbf{R}\mathfrak{so}(3). \quad (1.38)$$

This space is 3-dimensional, but its elements are generally not themselves skew-symmetric unless $\mathbf{R} = \mathbf{I}$. The Lie algebra structure—defined through the commutator bracket $[\mathbf{S}_1, \mathbf{S}_2] = \mathbf{S}_1\mathbf{S}_2 - \mathbf{S}_2\mathbf{S}_1$ —is exactly the Lie bracket of vector fields on the manifold $\text{SO}(3)$. This bridge between algebraic (Lie algebra) and geometric (Lie bracket) structures is central to Agrachev and Sachkov’s treatment of geometric control on Lie groups [AS04, Ch. 2].

Jacobian on SO(3)

Consider a rigid body with rotation matrix $\mathbf{R} \in \text{SO}(3)$ and angular velocity $\boldsymbol{\omega} = (\omega_x, \omega_y, \omega_z)$. The kinematic equation is

$$\dot{\mathbf{R}} = \mathbf{R}[\boldsymbol{\omega}]_{\times}, \quad (1.39)$$

where $[\boldsymbol{\omega}]_{\times}$ is the skew-symmetric matrix representation:

$$[\boldsymbol{\omega}]_{\times} = \begin{pmatrix} 0 & -\omega_z & \omega_y \\ \omega_z & 0 & -\omega_x \\ -\omega_y & \omega_x & 0 \end{pmatrix}. \quad (1.40)$$

The Jacobian of this system with respect to a perturbation in angular velocity is

$$\frac{\partial \dot{\mathbf{R}}}{\partial \boldsymbol{\omega}} = \mathbf{R} \frac{\partial [\boldsymbol{\omega}]_{\times}}{\partial \boldsymbol{\omega}}. \quad (1.41)$$

This reveals a key point: perturbations to the angular velocity propagate through the system as skew-symmetric matrices. More precisely, the tangent space at the identity $T_{\mathbf{I}}\text{SO}(3) = \mathfrak{so}(3)$ consists of skew-symmetric matrices. The tangent space at an arbitrary element $R \in \text{SO}(3)$ is $T_R\text{SO}(3) = \{R \cdot S : S \in \mathfrak{so}(3)\}$. The linear perturbation dynamics lives naturally in $\mathfrak{so}(3)$ when expressed in body-frame coordinates (i.e., left-trivialized).

Why SO(3) Matters

For quadcopters, satellites, and any system with rotational degrees of freedom, using Euler angles or quaternions often introduces artificial singularities or redundancy. By working directly with $\text{SO}(3)$ and its tangent space, we eliminate these complications and gain access to the rich structure of Lie groups and Lie algebras, which provide exact (non-approximate) transport laws through the state space.

1.7.2 SE(3): Rigid Body Transformations

The special Euclidean group $\text{SE}(3)$ describes rigid body motions in 3D: rotations and translations. It is the semidirect product $\text{SO}(3) \ltimes \mathbb{R}^3$, represented as 4×4 homogeneous transformation matrices:

$$\mathbf{T} = \begin{pmatrix} \mathbf{R} & \mathbf{p} \\ 0 & 1 \end{pmatrix}, \quad \mathbf{R} \in \text{SO}(3), \quad \mathbf{p} \in \mathbb{R}^3. \quad (1.42)$$

The tangent space to $\text{SE}(3)$ at any $\mathbf{T}$ is the space of Plücker coordinates or twist vectors, represented as 4×4 matrices of the form

$$\begin{pmatrix} [\boldsymbol{\omega}]_{\times} & \mathbf{v} \\ 0 & 0 \end{pmatrix}, \quad (1.43)$$

where $[\boldsymbol{\omega}]_{\times} \in \mathfrak{so}(3)$ and $\mathbf{v} \in \mathbb{R}^3$ is a linear velocity. This is the Lie algebra $\mathfrak{se}(3)$, a 6-dimensional space.

Kinematics and Dynamics

For a rigid body in space with configuration $\mathbf{T}(t) \in \text{SE}(3)$ and twist (body velocity) $\boldsymbol{\xi} = (\mathbf{v}, \boldsymbol{\omega})$, the kinematic equation is

$$\dot{\mathbf{T}} = \mathbf{T} \begin{pmatrix} [\boldsymbol{\omega}]_{\times} & \mathbf{v} \\ 0 & 0 \end{pmatrix}. \quad (1.44)$$

Again, the dynamics live in the tangent space (the Lie algebra), and perturbations evolve linearly within that space—an expression of Axiom 2. The nonlinearity re-enters through the composition of infinitesimal steps, as formalized in Axiom 4 (transport).

1.7.3 The Double Pendulum Configuration Manifold

A double pendulum consists of two rigid links connected by hinges, with angles θ_1 and θ_2 . The configuration space is naturally a torus:

$$\mathcal{M} = T^2 = S^1 \times S^1, \quad (1.45)$$

where each S^1 is a circle (angle wraparound).

Coordinates and Tangent Space

Coordinates on T^2 are $(\theta_1, \theta_2) \in [0, 2\pi) \times [0, 2\pi)$ with wraparound identification. The tangent space $T_{(\theta_1, \theta_2)}(T^2)$ is a 2-dimensional space representing the angular velocities $(\dot{\theta}_1, \dot{\theta}_2)$.

The state is $\mathbf{x} = (\theta_1, \theta_2, \dot{\theta}_1, \dot{\theta}_2) \in T^2 \times \mathbb{R}^2$. The dynamics come from the Lagrangian or energy conservation, with gravity and friction. For example:

$$\ddot{\theta}_1 = g(\sin \theta_1 + \frac{1}{2} \sin(\theta_1 + \theta_2)) + (\text{friction, control}), \quad (1.46)$$

and similarly for θ_2 .

Nonlinear Effects and Coupling

The double pendulum exhibits rich nonlinear phenomena:

- **Tangent-space superposition.** Small perturbations around a nominal trajectory add linearly in the tangent space.
- **Residual geometry.** The residual $r(\delta \mathbf{x})$ from Eq. (1.32) is large when the nominal trajectory passes through regions of high kinetic-energy curvature or steep potential gradients.
- **Transport and coupling.** As the system evolves, the principal directions of stability rotate through the torus. The state-transition matrix (Section 1.8) encodes this rotation exactly.

The torus structure is essential: wraparound in angles is handled correctly only by recognizing that the manifold is curved (topologically), not flat. Standard treatments that treat θ_i as real variables miss this structure.

1.8 Nonlinearity Re-Enters Through Transport

1.8.1 Transport as Curved Geometry

Principle 4: Transport Between Tangent Spaces Moving along a trajectory from $\bar{\mathbf{x}}(t_0)$ to $\bar{\mathbf{x}}(t_1)$ means moving between tangent spaces $T_{\bar{\mathbf{x}}(t_0)}\mathcal{M}$ and $T_{\bar{\mathbf{x}}(t_1)}\mathcal{M}$. The connection between these spaces—parallel transport, Christoffel symbols in Riemannian geometry—encodes the nonlinearity. Optimal control (DDP, iLQR) is therefore *exact local optimization + careful transport*, not “global optimization with approximations.”

The relationship between successive tangent spaces is governed by the *state transition matrix* $\Phi(t_1, t_0)$, which we develop fully in Chapter 2. For now, we sketch the idea.

1.8.2 State Transition Matrix and Variational Equations

Consider the system $\dot{\mathbf{x}} = f(\mathbf{x})$ and a reference trajectory $\bar{\mathbf{x}}(t)$. A nearby trajectory with initial condition $\bar{\mathbf{x}}(t_0) + \delta\mathbf{x}(t_0)$ follows

$$\mathbf{x}(t) = \bar{\mathbf{x}}(t) + \delta\mathbf{x}(t) + o(\|\delta\mathbf{x}(t_0)\|), \quad (1.47)$$

where $\delta\mathbf{x}(t)$ satisfies the variational equation:

$$\dot{\delta\mathbf{x}}(t) = \mathbf{A}(t) \delta\mathbf{x}(t), \quad \mathbf{A}(t) := \left. \frac{\partial f}{\partial \mathbf{x}} \right|_{\bar{\mathbf{x}}(t)}. \quad (1.48)$$

The unique solution with initial condition $\delta\mathbf{x}(t_0)$ is

$$\delta\mathbf{x}(t) = \Phi(t, t_0) \delta\mathbf{x}(t_0), \quad (1.49)$$

where $\Phi(t, t_0)$ is the state transition matrix (also called fundamental matrix).

1.8.3 Christoffel Symbols and Parallel Transport (Intuitive Picture)

In Riemannian geometry on a curved manifold, “parallel transport” means moving a tangent vector along a curve while keeping it “as parallel as possible” (minimizing rotation relative to the manifold curvature). This is formalized by the Christoffel symbols Γ_{ij}^k , which measure how basis vectors change as you move along the manifold.

For our nonlinear dynamics, an analogous concept applies: as the reference trajectory $\bar{\mathbf{x}}(t)$ evolves, the linearized dynamics at successive points are not simply comparable; they must be “transported” via the state transition matrix $\Phi(t, t_1)$. The transport is exact (no approximation), but it encodes the manifold’s curvature.

1.8.4 Connection to Differential Dynamic Programming

In Differential Dynamic Programming (DDP) and iLQR (discussed in later chapters), the algorithm repeatedly:

1. Linearize the dynamics along a nominal trajectory, computing $\mathbf{A}(t), \mathbf{B}(t)$.
2. Solve a linear-quadratic problem in the tangent spaces, obtaining optimal perturbations $\delta\mathbf{x}(t), \delta\mathbf{u}(t)$.
3. Transport these perturbations back to the full manifold via $\Phi(t, t_0)$, updating the nominal trajectory.
4. Repeat.

Each iteration solves an *exact* local problem (Axiom 1) within the tangent spaces, then accounts for curvature via *exact* transport (Axiom 4). The algorithm does not approximate; it refines the nominal trajectory by exploiting the local structure at each point.

1.9 Scope of Exactness: When the Tangent-Space Picture Breaks Down

The tangent-space framework is powerful and exact for smooth systems. But it has boundaries. Understanding these boundaries is essential for knowing when the theory applies and when generalizations are needed.

1.9.1 Discontinuities and Piecewise-Smooth Systems

The C^1 smoothness assumption (Assumption 1.2) is critical. If the vector field f or its Jacobian $\partial f/\partial x$ jumps or is undefined at a point, the Fréchet derivative fails to exist. Common examples:

Coulomb Friction. The friction force has a discontinuous dependence on velocity:

$$f_{\text{friction}} = \begin{cases} -\mu_s |N| \cdot \text{sign}(v), & v = 0 \text{ (static)} \\ -\mu_k |N| \cdot \text{sign}(v), & v \neq 0 \text{ (kinetic)} \end{cases} \quad (1.50)$$

The sign function is discontinuous; hence $\partial f/\partial v$ does not exist.

Switching Controllers. A controller that switches between $u = u_1$ and $u = u_2$ based on crossing a threshold introduces a discontinuity in f or $\partial f/\partial u$.

Hard Constraints. A state constraint $x_i \leq x_{\max}$ enforced by a spring-like potential $V = \frac{1}{2}k(x_i - x_{\max})^2$ near the boundary is okay (smooth), but a hard wall (infinite force at the boundary) is not.

For such systems, the Fréchet derivative and Axiom 1 do not apply. Instead, one must use generalized notions: Filippov solutions, saltation matrices (for impacts), or differential inclusions. These are beyond the scope of this book but represent important extensions.

1.9.2 Chattering and Sliding Modes

In optimal control with control constraints (e.g., $|u| \leq u_{\max}$), the optimal control can be *bang-bang*: switching infinitely often between $u = u_{\max}$ and $u = -u_{\max}$. On a time interval where infinitely many switches occur (sliding mode), the averaged effect of the rapid switching can be captured by a generalized velocity constraint, but the instantaneous dynamics are discontinuous and do not satisfy C^1 smoothness.

The tangent-space framework applies to the intervals between switches and to the averaged dynamics, but not at the switching surfaces themselves.

1.9.3 Zeno Behavior and Accumulation of Events

In some hybrid systems, an infinite number of discrete events (impacts, mode switches) can accumulate in finite time, a phenomenon called Zeno behavior. At the accumulation point, the system's state may be well-defined (by continuity), but the dynamics are singular and do not admit a classical smooth vector field.

1.9.4 Singular Configurations on Manifolds

On manifolds like $\text{SO}(3)$ or $\text{SE}(3)$, certain configurations are singular: the exponential map or logarithmic map may not be invertible, or the intrinsic metric may degenerate. For example, the quaternion representation of rotations has a singularity at the antipodal point: two different quaternions represent the same rotation. When the system passes through such a point, local coordinates become singular, and care must be taken to handle the transition.

The tangent-space theory remains valid (the Lie group structure is smooth everywhere), but global coordinate charts cannot cover the entire manifold without singularities (a topological consequence of the Hairy Ball Theorem for S^2 and its generalizations).

Table 1.3: Scope of Tangent-Space Exactness and When Extensions Are Needed.

Feature	Smooth Dynamics	Extension Needed
Discontinuous f or $\partial f/\partial \mathbf{x}$	Not applicable	Filippov, differential inclusions
Switching controllers	OK between switches	Saltation matrices at switch
Bang-bang control	Averaged dynamics okay	Singular control on sliding surface
Impacts/collisions	Not applicable	Saltation matrix, impact law
Zeno behavior	Not applicable	Hybrid system theory
Singular configurations	Handled locally	Global charts may be singular

1.9.5 Summary: Boundaries of the Theory

Throughout this book, we work exclusively with smooth systems and note extensions where relevant. The exactness of the tangent-space picture is one of its greatest strengths, and understanding its boundaries is essential for applying it responsibly.

1.10 The Five Axioms: A Summary

The conceptual framework of this book rests on five axioms, each a consequence of standard differential geometry but rarely stated explicitly in control texts.

1. **Tangent spaces are exact, not approximate.** The derivative is the unique first-order structure at a point.
2. **Superposition lives in tangent spaces.** Tangent spaces are vector spaces; perturbation addition is well-defined and exact.
3. **Residuals are geometry, not error.** Deviations from linearity measure curvature, not modeling failure.
4. **Nonlinearity re-enters through transport.** Moving between tangent spaces requires navigating the manifold’s curvature.
5. **Integration preserves exactness.** Accumulating infinitesimal linear contributions is itself exact; residuals arise from curvature, not from integration.

These axioms inform every derivation in the chapters that follow. When we write a Jacobian, we are not approximating. When we solve a Riccati equation in tangent coordinates, we are solving an exact local problem. When we iterate (as in DDP), we are re-centering the exact local analysis at a new base point. The “error” is always transport cost—the price of moving through curved space.

1.11 Scope and Limitations

The mathematical framework developed here applies to smooth (C^1) nonlinear systems, including mechanical systems (Newtonian, Lagrangian, Hamiltonian), robotic manipulators, vehicles, aerospace systems, and chemical process control.

The framework *does not* directly apply to discontinuous systems, impact dynamics, Coulomb friction, or hybrid switching systems. For these, generalizations exist—saltation matrices for impacts, differential inclusions for set-valued dynamics, complementarity systems for contact—and we note these extensions where appropriate.

1.11.1 When to Use This Framework

This textbook is most applicable when:

- The system dynamics arise from conservation laws (energy, momentum) or classical mechanics.
- The control inputs are continuous and bounded (not discontinuous switching).
- The state evolves on a smooth manifold (including $\mathbb{R}^n$, $\text{SO}(3)$, $\text{SE}(3)$, and their products).
- Local behavior around trajectories is of primary interest (not global existence or long-time stability in highly chaotic regimes).
- Numerical precision and computational efficiency are important, justifying exploitation of local structure.

1.11.2 Important Distinction: Linearization vs. Linear Approximation

Remark 1.5. Throughout this book, we use “linearization” to mean “computing the Jacobian (Fréchet derivative)” — an exact operation. We reserve “linear approximation” for the distinct act of using the Jacobian to predict finite perturbations, which introduces the residual of Eq. (1.32). Conflating these two operations is the source of most conceptual confusion about linearization in nonlinear systems.

A linearization is always exact. A linear approximation introduces error (residual). By keeping these concepts distinct, we unlock the structural power of tangent spaces and avoid the psychological barrier of thinking that everything about perturbations is approximate.

1.11.3 Looking Ahead

Chapter 2 develops the theory of perturbation evolution: how infinitesimal variations propagate along a trajectory, quantifying the sensitivity of orbits to initial conditions. The state transition matrix and Lyapunov exponents emerge as central objects.

Chapter 5 introduces contractivity and metric tensors, translating the intuition that “some directions are more stable than others” into a precise geometric framework.

Chapter 6 applies these ideas to optimal control, showing how DDP and iLQR are exact local algorithms operating in tangent spaces, with control constraints and terminal costs handled via their residual geometry.

The journey from foundations (this chapter) to applications (later chapters) is one of increasing structure and pragmatism: we leverage the exactness of the tangent space to build algorithms that are both conceptually clear and computationally efficient.

1.12 Preview: Why These Ideas Matter for the Golf Swing

Before proceeding to the formal theory, it is worth previewing how the foundations of this chapter connect to the book’s primary application domain: the biomechanics of the golf swing. This preview is deliberately non-technical; the full mathematical treatment appears in Chapter 9.

In Plain Language 1.2. The Golfer’s Frame of Reference

A golfer’s swing is a chain of rotating body segments—torso, arms, wrists, club—that accelerates a clubhead to high speed and launches a ball. The physics is ferociously nonlinear: centrifugal forces grow as the square of rotational speed, the club shaft bends and rebounds elastically, and the mass distribution changes as the golfer’s posture evolves. Yet at each instant, the tangent-space picture gives us an exact local model of how small changes propagate.

1.12.1 The Golfer’s Tangent Space

At any instant during the downswing, the golfer’s state is a point on a high-dimensional manifold: joint angles, angular velocities, shaft bending amplitudes, and their rates. The tangent space at this point is the space of all infinitesimal variations—a slightly different wrist angle, a marginally faster shoulder rotation, a small change in shaft flex.

By Axiom 1, the Jacobian at this point is the *exact* description of how these small variations evolve over the next instant. By Axiom 2, these variations add as vectors. A small wrist perturbation and a small shoulder perturbation evolve independently at first order, even though the full nonlinear swing couples them through centrifugal and Coriolis forces.

1.12.2 Curvature as a Diagnostic

The residual—the gap between tangent-space prediction and actual evolution—measures the “curvature” of the swing manifold. During the early backswing, velocities are low and the dynamics are nearly linear (small residual). During the late downswing, when the clubhead is moving at high speed, centrifugal forces dominate and the residual becomes large. This is not a failure of the theory; it is a geometric signal that the system is passing through a high-curvature region.

Practically, this means:

- Controllers (biological or engineered) that linearize once and hold the gain constant work well in the backswing but deteriorate in the downswing.
- Iterative methods (DDP, iLQR) that re-linearize at each time step naturally adapt to the changing curvature.
- The transition from “control-dominated” to “drift-dominated” dynamics (Chapter 8) is precisely the transition from small to large residuals.

1.12.3 Transport and the Kinematic Chain

Axiom 4 (transport) is especially vivid in the golf swing. As the club sweeps through a large arc, the tangent space rotates and stretches. The state transition matrix $\Phi(t_1, t_0)$ maps perturbations at one phase of the swing to perturbations at another. A small error in wrist lag at the top of the backswing may amplify into a large clubface angle error at impact—or it may be “washed out” by the dynamics. The eigenvalues of Φ tell us which scenario applies.

This is the deep connection between the abstract mathematics of this chapter and the practical question every golfer cares about: *which aspects of technique are forgiving, and which are critical?* Tangent-space analysis provides a principled, quantitative answer.

Exercises

1. **Fréchet derivative computation.** Compute the Fréchet derivative of $f(x, y) = (x^2y, \sin(xy))$ at the point $(1, \pi)$. Verify that the residual $\|f(\bar{x} + \delta x) - f(\bar{x}) - Df(\bar{x})\delta x\| = O(\|\delta x\|^2)$ by evaluating at $\delta x = (0.1, 0.1)$, $(0.01, 0.01)$, and $(0.001, 0.001)$.
2. **Residual scaling table.** Construct a residual scaling table (analogous to Table 1.1) for $f(x) = e^x$ at $\bar{x} = 0$. Compute $r/(\delta x)^2$ for $\delta x = 0.1, 0.01, 0.001, 0.0001$. What value does the ratio converge to? Relate this to the Taylor series of e^x .
3. **Tangent space of $\text{SO}(3)$.** The rotation group $\text{SO}(3)$ consists of 3×3 orthogonal matrices with determinant 1. Using the constraint $R^T R = I$, show that the tangent space at $R = I$ consists of skew-symmetric matrices. What is the dimension of this tangent space?
4. **Tangent space of a torus.** The torus $\mathbb{T}^2$ is parameterized by two angles $(\theta_1, \theta_2) \in [0, 2\pi)^2$. Describe the tangent space at an arbitrary point. Is it isomorphic to $\mathbb{R}^2$? Explain why the tangent space is “flat” even though the torus is curved.

5. **When linearization is not an approximation.** Consider the system $\dot{x} = ax + bx^3$ for constants a, b . Compute the linearization at $\bar{x} = 0$. In what sense is this linearization “exact”? In what sense is it “approximate”? Use the language of Axiom 1 (tangent-space exactness) to articulate the distinction.
6. **Curvature and residual.** For $f(x) = \tan(x)$ at $\bar{x} = 0$, compute $f''(0)$ and predict the leading-order residual behavior. Construct a scaling table to verify. Compare with the $\sin(x)$ example in the text.
7. **Connection (Axiom 3).** For a 2D system $\dot{x}_1 = x_2$, $\dot{x}_2 = -\sin(x_1)$ (simple pendulum), compute the Jacobian $A(\bar{x})$ at three different equilibria: $\bar{x} = (0, 0)$, $(\pi, 0)$, and $(0, 1)$. How do the eigenvalues change? Interpret the change geometrically.
8. **Programming exercise.** Implement a function that, given $f : \mathbb{R}^n \rightarrow \mathbb{R}^n$ and a point $\bar{x}$, computes the Fréchet derivative numerically using finite differences. Test it on the pendulum system from Exercise 7. Compare with the analytical Jacobian.

Chapter 2

Variational Dynamics and the Moving Frame

Two swings can pass through almost the same pose and then produce different impact conditions. The difference may come from velocity, retained muscle or shaft states, contact conditions, or a changed command. Variational dynamics asks a precise local question: along a declared reference motion, how does a small change in state or input change a later outcome? It provides the derivative of a model prediction. It does not identify the golfer's neural strategy from motion alone.

The distinction between a derivative and a finite intervention is central. The derivative obeys an exact linear equation. A finite change in a nonlinear swing generally does not. This chapter derives both the linear equation and its approximation error, develops the state transition matrix, and connects them to control authority, adjoint gradients and numerical computation. A moving frame can simplify the representation, but it does not remove physical sensitivity or guarantee stability.

2.1 First Variation Along a Feasible Motion

2.1.1 State, Input and Reference

Work in a regular local state chart and write

$$\dot{x} = F(x, u) = f(x) + G(x)u, \quad x \in \mathbb{R}^n, \quad u \in \mathbb{R}^m. \quad (2.1)$$

The input port must be specified: generalized torque, motor voltage and muscle excitation define different plants and retained states. A mechanical state commonly includes position and velocity; actuator activation, current or shaft deformation may add further states. Contact constraints must already be resolved in the chart or treated with an appropriate constrained formulation. The smooth results below hold within a fixed valid mode, not automatically through impact, slip or a coordinate singularity.

On a fixed finite interval $[t_0, T]$, let $\bar{u}(t)$ be bounded and piecewise continuous, and let the feasible reference satisfy

$$\dot{\bar{x}} = F(\bar{x}, \bar{u}). \quad (2.2)$$

If a proposed reference does not satisfy this equation, its defect is an additional forcing in the error dynamics. A planned curve and its timing are not made feasible simply by calling them nominal. Assume the state derivatives used below exist and are bounded on a tube containing the compared trajectories. State and input norms require chosen scales: adding radians, metres and activation units in an unscaled Euclidean norm has no invariant physical meaning.

2.1.2 A Family of Nearby Solutions

Introduce a scalar family parameter ε , an initial direction ξ_0 , and a bounded piecewise-continuous input direction $v(t)$:

$$x_\varepsilon(t_0) = \bar{x}(t_0) + \varepsilon\xi_0, \quad u_\varepsilon(t) = \bar{u}(t) + \varepsilon v(t). \quad (2.3)$$

Define the first variation $\xi(t) = \partial_\varepsilon x_\varepsilon(t)|_{\varepsilon=0}$. Differentiating the differential equation and initial condition gives

$$\dot{\xi} = A(t)\xi + B(t)v, \quad \xi(t_0) = \xi_0, \quad (2.4)$$

where, writing the columns of G as g_j ,

$$A = Df(\bar{x}) + \sum_{j=1}^m \bar{u}_j Dg_j(\bar{x}), \quad B = G(\bar{x}). \quad (2.5)$$

Every term in A is an $n \times n$ matrix. Its action is $A\xi = Df\xi + (DG[\xi])\bar{u}$; no unspecified tensor contraction is needed. The reference command affects state sensitivity even though the original dynamics are affine in the declared input. A state-feedback comparison $u = \pi(x, t)$ instead differentiates the closed-loop field and adds $GD_x\pi$ to this Jacobian.

Equation (2.4) is exact for the derivative ξ . Under the stated local smoothness and boundedness conditions,

$$x_\varepsilon(t) = \bar{x}(t) + \varepsilon\xi(t) + O(\varepsilon^2) \quad (2.6)$$

uniformly on a fixed finite interval for sufficiently small ε . The constant depends on the interval, derivatives and amplification along the reference. This statement does not promise that one linear model remains accurate for every perturbation or indefinitely near an unstable trajectory. If the reference input lies on a bound, a two-sided family may be infeasible; then only admissible one-sided directions have a physical intervention interpretation.

2.1.3 The Taylor Remainder and Its Mixed Term

For a twice continuously differentiable vector field h and a state displacement e , the exact first-order remainder is

$$h(\bar{x} + e) = h(\bar{x}) + Dh(\bar{x})e + \int_0^1 (1-s)D^2h(\bar{x} + se)[e, e] ds. \quad (2.7)$$

There is no extra factor of one-half outside this integral. The integral of $1-s$ already equals one-half. For the scalar check $h(x) = x^2$, its second derivative is 2 and the integral returns exactly e^2 .

Let $F_0(x, t) = f(x) + G(x)\bar{u}(t)$. The finite error $e = x - \bar{x}$ under a finite input increment $w = u - \bar{u}$ satisfies

$$\dot{e} = Ae + Bw + \rho(t, e, w), \quad (2.8)$$

with the exact forcing remainder

$$\begin{aligned} \rho(t, e, w) = & \int_0^1 (1-s)D_x^2F_0(\bar{x} + se, t)[e, e] ds \\ & + [G(\bar{x} + e) - G(\bar{x})]w. \end{aligned} \quad (2.9)$$

If $\|D_x^2F_0\| \leq H$ and $\|DG\| \leq L_G$ on the relevant segments, then

$$\|\rho\| \leq \frac{1}{2}H\|e\|^2 + L_G\|e\|\|w\|. \quad (2.10)$$

The mixed state/input term cannot be dropped merely because e is small. For example, at any fixed reference pair in $F(x, u) = x^2 + (1+x)u$, the exact remainder is $e^2 + ew$. Joint perturbations $e, w = O(\varepsilon)$ make both terms second order. Input affinity removes a pure w^2 term at frozen state; it does not remove state/input coupling along a trajectory.

2.2 The State Transition Matrix

2.2.1 Definition and Composition

For piecewise continuous $A(t)$, define the state transition matrix by

$$\partial_t \Phi(t, s) = A(t)\Phi(t, s), \quad \Phi(s, s) = I. \quad (2.11)$$

Each column is the homogeneous solution from one coordinate basis vector, so $\xi(t) = \Phi(t, s)\xi(s)$ when $v = 0$. The matrix is itself a solution of a matrix initial-value problem. Its coordinate representation changes if the basis or state scaling changes.

On an interval where the linear equation exists, uniqueness gives

$$\Phi(t, r)\Phi(r, s) = \Phi(t, s), \quad \Phi(t, s)^{-1} = \Phi(s, t). \quad (2.12)$$

For the first identity, both products propagate the same arbitrary initial vector and solve the same initial-value problem. For the second, set the endpoint equal to the start in the composition identity. These are identities for the exact fundamental solution, including backward propagation on the common interval. A numerically tiny singular value can make inversion inaccurate even though the exact matrix remains nonsingular.

For constant A , $\Phi(t, s) = \exp(A(t - s))$. In a time-varying system, $\exp(\int_s^t A(r)dr)$ is not generally the answer. A sufficient condition for that simplification is pairwise commutation of the matrices at different times.

2.2.2 Liouville's Identity

Jacobi's determinant derivative, for invertible Φ , reads

$$\frac{d}{dt} \det \Phi = \det \Phi \operatorname{tr}(\Phi^{-1} \dot{\Phi}) = \det \Phi \operatorname{tr} A. \quad (2.13)$$

The trace is unchanged by similarity. Equivalently, the adjugate is $\operatorname{adj} \Phi = (\det \Phi) \Phi^{-1}$, without an inverse transpose. This derivative identity is distinct from the matrix determinant lemma for a rank-one update. Integrating the scalar equation gives

$$\det \Phi(t, s) = \exp \left(\int_s^t \operatorname{tr} A(r) dr \right) > 0. \quad (2.14)$$

It is a valuable independent check on a computed STM, but a correct determinant alone does not establish that its individual entries or singular directions are correct.

2.3 Time Ordering and the Peano–Baker Series

The matrix initial-value problem is equivalent to the Volterra equation

$$\Phi(t, s) = I + \int_s^t A(r) \Phi(r, s) dr. \quad (2.15)$$

Repeated substitution produces a sum of ordered products. With $\Phi_0 = I$ and $\Phi_{k+1}(t, s) = \int_s^t A(r) \Phi_k(r, s) dr$,

$$\Phi(t, s) = I + \int_s^t A(r_1) dr_1 + \int_s^t \int_s^{r_1} A(r_1) A(r_2) dr_2 dr_1 + \cdots. \quad (2.16)$$

Later times occur on the left. This is a time-ordered sum, not an unrestricted average over all matrix permutations. If $\|A(r)\| \leq L$ in an induced norm and $0 \leq t - s \leq \Delta$, integration over the ordered simplex gives

$$\|\Phi_k(t, s)\| \leq \frac{(L\Delta)^k}{k!}. \quad (2.17)$$

The exponential majorant proves absolute and uniform convergence on this bounded interval. Passing to the integral equation identifies the sum with its unique solution. More generally, local integrability of $\|A\|$ suffices; the short treatment by [Baake and Schlaegel](#) supplies that version.

A direct check makes order tangible. Apply $A_1 = \begin{pmatrix} 0 & 1 \\ 0 & 0 \end{pmatrix}$ for one unit of time and then $A_2 = \begin{pmatrix} 0 & 0 \\ 1 & 0 \end{pmatrix}$ for one unit. Each squares to zero, so

$$\Phi(2, 0) = (I + A_2)(I + A_1) = \begin{pmatrix} 1 & 1 \\ 1 & 2 \end{pmatrix}. \quad (2.18)$$

Reversing the intervals gives $\begin{pmatrix} 2 & 1 \\ 1 & 1 \end{pmatrix}$. Neither ordering is recovered by pretending the two generators commute. The Magnus representation organizes a local logarithm $\Phi = \exp \Omega$ using integrals and commutators; a truncated Magnus series needs its own convergence and error analysis. An exact infinite representation and a finite numerical approximation are different claims.

2.4 Variation of Constants and Outcome Sensitivity

2.4.1 Derivation of the Forced Solution

Write $\xi(t) = \Phi(t, t_0)c(t)$. Differentiation cancels the homogeneous terms and yields $\dot{c} = \Phi(t_0, t)B(t)v(t)$. Integration and composition give

$$\xi(t) = \Phi(t, t_0)\xi_0 + \int_{t_0}^t \Phi(t, s)B(s)v(s) ds. \quad (2.19)$$

This is exact for the variational equation. Numerical integration and quadrature introduce additional errors. The first term propagates the initial variation; the second propagates each infinitesimal input contribution from its application time to the observation time. Initial-state effects and input effects superpose within this one linear problem.

For a differentiable fixed-time output $y = h(x(T))$, define $C_T = Dh(\bar{x}(T))$. Then

$$\delta y = C_T \Phi(T, t_0)\xi_0 + \int_{t_0}^T K(T, s)v(s) ds, \quad K(T, s) = C_T \Phi(T, s)B(s). \quad (2.20)$$

The output kernel, not B or Φ alone, determines the first-order effect on the chosen task. Clubface orientation, normal clubhead velocity and strike location select different output rows. Their coordinates and units must be declared, and orientation differences require a valid local orientation chart.

Earlier inputs are not always more influential. In a scalar stable model $\dot{\xi} = -a\xi + v$, $a > 0$, the terminal kernel is $e^{-a(T-s)}$, so equal short input increments applied later have greater terminal-state influence. For a double integrator, the position kernel is $T - s$ while the velocity kernel is 1. The same actuator and horizon therefore yield different timing sensitivities for different tasks. Coupling, constraints and actuator dynamics can rotate and filter these effects further.

2.4.2 Impact Time Is an Additional Variable

Golf impact is often an event rather than a fixed clock time. Suppose a smooth scalar guard $g(x, t) = 0$ is crossed transversely at T , so $g_x F + g_t \neq 0$. A fixed-time state variation $\xi(T)$ shifts the event by

$$\delta T = -\frac{g_x \xi(T)}{g_x F + g_t}. \quad (2.21)$$

For a pre-impact output $h(x(T), T)$, its event variation is

$$\delta y = h_x \xi(T) + (h_x F + h_t) \delta T. \quad (2.22)$$

All derivatives are evaluated on the reference event. Parameter-dependent guards add their direct parameter terms. A reset or collision map requires its derivative and the appropriate event-time correction; grazing contact can invalidate this smooth sensitivity. A calculation at a fixed nominal impact time must not silently stand in for sensitivity of the actual collision outcome.

2.5 Finite Error and the Limits of Linear Prediction

Let z solve $\dot{z} = Az + Bw$ with the same initial displacement as the finite nonlinear error e . Their difference $d = e - z$ obeys

$$\dot{d} = Ad + \rho(t, e, w), \quad d(t_0) = 0, \quad d(t) = \int_{t_0}^t \Phi(t, s)\rho(s, e(s), w(s)) ds. \quad (2.23)$$

The nonlinear forcing ρ is not the entire derivative difference $\dot{e} - \dot{z}$: that difference also contains Ad . Combining the exact identity with the remainder bound gives

$$\|d(t)\| \leq \int_{t_0}^t \|\Phi(t, s)\| \left[\frac{1}{2} H \|e(s)\|^2 + L_G \|e(s)\| \|w(s)\| \right] ds. \quad (2.24)$$

For $\|\Phi(t, s)\| \leq K$ on the comparison interval, and suprema $E = \sup \|e\|$, $U = \sup \|w\|$, this is bounded by $K(t - t_0)(HE^2/2 + L_G EU)$. Stability by itself does not imply $K \leq 1$ in an arbitrary norm; stable nonnormal systems can amplify errors transiently.

Twice continuous differentiability on a compact tube suffices for this quadratic bound. A cubic bound after subtracting the quadratic Taylor polynomial requires stronger control of the Hessian, such as a Lipschitz Hessian. The finite-error estimate concerns nonlinear derivatives in the chosen chart; it is not necessarily intrinsic manifold curvature. Even a scalar system on a flat line can have a nonzero remainder.

Re-linearizing can improve a local prediction, but it does not alone prove quadratic convergence of an optimizer. Newton and suitable SQP/DDP convergence results require the relevant second-order information, regularity, nondegeneracy and sufficiently accurate steps near an appropriate solution. Constraints, regularization, line searches and omitted second derivatives affect the rate. iLQR and DDP should not inherit a universal 2^{-2^k} error law from the Taylor remainder. Nonlinear rollout and gradient verification remain necessary.

2.6 Discrete Flow and Its Derivative

2.6.1 Zero-Order-Held Inputs

For a fixed interval $h > 0$, let $\varphi_h(x_k, u_k)$ denote the nonlinear solution at its endpoint with initial state x_k and held input u_k . It satisfies

$$\varphi_h(x_k, u_k) = x_k + \int_{t_k}^{t_k+h} F(x(s), u_k) ds. \quad (2.25)$$

The trajectory inside the integral is the corresponding nonlinear solution. Drift is retained. Continuous input affinity does not imply that φ_h is affine in the held input: $\dot{x} = xu$ gives $\varphi_h(x, u) = xe^{uh}$.

Along the held-input reference, integrate

$$\dot{X} = AX, \quad X(t_k) = I, \quad \dot{U} = AU + B, \quad U(t_k) = 0. \quad (2.26)$$

Then $A_k = D_x \varphi_h = X(t_k + h)$ and $B_k = D_u \varphi_h = U(t_k + h)$, or equivalently

$$A_k = \Phi(t_k + h, t_k), \quad B_k = \int_{t_k}^{t_k+h} \Phi(t_k + h, s) B(s) ds. \quad (2.27)$$

These are exact derivatives of the exact flow. Freezing A, B at the beginning of a nonlinear interval is an additional approximation. Differentiating a numerical step gives derivatives of that numerical map; for a fixed Runge–Kutta grid, differentiating its stages consistently agrees with applying those stages to the augmented sensitivity equations.

2.6.2 A Singular-Safe Linear Formula

For constant linear A, B , the block exponential gives

$$\exp \left(h \begin{pmatrix} A & B \\ 0 & 0 \end{pmatrix} \right) = \begin{pmatrix} A_d & B_d \\ 0 & I \end{pmatrix}, \quad A_d = e^{Ah}. \quad (2.28)$$

Here $B_d = \int_0^h e^{As} B ds$. Only when A is invertible may it also be written $A^{-1}(e^{Ah} - I)B$; even then, explicitly forming an inverse or subtracting nearly equal matrices may be unattractive numerically. The block formula handles an integrator. For $A = \begin{pmatrix} 0 & 1 \\ 0 & 0 \end{pmatrix}$ and $B = (0, 1)^T$,

$$A_d = \begin{pmatrix} 1 & h \\ 0 & 1 \end{pmatrix}, \quad B_d = \begin{pmatrix} h^2/2 \\ h \end{pmatrix}. \quad (2.29)$$

The discrete transition from k to ℓ is $A_{\ell-1} \cdots A_k$, with the earliest interval on the right. Exact smooth-flow Jacobians are invertible; arbitrary discrete maps and coarse numerical approximations need not share that property.

2.7 A Checked Pendulum Example

2.7.1 Model and Analytic Transition

Use a point mass m on a massless rod of length ℓ , a fixed pivot, no damping, and angle θ measured from downward vertical. Positive pivot torque τ increases θ :

$$\ddot{\theta} = -\frac{g}{\ell} \sin \theta + \frac{\tau}{m\ell^2}. \quad (2.30)$$

At the downward zero-torque equilibrium, with state $(\theta, \dot{\theta})$,

$$A = \begin{pmatrix} 0 & 1 \\ -\omega_0^2 & 0 \end{pmatrix}, \quad B = \begin{pmatrix} 0 \\ 1/(m\ell^2) \end{pmatrix}, \quad \omega_0 = \sqrt{g/\ell}. \quad (2.31)$$

Since $A^2 = -\omega_0^2 I$, separating even and odd exponential terms gives

$$\Phi(t, 0) = \begin{pmatrix} \cos(\omega_0 t) & \sin(\omega_0 t)/\omega_0 \\ -\omega_0 \sin(\omega_0 t) & \cos(\omega_0 t) \end{pmatrix}. \quad (2.32)$$

Differentiation verifies $\dot{\Phi} = A\Phi$, and its determinant is 1. The eigenvalues are $\pm i\omega_0$. This undamped linear oscillator is stable, not asymptotically stable. Stability of the nonlinear downward equilibrium can be established separately with its local energy minimum. Purely imaginary linear eigenvalues alone do not settle a general nonlinear system's stability.

2.7.2 Numbers, Units and Impulse Interpretation

For this illustrative calculation set $m = 1$ kg, $\ell = 1$ m and rounded $g = 10$ m/s², distinct from the 9.81 convention in other chapters. The small-amplitude period is $2\pi/\sqrt{10} = 1.986918$ s. The following values are generated by the program below and independently checked against a matrix-exponential implementation.

t (s)	Φ_{11}	Φ_{12} (s)	Φ_{21} (1/s)	Φ_{22}
0.25	0.703441	0.224760	-2.247601	0.703441
0.50	-0.010342	0.316211	-3.162109	-0.010342

The upper-right STM entry converts initial angular velocity to angle and has units of seconds; the lower-left has reciprocal-second units. A matrix norm that mixes these coordinates needs an explicit scale. For initial displacement $(0.1 \text{ rad}, 0)^T$, the first-order response at 0.5 s is given below. It is not an exact finite-amplitude nonlinear pendulum trajectory.

Variation	$\delta\theta$ (rad)	$\delta\dot{\theta}$ (rad/s)
Initial Angle	-0.001034	-0.316211
Torque Impulse	0.224760	0.703441

The second row assumes zero initial variation and an ideal torque impulse at 0.25 s with angular impulse $J_\tau = 1$ N m s. The jump is $\Delta\dot{\theta} = J_\tau/(m\ell^2)$, and the linear response at 0.5 s is $\Phi(0.25, 0)BJ_\tau$. The Dirac distribution has units of 1/s, so its coefficient is torque times time, not torque. The application time 0.25 s is not a quarter of the stated period; that quarter is approximately 0.49673 s. A finite actuator pulse must also satisfy amplitude, rate and retained actuator-state limits. A unit impulse illustrates a linear response calculation and is not evidence for an executable muscle command.

2.8 Parameter Sensitivity and Adjoint Gradients

2.8.1 Forward Sensitivities

Let $\dot{x} = F(x, u(t, p), p, t)$ with $p \in \mathbb{R}^r$. All partial derivatives below hold the other arguments fixed. With fixed initial time,

$$S = \frac{\partial x}{\partial p}, \quad \dot{S} = F_x S + F_p + F_u u_p, \quad S(t_0) = \frac{\partial x_0}{\partial p}. \quad (2.33)$$

The direct-control term vanishes only when the prescribed input is independent of p . If the control is state feedback, first form the closed-loop field and differentiate its state and parameter dependence. Variation of constants adds both the propagated initial sensitivity and the integral of the direct forcing. Assuming a zero initial sensitivity without declaring it can reverse an optimization conclusion.

For a differentiable observable $h(x(T), p)$ at fixed T , the derivative is $h_x S(T) + h_p$. A maximum over time or a minimum distance can be nonsmooth when the active extremum changes or ties. Event-defined quantities require the event-time calculation above. Sensitivity is a local derivative, not a replacement for nonlinear simulation across an arbitrary parameter range.

2.8.2 Derivation of the Adjoint

For a scalar objective at fixed t_0, T ,

$$J(p) = \psi(x(T), p) + \int_{t_0}^T L(x, u, p, t) dt, \quad (2.34)$$

define the column adjoint as the derivative of remaining cost with respect to the current state under the specified future input policy. With an open-loop prescribed input, it satisfies

$$-\dot{\lambda} = F_x^T \lambda + L_x, \quad \lambda(T) = \psi_x. \quad (2.35)$$

Here L_x and ψ_x are column gradients. To verify the signs, differentiate $\lambda^T S$:

$$\frac{d}{dt}(\lambda^T S) = -L_x^T S + \lambda^T (F_p + F_u u_p). \quad (2.36)$$

Substitute this identity into the direct derivative of J and integrate. In row-gradient form,

$$\begin{aligned} \frac{dJ}{dp} &= \psi_p + \lambda(t_0)^T S(t_0) \\ &\quad + \int_{t_0}^T [L_p + \lambda^T F_p + (L_u^T + \lambda^T F_u) u_p] dt. \end{aligned} \quad (2.37)$$

The terminal plus sign follows from this convention. An alternative Hamiltonian convention can change signs consistently; changing only the terminal sign breaks the identity. With $T = T(p)$, add $(\psi_x^T F + L)T_p$ at the endpoint, and add direct $\psi_t T_p$ if the terminal cost explicitly depends on time. Variable initial times and event resets require their corresponding boundary terms.

The adjoint is advantageous when there are many parameters but few scalar objectives. Its state dimension is n , while forward sensitivity uses nr entries; parameter-gradient accumulation still has a cost. Backward evaluation also needs the forward trajectory, through storage, dense output or checkpointing. Reconstructing an unstable reverse-time trajectory without stored information can be inaccurate.

2.8.3 A Boundary-Term Check

In nondimensional variables, take $\dot{x} = px$, $x(0) = p$, and $J = \frac{1}{2}x(T)^2 + \int_0^T \frac{1}{2}x(t)^2 dt$, with fixed T . The exact solution is $x(t) = pe^{pt}$ and $S(t) = e^{pt}(1 + pt)$. The adjoint obeys $-\dot{\lambda} = p\lambda + x$, $\lambda(T) = x(T)$. Its gradient is

$$\frac{dJ}{dp} = \lambda(0) + \int_0^T \lambda(t)x(t) dt. \quad (2.38)$$

The $\lambda(0)$ term is required because $dx(0)/dp = 1$. The accompanying program checks this against finite differences of the independently integrated objective at $p = 0.4$, $T = 0.7$. Agreement over a useful finite-difference step range checks the implementation; arbitrarily tiny steps can instead expose subtractive cancellation.

2.8.4 Discrete Adjoint and Backpropagation

For $x_{k+1} = f_k(x_k, p)$ and $J = \psi(x_N, p) + \sum_k L_k(x_k, p)$, with input dependencies included in f_k, L_k ,

$$\lambda_N = \psi_x, \quad \lambda_k = (D_x f_k)^T \lambda_{k+1} + (L_k)_x. \quad (2.39)$$

The parameter gradient adds ψ_p , the initial-state term and $\sum_k [(L_k)_p + \lambda_{k+1}^T D_p f_k]$. This is reverse-mode differentiation of the implemented discrete graph. It need not equal a separately discretized continuous adjoint at finite step size. Automatic differentiation differentiates the operations and branches actually executed; it does not certify the physical model, smoothness of contact events or an adaptive solver's gradient accuracy.

2.9 Volume, Distance and Stability Are Different

2.9.1 Which Divergence?

For the same prescribed reference input applied to neighboring initial states, Liouville's formula describes infinitesimal coordinate volume. Its divergence is that of $F_0 = f + G\bar{u}$, so

$$\text{tr } A = \text{div } f + \sum_j \bar{u}_j \text{div } g_j. \quad (2.40)$$

Feedback changes the field and its divergence. For a finite region, integrate the local Jacobian determinant over the initial region; one reference determinant is not generally the exact factor for the whole region. A nonconstant volume density also changes the geometric volume formula. Hamiltonian Liouville preservation refers to the canonical symplectic volume, not every unweighted position/velocity chart.

Negative trace along an interval makes its infinitesimal coordinate-volume ratio less than 1. A bound $\text{tr } A \leq -c < 0$ gives the uniform rate $e^{-c(t-s)}$; strict negativity alone need not give a uniform exponential rate. Volume decrease does not imply distance contraction or stability: $A = \text{diag}(1, -2)$ has determinant factor e^{-t} while the first direction grows as e^t .

For a damped pendulum $\ddot{\theta} + c\dot{\theta} + (g/\ell) \sin \theta = \tau/(m\ell^2)$ with c in 1/s, the trajectory Jacobian has lower-left entry $-(g/\ell) \cos \theta(t)$ and trace $-c$. The volume factor is $e^{-c(t-s)}$, including near the unstable upright equilibrium. Damping and shrinking phase volume do not make that equilibrium stable.

2.9.2 Growth in a Declared Metric

For an unforced variation in a fixed scaled Euclidean chart,

$$\frac{d}{dt} \|\xi\|^2 = \xi^T (A^T + A) \xi. \quad (2.41)$$

The skew part cancels from this instantaneous quadratic derivative, although its rotation of directions influences later exposure to stretching. With input, add $2\xi^T Bv$. The norm is a perturbation measure, not automatically mechanical energy. For a positive metric $P(t)$,

$$\frac{d}{dt} (\xi^T P \xi) = \xi^T (\dot{P} + A^T P + P A) \xi \quad (2.42)$$

in the homogeneous problem. A uniformly positive and uniformly bounded metric and an inequality $\dot{P} + A^T P + P A \preceq -2\alpha P$, $\alpha > 0$, establish exponential decay for this variational system. Extending a differential inequality to a nonlinear contraction claim requires a suitable domain, metric regularity and comparison between trajectories there.

Frozen eigenvalues are insufficient for general LTV stability. To verify this explicitly, let

$$D = \begin{pmatrix} -1 & 4 \\ 0 & -1 \end{pmatrix}, \quad \Omega = \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix}, \quad R(t) = e^{\Omega t}, \quad A(t) = R(t)DR(t)^T. \quad (2.43)$$

Every frozen $A(t)$ has eigenvalues $-1, -1$. But $\eta = R(t)^T \xi$ satisfies $\dot{\eta} = (D - \Omega)\eta$, whose eigenvalues are $-1 \pm \sqrt{3}$. One direction grows exponentially. This smooth example separates instantaneous spectra from the propagated dynamics. Even a constant Hurwitz matrix can produce transient growth in a chosen Euclidean norm if it is nonnormal.

2.10 Control Authority Over a Horizon

At one instant, Bv is an increment in the state derivative. It is not an instantaneous finite state displacement. Its column space describes possible derivative directions only with unrestricted signed input directions; actual actuator bounds restrict that set. A fully actuated mechanical system with d configuration coordinates often has $2d$ states and a rank- d input matrix. Thus $\text{rank } B < n$ by itself does not define mechanical underactuation. Underactuation concerns independent generalized-force authority relative to the mechanical degrees of freedom.

For unrestricted square-integrable inputs in an LTV model, the terminal controllability Gramian is

$$W(T, t_0) = \int_{t_0}^T \Phi(T, s)B(s)B(s)^T \Phi(T, s)^T ds. \quad (2.44)$$

For any a , $a^T W a = \int \|B^T \Phi^T a\|^2 ds \geq 0$. Positive definiteness means no terminal direction is orthogonal to all propagated channels and is equivalent to full finite-horizon controllability of this linear problem. It does not guarantee bounded-input feasibility or global nonlinear controllability. For a positive input-cost matrix R_u , replace BB^T by $BR_u^{-1}B^T$; this makes the chosen effort weighting explicit.

For the unit double integrator over length $T > 0$,

$$W = \begin{pmatrix} T^3/3 & T^2/2 \\ T^2/2 & T \end{pmatrix}, \quad \det W = T^4/12 > 0. \quad (2.45)$$

Its rank-one instantaneous channel can influence both terminal position and velocity through propagation. Yet as the horizon shortens, some corrections become expensive. With $|u| \leq u_{\max}$ and zero initial error, $|\delta q(T)| \leq u_{\max} T^2/2$ and $|\delta v(T)| \leq u_{\max} T$. Controllability rank alone hides these practical limits.

Singular values require state and input scaling. For a full-column-rank B , $\kappa_2(B^T B) = \kappa_2(B)^2 = (\sigma_{\max}(B)/\sigma_{\min}(B))^2$. Redundant columns make $B^T B$ singular even when useful output authority remains. Neither a large condition number nor a low rank alone proves saturation for a specified task. Evaluate the desired output change, feasible channel set, horizon, uncertainties and retained actuator dynamics together. The finite-horizon kernel supplies a disciplined way to investigate earlier preparation versus later correction in the swing; it supplies no universal timing prescription without a validated model and measured boundary conditions.

2.11 Moving Frames and Geometric Meaning

Let $\xi = E(t)\eta$, with a differentiable invertible basis matrix E . Then

$$\dot{\eta} = (E^{-1}AE - E^{-1}\dot{E})\eta + E^{-1}Bv. \quad (2.46)$$

The basis-rate term is essential. Setting $E = \Phi(t, t_0)$ eliminates the homogeneous coefficient, but the basis itself then carries all the original stretching and can become ill-conditioned. This coordinate choice is not a physical stabilization mechanism.

The STM is the derivative, or tangent pushforward, of the specified flow with respect to initial state. It need not be parallel transport for the kinetic metric or any Levi-Civita connection. On the Euclidean line,

$\dot{x} = ax$ gives a flow derivative $e^{a(t-s)}$, whereas Euclidean parallel transport preserves a vector's length. A connection must be specified before making a parallel-transport claim. Under a smooth coordinate change $y = \chi(x)$, the same flow derivative has matrix $D\chi(\bar{x}(t))\Phi(t, s)D\chi(\bar{x}(s))^{-1}$. Finite subtraction on a manifold is chart-dependent; tangent vectors and finite displacements should not be interchanged without that declaration.

2.12 Reliable Numerical Computation

2.12.1 Integrating What the Task Requires

Integrating the full STM adds n^2 state variables. A dense product $A\Phi$ costs $O(n^3)$ per right-hand-side evaluation, plus the cost of obtaining A . If only a few initial directions are needed, propagate an $n \times r$ sensitivity block instead. If only a few scalar output gradients are needed, an adjoint may be preferable. Sparse products, Jacobian-vector products and matrix-exponential actions can avoid forming dense matrices. No single method is uniformly cheapest across dimensions, structures, output requests and tolerances.

Analytic derivatives and automatic differentiation should be checked against independent directional differences where feasible. A derivative can faithfully differentiate the wrong force law. Integrate the reference state and sensitivities consistently, use scales appropriate to each block, refine tolerances or the time step, and compare the final task output and derivative. The [MIT trajectory-linearization treatment](#) connects these derivatives to local trajectory feedback while keeping the reference feasible.

2.12.2 Matrix Exponentials and Conditioning

For constant coefficients, scaling and squaring approximates e^Z through

$$e^Z \approx [r_m(2^{-s}Z)]^{2^s}, \quad r_m = N_m/D_m. \quad (2.47)$$

Modern algorithms choose a diagonal $[m/m]$ Padé degree and scaling according to error estimates, then solve the matrix-polynomial system rather than forming its denominator inverse. The [Al-Mohy-Higham analysis](#) explains how unnecessary scaling can worsen rounding error. A fixed $[7/8]$ rule and threshold are not a general guarantee of machine accuracy. Backward error, conditioning of the matrix-exponential problem and roundoff together determine forward accuracy; consult the numerical library's documented algorithm and verify the application.

For a dense fixed-degree approximant, polynomial evaluation and a solve have cubic scaling, with additional cubic work for each squaring. Constants, selected degree, structure and reuse matter. An adaptive ODE solver's cost depends on accepted and rejected steps, not simply the number of requested output samples. For time-varying coefficients, repeatedly applying frozen exponentials also introduces a time-discretization error.

2.12.3 Stiffness Is Not the Same as Loss of Information

Stiffness is a numerical stability restriction relative to the solution and accuracy sought. Widely separated decaying modes can create it; an eigenvalue ratio is a diagnostic in some problems, not a universal definition. An explicit solver may need a short step for stability after the fast transient is already small. Suitable implicit methods address that restriction, but do not restore information lost through extreme expansion or contraction.

For $A = \text{diag}(-1, -1000)$, $\Phi = \text{diag}(e^{-t}, e^{-1000t})$ has condition number e^{999t} in these scaled coordinates. In contrast, $\Phi = e^{-100t}I$ has condition number 1 even when every entry is very small. The smallest singular value falling below an absolute machine-epsilon threshold is not by itself a singularity criterion. Relative singular-value separation, absolute error scales, underflow and the intended operation all matter. Inversion or recovery of suppressed directions can be unreliable long before a forward output of interest becomes unusable.

2.12.4 QR Propagation With Correct Product Order

Suppose $\Phi_k = Q_k R_k$ and a computed interval propagator is P_k . Form $Y = P_k Q_k$ and factor $Y = Q_{k+1} S_k$. Then

$$\Phi_{k+1} = P_k \Phi_k = Q_{k+1} S_k R_k, \quad R_{k+1} = S_k R_k. \quad (2.48)$$

The new triangular factor multiplies on the left. During the interval, one propagates Y with $\dot{Y} = AY$ from an orthonormal starting basis; Y is not orthonormal between QR steps. The accumulated R carries the stretching and is not promised to remain bounded or well-conditioned. QR can stabilize basis propagation and support logarithmic growth diagnostics, but reconstructing the full product can still overflow, underflow or lose relative information. Keep scaled factors or checkpointed short transitions when appropriate. Restarting a local transition does not magically recover information already lost from the original long-horizon map.

2.13 Structure-Preserving Integration

2.13.1 Symplectic Structure and Energy

For an autonomous unforced canonical Hamiltonian system, the exact flow preserves its Hamiltonian and symplectic form. A symplectic numerical map satisfies $(D\Psi_h)^T \mathbb{J} D\Psi_h = \mathbb{J}$ and hence preserves canonical volume. Volume preservation alone is weaker in dimensions above two. A generic explicit RK4 method is not symplectic, but implicit midpoint and Gauss Runge–Kutta methods are symplectic under their defining assumptions; [Hairer’s symplectic-integration lectures](#) derive these examples.

For separable $H(q, p) = T(p) + V(q)$, kick-drift symplectic Euler gives

$$p_{k+1} = p_k - h\nabla V(q_k), \quad q_{k+1} = q_k + h\nabla T(p_{k+1}). \quad (2.49)$$

It preserves symplectic structure in exact arithmetic but does not conserve the original energy exactly or remain stable for every step. For the unit oscillator with state order (q, p) , its matrix is

$$S_h = \begin{pmatrix} 1 - h^2 & h \\ -h & 1 \end{pmatrix}, \quad \det S_h = 1, \quad \text{tr } S_h = 2 - h^2. \quad (2.50)$$

When $0 < h < 2$, its eigenvalues lie on the unit circle and it preserves the positive quadratic $\frac{1}{2}(q^2 + p^2 - hqp)$. At $h > 2$ one eigenvalue has magnitude greater than 1, so energy can grow without bound despite symplecticity. At $h = 2$ the repeated eigenvalue needs its Jordan structure checked. Long-time near-energy conservation requires suitable small-step, regularity and bounded-trajectory assumptions; it is not an all-time, all-step guarantee.

Numerical energy error need not drift monotonically or always produce an outward spiral. A short downswing is not an automatic accuracy certificate, and independently restarted parameter sweeps do not accumulate integration time merely because many runs are executed. Check force balance, convergence and task outputs at the actual time scales. Forced, dissipative or impact dynamics need their own work and jump balances rather than an inappropriate energy-conservation test.

2.13.2 Rotations and Variational Integrators

For a body-to-space rotation R and body-resolved angular velocity ω_b , $\dot{R} = R\hat{\omega}_b$, where $\hat{\omega}_b z = \omega_b \times z$. A frozen-velocity update $R_{k+1} = R_k \exp(h\hat{\omega}_{b,k})$ stays on $SO(3)$ in exact arithmetic and is first order for general time-varying velocity. Space-resolved velocity uses left multiplication. Higher order needs appropriate stage and noncommutativity treatment; simply integrating three angular components and exponentiating does not automatically supply it. Floating-point matrix products can still require monitoring of orthogonality. Euler-angle chart singularities and quaternion normalization drift are different issues.

A discrete action $\sum_k L_d(q_k, q_{k+1})$, varied with fixed endpoints, gives

$$D_2 L_d(q_{k-1}, q_k) + D_1 L_d(q_k, q_{k+1}) = 0. \quad (2.51)$$

For a regular discrete Lagrangian these equations define a local map. Its discrete Legendre transforms $p_k = -D_1 L_d(q_k, q_{k+1})$ and $p_{k+1} = D_2 L_d(q_k, q_{k+1})$ place it in canonical phase space, where the unforced map is symplectic. Momentum preservation follows for symmetries actually retained by the discrete Lagrangian; see [West’s variational-integrator account](#). Forced, constrained and nonsmooth extensions require their corresponding formulations. Differentiating a symplectic map preserves its tangent symplectic identity in canonical coordinates, but does not guarantee faster optimization or make a generic position/velocity Jacobian canonically symplectic.

2.14 Reproducible Checks

The standalone Python program uses NumPy and SciPy. Its functions expose the pendulum transition, singular-safe ZOH sensitivity, ordered QR product, scalar remainder, boundary-sensitive adjoint and symplectic-Euler matrix. The published table values are generated from it. Independent tests compare its pendulum result with matrix-exponential and ODE calculations, its QR result with direct noncommuting products, its ZOH result with a polynomial solution and its adjoint with finite differences of a separately integrated objective.

```

1 # Variational chapter example
2 import numpy as np
3 from scipy.integrate import quad
4 from scipy.linalg import expm
5
6 GRAVITY_M_S2 = 10.0
7 LENGTH_M = 1.0
8 MASS_KG = 1.0
9
10
11 def pendulum_stm(time: float) -> np.ndarray:
12     """Downward point-mass pendulum, state (angle, angular velocity)."""
13     frequency = np.sqrt(GRAVITY_M_S2 / LENGTH_M)
14     cosine, sine = np.cos(frequency * time), np.sin(frequency * time)
15     return np.array([[cosine, sine / frequency], [-frequency * sine, cosine]])
16
17
18 def zoh(matrix: np.ndarray, channel: np.ndarray, interval: float) -> tuple[np.ndarray, np.
    ndarray]:
19     """Exact linear held-input blocks, including singular state matrices."""
20     states, inputs = channel.shape
21     augmented = np.zeros((states + inputs, states + inputs))
22     augmented[:states, :states] = matrix
23     augmented[:states, states:] = channel
24     result = expm(interval * augmented)
25     return result[:states, :states], result[:states, states:]
26
27
28 def qr_product(intervals: list[np.ndarray]) -> tuple[np.ndarray, np.ndarray]:
29     """Finite illustrative product; accumulated factors can be ill-conditioned."""
30     if not intervals:
31         raise ValueError("Supply at least one square interval propagator")
32     orthogonal = np.eye(intervals[0].shape[0])
33     triangular = orthogonal.copy()
34     for interval in intervals:
35         orthogonal, factor = np.linalg.qr(interval @ orthogonal)
36         triangular = factor @ triangular
37     return orthogonal, triangular
38
39
40 def joint_remainder(displacement: float, increment: float) -> float:
41     """Exact remainder for  $F(x,u)=x*x+(1+x)*u$  at a frozen pair."""
42     return displacement**2 + displacement * increment
43
44
45 def scalar_adjoint_gradient(parameter: float, terminal: float) -> float:
46     """ $x'=p*x$ ,  $x(0)=p$ ; half squared terminal and running state cost."""
47
48     def state(time: float) -> float:
49         return float(parameter * np.exp(parameter * time))
50
51     def adjoint(time: float) -> float:
52         forced = quad(
53             lambda moment: np.exp(parameter * (moment - time)) * state(moment),
54             time,
55             terminal,
56         )[0]

```

```

57     return float(np.exp(parameter * (terminal - time)) * state(terminal) + forced)
58
59     return adjoint(0.0) + quad(lambda time: adjoint(time) * state(time), 0.0, terminal)[0]
60
61
62 def symplectic_euler_matrix(step: float) -> np.ndarray:
63     """Unit oscillator, kick then drift, state (q,p)."""
64     return np.array([[1 - step**2, step], [-step, 1]])
65
66
67 initial_response = pendulum_stm(0.5) @ np.array([0.1, 0.0])
68 impulse_response = pendulum_stm(0.25) @ np.array([0.0, 1.0 / (MASS_KG * LENGTH_M**2)])
69 if __name__ == "__main__":
70     for time in [0.25, 0.5]:
71         print(time, pendulum_stm(time))
72     print("Initial response:", initial_response)
73     print("Impulse response:", impulse_response)
74     print("Adjoint gradient:", scalar_adjoint_gradient(0.4, 0.7))

```

2.15 What This Establishes for the Swing

Variational analysis connects preparation and correction through a specified trajectory, retained state, input port and output. Earlier effort may establish velocities or elastic and activation states that shape later motion. A later input can still affect some impact variables while having little authority over others. Constraint reactions can redirect acceleration without supplying total mechanical work; actuator dynamics can delay or filter a command. These mechanisms enter the reference dynamics and its derivatives, rather than being inferred from a single speed peak.

To investigate a proposed release mechanism, first declare the model and event, then identify measured and inferred states, compute the appropriate finite-horizon output sensitivities, impose feasible inputs and uncertainties, and check representative finite nonlinear interventions. Compare those predictions with data that distinguish competing mechanisms. A locally sensitive direction does not prove human causation, and a locally insensitive output does not prove that earlier muscular work was irrelevant. The mathematical tools sharpen the research question while keeping model evidence separate from observations of a golfer.

Exercises

1. **A Joint Taylor Check.** For $F(x, u) = x^2 + (1 + x)u$, derive the exact finite-error equation about a feasible reference. Compare equal scaling of state/input perturbations with a fixed finite input change as the state displacement tends to zero.
2. **Ordered Propagation.** Compute both orders of the two nilpotent interval generators above. Compare with $\exp(A_1 + A_2)$ and identify the commutator term responsible for the discrepancy.
3. **A Moving Stable Spectrum.** Differentiate $\Phi(t, 0) = R(t) \exp((D - \Omega)t)$ for the rotating example and verify its initial condition. Show that one solution grows although every frozen eigenvalue is negative.
4. **Pendulum Limits.** Using $m = \ell = 1$ and $g = 10$, compare the nonlinear pendulum and first variation from angles 0.1, 0.05 and 0.025 rad over 0.5 s. State the norm and integration tolerance; investigate the special odd-symmetry error order at this equilibrium.
5. **Bounded Pulses.** Replace the ideal torque impulse by a rectangular pulse with the same angular impulse. Vary duration and enforce a declared torque limit. Separate the short-pulse approximation from actuator feasibility.
6. **The Initial-State Gradient.** Reproduce the scalar adjoint check with $x(0) = p$, then repeat with fixed $x(0)$. Identify the changed boundary term and verify gradients across several finite-difference steps.

7. **A Short-Horizon Task.** Derive the double-integrator Gramian and amplitude bounds. Compare the achievable terminal position and velocity corrections as T decreases; explain why full rank does not imply a uniformly easy correction.
8. **Volume Versus Distance.** For $A = \text{diag}(1, -2)$, compute the determinant, singular values and response from each coordinate direction. Repeat for a damped pendulum at its upright equilibrium.
9. **A QR Product.** Implement the interval factorization and compare the correct left accumulation with the reversed order using noncommuting propagators. Monitor reconstruction error and factor magnitudes as the horizon grows.
10. **Symplecticity Versus Stability.** Verify the unit-oscillator symplectic identity and modified quadratic for symplectic Euler. Compare $h = 0.5, 2$ and 3 , including the repeated-eigenvalue case. Do not infer stability from determinant 1.
11. **A Golf Output Contract.** Choose one pre-impact outcome, declare its units, frame, event and retained actuator states, and write its first-order input kernel. Describe the measurements needed to test a timing claim and a finite intervention that could falsify it.

Chapter 3

Superposition: From Linear to Affine

A golfer's effort, posture, motion, contact with the ground, and flexible equipment act together. The useful question is not whether one of these explains the swing by itself. It is which mathematical operation allows their effects to be separated, what is held fixed during that operation, and what must be recomputed when the motion changes. This chapter develops that distinction from mechanics, then connects it to energy transfer, constraints, actuator limits, accessibility, and feedback control.

The central result is exact but deliberately local in state: in a declared mechanical model with a fixed contact mode and forces affine in the chosen inputs, input-induced acceleration increments add at the same position and velocity. Entire trajectories generally do not. An instantaneous decomposition can identify how a net joint moment contributes to acceleration now; it cannot, by itself, identify the muscle that supplied that moment, the work done over a downswing, or the result of changing a golfer's movement strategy.

3.1 Three Meanings of Addition

3.1.1 Tangent Vectors and First Variations

At a point on a smooth configuration or state manifold, tangent vectors form a vector space. Their addition is exact. A finite change between two postures, however, is not intrinsically a tangent vector, and vectors attached to different postures cannot be added without a specified identification or transport. Coordinates provide a local representation; they do not make nonlinear geometry disappear.

For a smooth dynamical system, the first variation about a specified reference trajectory satisfies a linear differential equation. Perturbations of that variational equation superpose. Their relationship to finite perturbed trajectories is generally an approximation whose error must be controlled. Thus, exact vector-space algebra and a first-order approximation to a finite response are compatible statements, not competing descriptions.

3.1.2 Exact Input Increments at One State

Theorem 3.1 (Fixed-State Input Superposition). *Let $F(x, u) = f_0(x) + G(x)u$ on a smooth mode, with $u \in \mathbb{R}^m$. At a fixed x , the total derivative is affine in u , while its increment is linear:*

$$\Delta F_x(u) := F(x, u) - F(x, 0) = G(x)u. \quad (3.1)$$

Consequently,

$$F(x, u_1 + u_2) = F(x, u_1) + F(x, u_2) - F(x, 0). \quad (3.2)$$

The zero-input anchor is counted once. For any real coefficients, $\Delta F_x(\alpha u_1 + \beta u_2) = \alpha \Delta F_x(u_1) + \beta \Delta F_x(u_2)$. These are algebraic identities wherever the model is defined; a combined input outside the feasible set remains a mathematical evaluation rather than an executable command. Affine interpolation of total derivatives uses coefficients summing to one.

The anchor also depends on the input definition. Zero net joint torque, zero motor voltage, and zero muscle excitation are different interventions. Muscle activation, tendon tension, shaft deflection, and other stored states can retain forces after a command is set to zero. We will use zero applied generalized effort unless another port is explicitly introduced. Known gravity, passive forces, prescribed external loads, and the active constraint model remain present.

3.1.3 Finite Trajectories and the Evolving Baseline

Write $x[u](t)$ for the trajectory from one common initial state under an input history u . In a shared coordinate chart, the appropriate baseline comparison is

$$\epsilon(t) = x[u_1 + u_2](t) - x[u_1](t) - x[u_2](t) + x[0](t). \quad (3.3)$$

Nonlinear dynamics generally give $\epsilon \neq 0$. The zero-input trajectory evolves; it is not generally the initial state or the zero vector. The trajectories sample different f_0 and G , possibly different contacts, and eventually different domains. There can be exceptional input pairs for which this defect vanishes, including symmetry-related responses of a pendulum. One such pair neither proves a general superposition theorem nor disproves nonlinearity.

For a realizable reference $(\bar{x}(t), \bar{u}(t))$, the first variation is

$$\delta \dot{x} = A(t)\delta x + G(\bar{x}(t))\delta u, \quad A = D_x f_0(\bar{x}) + \sum_j \bar{u}_j D_x G_j(\bar{x}). \quad (3.4)$$

Omitting the derivatives of the input directions gives the wrong linearization when the reference effort is nonzero and G varies with posture. A reference that does not satisfy the dynamics also introduces a residual forcing. In a golf analysis, each of these choices affects the meaning of an estimated sensitivity.

3.2 Mechanical Origins of the Affine Map

3.2.1 Kinetic Energy and a Regular Mass Matrix

Use n independent local coordinates q , with $v = \dot{q}$, and N_b rigid bodies. For a stationary base, each center-of-mass velocity and angular velocity depends linearly on v . Express an angular velocity and its inertia tensor in the same frame, with the inertia taken about that body's center of mass. Then

$$T = \frac{1}{2} \sum_{i=1}^{N_b} (m_i \|J_{v,i} v\|^2 + (J_{\omega,i} v)^T I_{C,i} (J_{\omega,i} v)) = \frac{1}{2} v^T M(q) v, \quad (3.5)$$

where

$$M = \sum_i (m_i J_{v,i}^T J_{v,i} + J_{\omega,i}^T I_{C,i} J_{\omega,i}). \quad (3.6)$$

This matrix is symmetric and positive semidefinite. It is positive definite when every nonzero admissible generalized velocity produces positive modeled kinetic energy. Independent regular coordinates and a nondegenerate inertial model supply that property. Massless unconstrained freedoms, redundant coordinates, or singular charts require additional treatment. The number of bodies need not equal the number of coordinates. Quaternion coordinates also require a kinematic map $\dot{q} = N(q)v$ instead of identifying all coordinate rates with independent velocities.

3.2.2 Force, Acceleration, and Connection Coefficients

For the independent-coordinate model, let $U(q)$ be potential energy, $D(q, v)v$ a dissipative force with $v^T Dv \geq 0$, and $Q_e(q, v, t)$ a prescribed external generalized force. The equation is

$$M\dot{v} + c(q, v) + \nabla U + Dv = B(q)u + Q_e. \quad (3.7)$$

Here B maps the chosen efforts to generalized forces. It need not be square. Velocity-dependent or time-dependent B also preserves frozen-state input affinity, provided it does not depend on u . Unknown contact reactions are not arbitrary prescribed loads; they will be solved with constraints below.

The Euler–Lagrange equations give the velocity-product force

$$c_i = \sum_{j,k} \Gamma_{ijk} v_j v_k, \quad \Gamma_{ijk} = \frac{1}{2} (\partial_j M_{ik} + \partial_k M_{ij} - \partial_i M_{jk}). \quad (3.8)$$

These are Christoffel symbols of the first kind. The second-kind coefficients $\Gamma^i_{jk} = \sum_{\ell} (M^{-1})_{i\ell} \Gamma_{\ell jk}$ act at acceleration level. Adding $\Gamma^i_{jk} v_j v_k$ directly to $M\dot{v}$ mixes those levels. One consistent choice is $C_{ij} = \sum_k \Gamma_{ijk} v_k$, so that $Cv = c$ and $\dot{M} - 2C$ is skew symmetric. The matrix C is not unique, whereas the mechanically specified vector c is fixed.

With no potential gradient, damping, or applied nonconstraint force, the free equation is $\ddot{q}^i + \Gamma^i_{jk} \dot{q}^j \dot{q}^k = 0$: a geodesic of the kinetic metric. A gravity-driven swing is not such a free geodesic merely because commanded torque is zero. For background on the force-level derivation, see the [Modern Robotics Lagrangian dynamics transcript](#).

Solving the regular equation gives

$$a_0 = M^{-1}(Q_e - c - \nabla U - Dv), \quad H = M^{-1}B, \quad \dot{v} = a_0 + Hu. \quad (3.9)$$

Thus $f_0 = \begin{bmatrix} v \\ a_0 \end{bmatrix}$ and $G = \begin{bmatrix} 0 \\ H \end{bmatrix}$. The retained external load stays in a_0 . This derivation establishes affinity for the declared effort variables; it does not imply that an arbitrary electrical, neural, or software command enters affinely.

3.2.3 Virtual Work Explains the Force Map

If $\delta p_i = J_{v,i} \delta q$ and the infinitesimal body rotation is $\delta \theta_i = J_{\omega,i} \delta q$, virtual work gives

$$\delta W = \sum_i (F_i^T \delta p_i + N_i^T \delta \theta_i) = Q^T \delta q, \quad Q = \sum_i (J_{v,i}^T F_i + J_{\omega,i}^T N_i). \quad (3.10)$$

All forces, moments, velocities, and lever arms must use compatible points and frames. Generalized forces are dual to generalized velocities: their pairing is power. At fixed geometry this mapping is linear in physical wrenches. If a wrench is nonlinear in a chosen command, the Jacobian transpose does not remove that nonlinearity. Ideal stationary constraint reactions do no virtual work on allowed displacements; this is why they disappear under a valid reduction, not why their numerical values are independent of actuation.

3.3 One Arm, Three Consistent Formulations

3.3.1 A Fully Specified Uniform-Rod Model

Consider two uniform planar rods with lengths $l_1, l_2 > 0$, masses $m_1, m_2 > 0$, fixed proximal endpoint, and center-of-mass inertias $I_{C,i} = m_i l_i^2 / 12$. Let q_1 be counterclockwise from the horizontal and q_2 the relative elbow angle. Therefore the absolute angles are q_1 and $q_1 + q_2$, and angular velocities are v_1 and $v_1 + v_2$. These conventions determine every trigonometric sign below. Gravity is the Cartesian vector $(0, -g)$.

Set $e(\theta) = (\cos \theta, \sin \theta)^T$. The centers are

$$p_{C,1} = \frac{l_1}{2} e(q_1), \quad p_{C,2} = l_1 e(q_1) + \frac{l_2}{2} e(q_1 + q_2). \quad (3.11)$$

Differentiating these positions and adding the rotational energies gives, with $\beta = m_2 l_1 l_2 / 2$, $d = m_2 l_2^2 / 3$, and $a = m_1 l_1^2 / 3 + m_2 l_1^2 + d$,

$$M = \begin{bmatrix} a + 2\beta \cos q_2 & d + \beta \cos q_2 \\ d + \beta \cos q_2 & d \end{bmatrix}, \quad c = \beta \sin q_2 \begin{bmatrix} -2v_1 v_2 - v_2^2 \\ v_1^2 \end{bmatrix}. \quad (3.12)$$

The potential and its gradient are

$$U = g \left[\left(\frac{m_1 l_1}{2} + m_2 l_1 \right) \sin q_1 + \frac{m_2 l_2}{2} \sin(q_1 + q_2) \right], \quad (3.13)$$

$$\nabla U = g \begin{bmatrix} (m_1 l_1 / 2 + m_2 l_1) \cos q_1 + (m_2 l_2 / 2) \cos(q_1 + q_2) \\ (m_2 l_2 / 2) \cos(q_1 + q_2) \end{bmatrix}. \quad (3.14)$$

At a horizontal posture gravity therefore gives a clockwise tendency. A sine formula associated with angles measured from the downward vertical cannot be inserted without changing the coordinate convention. Both joint accelerations appear in each coupled balance; a single-link inertia about the base cannot silently replace the two-link mass matrix.

The determinant is

$$\det M = \frac{m_1 m_2 l_1^2 l_2^2}{9} + m_2^2 l_1^2 l_2^2 \left(\frac{1}{3} - \frac{1}{4} \cos^2 q_2 \right) > 0. \quad (3.15)$$

Together with $d > 0$, this verifies positive definiteness for this model, including aligned rods. A task Jacobian can lose rank at alignment while M remains invertible. A condition number, unlike positive definiteness, also depends on parameter values and the scaling chosen for coordinates.

Writing $h = \beta \sin q_2$, a compatible Coriolis matrix is

$$C = \begin{bmatrix} -h v_2 & -h(v_1 + v_2) \\ h v_1 & 0 \end{bmatrix}. \quad (3.16)$$

Direct multiplication recovers c , and $v^T c = \frac{1}{2} v^T \dot{M} v$. The factor of one half in β comes from the second rod's center-of-mass distance. Treating its entire mass as a point at the tip would define a different model and different coefficients.

3.3.2 Newton–Euler Balances Recover the Same Efforts

Let F_{12} be the elbow force on rod 2, F_{01} the base force on rod 1, and τ_2 the counterclockwise actuator moment on rod 2, with reaction $-\tau_2$ on rod 1. The base moment is τ_1 . Define $\rho_1 = p_{C,1}$ and $\rho_2 = p_{C,2} - l_1 e(q_1)$. For any proposed joint acceleration, differentiating the center positions gives their Cartesian accelerations, including velocity-product terms. Force balance requires

$$F_{12} = m_2(a_{C,2} - g_{\text{vec}}), \quad F_{01} = m_1(a_{C,1} - g_{\text{vec}}) + F_{12}. \quad (3.17)$$

With planar cross products interpreted as signed moments, the center-of-mass moment balances give

$$\tau_2 = I_{C,2}(\ddot{q}_1 + \ddot{q}_2) + \rho_2 \times F_{12}, \quad (3.18)$$

$$\tau_1 = I_{C,1}\ddot{q}_1 + \tau_2 + \rho_1 \times F_{01} + (l_1 e(q_1) - \rho_1) \times F_{12}. \quad (3.19)$$

Eliminating the internal forces yields $\tau = M\ddot{q} + c + \nabla U$. Conversely, solving that equation and substituting into these body balances must recover the applied torques. The runnable example is tested in precisely this way, using independently differentiated Cartesian positions. This checks geometry, inertia, gravity signs, and coupling rather than merely evaluating the same mass-matrix formula twice.

These equations used inertial-frame derivatives. In axes rotating with a body, translational balance at its center is $F = m(\dot{v}_C^b + \omega^b \times v_C^b)$, and rotational balance is $N_C = I_C \dot{\omega}^b + \omega^b \times (I_C \omega^b)$. A dot on body components alone omits the transport term. Origins away from the center require the corresponding inertia and acceleration transformations.

3.3.3 Spatial Vectors Preserve the Same Constraints

In body axes at the center of mass, use an angular-first twist $V = (\omega, v_C^b)$ and wrench $W = (N_C, F)$. The pairing $W^T V$ is power. With $[z]_\times w = z \times w$,

$$\mathcal{I} = \text{diag}(I_C, mI_3), \quad \text{ad}_V = \begin{bmatrix} [\omega]_\times & 0 \\ [v_C^b]_\times & [\omega]_\times \end{bmatrix}, \quad W = \mathcal{I}\dot{V} - \text{ad}_V^T \mathcal{I}V. \quad (3.20)$$

The lower block contains $m(\dot{v}_C^b + \omega \times v_C^b)$, exactly the force balance above. Wrench transformations are dual to twist transformations; using one transformation for both would generally corrupt power.

For a connected stationary-base chain, stack the body twists as $V = \mathcal{J}(q)v$. Then $\dot{V} = \mathcal{J}\dot{v} + \dot{\mathcal{J}}v$, and the assembled kinetic metric is $M = \mathcal{J}^T \mathcal{I} \mathcal{J}$. Project the body balances with the dual map $\mathcal{J}^T$, retaining their bias terms and joint compatibility. Ideal internal reactions cancel in this projection. Inverting each

free body's spatial inertia without enforcing the joints instead simulates disconnected bodies. Generalized actuator efforts also do not uniquely specify an arbitrary collection of free-body wrenches.

Newton–Euler, Lagrange, and spatial-vector methods are consequently different organizations of the same model. Agreement requires the same geometry, inertias, loads, coordinate conventions, and constraints. Their agreement is a verification opportunity, not three independent physical explanations of the swing.

3.4 Power, Work, and Intersegment Transfer

The actuation power is

$$P_u = (Bu)^T v = u^T y, \quad y = B^T v, \quad (3.21)$$

not generally $u^T v$. At fixed state, $P_u = \sum_j u_j y_j$. If $B = I$, each input is a joint torque and each output its corresponding relative angular velocity. Contributions can be negative: an actuator may absorb mechanical energy while the total motion continues to speed up elsewhere.

For $E = T + U$, differentiating before substituting the dynamics is essential:

$$\dot{E} = v^T M \dot{v} + \frac{1}{2} v^T \dot{M} v + (\nabla U)^T v = u^T B^T v + v^T Q_e - v^T D v. \quad (3.22)$$

The cancellation uses $v^T c = \frac{1}{2} v^T \dot{M} v$, with a positive sign. Coriolis and centrifugal terms are not a dissipative sink. Calling $-(c + \nabla U)^T v$ the total energy rate misses the changing kinetic metric. Gravity exchanges kinetic and potential energy, whereas damping removes mechanical energy in this model.

For the arm, a shared elbow point has the same velocity on both rods. The equal and opposite elbow forces therefore have equal and opposite powers in the combined balance, while each rod can gain or lose energy through that boundary. The actuator moment pair contributes

$$\tau_2(v_1 + v_2) - \tau_2 v_1 = \tau_2 v_2. \quad (3.23)$$

The base force acts at a stationary point and has zero power; the base actuator contributes $\tau_1 v_1$. Summing the two rod energy balances gives $\dot{E} = \tau_1 v_1 + \tau_2 v_2$. On individual rods, joint force power and joint moment power both matter. Their division depends on the chosen subsystem boundary and wrench reference point; a consistent total balance does not.

This is the connection to proximal-to-distal sequencing. Proximal slowing and distal speeding are kinematic observations. Demonstrating transfer requires a segment energy balance with boundary force and moment powers, external work, and any elastic storage. A shaft can temporarily store energy while hands and clubhead change speed. A net wrist moment cannot uniquely identify individual muscle forces or co-contraction. The mechanical accounting can support a proposed mechanism, but the timing pattern alone is not its proof.

Finite channel work is $W_j = \int u_j(t) y_j(t) dt$. Along one recorded trajectory these integrals sum exactly. After an intervention changes one channel, all the velocities and possibly the feasible contacts change. Differences between two such experiments are therefore not obtained by adding the original channel works or integrating independent acceleration contributions along their own trajectories.

3.5 Constraints Preserve an Affine Map Within a Regular Mode

3.5.1 Reaction Forces Depend on the Input

For a stationary holonomic constraint $\phi(q) = 0$ with full-row-rank $J = \partial\phi/\partial q$, admissible velocities satisfy $Jv = 0$ and accelerations satisfy $J\dot{v} = -\kappa$, where $\kappa = \dot{J}v$. The configuration manifold is a set of positions; its tangent space is the allowed velocity space at one position. Accelerations form an affine set because of the curvature term. General rolling constraints need not integrate to a configuration equation and must not be classified as holonomic without checking integrability.

Use the reaction convention

$$M\dot{v} = r + Bu + J^T \lambda, \quad r = Q_e - c - \nabla U - Dv. \quad (3.24)$$

Together with the acceleration constraint this is the regular saddle-point system

$$\begin{bmatrix} M & -J^T \\ J & 0 \end{bmatrix} \begin{bmatrix} \dot{v} \\ \lambda \end{bmatrix} = \begin{bmatrix} r + Bu \\ -\kappa \end{bmatrix}. \quad (3.25)$$

Let $W = JM^{-1}J^T$ and $P = I - M^{-1}J^TW^{-1}J$. The solution is

$$\dot{v} = PM^{-1}r - M^{-1}J^TW^{-1}\kappa + PM^{-1}Bu, \quad (3.26)$$

$$\lambda = -W^{-1}(\kappa + JM^{-1}r + JM^{-1}Bu). \quad (3.27)$$

Thus the constrained acceleration remains affine in effort, but its slope is $PM^{-1}B$, and its anchor includes curvature. The reactions vary with u . Holding their values fixed while changing effort generally violates the constraint. P is a projection orthogonal in the mass metric, not necessarily in the Euclidean metric.

For a particle of mass m constrained to a circle of radius R , take $\phi = (q^Tq - R^2)/2$. Then $J = q^T$ and $\kappa = v^Tv$. At $q = (R, 0)$ with tangential speed s , the radial acceleration must be $-s^2/R$, even with zero applied force. An additional radial force changes the reaction; an additional tangential force changes the tangential acceleration. This elementary example makes both the offset and the input-dependent reaction visible.

3.5.2 Reduced Coordinates and Contact Feasibility

In a local configuration chart $q = \psi(z)$, let $N = D\psi$ and $w = \dot{z}$. Then $v = Nw$ and $\dot{v} = N\dot{w} + \dot{N}w$. Projection gives

$$(N^TMN)\dot{w} = N^T(r + Bu - M\dot{N}w). \quad (3.28)$$

Dropping $\dot{N}w$ removes the geometry-induced acceleration. An arbitrary null-space basis for a velocity constraint may instead define quasi-velocities; it does not automatically define integrable coordinates z .

Stationary ideal reactions have zero total power because $\lambda^T Jv = 0$. For $\phi(q, t) = 0$, the velocity condition is $Jv = -\phi_t$, so reaction power is $-\lambda^T \phi_t$: a moving boundary can supply or absorb energy. Its acceleration equation also needs the corresponding time derivatives.

Ground contact adds inequalities: a normal reaction cannot pull a unilateral surface together, and tangential reactions must satisfy the selected friction law. The affine expression is usable only while its solved reactions remain admissible in the assumed mode. Lift-off, slip, impact, or a change of constraint rank requires the appropriate new equations. A golf swing model with permanently fixed feet must justify that assumption over the analyzed interval; the projection is not a substitute for that check.

3.6 A Pendulum Example That Can Be Reproduced

3.6.1 Frozen-State Arithmetic

Use a point mass $m = 1$ kg at the end of a massless rod of length $l = 1$ m, a frictionless fixed pivot, and $g = 9.81$ m/s². Here, unlike the uniform-rod arm, q is measured counterclockwise from the downward vertical. The pivot inertia is $I = ml^2 = 1$ kg m², and

$$I\ddot{q} = -mgl \sin q + \tau, \quad E = \frac{1}{2}I\dot{q}^2 + mgl(1 - \cos q), \quad \dot{E} = \tau\dot{q}. \quad (3.29)$$

This is a teaching model, not a fitted golf swing. Its standard phase-space and energy structure are described in the [MIT Underactuated Robotics pendulum chapter](#).

At the same state with $q = \pi/6$, the baseline acceleration is -4.905 rad/s². Torques of 5, 2.5, and 7.5 N m give respectively 0.095, -2.405 , and 2.595 rad/s². The identity is

$$2.595 = 0.095 + (-2.405) - (-4.905). \quad (3.30)$$

The incremental gain is $\partial\ddot{q}/\partial\tau = 1/I$, with units (rad/s²)/(N m). The ratio of total acceleration to total torque is not that gain when gravity contributes an offset. A torque $\tau_g = mgl \sin q$ cancels gravity at the

current angle. Maintaining this cancellation as the pendulum moves requires updating the torque, and the actuator’s work still appears in the energy balance.

The gravitational contribution is bounded by $g/l = 9.81 \text{ rad/s}^2$ in magnitude. This simple bound and the sign convention are useful checks on every numerical row before discussing its physical meaning.

3.6.2 Trajectories Under Constant Torques

Start every experiment at $q(0) = \dot{q}(0) = 0$ and hold its torque constant. The program below integrates with fourth-order Runge–Kutta steps no larger than 0.001 s. Table values are rounded to six decimals. Halving the step and comparing with an independently implemented adaptive DOP853 integration both change the sampled state by less than 2×10^{-10} in the stated SI coordinates for the listed inputs and times. These are checks of this example, not universal error bounds for the algorithm.

For $\tau = 5 \text{ N m}$:

t (s)	q (rad)	$\dot{q}$ (rad/s)	$\ddot{q}$ (rad/s ²)
0.00	0.000000	0.000000	5.000000
0.25	0.148434	1.126321	3.549201
0.50	0.508441	1.613248	0.224337
1.00	1.109439	0.456624	-3.784356
1.50	0.867969	-1.319704	-2.485204
2.00	0.133555	-1.077419	3.693713

At $t = 1 \text{ s}$ the pendulum is still moving in the positive direction but has negative angular acceleration. At $t = 1.5 \text{ s}$ both its velocity and acceleration are negative; the constant positive torque is then absorbing energy. Torque sign, acceleration sign, velocity sign, and power sign answer different questions. The same distinction prevents incorrect interpretations of joint moment or segment deceleration in a swing.

The zero-torque trajectory stays at the downward equilibrium. The odd equation and symmetric initial state imply exactly $q[-5] = -q[5]$ and $\dot{q}[-5] = -\dot{q}[5]$. Therefore the pair 5, −5 happens to satisfy trajectory addition. To exhibit a nonzero defect, compare the nonsymmetric pair 5, 2.5 with their sum 7.5:

t (s)	$q[5]$	$q[2.5]$	$q[7.5]$	ϵ_q
0.00	0.000000	0.000000	0.000000	0.000000
0.25	0.148434	0.074215	0.222663	0.000014
0.50	0.508441	0.253779	0.764851	0.002631
1.00	1.109439	0.520651	1.844183	0.214093
1.50	0.867969	0.293486	2.561097	1.399642
2.00	0.133555	0.003088	3.981019	3.844375

The angle and defect entries in this second table are radians on the same unwrapped coordinate. At two seconds the combined input has carried the mass beyond π , while the two smaller-input trajectories have returned near the lower posture. Adding those two positions misses nearly 3.8444 radians. The underlying cause is the different gravitational acceleration sampled along each history, not a failure of forces to add at a fixed state. An angle can be wrapped for display, but wrapping each trajectory independently before subtraction changes this comparison and can create discontinuities.

For any one constant torque, integrating $\dot{E} = \tau \dot{q}$ gives

$$\frac{1}{2}\dot{q}(t)^2 + 9.81(1 - \cos q(t)) - \tau q(t) = 0 \quad (3.31)$$

for these initial conditions. The numerical residual is below $2 \times 10^{-10} \text{ J}$ at the sampled times. The work term uses the unwrapped angle; a constant torque performs work on every revolution. Relative error against a zero baseline is undefined, so the tables report absolute differences rather than assigning a misleading zero percent.

3.7 Passivity, Dissipation, and Contraction Are Different Claims

3.7.1 An Energy Inequality at a Declared Port

A system with input u and output y is passive on a stated domain if it has a nonnegative storage function S satisfying

$$S(x(t)) - S(x(0)) \leq \int_0^t u(s)^T y(s) ds \quad (3.32)$$

for admissible trajectories. A storage bounded below can be shifted by a constant to be nonnegative. Equality describes a lossless system and can hold away from equilibrium. Positive dissipation is a stronger property than passivity; neither should be substituted for the other. See the definitions and pendulum example in [Khalil's passivity lecture](#).

For the mechanical model, $S = E - E_{\min}$ is available when energy has a lower bound on the domain. The effort port is $(u, B^T v)$. A nonzero external load Q_e must be included as another power port, or its power must be accounted for separately. Omitting it can falsely classify an externally driven subsystem as passive or active. The dissipative assumption is $v^T D v \geq 0$; a general appeal to thermodynamics does not establish that an arbitrary fitted matrix satisfies it.

Bounded input does not imply bounded energy. A unit free mass driven by the constant unit force has $\dot{q} = t$, $q = t^2/2$, and $E = t^2/2$ from rest. It is lossless with $\dot{E} = u\dot{q}$, yet its energy grows without bound. Adding viscous drag bounds the limiting speed under constant force, but position can still drift without bound. A storage that controls velocity alone cannot bound every state variable. Bounded-state and asymptotic-convergence conclusions require suitable storage growth, dissipation or feedback, existence of solutions, and often an invariance or detectability argument.

For a well-posed negative feedback interconnection of two passive systems, choose $u_1 = r - y_2$ and $u_2 = y_1$ with compatible port dimensions. Their inequalities sum to $\dot{S}_1 + \dot{S}_2 \leq r^T y_1$ because internal power cancels. This is the interconnection guarantee. To conclude convergence to a particular equilibrium, one must additionally show that the zero-dissipation invariant set contains only the desired motion in the relevant domain. Algebraic loops, unmodeled delays, saturation, and incompatible ports need their own analysis.

3.7.2 Port-Hamiltonian Structure and Its Limits

In canonical mechanical coordinates $z = (q, p)$, $p = M(q)v$, the Hamiltonian is

$$\mathcal{H}(q, p) = \frac{1}{2} p^T M(q)^{-1} p + U(q). \quad (3.33)$$

With symmetric positive-semidefinite viscous damping and no omitted external port, one representation is

$$\dot{z} = (\mathcal{J} - \mathcal{R})\nabla\mathcal{H} + \mathcal{G}u, \quad \mathcal{J} = \begin{bmatrix} 0 & I \\ -I & 0 \end{bmatrix}, \quad \mathcal{R} = \begin{bmatrix} 0 & 0 \\ 0 & D \end{bmatrix}, \quad \mathcal{G} = \begin{bmatrix} 0 \\ B \end{bmatrix}. \quad (3.34)$$

Since $\mathcal{J}$ is skew symmetric and $\mathcal{R}$ is positive semidefinite,

$$\dot{\mathcal{H}} = -(\nabla\mathcal{H})^T \mathcal{R} \nabla\mathcal{H} + u^T y, \quad y = \mathcal{G}^T \nabla\mathcal{H} = B^T v. \quad (3.35)$$

This representation exposes power exchange and dissipation. Generalized coordinates and momenta cannot be swapped with (q, v) while retaining the same constant canonical matrix unless the transformation is handled correctly. Nor does arbitrary control-affine dynamics automatically possess this physical Hamiltonian and passive port.

Even a positive-definite dissipation matrix in a more general port-Hamiltonian representation does not alone imply $\dot{\mathcal{H}} \leq -\alpha\mathcal{H}$ with a uniform $\alpha > 0$. For a scalar example, take $\mathcal{H} = x^4/4$, $\mathcal{R} = 1$, and $\dot{x} = -x^3$. Then $\dot{\mathcal{H}} = -x^6$ and $-\dot{\mathcal{H}}/\mathcal{H} = 4x^2$, which approaches zero near the equilibrium. A uniform exponential bound needs an additional relationship between energy and its dissipative gradient.

3.7.3 A Differential Certificate Must Be Checked Separately

Contraction concerns separation of nearby trajectories under the same specified input or closed-loop law. For $\dot{x} = F(x, t)$ and $A = D_x F$, a sufficient differential certificate on a suitable forward-invariant domain is a smooth metric $P(x, t)$ with uniform positive bounds and

$$\dot{P} + A^T P + P A \preceq -2\lambda P, \quad \lambda > 0. \quad (3.36)$$

Here $\dot{P} = \partial_t P + \sum_k F_k \partial_{x_k} P$ is the derivative along the flow. The inequality makes $\delta x^T P \delta x$ decay; domain and path conditions are then needed to translate this into a statement about distances between trajectories. An energy derivative along one trajectory is a different calculation. For a feedback law, A must include the derivative of the feedback, and robustness needs a quantified perturbation margin in the same metric.

A damped pendulum is passive at its torque-angular-velocity port, yet its upright equilibrium has linearization

$$A_{\text{up}} = \begin{bmatrix} 0 & 1 \\ g/l & -d/I \end{bmatrix}. \quad (3.37)$$

Its determinant is $-g/l < 0$, so one eigenvalue is positive. Damping does not make a domain containing that equilibrium uniformly contracting. The energy Hessian also has a negative angular entry at the upright posture and cannot serve there as a positive-definite contraction metric. Multiple stationary solutions provide another obstruction to uniform incremental convergence on a domain containing them all.

Passivity is therefore useful for power accounting and interconnection, while contraction can certify incremental convergence when its full conditions hold. Neither gives a blanket preference for preserving or cancelling a particular term in a golf controller. A model-based strategy must be evaluated against its actual tracking objective, feasible effort, sensing, uncertainty, and contact assumptions.

3.8 Actuator Limits and the Choice of Input

3.8.1 Feasible Sets Do Not Erase Affinity

At a fixed state, allowed inputs $u \in \mathcal{U}(x)$ produce the acceleration set

$$\mathcal{A}(x) = a_0(x) + H(x)\mathcal{U}(x). \quad (3.38)$$

State-dependent limits change this set, not the affine formula itself. If each scalar channel is independently bounded, $\mathcal{U} = \mathcal{U}_1 \times \cdots \times \mathcal{U}_m$, then $H\mathcal{U}$ is the Minkowski sum of the individual sets $H_j \mathcal{U}_j$. Coupled electrical power limits, muscle-sharing constraints, or contact feasibility may restrict the allowed combinations; summing independently maximized contributions can then predict an unattainable acceleration.

3.8.2 Voltage, Current, and Torque

For an idealized fixed-field DC motor, with armature inductance L , resistance R , positive torque constant k_t , and back-EMF constant k_e ,

$$L\dot{i} = V - Ri - k_e\omega, \quad \tau_m = k_t i. \quad (3.39)$$

These are the electrical and torque relations in the [University of Michigan DC motor model](#). Torque and back-EMF constants have different units even when their numerical SI values coincide for consistent ideal conventions.

If electrical transients can be neglected, the algebraic approximation is

$$\tau_m = \frac{k_t}{R}V - \frac{k_t k_e}{R}\omega. \quad (3.40)$$

With symmetric voltage limits $|V| \leq V_{\max}$, its torque interval at a fixed speed is

$$\frac{k_t}{R}(-V_{\max} - k_e\omega) \leq \tau_m \leq \frac{k_t}{R}(V_{\max} - k_e\omega). \quad (3.41)$$

It is generally offset rather than symmetric about zero. Intersect it with $[-k_t i_{\max}, k_t i_{\max}]$ when a current limit is imposed. These are ideal steady electrical feasibility bounds; thermal limits, available regenerative operation, drive switching, and finite current slew can impose further restrictions. Torque at the load also depends on rotor acceleration, friction, and gearing. For a rigid ideal gear ratio $N = \omega_m / \omega_{\text{load}}$, motor inertia contributes $N^2 J_m$ at the load coordinate. The [Modern Robotics actuation transcript](#) explains this reflected-inertia effect.

Keeping current as a state instead of eliminating it gives a voltage-affine extended model. At a frozen (q, v, i) , voltage initially changes $\dot{i}$; it does not instantly replace the existing electromagnetic torque. Similarly, zero excitation in a muscle model can leave activation and elastic tension nonzero. An additional actuator state may preserve command affinity while changing the immediate input directions and the meaning of zero-input motion. Whether it does so must be checked from the chosen actuator equations.

3.8.3 Nonsmoothness Is a Separate Modeling Issue

During sliding, a simple dry-friction law has resisting torque $-\tau_c \text{sgn}(\dot{q})$. This is nonsmooth in velocity but does not itself make applied torque enter nonlinearly. At zero velocity, static friction is a reaction in an interval such as $[-\tau_s, \tau_s]$, selected by force balance and the stick/slip conditions; defining $\text{sgn}(0) = 0$ does not reproduce stiction. Smooth approximations may help a numerical method but alter the near-zero behavior and must be validated for the intended time scale.

Saturation composed with a raw command generally makes the raw-command map piecewise affine rather than globally affine. Nonlinear transmission, muscle recruitment, contact switching, or hysteresis can introduce other departures. State the port, state variables, and mode first, then determine which identity survives. Calling every practical limitation a failure of superposition hides the specific assumption that needs repair.

3.9 Lie Brackets, Coupling, and Reachability

3.9.1 The Order of Motions Can Matter

For smooth vector fields, use the convention

$$[f, g](x) = Dg(x)f(x) - Df(x)g(x). \quad (3.42)$$

Comparing short flow compositions in opposite orders produces a second-order difference involving this bracket, with a sign determined by the chosen composition order. This describes how the directions change as the state changes. It does not mean that any signed field, especially the uncontrolled drift, is physically reversible on demand.

For second-order mechanics $f = (v, a_0(q, v))$ and a configuration-dependent input field $g_j = (0, h_j(q))$,

$$[f, g_j] = \begin{bmatrix} -h_j \\ D_q h_j v - D_v a_0 h_j \end{bmatrix}. \quad (3.43)$$

The bracket has a configuration component, not merely an acceleration in an unactuated coordinate. Even a fully actuated n -coordinate system has at most n immediate input directions in a $2n$ -dimensional state space; time integration connects acceleration to velocity and position. For the normalized undamped pendulum, $f = (v, -\sin q)$ and $g = (0, 1)$ give $[f, g] = (-1, 0)$, so g and $[f, g]$ span the two state directions without any intersegment inertia coupling.

3.9.2 Accessibility Is Not Controllability

For smooth driftless systems with reversible controls containing a neighborhood of zero, a bracket-generating distribution yields local connectivity through admissible motions under the hypotheses of the Chow–Rashevskii theorem. The [LaValle driftless-system discussion](#) states the setting explicitly. Input bounds and a nonreversible drift require a different conclusion. Accessibility concerns the interior of reachable sets; it does not assert

that every nearby state can be reached in arbitrarily short time. Fixed-time accessibility is another distinct property.

A simple illustration is $\dot{x}_1 = u$, $\dot{x}_2 = x_1^2$. Its drift and control brackets span both directions, but x_2 never decreases along a physical trajectory, even with both signs of u available. Starting at the origin, nearby points with negative x_2 are unreachable. This is the counterexample in [LaValle's treatment of systems with drift](#). Algebraic rank alone does not remove that one-way restriction.

For a golf mechanism, a proposed transfer into an unactuated shaft mode must be established from the actual inertia, elastic coupling, forcing, and boundary conditions. Coupling can arise from a spring even with a diagonal mass matrix. Conversely, an off-diagonal mass entry or a named bracket is not evidence that a particular sequencing maneuver is feasible, beneficial, or robust over a finite downswing. Reachability, energy availability, contact feasibility, and the terminal clubhead objective must be checked together.

3.10 Feedback Linearization Has a Local Domain of Validity

For a smooth single-input system $\dot{x} = f(x) + g(x)u$ with scalar output $y = h(x)$, a constant relative degree r on a neighborhood requires $L_g L_f^k h = 0$ there for $k = 0, \dots, r-2$, and $b(x) = L_g L_f^{r-1} h \neq 0$. Then

$$y^{(r)} = L_f^r h + b(x)u, \quad u = \frac{\nu - L_f^r h}{b(x)} \quad (3.44)$$

gives $y^{(r)} = \nu$ while the feedback and local coordinate transformation remain valid. A decoupling coefficient can vanish elsewhere, the resulting effort can exceed a limit, and the trajectory can leave the coordinate domain. The cancellation is exact for the specified model; its performance under model error requires separate analysis.

If $r < n_x$, the output chain leaves internal states. Their dynamics when the output and its derivatives are held at zero are the zero dynamics. Local asymptotic stability of those dynamics is the usual minimum-phase condition for this construction. Unstable zero dynamics obstruct stable exact tracking in the corresponding regime; they do not say that every trajectory diverges or that every finite-horizon strategy is impossible. If $r = n_x$, there is no internal subsystem to classify. A multi-input version additionally requires a nonsingular decoupling matrix and a compatible vector relative degree.

For the pendulum output q , $r = 2 = n_x$ and $\tau = mgl \sin q + I\ddot{q}$ gives $\ddot{q} = \nu$. This does not erase gravitational work from the physical system; the actuator supplies the compensating moment. If torque is bounded, only the corresponding range of ν is feasible at each angle. Tracking a clubhead output in a flexible multibody model is more demanding because internal modes and task singularities can remain after output linearization.

Feedback linearization is a design construction; contraction is a property that a resulting system may or may not possess. They can be used together. A linear time-invariant closed-loop system with a Hurwitz matrix, obtained by exact full-state linearization, has a quadratic contraction metric in its linear coordinates, which can be pulled back locally through a valid transformation. Uniform bounds and the physical domain still need checking. There is no general theorem that one approach is preferable because it preserves a term called drift.

3.11 What This Establishes for the Golf Swing

The instantaneous analysis begins with a common measured or simulated state, a declared effort port, a physically consistent inertial model, and an admissible contact mode. Within that model, each effort increment has an exact acceleration contribution. Contributions may act in coordinates far from the actuated joint because the mechanism couples them. The anchor retains gravity, motion-dependent effects, elastic forces, and any declared external loads; it is not synonymous with effortless or purely passive human motion.

To explain a finite swing, propagate the coupled equations after an intervention and report how the state, reaction forces, power flows, and flexible storage change. A useful argument then has several linked pieces: an induced acceleration describes the immediate mechanical effect; a segment power balance tests the proposed energy pathway; a trajectory calculation tests its accumulated effect; and a feasible-input and contact analysis

tests whether the maneuver can occur. Impact and ball flight require their own downstream models before a clubhead change can be interpreted as a distance or accuracy benefit.

None of these mathematical tools independently validates a coaching cue. Net moments estimated from inverse dynamics depend on kinematic differentiation, inertial parameters, external loads, and measurement uncertainty. Muscle-level interpretations require additional physiological information. A rigorous presentation makes the model-based conclusion precise, compares it with observations, and states what alternative mechanisms remain consistent with the evidence.

3.12 Reproducible Verification

The following NumPy-only program generates the two pendulum tables and the uniform-rod matrices used in the independent verification tests. It needs no site-specific package. Arrays use SI units and the angle conventions stated in the function documentation. The integration is for the smooth constant-torque pendulum only; it is not an impact or stick/slip solver.

```

1 # Superposition chapter example
2 import numpy as np
3
4
5 def rod_arm(
6     q: np.ndarray,
7     velocity: np.ndarray,
8     lengths: np.ndarray,
9     masses: np.ndarray,
10    gravity: float = 9.81,
11 ) -> tuple[np.ndarray, np.ndarray, np.ndarray]:
12     """Return M, c, and the left-side gravity vector for two uniform rods.
13
14     q[0] is counterclockwise from horizontal; q[1] is the relative elbow angle.
15     The proximal endpoint is fixed. SI units are used throughout.
16     """
17     l1, l2 = lengths
18     m1, m2 = masses
19     q1, q2 = q
20     v1, v2 = velocity
21     beta = m2 * l1 * l2 / 2
22     distal = m2 * l2**2 / 3
23     base = m1 * l1**2 / 3 + m2 * l1**2 + distal
24     coupling = beta * np.cos(q2)
25     mass = np.array([[base + 2 * coupling, distal + coupling],
26                     [distal + coupling, distal]])
27     c = beta * np.sin(q2) * np.array([-2 * v1 * v2 - v2**2, v1**2])
28     gravity_vector = gravity * np.array([
29         (m1 * l1 / 2 + m2 * l1) * np.cos(q1) + m2 * l2 / 2 * np.cos(q1 + q2),
30         m2 * l2 / 2 * np.cos(q1 + q2),
31     ])
32     return mass, c, gravity_vector
33
34
35 def pendulum_trace(
36     torque: float, times: np.ndarray, max_step: float = 0.001
37 ) -> np.ndarray:
38     """Integrate the unit-mass, unit-length pendulum from rest at q=0.
39
40     Columns are q (rad), velocity (rad/s), acceleration (rad/s^2).
41     Times must increase strictly from zero; the angle remains unwrapped.
42     """
43     times = np.asarray(times, dtype=float)
44     if (times.ndim != 1 or times.size == 0 or times[0] != 0
45         or not np.all(np.isfinite(times)) or np.any(np.diff(times) <= 0)):
46         raise ValueError("Times must increase strictly from zero")
47     if not np.isfinite(max_step) or max_step <= 0 or not np.isfinite(torque):
48         raise ValueError("Use finite torque and a positive finite step")
49

```



```

50 def rhs(state: np.ndarray) -> np.ndarray:
51     return np.array([state[1], torque - 9.81 * np.sin(state[0])])
52
53     state = np.zeros(2)
54     result = np.empty((times.size, 3))
55     result[0] = [0, 0, torque]
56     for index in range(1, times.size):
57         duration = times[index] - times[index - 1]
58         steps = int(np.ceil(duration / max_step))
59         step = duration / steps
60         for _ in range(steps):
61             k1 = rhs(state)
62             k2 = rhs(state + step * k1 / 2)
63             k3 = rhs(state + step * k2 / 2)
64             k4 = rhs(state + step * k3)
65             state += step * (k1 + 2 * k2 + 2 * k3 + k4) / 6
66             result[index] = [*state, rhs(state)[1]]
67     return result
68
69
70 times = np.array([0.0, 0.25, 0.5, 1.0, 1.5, 2.0])
71 trajectories = {u: pendulum_trace(u, times) for u in (0.0, 2.5, 5.0, -5.0, 7.5)}
72 trajectory_defect = trajectories[7.5] - trajectories[5.0] - trajectories[2.5] + trajectories
73 # Inspect trajectories[5.0] and trajectory_defect to reproduce the tables.

```

3.13 Exercises

1. **A Baseline Counted Once.** At $q = \pi/6$ in the unit pendulum, verify the frozen-state identity for torques 5, 2.5, and 7.5 N m. Repeat it about a nonzero reference torque τ_* using increments $\delta\tau$. Explain why total acceleration divided by torque is not the incremental gain.
2. **One Model in Two Formulations.** Derive the uniform-rod mass matrix from the center velocities and center-of-mass rotational energies. Recover the two torque equations from the separate body balances. Show that the determinant is positive for all angles when both lengths and masses are positive.
3. **Conditioning Requires a Scale.** Use $l = (0.8, 0.6)$ m and $m = (1.4, 0.5)$ kg, with both angles in radians. Compute the spectral condition number of M over $q_2 \in [-\pi, \pi]$ and refine any candidate maximum. Recompute after scaling one coordinate by ten. Distinguish physical regularity from numerical conditioning.
4. **Velocity-Product Power.** At $q = (0.4, -0.7)$ rad and $v = (2.1, -0.8)$ rad/s, verify $v^T c = \frac{1}{2} v^T \dot{M} v$ using a centered directional difference of M . Explain why a nonzero value is consistent with zero dissipation.
5. **An Affine Constraint Set.** For $m = 2$ kg, $R = 2$ m, $q = (2, 0)$ m, and $v = (0, 3)$ m/s, compute acceleration and reaction under zero force and under (4, 6) N, without gravity. Verify the radial acceleration and show that the reaction changes with input.
6. **A Trajectory Defect.** Reproduce both pendulum tables, halve the integration step, and check constant-torque work–energy balance. Explain the 5, -5 symmetry exception and why the 5, 2.5 pair is a more informative comparison. State the angle convention and avoid relative error against a zero reference.
7. **A Local Nonlinear Counterexample.** Solve $\dot{x} = x^2 + u$ from $x(0) = 0$ for positive constant u , restricting attention to times before the earliest finite-time blow-up. Compare the inputs 1, 2, and 3. Verify fixed-state input affinity despite the nonzero trajectory defect.
8. **A Passive but Unstable Posture.** Derive the damped pendulum’s torque-port storage inequality after choosing an energy offset. Compute the upright linearization and energy Hessian. Identify which conclusion prevents global contraction on a domain containing that posture.

9. **Motor Feasibility.** Let $R = 2$ ohm, $k_t = 0.1$ N m/A, $k_e = 0.1$ V s/rad, $V_{\max} = 24$ V, and $i_{\max} = 10$ A. Find the quasistatic torque interval at $\omega = 100$ rad/s. Explain why voltage has no instantaneous effect on torque when current is retained as a state.
10. **Bracket Rank and One-Way Motion.** Compute $[f, g]$ for the normalized pendulum. For $\dot{x}_1 = u$, $\dot{x}_2 = x_1^2$, compute enough brackets to span the plane and explain why negative x_2 remains unreachable from the origin. State why an actuation matrix alone cannot settle the reachability of an unspecified underactuated model.
11. **Cancellation With a Bound.** For a pendulum with $|\tau| \leq \tau_{\max}$, derive the feasible interval of virtual acceleration ν under gravity-compensating feedback. State the relative degree and whether internal zero dynamics exist for the angle output.
12. **A Testable Swing Argument.** Propose a model-based test of the claim that proximal slowing transfers energy to the club. Specify subsystem boundaries, measured quantities, joint force and moment powers, shaft storage, external work, uncertainty, and the intervention used to distinguish transfer from simultaneous active work. Identify what the instantaneous acceleration decomposition can and cannot establish.

The next chapter connects these frozen-state decompositions to induced acceleration analysis in biomechanics. The correspondence is strongest when the inertial model, force channels, constraints, and definition of the zero-input anchor are made explicit in both formulations.

Chapter 4

Induced Acceleration Analysis: Superposition in the Biomechanics Literature

In Plain Language 4.1. A Parallel Discovery

The superposition principle developed in the preceding chapter—that forces map linearly to accelerations at each frozen instant via the inverse mass matrix—was independently developed in the biomechanics community under the name **induced acceleration analysis**. This chapter traces that development and the conditions required before the frameworks can be compared. A shared frozen-state linear map does not make their force partitions, controls, constraints, outputs, or causal interpretations equivalent.

Normative Attribution Record

A publishable attribution must identify the model and revision; engine, solver, and revision; generalized coordinates and reference frame; output point; mass matrix; constraint handling; contact model and mode; complete force partition; residual treatment; and numerical tolerance with closure error. Its identifiability contract must state the measurements or assumptions supporting each term. An algebraic term does not by itself identify anatomical source, neural intent, necessity, sufficiency, or intervention effect. Missing fields make a result **unsupported or unqualified**; an unavailable cross-engine state is reported that way rather than treated as solver parity.

Under $q = Tz$, the same dynamics use $M_z = T^T M_q T$ and $Q_z = T^T Q_q$: component values change even though $T\ddot{z} = \ddot{q}$. If $Q = Q_A + Q_B$, then $Q = (Q_A + r) + (Q_B - r)$: residual reassignment changes both terms while preserving their sum. These counterexamples block unique attribution. An intervention must separately re-solve constraints and contact and declare what is held fixed.

4.1 Historical Context and Motivation

Human movement presents an attribution problem: how should a declared model partition its acceleration ledger? Inverse dynamics can estimate net generalized forces, but it does not identify individual muscle forces or a unique causal relationship. IAA adds a forward-model term calculation, not the missing identifiability contract.

[ZG89] addressed this gap in a seminal review that established the theoretical basis for induced acceleration analysis in multi-articular movement. Their central observation was that in a multi-joint system, a muscle force produces torques at the joints it crosses, but through the dynamic coupling inherent in the equations of motion, these torques induce accelerations at *every* joint in the chain. Moreover, the induced accelerations depend not only on the muscle's torque, but on the entire system's mass matrix $M(q)$ and its inverse—precisely the quantities that encode the inertial coupling between segments.

This observation motivated a research program spanning more than three decades, applying induced acceleration analysis to walking [ZNK02, ZNK03, NKZ01, KSS97], clinical gait pathology [RK99, Sil18], throwing [HKWO07, HYN08, HO08], cycling [SRZG93], sit-to-stand transfers [CTC⁺16], and postural control [Cha11].

4.2 The Formal Framework

4.2.1 Equations of Motion and the Forward Problem

Consider a mechanical system with n generalized coordinates $\mathbf{q} \in \mathbb{R}^n$. The equations of motion take the standard form:

$$\mathbf{M}(\mathbf{q})\ddot{\mathbf{q}} + \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + \mathbf{g}(\mathbf{q}) = \boldsymbol{\tau} \quad (4.1)$$

Here $\mathbf{M}(\mathbf{q}) \succ 0$ assumes independent minimal coordinates and a regular kinetic-energy metric. Redundant coordinates or active constraints require a declared constrained solve. Generalized-force labels are a model partition; anatomical labels require an actuator map and identifiability contract.

Solving for accelerations:

$$\ddot{\mathbf{q}} = \mathbf{M}^{-1}(\mathbf{q}) [\boldsymbol{\tau} - \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} - \mathbf{g}(\mathbf{q})] \quad (4.2)$$

In the biomechanics literature, the convention is to move the velocity-dependent and gravity terms to the right side as positive contributions:

$$\ddot{\mathbf{q}} = \mathbf{M}^{-1}(\mathbf{q}) [\boldsymbol{\tau}_{\text{muscle}} + \mathbf{V}(\mathbf{q}, \dot{\mathbf{q}}) + \mathbf{g}(\mathbf{q})] \quad (4.3)$$

where $\mathbf{V}(\mathbf{q}, \dot{\mathbf{q}}) = -\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}}$ collects the velocity-dependent torques (note the sign convention difference) and $\mathbf{g}(\mathbf{q})$ now represents the gravitational contribution with appropriate sign.

4.2.2 Induced Acceleration Decomposition

The core operation of induced acceleration analysis is the decomposition of the total acceleration into contributions from individual force sources:

$$\ddot{\mathbf{q}} = \underbrace{\sum_{k=1}^m \mathbf{M}^{-1}(\mathbf{q})\boldsymbol{\tau}_k}_{\text{muscle-induced}} + \underbrace{\mathbf{M}^{-1}(\mathbf{q})\mathbf{V}(\mathbf{q}, \dot{\mathbf{q}})}_{\text{velocity-induced}} + \underbrace{\mathbf{M}^{-1}(\mathbf{q})\mathbf{g}(\mathbf{q})}_{\text{gravity-induced}} \quad (4.4)$$

Here $\boldsymbol{\tau}_k$ is a declared generalized-force channel. Its mapped term is part of a frozen-state ledger, not an observation of a muscle acting alone.

Theorem 4.1 (Compatibility with Control-Affine Superposition). *The two ledgers can share a linear operator, but their terms are comparable only when plant, state, coordinates, actuator map, constraints, contact, residual treatment, solver qualification, and output match.*

In the control-affine form $\dot{\mathbf{x}} = \mathbf{f}(\mathbf{x}) + \mathbf{G}(\mathbf{x})\mathbf{u}$:

- The drift $\mathbf{f}(\mathbf{x})$ corresponds to $\mathbf{M}^{-1}(\mathbf{q})[\mathbf{V}(\mathbf{q}, \dot{\mathbf{q}}) + \mathbf{g}(\mathbf{q})]$ (velocity-induced plus gravity-induced accelerations).
- The control columns $\mathbf{G}(\mathbf{x}) = [\mathbf{g}_1(\mathbf{x}), \dots, \mathbf{g}_m(\mathbf{x})]$ correspond to $\mathbf{M}^{-1}(\mathbf{q})\mathbf{B}$, where $\mathbf{B}$ maps control inputs to generalized forces.
- A generalized-force channel can match $\mathbf{g}_k(\mathbf{x})\mathbf{u}_k$ only under the same actuator map and partition; neither label identifies a muscle by itself.

Both frameworks exploit the fact that $\mathbf{M}^{-1}(\mathbf{q})$ is a linear operator: the mapping from forces to accelerations is linear at each frozen state, even though the system dynamics are globally nonlinear.

Proof. Distributing a fixed linear forward operator over $\boldsymbol{\tau} = \sum_k \boldsymbol{\tau}_k$ proves closure for that partition. It does not prove partition uniqueness, coordinate-invariant components, anatomical source, or an intervention effect. $\square$

4.3 Instantaneous Effects, Cumulative Effects, and the Drift Field

One of the most significant conceptual contributions of the induced acceleration literature is the distinction between **instantaneous effects** and **cumulative effects**, developed most clearly by [HYNO08] and [Hir11].

4.3.1 Instantaneous Effects

The mapped term $\mathbf{M}^{-1}(\mathbf{q}(t))\boldsymbol{\tau}_k(t)$ is a frozen-state quantity under the declared partition. Removing a physical force is a different intervention that can change activation, passive force, constraints, and contact.

- **Direct effects:** A joint torque accelerating its own joint (diagonal elements of $\mathbf{M}^{-1}$).
- **Remote effects:** A joint torque accelerating distant joints through dynamic coupling (off-diagonal elements of $\mathbf{M}^{-1}$).

4.3.2 Cumulative Effects

The velocity-dependent acceleration $\mathbf{M}^{-1}(\mathbf{q}(t))\mathbf{V}(\mathbf{q}(t), \dot{\mathbf{q}}(t))$ depends on the current angular velocities $\dot{\mathbf{q}}(t)$, which are the time-integrated result of all previous forces. This term therefore reflects the *cumulative* consequence of the entire force history up to time t .

4.3.3 Mapping to the Drift-Control Decomposition

The correspondence is exact:

IAA Terminology	Control-Affine Terminology
Instantaneous muscle-induced acceleration	Control input $\mathbf{G}(\mathbf{x})\mathbf{u}$
Cumulative velocity-dependent acceleration	Drift field $\mathbf{f}(\mathbf{x})$ (velocity component)
Gravity-induced acceleration	Drift field $\mathbf{f}(\mathbf{x})$ (gravity component)

The cumulative effect is the drift field: it is what the system would do if all control inputs were set to zero at the current instant. The instantaneous effects are the control inputs: they are what the muscles add on top of the drift at this instant.

A model-reported term-magnitude comparison requires a declared norm, partition, and output. It does not show that a person is on autopilot, identify control authority, or establish cross-engine parity.

4.4 Applications of Induced Acceleration Analysis

4.4.1 Walking: The Zajac–Neptune Framework

The most comprehensive application of induced acceleration analysis has been to human walking. [ZNK02] (Part I) and [ZNK03] (Part II) provided a two-part review that established the methodological framework and derived coordination principles from dynamical simulations.

Key findings include:

1. **Inverse dynamics and IAA have different limits.** Inverse dynamics estimates net generalized forces. IAA can repartition a forward-model ledger, but does not identify causal contributions of individual muscles without an identifiability contract.
2. **Acceleration, power, work, and energy are distinct.** Joint power alone does not identify segment-energy transfer. IAA and induced-power ledgers are also model- and partition-dependent and require constraint, contact, and residual closure.

3. **Biarticular muscles have complex, configuration-dependent roles.** Muscles crossing two joints (such as the gastrocnemius or rectus femoris) can have different—sometimes opposite—effects on the two joints they cross, and these effects change with posture.

[NKZ01] applied this framework to the ankle plantar flexors during walking. Using a forward dynamics simulation driven by 15 individual muscle actuators, they decomposed the contributions of the soleus and gastrocnemius to trunk support (vertical center-of-mass acceleration), forward progression (horizontal center-of-mass acceleration), and swing initiation (mechanical energy delivered to the leg in pre-swing). Their results demonstrated that the soleus delivers its energy primarily to the trunk (providing support and forward progression), while the gastrocnemius delivers its energy primarily to the leg (initiating swing). This functional dissociation between two muscles at the same joint—invisible to inverse dynamics—exemplifies the power of the induced acceleration framework and the principle of superposition applied to individual force sources.

4.4.2 Overarm Throwing: The Hirashima Framework

[HKWO07] and [HYNO08] extended induced acceleration analysis to three-dimensional, 13-degree-of-freedom models of baseball pitching. Their work introduced several methodological advances:

1. **Full 3D induced acceleration analysis.** By writing the equations of motion in generalized coordinates (joint angles) rather than segment coordinates, and premultiplying by the full 13×13 inverse mass matrix, [HYNO08] computed the acceleration induced by each of the 13 generalized forces, plus the velocity-dependent torque, plus gravity, on each of the 13 degrees of freedom.
2. **Decomposition of velocity-dependent torques.** [HYNO08] further decomposed the velocity-dependent torque into contributions from the angular velocity of each individual segment, tracing the kinematic source of each cumulative effect. This allowed them to determine which segment’s motion was the “origin” of the velocity-dependent torque acting at distant joints.
3. **Correction of erroneous methods in the literature.** [HO08] demonstrated that previous studies had incorrectly analyzed multi-joint dynamics by treating each segment’s equation of motion independently (dividing by the diagonal inertia term) rather than solving the coupled system through the full inverse mass matrix. This error led to incorrect attributions of muscle function and is equivalent, in our framework, to neglecting the off-diagonal elements of $\mathbf{M}^{-1}$ —that is, ignoring the dynamic coupling that is the very phenomenon induced acceleration analysis is designed to capture.

The key finding from the throwing studies was that the kinetic chain operates through a conversion of instantaneous muscle effects (at proximal joints, in the early phase) into cumulative velocity-dependent effects (at distal joints, in the late phase). The proximal muscles create angular velocities that persist in the system as velocity-dependent torques, which then accelerate the distal joints without requiring large distal muscle forces. This is the kinetic chain reinterpreted through the lens of superposition: proximal forces create the drift field that drives the distal motion.

4.4.3 Postural Control and the Induced Acceleration Index

[Cha11] introduced the **induced acceleration index** (IAI), a dimensionless quantity that captures the configuration-dependent coupling potential between joints:

$$\text{IAI}_{j \rightarrow k} = |\mathbf{M}_{kk}^{-1} \mathbf{M}_{kj}| \quad (4.5)$$

For a two-joint model of quiet standing (ankle and hip), the IAI revealed that the ankle has over 12 times the ability to accelerate the hip compared to the reverse. This asymmetry depends only on the system’s inertial properties and configuration, not on the forces applied, and provides a structural explanation for the dominance of the ankle strategy in postural control.

The IAI is a scalar summary of the off-diagonal structure of $\mathbf{M}^{-1}(\mathbf{q})$. In terms of the control-affine framework, it quantifies how the control authority at one joint propagates to other joints through the dynamic coupling. The IAI is useful for any application where the question is: “given the current configuration, how effective is a torque at joint A at producing acceleration at joint B ?”

4.4.4 Clinical Applications

Induced acceleration analysis has been applied to clinical gait analysis, where it provides individualized diagnostic information about the sources of movement dysfunction:

- **Stiff-legged gait:** [RK99] showed that reduced knee flexion in swing-phase gait after stroke can result from impairments at the hip, knee, or ankle, with the specific cause varying between patients. Induced acceleration analysis, by decomposing knee acceleration into contributions from each joint’s torque, identified the patient-specific impairment pattern and informed individualized rehabilitation protocols.
- **Sit-to-stand transfers:** [CTC+16] reported positive gluteus-maximus and soleus terms and an opposing quadriceps term for selected center-of-mass outputs in a 46-degree-of-freedom, 194-actuator model. These are model-reported terms, not uniquely identified anatomical sources.
- **Electrical stimulation cycling:** [SRZG93] used a musculoskeletal model to analyze electrically stimulated leg cycling for spinal cord injury rehabilitation, identifying how seat configuration and stimulation timing affect the ability of stimulated muscles to produce the desired pedaling motion.

4.5 Methodological Considerations

4.5.1 Ground Contact and Constraint Forces

In movements involving ground contact (walking, standing, the golf stance), the ground reaction force must be included in the induced acceleration analysis. Because the ground reaction force is itself a constraint force that depends on all other forces in the system, decomposing it into individual muscle contributions requires special treatment. [NKZ01] addressed this by computing each muscle’s contribution to the ground reaction force through a perturbation approach: remove one muscle force, re-integrate the equations of motion over one time step, and compare the resulting ground reaction force to the original.

[Sil18] reviewed the various computational approaches and their assumptions. The choice of ground contact model (rigid constraint, viscoelastic elements, rolling surface) affects the decomposition and must be reported and validated.

4.5.2 Model Dependence

[HYNO08] noted that the results of induced acceleration analysis can depend on the number of segments and degrees of freedom in the model. Adding trunk motion or lower extremity dynamics can change the interpretation of upper extremity muscle function. The induced acceleration framework is exact given the model, but the model is always an approximation of the biological system. Validation against experimental kinematics (by integrating the induced accelerations forward and comparing to observed motion) is an essential step, as demonstrated by [HYNO08] and [RK99].

4.6 Synthesis: Two Communities, One Mathematical Structure

IAA and control-affine analysis can share a frozen-state linear map. Their answers are not mathematically identical unless plant, coordinates, force and input partitions, constraints, contact mode, residual treatment, solver qualification, and output are identical.

Recognizing this equivalence has several benefits:

1. **Terminology bridge.** Researchers in biomechanics can draw on the extensive control-theoretic literature on controllability, observability, and optimal control for affine systems. Researchers in control theory can draw on the rich experimental database of induced acceleration results for biological systems.
2. **Conceptual unification.** The drift-control distinction in control theory provides a natural framework for organizing the biomechanical findings: instantaneous muscle effects are control inputs; cumulative velocity-dependent effects are the drift field; drift dominance in fast movements is a statement about the relative magnitudes of these two contributions.

3. **Methodological rigor.** The control-affine framework's emphasis on the *instantaneous* nature of superposition (Chapter 3) provides a clear warning against the trajectory-superposition errors identified by [HO08] in the biomechanics literature.
4. **Broader applicability.** The same mathematical structure applies to any multi-body mechanical system: robotic manipulators, prosthetic limbs, sports equipment, and any system governed by Lagrangian or Newtonian mechanics.

Common Misconception

Superposition is instantaneous, not global. Induced acceleration analysis decomposes the *acceleration at one instant* into individual contributions. It does not decompose the *trajectory over time* into individual contributions, because the system dynamics are nonlinear. The cumulative effect (drift field) at time t depends on the entire history of forces up to t , and there is no general way to attribute portions of the trajectory to individual muscles over extended time intervals.

Chapter 5

Contraction Theory and Metric Certificates

In Plain Language 5.1. Shrinking Mistakes

Imagine running the same robot motion twice with slightly different starting conditions. If the system is “contracting,” those two runs quickly converge to the same trajectory—small mistakes do not snowball. This chapter develops the mathematical machinery for certifying that property: a metric (local ruler) that provably shrinks along the flow.

5.1 Historical Context and the Shift to Trajectory Stability

5.1.1 From Lyapunov Point Stability to Trajectory Convergence

Classical Lyapunov stability, as developed in the late 1800s and formalized throughout the twentieth century, addresses a foundational question: *does the system return to an equilibrium point after small perturbations?* This point-stability perspective is powerful for understanding equilibria, but it misses a central feature of many practical systems: the behavior of interest is often a *moving trajectory*, not a rest point.

A robot executing a reaching task, a vehicle tracking a path, a biological motor system performing a skilled movement—these systems are intrinsically *trajectory-focused*. A Lyapunov function certifying stability at one point does not explain why nearby trajectories diverge under perturbations or what determines their convergence rate.

The concept of contraction—trajectories converging robustly—is fundamentally dual to the concept of controllability in Agrachev and Sachkov’s geometric framework [AS04, Ch. 4]. While controllability asks *what is reachable* from a given initial condition via forward-time controls, contraction analysis asks *do trajectories converge* and thus provides a certificate of robustness and structural stability. Both are geometric properties: controllability relies on Lie bracket accessibility in the forward direction, while contraction provides a metric-based certificate of asymptotic behavior.

Contraction theory reframes the question: **do all nearby trajectories converge to each other, regardless of initial condition?** This is a genuinely different property, and it provides the certificate we need.

5.1.2 The Lohmiller–Slotine Framework (1998)

The modern contraction theory for nonlinear systems was formalized by **Lohmiller and Slotine** in 1998 [LS98]. Their key insight was to study how *tangent vectors* between trajectories evolve under the flow [MS17]. If all such vectors shrink in a suitably chosen metric, then the geodesic distance between any two trajectories shrinks exponentially.

The framework bridges classical results in differential geometry (Riemannian metrics, geodesic flows) with modern control and stability analysis. By allowing the metric to vary in space and time, Lohmiller–Slotine generalized earlier work and made contraction a practical tool for nonlinear system analysis and design.

5.1.3 Demidovich’s Condition (1961): An Historical Precursor

The mathematical seeds of contraction theory are rooted in work by **Demidovich** in 1961 [Dem61], who studied conditions for *global asymptotic stability* based on the symmetric part of the Jacobian. Demidovich showed that if the symmetric part of the system’s Jacobian is uniformly negative definite, all nearby solutions converge to a single trajectory. This foundational result [Kha02] predated modern contraction theory by decades and provides important context for understanding contemporary approaches.

Although Demidovich did not use the language of Riemannian metrics or contraction, his condition is in fact a special case of modern contraction theory: it corresponds to contraction in the *Euclidean metric* (identity matrix). The modern framework generalizes Demidovich’s insight by relaxing the constant-metric requirement, allowing the “ruler” to change with position and time.

5.1.4 Connection to Modern Research

Contraction theory has since become a cornerstone of:

- **Incremental stability and synchronization:** studying how coupled oscillators, networked systems, and consensus algorithms achieve agreement.
- **Control design:** synthesis of feedback laws that guarantee contraction, leading to robust and verifiable controllers.
- **Learning-based control:** verification of neural network controllers via metric composition and convex optimization.
- **Robotics and autonomous systems:** design of feedback laws that are tolerant to perturbations and external disturbances.

5.2 From Equilibrium Stability to Trajectory Stability

Classical Lyapunov stability asks: does a system return to an equilibrium point after a perturbation? Contraction theory asks a more general question: do *all* nearby trajectories converge to each other, regardless of where they start?

This generalization is essential for systems where the behavior of interest is a *moving trajectory*—a robot executing a task, a vehicle following a path, a biological organism performing a skilled movement—rather than a static rest point.

Geometric Intuition

Contraction checks whether tangent vectors between nearby trajectories shrink under the flow. If all tangent vectors shrink in a chosen metric, the geodesic distance between trajectories also shrinks. Contraction is local shrinking that integrates into global convergence.

5.3 The Contraction Condition

The contraction metric $M(\mathbf{x})$ acts as a Riemannian metric on the state space, defining distance and angle between perturbations in the tangent space. As Agrachev and Sachkov discuss [AS04, Ch. 8], Riemannian geometry is central to sub-Riemannian optimal control problems, where the metric constrains which directions are directly accessible via controls. Contraction analysis uses a metric to measure convergence rates in this geometric sense—a local ruler that changes from point to point, naturally extending linear stability theory to nonlinear, curved state spaces.

Consider the autonomous system

$$\dot{\mathbf{x}} = f(\mathbf{x}, t), \quad \mathbf{x} \in \mathbb{R}^n. \quad (5.1)$$

The variational dynamics (Chapter 2) are

$$\dot{\delta \mathbf{x}} = \mathbf{A}(\mathbf{x}, t) \delta \mathbf{x}, \quad \mathbf{A}(\mathbf{x}, t) = \frac{\partial f}{\partial \mathbf{x}}(\mathbf{x}, t). \quad (5.2)$$

Let $\mathbf{M}(\mathbf{x}, t) \succ 0$ be a smooth, positive-definite **metric tensor** and define the Lyapunov-like function on perturbations:

$$V(\delta \mathbf{x}, \mathbf{x}, t) = \delta \mathbf{x}^\top \mathbf{M}(\mathbf{x}, t) \delta \mathbf{x}. \quad (5.3)$$

In Plain Language 5.2. Mathematical Reminder: The Metric Tensor $\mathbf{M}(\mathbf{x}, t)$

Recall from Chapter 1 that the perturbation $\delta \mathbf{x}$ is a vector living in the flat **Tangent Space** attached to the state $\mathbf{x}$. But how do we measure the "length" of this vector?

In standard flat Euclidean space, distance is measured using the Pythagorean theorem (represented by the identity matrix $\mathbf{I}$). But on a curved manifold, the definition of distance changes depending on where you are. The **Metric Tensor** $\mathbf{M}(\mathbf{x}, t)$ is the rigorous differential geometric "ruler" that defines the inner product, and therefore lengths and angles, inside the local Tangent Space at point $\mathbf{x}$. By allowing $\mathbf{M}$ to vary with $\mathbf{x}$, contraction theory mathematically warps our measurement of space to prove that trajectories are getting closer to each other.

Differentiating along the flow:

$$\dot{V} = \delta \mathbf{x}^\top (\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}}) \delta \mathbf{x}, \quad (5.4)$$

where $\dot{\mathbf{M}}$ is the total derivative of the metric along trajectories of (5.1):

$$\dot{\mathbf{M}}(\mathbf{x}, t) = \frac{\partial \mathbf{M}}{\partial t} + \sum_{i=1}^n \frac{\partial \mathbf{M}}{\partial x_i} f_i(\mathbf{x}, t). \quad (5.5)$$


Definition 5.1 (Contraction with Rate λ). The system (5.1) is **contracting** on a forward-invariant region $\mathcal{D}$ with rate $\lambda > 0$ in the metric $\mathbf{M}$ if

$$\mathbf{A}(\mathbf{x}, t)^\top \mathbf{M}(\mathbf{x}, t) + \mathbf{M}(\mathbf{x}, t) \mathbf{A}(\mathbf{x}, t) + \dot{\mathbf{M}}(\mathbf{x}, t) \preceq -2\lambda \mathbf{M}(\mathbf{x}, t) \quad (5.6)$$

holds for all $(\mathbf{x}, t) \in \mathcal{D} \times [0, \infty)$.

Remark 5.2. The factor of 2 on the right-hand side is conventional and ensures that the contraction rate λ corresponds directly to the exponential decay rate of perturbations. The condition is called a **matrix inequality** because it compares two matrices in the partial order defined by positive semidefiniteness.

Contracting trajectories: distance decays exponentially

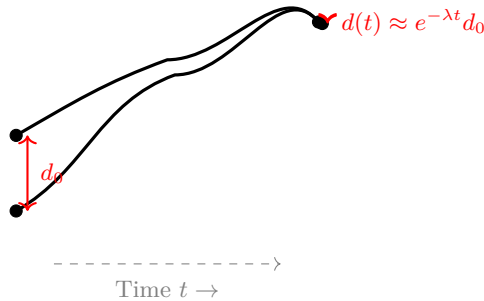

5.4 Complete Proof of Exponential Convergence

Theorem 5.3 (Exponential Convergence of Trajectories). Assume $\mathcal{D}$ is forward-invariant and geodesically convex in the metric $\mathbf{M}(\mathbf{x}, t)$. Suppose there exist constants $0 < \underline{m} \leq \bar{m} < \infty$ such that

$$\underline{m} \mathbf{I} \preceq \mathbf{M}(\mathbf{x}, t) \preceq \bar{m} \mathbf{I} \quad \text{for all } (\mathbf{x}, t) \in \mathcal{D} \times [0, \infty). \quad (5.7)$$

If (5.6) holds uniformly on $\mathcal{D}$, then for any two trajectories $\mathbf{x}_1(t)$, $\mathbf{x}_2(t)$ remaining in $\mathcal{D}$:

$$d_{\mathbf{M},t}(\mathbf{x}_1(t), \mathbf{x}_2(t)) \leq e^{-\lambda t} d_{\mathbf{M},0}(\mathbf{x}_1(0), \mathbf{x}_2(0)), \quad (5.8)$$

where $d_{\mathbf{M},t}$ is the geodesic distance in the Riemannian metric induced by $\mathbf{M}$ at time t . Moreover, in Euclidean norm:

$$\|\mathbf{x}_1(t) - \mathbf{x}_2(t)\| \leq \sqrt{\frac{\bar{m}}{\underline{m}}} e^{-\lambda t} \|\mathbf{x}_1(0) - \mathbf{x}_2(0)\|. \quad (5.9)$$

Proof. Step 1: Geodesic Parametrization and Tangent Vector Evolution.

Let $\gamma(\mathbf{x}_1, \mathbf{x}_2; s)$ be a geodesic curve of minimal length connecting $\mathbf{x}_1$ and $\mathbf{x}_2$ in the Riemannian metric $\mathbf{M}(\mathbf{x}, t)$, parametrized by arc length $s \in [0, 1]$. The tangent vector to this geodesic is $\delta\mathbf{x}(s) = \frac{\partial \gamma}{\partial s}$.

By definition of arc-length parametrization,

$$\delta\mathbf{x}(s)^\top \mathbf{M}(\gamma(s, t), t) \delta\mathbf{x}(s) = 1. \quad (5.10)$$

As the two trajectories $\mathbf{x}_1(t)$ and $\mathbf{x}_2(t)$ evolve, the geodesic connecting them also evolves. The tangent vector $\delta\mathbf{x}(s, t)$ at arc-length position s along the geodesic at time t satisfies the variational equation

$$\left. \frac{\partial \delta\mathbf{x}}{\partial t} \right|_s = \mathbf{A}(\gamma(s, t), t) \delta\mathbf{x}(s, t). \quad (5.11)$$

Step 2: Evolution of the Lyapunov-Like Quadratic Form.

Define the Lyapunov function along the geodesic:

$$V(s, t) = \delta\mathbf{x}(s, t)^\top \mathbf{M}(\gamma(s, t), t) \delta\mathbf{x}(s, t). \quad (5.12)$$

Differentiating with respect to time:

$$\dot{V}(s, t) = \frac{\partial}{\partial t} [\delta\mathbf{x}^\top \mathbf{M} \delta\mathbf{x}] \quad (5.13)$$

$$= 2\dot{\delta\mathbf{x}}^\top \mathbf{M} \delta\mathbf{x} + \delta\mathbf{x}^\top \dot{\mathbf{M}} \delta\mathbf{x} + \delta\mathbf{x}^\top \mathbf{M} \dot{\delta\mathbf{x}} \quad (5.14)$$

Substituting $\dot{\delta\mathbf{x}} = \mathbf{A} \delta\mathbf{x}$ from (5.11):

$$\dot{V} = 2\delta\mathbf{x}^\top \mathbf{A}^\top \mathbf{M} \delta\mathbf{x} + \delta\mathbf{x}^\top \dot{\mathbf{M}} \delta\mathbf{x} + 2\delta\mathbf{x}^\top \mathbf{M} \mathbf{A} \delta\mathbf{x} \quad (5.15)$$

$$= \delta\mathbf{x}^\top (\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}}) \delta\mathbf{x}. \quad (5.16)$$

By the contraction condition (5.6):

$$\dot{V}(s, t) \leq -2\lambda \delta\mathbf{x}^\top \mathbf{M} \delta\mathbf{x} = -2\lambda V(s, t). \quad (5.17)$$

Step 3: Application of Gronwall's Inequality.

The inequality $\dot{V} \leq -2\lambda V$ is a first-order scalar differential inequality. By Gronwall's inequality, for any $s \in [0, 1]$:

$$V(s, t) \leq e^{-2\lambda t} V(s, 0). \quad (5.18)$$

Step 4: Integration Over the Geodesic.

The squared geodesic distance between $\mathbf{x}_1(t)$ and $\mathbf{x}_2(t)$ is

$$d_{\mathbf{M},t}^2(\mathbf{x}_1, \mathbf{x}_2) = \int_0^1 \delta\mathbf{x}(s, t)^\top \mathbf{M}(\gamma(s, t), t) \delta\mathbf{x}(s, t) ds = \int_0^1 V(s, t) ds. \quad (5.19)$$

Therefore,

$$d_{\mathbf{M},t}^2(\mathbf{x}_1, \mathbf{x}_2) \leq \int_0^1 e^{-2\lambda t} V(s, 0) ds \quad (5.20)$$

$$= e^{-2\lambda t} \int_0^1 V(s, 0) ds \quad (5.21)$$

$$= e^{-2\lambda t} d_{\mathbf{M},0}^2(\mathbf{x}_1, \mathbf{x}_2). \quad (5.22)$$

Taking square roots yields the geodesic decay (5.8).

Step 5: Metric Sandwich Bound.

To translate the geodesic bound into a Euclidean norm bound, we use the metric sandwich assumption (5.7). For any vector $\delta \mathbf{x}$:

$$\underline{m} \delta \mathbf{x}^\top \delta \mathbf{x} \leq \delta \mathbf{x}^\top \mathbf{M} \delta \mathbf{x} \leq \overline{m} \delta \mathbf{x}^\top \delta \mathbf{x}. \quad (5.23)$$

The straight-line distance (Euclidean norm) is related to the geodesic distance via the metric bounds. For any two points $\mathbf{x}_1, \mathbf{x}_2$ in the geodesically convex region:

$$\|\mathbf{x}_1 - \mathbf{x}_2\|^2 \leq \frac{1}{\underline{m}} d_{\mathbf{M},t}^2(\mathbf{x}_1, \mathbf{x}_2) \leq \frac{1}{\underline{m}} e^{-2\lambda t} d_{\mathbf{M},0}^2(\mathbf{x}_1, \mathbf{x}_2) \leq \frac{\overline{m}}{\underline{m}} e^{-2\lambda t} \|\mathbf{x}_1(0) - \mathbf{x}_2(0)\|^2. \quad (5.24)$$

Taking square roots yields (5.9). □ □

Remark 5.4. The proof relies on three essential ingredients: (i) the variational equation governing tangent vectors, (ii) the metric-dependent Lyapunov function capturing shrinking, and (iii) the metric bounds providing translation between geodesic and Euclidean distance. The contraction condition ensures all three work together.

5.5 The Identity Metric: Symmetric Jacobian Condition

The simplest choice is $\mathbf{M} = \mathbf{I}$ (constant identity), giving $\dot{\mathbf{M}} = 0$. The contraction condition reduces to

$$\text{sym}(\mathbf{A}(\mathbf{x}, t)) := \frac{1}{2}(\mathbf{A} + \mathbf{A}^\top) \preceq -\lambda \mathbf{I}. \quad (5.25)$$

This means all eigenvalues of the symmetric part of the Jacobian must be uniformly negative. While restrictive (most interesting systems do not satisfy this globally), it provides useful intuition: contraction in the identity metric requires that the vector field be “uniformly squeezing” in every direction.

Remark 5.5. The power of contraction theory lies in the freedom to choose $\mathbf{M}$. A system that is not contracting in the identity metric may be contracting in a different metric that “stretches” certain directions to compensate for local expansion. Finding such a metric is the central computational challenge.

5.6 Worked Example: A Simple Linear System

5.6.1 Problem Setup

Consider the linear system

$$\dot{\mathbf{x}} = \mathbf{A} \mathbf{x}, \quad \mathbf{A} = \begin{bmatrix} -2 & 1 \\ 0 & -3 \end{bmatrix}. \quad (5.26)$$

We wish to find a constant metric $\mathbf{M} \succ 0$ such that the system is contracting with rate $\lambda > 0$. For a constant metric and autonomous linear system, the contraction condition is

$$\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} \preceq -2\lambda \mathbf{M}. \quad (5.27)$$

5.6.2 Checking the Symmetric Jacobian

First, compute the symmetric part:

$$\text{sym}(\mathbf{A}) = \frac{1}{2}(\mathbf{A} + \mathbf{A}^\top) = \frac{1}{2} \begin{bmatrix} -4 & 1 \\ 1 & -6 \end{bmatrix} = \begin{bmatrix} -2 & 0.5 \\ 0.5 & -3 \end{bmatrix}. \quad (5.28)$$

The eigenvalues are the roots of

$$\det \begin{bmatrix} -2 - \mu & 0.5 \\ 0.5 & -3 - \mu \end{bmatrix} = (-2 - \mu)(-3 - \mu) - 0.25 = \mu^2 + 5\mu + 5.75. \quad (5.29)$$

The roots are $\mu = \frac{-5 \pm \sqrt{25 - 23}}{2} = \frac{-5 \pm \sqrt{2}}{2} \approx -1.79, -3.21$.

Both eigenvalues are negative, so the system is contracting in the identity metric with rate approximately $\lambda \approx 1.79$.

5.6.3 Finding the Contraction Metric via the Lyapunov Equation

Now we find the metric $\mathbf{M}$ more explicitly. Let $\mathbf{M} = \begin{bmatrix} m_{11} & m_{12} \\ m_{12} & m_{22} \end{bmatrix}$ with $m_{11}, m_{22} > 0$ and $m_{11}m_{22} > m_{12}^2$.

The condition $\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} \preceq -2\lambda \mathbf{M}$ becomes:

$$\begin{bmatrix} -2 & 0 \\ 1 & -3 \end{bmatrix} \begin{bmatrix} m_{11} & m_{12} \\ m_{12} & m_{22} \end{bmatrix} + \begin{bmatrix} m_{11} & m_{12} \\ m_{12} & m_{22} \end{bmatrix} \begin{bmatrix} -2 & 1 \\ 0 & -3 \end{bmatrix} \preceq -2\lambda \begin{bmatrix} m_{11} & m_{12} \\ m_{12} & m_{22} \end{bmatrix}. \quad (5.30)$$

Computing the left-hand side:

$$\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} = \begin{bmatrix} -2m_{11} & -2m_{12} + m_{12} \\ m_{11} - 3m_{12} & m_{12} - 3m_{22} \end{bmatrix} + \begin{bmatrix} -2m_{11} + m_{12} & m_{11} - 3m_{12} \\ m_{12} - 3m_{22} & -3m_{22} \end{bmatrix} \quad (5.31)$$

$$= \begin{bmatrix} -4m_{11} + m_{12} & m_{11} - 5m_{12} \\ m_{11} - 5m_{12} & m_{12} - 6m_{22} \end{bmatrix}. \quad (5.32)$$

For the identity metric $\mathbf{M} = \mathbf{I}$, we have $m_{11} = m_{22} = 1$ and $m_{12} = 0$, giving

$$\mathbf{A}^\top \mathbf{I} + \mathbf{I} \mathbf{A} = \begin{bmatrix} -4 & 1 \\ 1 & -6 \end{bmatrix}. \quad (5.33)$$

The contraction condition $\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} \preceq -2\lambda \mathbf{M}$ is a *matrix inequality* (i.e., an eigenvalue condition), not an entry-wise condition. For $\mathbf{M} = \mathbf{I}$, we need the eigenvalues of $\mathbf{A}^\top + \mathbf{A}$ to satisfy $\lambda_{\max}(\mathbf{A}^\top + \mathbf{A}) \leq -2\lambda$. The eigenvalues of $\mathbf{A}^\top + \mathbf{A} = \begin{bmatrix} -4 & 1 \\ 1 & -6 \end{bmatrix}$ are approximately -1.79 and -3.21 (computed in the symmetric part analysis above), both negative. Therefore the identity metric *does* certify contraction, with rate $\lambda = |\lambda_{\max}(\text{sym}(\mathbf{A}))|/2 \approx 1.79/2 \approx 0.895$ (since the condition requires $\lambda_{\max} \leq -2\lambda$).

Design Implication

In practice, for linear systems, one solves the LMI (5.27) using semidefinite programming (e.g., `cvxpy`, `YALMIP`, `Mosek`). The solution yields both the metric $\mathbf{M}$ and the maximum feasible rate λ . For this simple system, the identity metric already achieves excellent contraction.

5.7 Partial Contraction: Hierarchical Structure

5.7.1 When Not All Directions Contract

In many applications, the system does not contract uniformly in all directions. For example, consider a robot with position q and velocity $\dot{q}$. The system might contract in velocity (feedback damping) but not in position (which can drift). This scenario is called **partial contraction**.

Let's partition the state as $\mathbf{x} = [\mathbf{x}_1; \mathbf{x}_2]$ and the Jacobian as

$$\mathbf{A}(\mathbf{x}, t) = \begin{bmatrix} \mathbf{A}_{11} & \mathbf{A}_{12} \\ \mathbf{A}_{21} & \mathbf{A}_{22} \end{bmatrix}. \quad (5.34)$$

Suppose the subsystem in $\mathbf{x}_2$ (e.g., velocity) is contracting, but $\mathbf{x}_1$ (position) may drift. We can still harness the contraction in $\mathbf{x}_2$ to establish synchronization.

5.7.2 The Hierarchical Contraction Theorem

Theorem 5.6 (Partial Contraction via Hierarchical Decomposition). *Partition $\mathbf{x} = [\mathbf{x}_1; \mathbf{x}_2]$ with dimensions n_1 and n_2 , and write the generalized Jacobian in the block form*

$$\mathbf{F} = \begin{bmatrix} \mathbf{F}_{11} & \mathbf{F}_{12} \\ 0 & \mathbf{F}_{22} \end{bmatrix}, \quad (5.35)$$

so that the $\mathbf{x}_2$ -dynamics do not depend on $\mathbf{x}_1$ (a cascade). Suppose:

1. The reduced system for $\mathbf{x}_2$ is globally contracting with rate $\lambda_2 > 0$ in a metric $\mathbf{M}_2(\mathbf{x}_2, t)$.
2. For any fixed trajectory $\mathbf{x}_2(t)$, the $\mathbf{x}_1$ -subsystem driven by $\mathbf{x}_2(t)$ is globally contracting with rate $\lambda_1 > 0$ in a metric $\mathbf{M}_1(\mathbf{x}_1, \mathbf{x}_2, t)$.
3. **The coupling is bounded:** there is a constant k with $\left\| \mathbf{M}_1^{1/2} \mathbf{F}_{12} \mathbf{M}_2^{-1/2} \right\| \leq k$ uniformly.

Then for every $\lambda < \min(\lambda_1, \lambda_2)$ there exists a weight $\theta > 0$, depending on k , such that the full system is contracting with rate λ in the weighted block-diagonal metric

$$\mathbf{M}_\theta = \begin{bmatrix} \mathbf{M}_1 & 0 \\ 0 & \theta \mathbf{M}_2 \end{bmatrix}. \quad (5.36)$$

Proof Sketch. In the metric $\mathbf{M}_\theta$ the symmetric part of the transformed Jacobian is block $\begin{pmatrix} -\lambda_1 & \frac{1}{2}\theta^{-1/2}k \\ \frac{1}{2}\theta^{-1/2}k & -\lambda_2 \end{pmatrix}$ in the two-block norm. Its largest eigenvalue is negative once $\theta^{-1}k^2 < 4\lambda_1\lambda_2$, which any sufficiently large θ achieves. Weighting the second block down is what absorbs the coupling; this is the standard small-gain argument, and it is the step that fails if θ is fixed at 1. $\square$

Common Misconception

The weight θ is not cosmetic, and hypothesis 3 is not free. In the *unweighted* metric ($\theta = 1$) the theorem is false. Take

$$\dot{x}_1 = -x_1 + Kx_2, \quad \dot{x}_2 = -x_2. \quad (5.37)$$

Each subsystem contracts at rate 1 in the identity metric, so hypotheses 1 and 2 hold. But the symmetric part of the full Jacobian is $\begin{pmatrix} -1 & K/2 \\ K/2 & -1 \end{pmatrix}$, whose eigenvalues are $-1 \pm K/2$. For $K \geq 2$ the larger one is non-negative and the full system is *not* contracting in the identity metric — for any K , however large, even though both subsystems contract at rate 1.

The system is of course still exponentially stable; a cascade of stable systems always is. What fails is contraction *in that particular metric*. Contraction is a statement about a metric, not about a trajectory, and a property that holds blockwise need not survive assembly unless the blocks are weighted against the coupling.

Example 5.7 (Cascade: Velocity Tracking Driving Position Regulation). Consider

$$\dot{q} = -\alpha q + v, \quad \dot{v} = -\gamma(v - u(t)), \quad (5.38)$$

with $\alpha, \gamma > 0$, where $u(t)$ is a time-varying reference.

The Jacobian is $\mathbf{A} = \begin{pmatrix} -\alpha & 1 \\ 0 & -\gamma \end{pmatrix}$. The v -subsystem contracts at rate γ ; the q -subsystem, driven by $v(t)$, contracts at rate α ; the coupling constant is $k = 1$. By the theorem the cascade contracts at any rate $\lambda < \min(\alpha, \gamma)$ in $\mathbf{M}_\theta$ with $\theta > 1/(4\alpha\gamma)$, and all solutions synchronize to the reference motion.

Note what happens if the position feedback is removed ($\alpha = 0$), giving the pure integrator $\dot{q} = v$: the Jacobian has an eigenvalue at 0, the q -subsystem is only marginally stable rather than contracting, and hypothesis 2 fails. A displacement in q is then never forgotten — two trajectories with the same velocity history but different initial positions stay a constant distance apart forever. No metric can certify contraction for that system, which is why $\alpha > 0$ is required rather than convenient.

5.8 Control Contraction Metrics: Design and Duality

Contraction metrics provide a natural dual certificate to control distributions and accessibility. Agrachev and Sachkov [AS04, Part III] analyze feedback stabilization and regulation through the lens of controlled accessibility: a system is stabilizable if the drift-controlled vector field admits appropriate accessibility properties. Control contraction metrics encode this geometric stabilization property via a metric that contracts under feedback, providing a constructive and verifiable stability certificate.

5.8.1 Feedback Design Under Contraction

For controlled systems

$$\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x}) \mathbf{u}, \quad (5.39)$$

we wish to design feedback $\mathbf{u} = -\mathbf{K}(\mathbf{x}) \delta \mathbf{x}$ to achieve contraction. The closed-loop Jacobian is

$$\mathbf{A}_{\text{cl}}(\mathbf{x}) = \left. \frac{\partial}{\partial \mathbf{x}} [f(\mathbf{x}) - G(\mathbf{x}) \mathbf{K}(\mathbf{x}) \delta \mathbf{x}] \right|_{\delta \mathbf{x}=0} = \mathbf{A}(\mathbf{x}) - G(\mathbf{x}) \mathbf{K}(\mathbf{x}). \quad (5.40)$$

The contraction condition becomes

$$(\mathbf{A} - G\mathbf{K})^\top \mathbf{M} + \mathbf{M}(\mathbf{A} - G\mathbf{K}) + \dot{\mathbf{M}} \preceq -2\lambda \mathbf{M}. \quad (5.41)$$

5.8.2 The Dual Formulation: $\mathbf{W} = \mathbf{M}^{-1}$

To enable convex optimization, we introduce the dual metric $\mathbf{W} = \mathbf{M}^{-1}$. Pre- and post-multiply (5.41) by $\mathbf{W}$ and use $\mathbf{M} = \mathbf{W}^{-1}$:

$$\mathbf{W}(\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}}) \mathbf{W} \preceq -2\lambda \mathbf{W} \mathbf{M} \mathbf{W} = -2\lambda \mathbf{W}. \quad (5.42)$$

After expanding and simplifying (using the fact that $\mathbf{M} = \mathbf{W}^{-1}$ and $\dot{\mathbf{M}} = -\mathbf{W}^{-1} \dot{\mathbf{W}} \mathbf{W}^{-1}$), the condition becomes:

$$\boxed{\mathbf{A} \mathbf{W} + \mathbf{W} \mathbf{A}^\top - 2\lambda \mathbf{W} + \mathbf{W} \dot{\mathbf{W}} \mathbf{W} \preceq -G \mathbf{K} \mathbf{W} - \mathbf{W} \mathbf{K}^\top G^\top} \quad (5.43)$$

This is a matrix inequality in $\mathbf{W}$ and $\mathbf{K}$ that is *bilinear* in the control gain. By treating $\mathbf{Y} = \mathbf{K} \mathbf{W}$ as the decision variable (control effort weighted by the inverse metric), the condition becomes convex in $\mathbf{W}$ and $\mathbf{Y}$.

5.8.3 Pointwise LMI for Feedback Synthesis

For a time-varying linear system with affine control:

$$\dot{\mathbf{x}} = \mathbf{A}(t) \mathbf{x} + G(t) \mathbf{u}, \quad (5.44)$$

with state feedback $\mathbf{u} = -\mathbf{K}(t) \mathbf{x}$, the dual contraction condition at each point in space and time is:

$$\boxed{\dot{\mathbf{W}} - (\mathbf{A} \mathbf{W} + \mathbf{W} \mathbf{A}^\top) + \gamma G G^\top \preceq -2\lambda \mathbf{W}} \quad (5.45)$$

where $\gamma > 0$ is a regularization parameter (often set to satisfy $\mathbf{W} \gamma G G^\top \mathbf{W}$ bounds control effort). This condition is *linear* in $\mathbf{W}$ and can be enforced at a collection of sample points in the state space, yielding a semidefinite program (SDP).

Design Implication

Modern computational tools can solve the SDP over a parameter space or via sum-of-squares (SOS) decomposition for polynomial systems. The result is a metric-based controller that achieves guaranteed contraction and hence guaranteed trajectory tracking or synchronization performance.

5.8.4 Computational Approaches

Sum-of-Squares (SOS) Method

For polynomial systems, one parameterizes $\mathbf{M}(\mathbf{x})$ (or $\mathbf{W}(\mathbf{x})$) as a polynomial matrix and uses sum-of-squares certificates:

$$-(\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}}) = \sum_i \mathbf{p}_i(\mathbf{x})^\top \mathbf{p}_i(\mathbf{x}) \quad (5.46)$$

for polynomial vectors $\mathbf{p}_i(\mathbf{x})$. This decomposition is enforced via an SDP, which is computationally efficient for moderate polynomial degrees.

Neural Network Parameterization

For general nonlinear systems, one can parameterize $\mathbf{M}(\mathbf{x}) = \Phi(\mathbf{x})^\top \Phi(\mathbf{x})$, where $\Phi : \mathbb{R}^n \rightarrow \mathbb{R}^p$ is a neural network. The contraction condition is verified via sampling or bounds over the domain. This enables data-driven metric synthesis.

Sampling and Conservative Approximation

One can sample the state space $\mathcal{D}$ at a finite grid and enforce the LMI at each sample point, solving a series of SDPs. The result is a conservative (but computable) approximation to the true metric.

5.9 Discrete-Time Contraction

5.9.1 Discrete Contraction Condition

Many digital control systems and learning algorithms operate in discrete time. The discrete-time analogue of Theorem 5.3 is:

Theorem 5.8 (Discrete-Time Exponential Convergence). *Consider the discrete-time system*

$$\mathbf{x}_{k+1} = \Phi_k(\mathbf{x}_k), \quad (5.47)$$

with Jacobian $\mathbf{J}_k(\mathbf{x}_k) = \frac{\partial \Phi_k}{\partial \mathbf{x}_k}$.

Suppose there exist constants $0 < \underline{m} \leq \overline{m}$ and a contraction rate $0 < \rho < 1$ such that

$$\underline{m} \mathbf{I} \preceq \mathbf{M}_k(\mathbf{x}_k) \preceq \overline{m} \mathbf{I} \quad (5.48)$$

and

$$\boxed{\mathbf{J}_k^\top(\mathbf{x}_k) \mathbf{M}_{k+1}(\mathbf{x}_{k+1}) \mathbf{J}_k(\mathbf{x}_k) \preceq \rho^2 \mathbf{M}_k(\mathbf{x}_k)} \quad (5.49)$$

hold for all $\mathbf{x}_k \in \mathcal{D}$.

Then for any two trajectories $\mathbf{x}_k^{(1)}$ and $\mathbf{x}_k^{(2)}$ in $\mathcal{D}$:

$$d_{\mathbf{M}_k}(\mathbf{x}_k^{(1)}, \mathbf{x}_k^{(2)}) \leq \rho^k d_{\mathbf{M}_0}(\mathbf{x}_0^{(1)}, \mathbf{x}_0^{(2)}), \quad (5.50)$$

with Euclidean norm bound

$$\|\mathbf{x}_k^{(1)} - \mathbf{x}_k^{(2)}\| \leq \sqrt{\frac{\overline{m}}{\underline{m}}} \rho^k \|\mathbf{x}_0^{(1)} - \mathbf{x}_0^{(2)}\|. \quad (5.51)$$

Proof Sketch. The proof parallels the continuous case. The tangent vector $\delta \mathbf{x}_k = \mathbf{x}_{k+1}^{(1)} - \mathbf{x}_{k+1}^{(2)}$ evolves via $\delta \mathbf{x}_{k+1} = \mathbf{J}_k \delta \mathbf{x}_k$. The Lyapunov function $V_k = \delta \mathbf{x}_k^\top \mathbf{M}_k \delta \mathbf{x}_k$ satisfies $V_{k+1} \leq \rho^2 V_k$ by the condition (5.49). Iterating yields $V_k \leq \rho^{2k} V_0$. $\square$

5.9.2 Connection to Riccati Analysis

For linear discrete-time systems, the discrete contraction metric can be related to the solution of a discrete-time algebraic Riccati equation (DARE), which is studied in detail in Chapter 6. Both frameworks certify stability and convergence, but contraction provides tighter guarantees on trajectory convergence rates.

Remark 5.9. Discrete-time contraction is especially relevant for iterative learning control, reinforcement learning, and digital controller implementations where the sampling time is fast enough that the discrete assumption is valid.

5.10 Numerical Example: Van der Pol Oscillator

5.10.1 System Description

Consider the Van der Pol oscillator with feedback:

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} x_2 \\ -x_1 + \epsilon(1 - x_1^2)x_2 \end{bmatrix}, \quad (5.52)$$

where $\epsilon > 0$ is the nonlinearity parameter. The Jacobian is

$$\mathbf{A}(x_1, x_2) = \begin{bmatrix} 0 & 1 \\ -1 - 2\epsilon x_1 x_2 & \epsilon(1 - x_1^2) \end{bmatrix}. \quad (5.53)$$

5.10.2 Metric Synthesis via Parameterization

We search for a metric of the form

$$\mathbf{M}(x_1) = \begin{bmatrix} m_1(x_1) & 0 \\ 0 & m_2(x_1) \end{bmatrix}, \quad (5.54)$$

where $m_1, m_2 > 0$ are smooth functions. The diagonal structure is motivated by the special structure of the Van der Pol system (position and velocity are somewhat decoupled).

The contraction condition $\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}} \preceq -2\lambda \mathbf{M}$ becomes element-wise:

$$\dot{m}_1 \preceq -2\lambda m_1, \quad (5.55)$$

$$2\epsilon(1 - x_1^2)m_2 + \dot{m}_2 \preceq -2\lambda m_2, \quad (5.56)$$

$$m_1 + 2(1 - 2\epsilon x_1 x_2)m_2 \preceq -2\lambda m_1 \cdot 0. \quad (5.57)$$

For constant metrics $m_1 = a$, $m_2 = b$ (diagonal constants), the conditions reduce to:

$$0 \preceq -2\lambda a \implies a > 0, \lambda \text{ arbitrary}, \quad (5.58)$$

$$2\epsilon(1 - x_1^2)b \preceq -2\lambda b. \quad (5.59)$$

The second condition requires $\epsilon(1 - x_1^2) \leq -\lambda$, which is violated when $|x_1| < 1$ (where the oscillator spends most of its time). Thus, a constant metric does not suffice.

Remark 5.10 (Why the Van der Pol oscillator is not globally contracting). The Van der Pol oscillator possesses a stable limit cycle, toward which all nonzero initial conditions converge. This means the system is *not* globally contracting: global contraction would require all trajectories to converge to each other (and hence to a single trajectory), but the limit cycle is an attractor of dimension one, not zero. Instead, the system exhibits *partial* contraction—trajectories converge to the limit cycle (contraction transverse to the cycle) while maintaining a phase offset along it. A state-dependent metric can certify contraction in the transverse direction, but no globally valid metric can certify contraction in all directions simultaneously.

5.10.3 Solution Strategy

We adopt a parameterized ansatz $m_1(x_1) = \alpha$ and $m_2(x_1) = \beta(1 + \gamma x_1^2)$, where $\alpha, \beta, \gamma > 0$ are constants to be determined. This metric *amplifies* the velocity direction when position is near the origin (where nonlinearity is strongest).

With $\dot{m}_1 = 0$ and $\dot{m}_2 = 2\beta\gamma x_1 \dot{x}_1 = 2\beta\gamma x_1 x_2$, the contraction conditions become (roughly):

$$2\epsilon(1 - x_1^2)\beta(1 + \gamma x_1^2) + 2\beta\gamma x_1 x_2 \leq -2\lambda\beta(1 + \gamma x_1^2). \quad (5.60)$$

It is tempting to now pick numbers — say $\lambda = 0.3$, $\epsilon = 0.5$, $\gamma \approx 1.5$ — and present

$$\mathbf{M}(x_1) = \begin{bmatrix} 1 & 0 \\ 0 & 1.2(1 + 1.5x_1^2) \end{bmatrix} \quad (5.61)$$

as a metric certifying global contraction. *No such metric exists*, and this one is not close. Evaluating the condition it is supposed to satisfy,

$$\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}} + 2\lambda \mathbf{M} \preceq 0, \quad (5.62)$$

on a grid over $[-3, 3]^2$ gives a largest eigenvalue that is *positive at every single sampled point*, reaching +1.95 at the origin and growing past +130 near the corners. The condition is violated everywhere, not marginally or in a small region.

That is exactly what the remark above predicts. The Van der Pol oscillator has an attracting limit cycle, so two trajectories starting at different phases along that cycle stay separated forever; no metric can make them converge. Searching for a global metric was never going to succeed, and a numerical solver that appears to return one has either been given a relaxed constraint set or has converged to an infeasible point.

The honest conclusion is the one the structure of the problem forces: the search must be restricted to *transverse* contraction — convergence to the limit cycle rather than to a single trajectory — which requires a metric defined on directions transverse to the flow, and a correspondingly weaker claim.

Geometric Intuition

The ansatz was not a bad idea — weighting the velocity direction more heavily where the nonlinearity is strongest is exactly how a state-dependent metric buys contraction that a constant one cannot. It fails here because the obstruction is topological rather than quantitative: an attracting limit cycle means neighbouring trajectories converge *to the cycle* but not *to each other*, and no amount of reweighting changes that.

The lesson generalises. When a metric search will not close, the first question is whether the system can possibly be contracting — a limit cycle, multiple equilibria, or any invariant set of positive dimension rules it out immediately. Only then is it worth blaming the ansatz or the solver.

5.11 Robustness Margins From Contraction

5.11.1 Disturbance Attenuation via Contraction Rate

A key practical benefit of contraction is quantifiable robustness to disturbances. Consider the perturbed system

$$\dot{\mathbf{x}} = f(\mathbf{x}, t) + d(t), \quad (5.63)$$

where $d(t)$ is an unknown disturbance with $\|d(t)\| \leq D$ for all $t \geq 0$.

If the unperturbed system $\dot{\mathbf{x}} = f(\mathbf{x}, t)$ is contracting with rate λ in metric $\mathbf{M}$, then the perturbed system exhibits **bounded-input bounded-state** (BIBS) behavior and **incremental input-to-state stability** (ISS).

Theorem 5.11 (Disturbance Rejection Bound). *Suppose $\dot{\mathbf{x}} = f(\mathbf{x}, t)$ is contracting with rate λ in metric $\mathbf{M}$ satisfying the metric bounds (5.7). Consider the perturbed system (5.63) with $\|d(t)\| \leq D$.*

Then for any two trajectories $\mathbf{x}_1(t)$ and $\mathbf{x}_2(t)$ of the perturbed system:

$$\|\mathbf{x}_1(t) - \mathbf{x}_2(t)\| \leq \sqrt{\frac{m}{M}} e^{-\lambda t} \|\mathbf{x}_1(0) - \mathbf{x}_2(0)\| + \frac{\sqrt{m}}{\lambda \sqrt{M}} D. \quad (5.64)$$

The ultimate bound (steady-state limit as $t \rightarrow \infty$) is

$$\limsup_{t \rightarrow \infty} \|\mathbf{x}_1(t) - \mathbf{x}_2(t)\| \leq \frac{\sqrt{m}}{\lambda \sqrt{M}} D. \quad (5.65)$$

Proof Sketch. Perturbing the trajectory by small $d(t)$ shifts the vector field. The contraction rate λ ensures that perturbations are damped exponentially at rate λ . For bounded disturbances, this damping is balanced by the steady-state input magnitude, yielding an ultimate bound proportional to D/λ . $\square$

5.11.2 Practical Implications

The ultimate bound (5.65) shows that:

- **Higher contraction rate** $\lambda \implies$ **smaller steady-state error**. A fast-contracting system naturally rejects disturbances more aggressively.
- **Metric condition number** $\kappa = \overline{m}/\underline{m}$ enters the bound. A well-conditioned metric (close to isotropic) improves robustness.
- **Design trade-off**: increasing λ may require larger control effort or more aggressive feedback. Practical design balances contraction rate and control limitations.

Design Implication

In robust control applications (aircraft flight control, surgical robotics), the contraction rate λ is often specified as a design requirement (e.g., “system must reject disturbances at 5 rad/s”). The metric-based approach automatically translates this into a convex optimization problem.

5.12 Incremental Input-to-State Stability (ISS)

5.12.1 ISS vs. Contraction

Input-to-state stability (ISS) is a classical robustness property: bounded inputs lead to bounded states. However, ISS alone does not constrain how different trajectories relate to each other.

Incremental ISS (or differential ISS) is a stronger property: bounded input differences lead to bounded state differences. Contraction *implies* incremental ISS, but not vice versa.

Proposition 5.12 (Contraction Implies Incremental ISS). *If the system $\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$ is contracting with rate λ in metric $\mathbf{M}$ (with metric bounds (5.7)), then for any two input signals $\mathbf{u}_1(t)$ and $\mathbf{u}_2(t)$:*

$$\|y_1(t) - y_2(t)\| \leq \sqrt{\frac{\overline{m}}{\underline{m}}} e^{-\lambda t} \|y_1(0) - y_2(0)\| + \frac{\overline{G}}{\lambda \sqrt{\underline{m}}} \sup_{\tau \in [0, t]} \|\mathbf{u}_1(\tau) - \mathbf{u}_2(\tau)\|, \quad (5.66)$$

where $\overline{G} = \sup_{\mathbf{x}} \|G(\mathbf{x})\|$.

Remark 5.13. Contraction is strictly stronger than ISS. A system can be ISS (bounded inputs $\implies$ bounded states) without being contracting (different trajectories can diverge). Conversely, contraction guarantees not only ISS but also trajectory synchronization.

5.13 Extended Lyapunov Comparison

5.13.1 Unified Perspective

Table 5.1 provides a comprehensive comparison of Lyapunov stability, Lyapunov asymptotic stability, incremental stability, and contraction.

5.13.2 Formal Relationships

Proposition 5.14 (Contraction Implies Lyapunov Stability). *If $\dot{\mathbf{x}} = f(\mathbf{x})$ with $f(\mathbf{x}^*) = 0$ is contracting with rate λ in metric $\mathbf{M}$ on a forward-invariant neighborhood $\mathcal{N}(\mathbf{x}^*)$, then $\mathbf{x}^*$ is a globally attractive equilibrium within $\mathcal{N}(\mathbf{x}^*)$. Moreover, the Lyapunov function*

$$V(\mathbf{x}) = \|\mathbf{x} - \mathbf{x}^*\|_{\mathbf{M}(\mathbf{x})}^2 = (\mathbf{x} - \mathbf{x}^*)^\top \mathbf{M}(\mathbf{x})(\mathbf{x} - \mathbf{x}^*) \quad (5.67)$$

satisfies $\dot{V} \leq -2\lambda V$ along trajectories, certifying exponential stability of $\mathbf{x}^$ at rate λ .*

Property	Lyapunov Stable	Asymptotically Stable	Incremental	Contracting
Object	Point $\mathbf{x}^*$	Point $\mathbf{x}^*$	Trajectory pair	All trajectories
Certificate	$V(\mathbf{x})$	$V(\mathbf{x}), \dot{V} < 0$	Pairwise distance	Metric $\mathbf{M}(\mathbf{x}, t)$
Decay	None (stable)	Exponential to $\mathbf{x}^*$	Coupled	Exponential
Scope	Local or global	Point attractor	Incremental	Global or local
Requires equilibrium	Yes	Yes	No	No
Implies ISS	No	Yes (under ∞ -gain)	Differential ISS	Yes (incremental ISS)

Table 5.1: Comparison of stability concepts: Lyapunov stability certifies return to an equilibrium, while contraction certifies convergence of all nearby trajectories to each other, independent of a particular equilibrium.

Remark 5.15. Conversely, not every Lyapunov function induces contraction. A system can have an equilibrium that is exponentially stable without all trajectories converging at the same rate—a scenario that contraction explicitly rules out.

5.14 Contraction in Biomechanical Systems

The theory of contraction metrics finds a natural and powerful application in the biomechanics of human movement. This section previews how the formal machinery developed above connects to the analysis and design of coordinated multisegment motions, with particular attention to the golf swing.

5.14.1 Why Biological Motor Systems Are Naturally Contracting

The human neuromuscular system implements contraction through several mechanisms that operate at different time scales:

1. **Muscle impedance (passive contraction):** Skeletal muscles exhibit intrinsic viscoelastic properties. Even without neural activation, a stretched muscle generates a restoring force proportional to its displacement and a damping force proportional to its velocity. In the language of this chapter, the Jacobian of the passive dynamics has negative eigenvalues at equilibrium—the muscle constitutes a natural contraction metric in joint space.
2. **Stretch reflex (active contraction):** The spinal stretch reflex provides fast (~ 40 ms) feedback that resists perturbations. This is a feedback controller that increases the contraction rate beyond the passive baseline. In our framework, the reflex effectively modifies $\mathbf{A}_{cl} = \mathbf{A} - G\mathbf{K}_{\text{reflex}}$, where $\mathbf{K}_{\text{reflex}}$ is the reflex gain.
3. **Co-contraction (metric shaping):** When a person stiffens a joint by simultaneously activating agonist and antagonist muscles, they are effectively increasing the eigenvalues of the contraction metric in the directions of that joint. This is the biological equivalent of choosing a non-identity metric $\mathbf{M}(\mathbf{x})$: co-contraction shapes the metric to provide stronger contraction where needed.

Geometric Intuition

A novice golfer co-contracts many muscles simultaneously, creating a stiff (high λ) but energetically expensive controller. An expert golfer selectively stiffens only the joints that need contraction at each phase, creating a time-varying metric $\mathbf{M}(\mathbf{x}(t))$ that is optimally adapted to the swing dynamics. The transition from novice to expert is, in part, the learning of the optimal contraction metric.

5.14.2 Partial Contraction in Sequential Motion

The golf swing is a prime example of a hierarchically structured system where partial contraction (Theorem 5.6) applies. The kinematic chain torso $\rightarrow$ shoulder $\rightarrow$ elbow $\rightarrow$ wrist $\rightarrow$ club exhibits a natural partitioning:

- The proximal segments (torso, shoulder) are heavily muscled and contract rapidly. Their contraction rate $\lambda_{\text{proximal}}$ is high.
- The distal segments (wrist, club) have less muscular authority. Their contraction rate λ_{distal} is lower, and the club shaft (being passive) does not contract at all without feedback.
- Partial contraction theory guarantees that if the proximal subsystem contracts, and the distal subsystem contracts when driven by a fixed proximal trajectory, then the overall chain contracts at rate $\lambda = \min(\lambda_{\text{proximal}}, \lambda_{\text{distal}})$.

This hierarchical structure explains why elite golfers focus on consistency of the proximal chain (stable torso rotation, repeatable shoulder turn): if the proximal subsystem is highly contracting, the distal response is automatically regularized.

5.14.3 Contraction and the Drift-Dominated Phase

During the late downswing, the system enters a drift-dominated regime (Chapter 8). The muscular torques become negligible compared to centrifugal and Coriolis forces. In this regime, the contraction properties of the *drift field* determine whether the motion is stable:

1. If the drift Jacobian has eigenvalues with negative real parts (natural damping), the uncontrolled trajectory is contracting. This is the “natural stability” of the late downswing.
2. If the drift Jacobian has eigenvalues with positive real parts (instability), perturbations grow exponentially. At impact, even small deviations from the intended trajectory can produce large clubface errors.
3. The contraction rate of the drift determines the “forgiveness” of the swing: a highly contracting drift absorbs perturbations, while a weakly contracting or expanding drift amplifies them.

Design Implication

The practical design principle for swing optimization is: use the controllable early phases (backswing, transition) to steer the system into a region of state space where the drift field is naturally contracting. This is the control-theoretic formalization of the coaching advice “set up the swing so the physics does the work.”

The contraction metric provides a quantitative tool: at each configuration, one can compute whether the drift is contracting (and at what rate) via the symmetric part of the drift Jacobian. Configurations where $\text{sym}(\frac{\partial f}{\partial \mathbf{x}})$ has uniformly negative eigenvalues are “safe zones” where the swing is inherently stable. The optimal trajectory passes through these zones during the critical impact phase.

5.15 Stochastic Contraction

Real systems are subject to process noise, sensor noise, and unmodeled disturbances. This section extends contraction theory to stochastic settings, providing convergence guarantees in the presence of randomness.

5.15.1 Systems With Brownian Perturbations

Consider the stochastic differential equation (SDE):

$$d\mathbf{x} = f(\mathbf{x}, t) dt + \sigma(\mathbf{x}, t) d\mathbf{W}, \quad (5.68)$$

where $\mathbf{W}(t)$ is a standard Wiener process and $\sigma(\mathbf{x}, t) \in \mathbb{R}^{n \times p}$ is the diffusion matrix. The deterministic contraction condition $\text{sym}(\mathbf{M} \frac{\partial f}{\partial \mathbf{x}}) + \dot{\mathbf{M}} \preceq -2\lambda \mathbf{M}$ must be augmented to account for the noise.

5.15.2 The Stochastic Contraction Condition

Theorem 5.16 (Stochastic Contraction — adapted from Pham, Tabuada, and Slotine). *Consider two solutions $\mathbf{x}_1(t), \mathbf{x}_2(t)$ of (5.68) with different initial conditions but the same noise realization. If the deterministic contraction condition holds with rate λ , then the expected squared distance satisfies:*

$$\mathbb{E}[\|\mathbf{x}_1(t) - \mathbf{x}_2(t)\|_{\mathbf{M}}^2] \leq e^{-2\lambda(t-t_0)} \mathbb{E}[\|\mathbf{x}_1(t_0) - \mathbf{x}_2(t_0)\|_{\mathbf{M}}^2] + \frac{C_\sigma}{\lambda}, \quad (5.69)$$

where C_σ depends on the diffusion coefficient σ and the metric $\mathbf{M}$.

The bound (5.69) shows that contraction dominates at large separations (exponential decay), while noise dominates at small separations (the C_σ/λ floor). The steady-state expected separation is $\sqrt{C_\sigma/\lambda}$: faster contraction (larger λ) produces tighter concentration of trajectories.

5.15.3 Connection to Uncertainty Propagation

The stochastic contraction bound has a direct interpretation for state estimation (Chapter 7). If an observer is contracting with rate λ , and the process noise has intensity C_σ , then the estimation error is bounded in expectation by $\sqrt{C_\sigma/\lambda}$. This provides a performance guarantee for nonlinear observers that the EKF cannot offer.

Design Implication

For practical controller design, the stochastic contraction bound suggests a design trade-off: increasing the contraction rate λ (e.g., by increasing feedback gains) reduces the noise floor $\sqrt{C_\sigma/\lambda}$ but requires more control effort. The optimal trade-off depends on the noise intensity and the available actuator authority.

5.16 Contraction Tubes and Funnel Control

The exponential convergence guarantee of contraction theory naturally defines a *tube* around the nominal trajectory: the set of all states that are guaranteed to converge to the nominal at rate λ .

5.16.1 The Contraction Tube

Given a contracting system with rate λ and metric $\mathbf{M}$, define the tube of radius r around a nominal trajectory $\bar{\mathbf{x}}(t)$:

$$\mathcal{T}_r(t) = \{\mathbf{x} \in \mathbb{R}^n \mid \|\mathbf{x} - \bar{\mathbf{x}}(t)\|_{\mathbf{M}(t)} \leq r\}. \quad (5.70)$$

If $\mathbf{x}(t_0) \in \mathcal{T}_{r_0}(t_0)$, then $\mathbf{x}(t) \in \mathcal{T}_{r(t)}(t)$ with $r(t) = r_0 e^{-\lambda(t-t_0)}$ for the unperturbed system, and $r(t) = r_0 e^{-\lambda(t-t_0)} + d/\lambda$ for bounded disturbances with $\|w(t)\|_{\mathbf{M}} \leq d$.

5.16.2 Funnel Control

Funnel control prescribes a time-varying performance boundary $\varphi(t) > 0$ (the “funnel”) and designs a gain that guarantees the tracking error satisfies $\|e(t)\| < \varphi(t)$ for all $t > 0$. The connection to contraction is:

- The funnel boundary $\varphi(t)$ defines the desired tube radius.
- A contracting controller with rate $\lambda \geq -\dot{\varphi}/\varphi$ guarantees that trajectories remain within the funnel.
- The adaptive gain $k(t) = 1/(\varphi(t) - \|e(t)\|)$ from classical funnel control achieves this by increasing gain as the error approaches the boundary.

Geometric Intuition

Contraction tubes formalize the intuition that “nearby trajectories stay nearby.” For trajectory tracking in robotics or biomechanics, the tube radius at impact time tells you the worst-case deviation from the planned motion. The condition number $\kappa(\mathbf{M})$ determines the shape of the tube: isotropic metrics give circular tubes; anisotropic metrics give ellipsoidal tubes that are tight in sensitive directions and loose in insensitive ones.

5.17 Chapter Summary

1. **Historical foundations:** Contraction theory evolved from Demidovich’s work on the symmetric Jacobian condition (1961) and was formalized by Lohmiller and Slotine (1998). It generalizes Lyapunov stability from point stability to trajectory stability.
2. **The contraction condition** (Def. 5.1) is a matrix inequality on the Jacobian and metric: $\mathbf{A}^\top \mathbf{M} + \mathbf{M} \mathbf{A} + \dot{\mathbf{M}} \preceq -2\lambda \mathbf{M}$.
3. **Exponential convergence** (Thm. 5.3): If the condition holds, all trajectories converge to each other at rate $e^{-\lambda t}$. The proof combines geodesic parametrization, Gronwall’s inequality, and metric sandwich bounds.
4. **Metric freedom:** The choice of $\mathbf{M}$ is flexible. Many nonlinear systems that do not contract in the identity metric may contract in a well-chosen metric. Finding the right metric is the central computational challenge.
5. **Worked example** (Sec. 5.6): A linear system with Jacobian $\mathbf{A} = \begin{bmatrix} -2 & 1 \\ 0 & -3 \end{bmatrix}$ is contracting in the identity metric at rate $\lambda \approx 1.79$.
6. **Partial contraction** (Sec. 5.7): Not all directions must contract uniformly. Hierarchical decomposition (Thm. 5.6) enables contraction in one subsystem to drive convergence in another.
7. **Control contraction metrics (CCM)** (Sec. 5.8): For controlled systems, feedback design can be posed as a convex optimization in the dual metric $\mathbf{W} = \mathbf{M}^{-1}$. The pointwise LMI $\dot{\mathbf{W}} - \mathbf{A}\mathbf{W} - \mathbf{W}\mathbf{A}^\top + \gamma \mathbf{G}\mathbf{G}^\top \preceq -2\lambda \mathbf{W}$ enables SDP-based controller synthesis.
8. **Discrete-time contraction** (Sec. 5.9): The condition $\mathbf{J}_k^\top \mathbf{M}_{k+1} \mathbf{J}_k \preceq \rho^2 \mathbf{M}_k$ certifies exponential decay with rate $\rho < 1$ for iterative algorithms and digital controllers.
9. **Limits of numerical metric synthesis:** The Van der Pol oscillator (Sec. 5.10) shows how a parameterized metric search is set up — and why it cannot succeed here. An attracting limit cycle rules out global contraction outright, so a returned “solution” must be checked against the condition it claims to satisfy rather than trusted.
10. **Robustness margins:** The contraction rate λ directly bounds disturbance rejection. For $\|d(t)\| \leq D$, the ultimate error bound is $\sqrt{\overline{m}/(\lambda \underline{m})} \cdot D$ (Thm. 5.11).
11. **ISS relationship:** Contraction implies incremental ISS, which is strictly stronger than standard ISS. Contraction certifies trajectory synchronization, not just input-output boundedness.
12. **Lyapunov connection:** Contraction implies Lyapunov stability, but the converse does not hold. Contraction is a stronger, trajectory-focused property (Prop. 5.14).

In the next chapter, we turn to **input-output analysis** and transfer functions, exploring how tangent-space methods interface with frequency-domain techniques for feedback design.

Exercises

1. **Contraction of a linear system.** For $\dot{\mathbf{x}} = \mathbf{A}\mathbf{x}$ with $\mathbf{A} = \begin{bmatrix} -1 & 2 \\ 0 & -3 \end{bmatrix}$, find the contraction rate using the identity metric $\mathbf{M} = \mathbf{I}$. Then find a diagonal metric $\mathbf{M} = \text{diag}(m_1, m_2)$ that maximizes the contraction rate.
2. **LMI feasibility.** For the system $\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})u$ with $f = (-x_1 + x_2^2, -2x_2)^T$ and $g = (0, 1)^T$, formulate the LMI condition for finding a constant contraction metric $\mathbf{M}$ and rate $\lambda > 0$ (with $u = -kx_2$). Solve it for $k = 1$.
3. **Partial contraction.** For a cascade system $\dot{x}_1 = -x_1 + x_2^2$, $\dot{x}_2 = -2x_2 + u$, verify partial contraction: show that the x_2 -subsystem contracts independently, and the x_1 -subsystem contracts when $x_2(t)$ is treated as a known input. What is the overall contraction rate?
4. **CCM computation.** For the single-input system $\dot{x}_1 = x_2$, $\dot{x}_2 = -x_1^3 + u$, search for a CCM by parameterizing $\mathbf{W}(\mathbf{x}) = \mathbf{M}(\mathbf{x})^{-1}$ as a polynomial in $\mathbf{x}$ and solving the pointwise LMI condition.
5. **Discrete-time contraction.** Show that the discrete system $\mathbf{x}_{k+1} = \mathbf{A}\mathbf{x}_k$ is contracting if and only if $\|\mathbf{A}\|_{\mathbf{M}} < 1$ for some positive definite $\mathbf{M}$. What is the contraction rate in terms of $\|\mathbf{A}\|_{\mathbf{M}}$?
6. **Stochastic contraction bound.** For the scalar SDE $dx = -\lambda x dt + \sigma dW$ with $\lambda > 0$, compute the steady-state variance $\mathbb{E}[x^2]$ exactly. Verify that it equals $\sigma^2/(2\lambda)$, consistent with the bound in Theorem 5.16.
7. **Tube computation.** For the system in Exercise 1 with bounded disturbance $\|w\| \leq d = 0.1$, compute the contraction tube radius $r(t)$ for $r_0 = 1$. At what time t^* does the tube radius reach twice the steady-state radius?
8. **Biological contraction.** Consider a simplified muscle model: $\dot{x} = -kx - b\dot{x} + F(t)$ where $k > 0$ (stiffness) and $b > 0$ (damping). Show this is contracting and compute the contraction rate as a function of k and b . Relate to the co-contraction mechanism described in the biomechanics section.

Chapter 6

Local Optimal Control: LQR, DDP, and Riccati

In Plain Language 6.1. Zoom in, Solve, Check, Repeat

A motion planner needs both a destination and a price for getting there. It predicts how today's action affects later states, then balances the predicted benefit against effort and other costs. For a linear system with a quadratic objective, this calculation is exact. For a nonlinear system it is a local approximation: roll the proposed action through the full dynamics and check whether the promised improvement actually occurs.

Three questions organize this chapter: what is optimal for a specified model and cost, whether an algorithm finds a stationary solution, and whether the resulting feedback stabilizes the physical system. An answer to one does not automatically answer the others.

6.1 Bellman and Pontryagin: Two Views of the Same Objective

For a fixed initial state, consider

$$\min_{u_0, \dots, u_{N-1}} J = \ell_N(x_N) + \sum_{k=0}^{N-1} \ell_k(x_k, u_k), \quad x_{k+1} = f_k(x_k, u_k). \quad (6.1)$$

Here $x_k \in \mathbb{R}^n$, $u_k \in \mathbb{R}^m$, and f_k is a discrete transition, potentially obtained by integrating a continuous model. Its derivatives must match that transition and its time step.

Bellman's principle gives

$$V_k(x) = \min_u \{ \ell_k(x, u) + V_{k+1}(f_k(x, u)) \}, \quad V_N = \ell_N. \quad (6.2)$$

The future value makes this different from repeatedly minimizing today's stage cost. With linear dynamics, quadratic costs, and unconstrained controls, this recursion reduces to a Riccati recursion [Bel57].

For Pontryagin's conditions, choose the Lagrangian sign convention

$$\mathcal{L} = \ell_N(x_N) + \sum_{k=0}^{N-1} \{ \ell_k(x_k, u_k) + \lambda_{k+1}^T [f_k(x_k, u_k) - x_{k+1}] \}. \quad (6.3)$$

With $H_k = \ell_k + \lambda_{k+1}^T f_k$, stationarity gives

$$0 = \ell_{k,u} + f_{k,u}^T \lambda_{k+1}, \quad (6.4)$$

$$\lambda_k = \ell_{k,x} + f_{k,x}^T \lambda_{k+1}, \quad \lambda_N = \ell_{N,x}. \quad (6.5)$$

In continuous time, the normal minimization convention $H = L + \lambda^T f$ uses $\dot{x} = H_\lambda$, $\dot{\lambda} = -H_x$, and a control minimizing H . The alternative maximum convention changes the sign of the running-cost term. The name “maximum principle” does not justify mixing conventions. For general discrete nonlinear dynamics the displayed stationarity conditions are necessary first-order conditions; they do not establish a global Hamiltonian minimum [PBGM62].

Where the value function is differentiable, the costate trajectory is the gradient of the value function along an optimal trajectory: $\lambda_k = \nabla_x V_k(x_k)$. Thus $V = \frac{1}{2}x^T Sx$ gives $\lambda = Sx$, whereas $V = x^T Sx$ gives $\lambda = 2Sx$. A costate is a covector of marginal cost, not the scalar cost itself. Constraints, nondifferentiable values, and abnormal extremals require the corresponding more general conditions.

6.2 A Dimensionally Consistent Local Model

Let $(\bar{x}_k, \bar{u}_k)$ be dynamically feasible and write $\delta x = x - \bar{x}$, $\delta u = u - \bar{u}$. Derivatives below are evaluated on that trajectory. Use column gradients, $\ell_{ux} \in \mathbb{R}^{m \times n}$, and $\ell_{xu} = \ell_{ux}^T$:

$$\ell \simeq \ell_0 + \ell_x^T \delta x + \ell_u^T \delta u + \frac{1}{2} \begin{bmatrix} \delta x \\ \delta u \end{bmatrix}^T \begin{bmatrix} \ell_{xx} & \ell_{xu} \\ \ell_{ux} & \ell_{uu} \end{bmatrix} \begin{bmatrix} \delta x \\ \delta u \end{bmatrix}. \quad (6.6)$$

Retain the linear terms: they drive improvement when the nominal trajectory is not stationary. Dropping them generally removes the feedforward correction. The first-order dynamics are

$$\delta x_{k+1} \simeq A_k \delta x_k + B_k \delta u_k, \quad A_k = f_{k,x}, \quad B_k = f_{k,u}. \quad (6.7)$$

Even an exact Jacobian gives a tangent approximation to a finite perturbation. An infeasible nominal trajectory introduces a defect $f_k(\bar{x}_k, \bar{u}_k) - \bar{x}_{k+1}$ that a defect-aware method must carry.

Write the next local value as $V_{k+1} \simeq V_0 + s^T \delta x_{k+1} + \frac{1}{2} \delta x_{k+1}^T S \delta x_{k+1}$. The action value $Q = \ell + V_{k+1} \circ f_k$ has derivatives

$$Q_x = \ell_x + A^T s, \quad Q_u = \ell_u + B^T s, \quad (6.8)$$

$$Q_{xx} = \ell_{xx} + A^T S A + \sum_i s_i f_{xx}^i, \quad (6.9)$$

$$Q_{uu} = \ell_{uu} + B^T S B + \sum_i s_i f_{uu}^i, \quad (6.10)$$

$$Q_{ux} = \ell_{ux} + B^T S A + \sum_i s_i f_{ux}^i. \quad (6.11)$$

The superscript i selects a component of f . The sums contract the value gradient with dynamics second derivatives. Full DDP retains these terms; iLQR omits them. Both methods retain the complete cost Hessian, including ℓ_{ux} , and the first-derivative coupling $B^T S A$. Velocity dependence does not itself require full DDP: iLQR still linearizes those dynamics.

6.3 The Discrete Riccati Recursion

Suppose $Q_{uu} \succ 0$. Invertibility alone gives only a stationary control, possibly a maximum or saddle. Completing the square gives

$$\delta u^* = k + K \delta x, \quad (6.12)$$

$$k = -Q_{uu}^{-1} Q_u, \quad K = -Q_{uu}^{-1} Q_{ux}. \quad (6.13)$$

Negative signs are included in k and K throughout this chapter. Implement the inverses with factorization and linear solves. The unregularized update is

$$s_k = Q_x - Q_{xu} Q_{uu}^{-1} Q_u, \quad (6.14)$$

$$S_k = Q_{xx} - Q_{xu} Q_{uu}^{-1} Q_{ux}. \quad (6.15)$$

Initialize $s_N = \ell_{N,x}$ and $S_N = \ell_{N,xx}$. Both gradient and curvature must be propagated. A large eigenvalue of Q_{uu} penalizes a control change; for fixed gradient it reduces the step in that direction.

For linear dynamics and stage cost $\ell_k = \frac{1}{2}(x^T Q_k x + 2u^T N_k x + u^T R_k u)$, with $N_k \in \mathbb{R}^{m \times n}$, the exact recursion is

$$H_k = R_k + B_k^T S_{k+1} B_k, \quad D_k = N_k + B_k^T S_{k+1} A_k, \quad (6.16)$$

$$K_k = -H_k^{-1} D_k, \quad (6.17)$$

$$S_k = Q_k + A_k^T S_{k+1} A_k - D_k^T H_k^{-1} D_k, \quad S_N = Q_N. \quad (6.18)$$

A sufficient convexity assumption is that the joint stage-cost block $\begin{bmatrix} Q_k & N_k^T \\ N_k & R_k \end{bmatrix}$ is positive semidefinite, $R_k \succ 0$, and $Q_N \succeq 0$. For $N_k = 0$ this is the familiar $Q_k \succeq 0$, $R_k \succ 0$ setting. The feedback minimizes this finite-horizon linear-quadratic problem globally. Applying it to a nonlinear system has a local approximation scope.

An independent check, including the cross-cost terms, is

$$S_k = Q_k + K_k^T N_k + N_k^T K_k + K_k^T R_k K_k + (A_k + B_k K_k)^T S_{k+1} (A_k + B_k K_k). \quad (6.19)$$

Let $A = B = Q = R = 1$, $N = 1/2$, and $S_{k+1} = 1$. Then $H = 2$, $D = 3/2$, $K = -3/4$, and $S_k = 7/8$. Both formulas give $7/8$; omitting the two cross-cost terms does not.

6.4 Controllability, Finite Cost, and Stabilization

Finite-horizon LQR does not require controllability. Under the positivity assumptions above, $H_k \succ 0$, including when $B_k = 0$. The optimizer then computes unavoidable state cost. Controllability asks whether arbitrary state transfers can be achieved. A hard terminal equality can be infeasible even though unconstrained finite-horizon LQR has a finite solution.

For a continuous time-varying linearization, endpoint reachability uses

$$W_c(t_0, T) = \int_{t_0}^T \Phi(T, s) B(s) B(s)^T \Phi(T, s)^T ds, \quad (6.20)$$

where Φ is the state-transition matrix of $A(t)$. A frozen-time rank test on $[B, AB, \dots]$ is not a general substitute. Small Gramian eigenvalues indicate expensive transfers under the specified state units and input metric; raw condition numbers change under arbitrary rescaling.

For infinite-horizon time-invariant LQR with $Q \succeq 0$, $R \succ 0$, and no cross term, stabilizability of (A, B) and detectability of $(Q^{1/2}, A)$ are standard sufficient assumptions for the stabilizing Riccati solution. Controllability is stronger than necessary. A finite-horizon optimum alone does not guarantee asymptotic stability.

6.5 Differential Dynamic Programming and iLQR

DDP repeatedly constructs the local action value and updates the nominal trajectory [JM70]. A practical implementation follows this sequence.

1. Specify initial state, model, integration method, horizon, cost, and constraints. Roll out nominal controls to obtain a feasible state sequence.
2. Compute cost gradients and Hessians and dynamics derivatives. Full DDP adds the three dynamics-Hessian contractions; iLQR omits those contractions.
3. Sweep backward from the terminal gradient and Hessian. Ensure positive control curvature, increasing regularization and restarting when necessary.
4. From the same initial state, roll out $u_k^{\text{trial}} = \bar{u}_k + \alpha k_k + K_k(x_k^{\text{trial}} - \bar{x}_k)$ and $x_{k+1}^{\text{trial}} = f_k(x_k^{\text{trial}}, u_k^{\text{trial}})$.
5. Compare actual and predicted cost changes and accept sufficient decrease. If no trial is acceptable, increase regularization or report failure.

6. Check stationarity, feasibility, cost change, and step size. A failed line search or tiny regularized step is not a certificate of convergence.

When choosing a policy, regularization may replace Q_{uu} by $Q_{uu} + \mu I$. Choose μ large enough to obtain positive definiteness. To evaluate that policy in the original quadratic model, use general substitution:

$$s_k = Q_x + K^T Q_u + Q_{xu} k + K^T Q_{uu} k, \quad (6.21)$$

$$S_k = Q_{xx} + Q_{xu} K + K^T Q_{ux} + K^T Q_{uu} K. \quad (6.22)$$

Mixing regularized gains with an unqualified Schur-complement update silently changes the model. State the regularization convention implemented.

Both methods use local Taylor approximations. Solving a quadratic subproblem exactly does not make that approximation globally exact or establish a global optimum. Repeated relinearization updates the approximation where it is used. For dense matrices, both methods propagate an $n \times n$ value Hessian and factor an $m \times m$ control Hessian. Standard dense algebra costs on the order of $N(n^3 + n^2 m + n m^2 + m^3)$, before derivative evaluation. Full DDP adds dynamics second derivatives or their contractions. iLQR does not reduce the whole backward pass to $O(Nm^3)$. Compare measured runtime at matched tolerances; there is no universal hundredfold speed advantage.

6.6 What Local Convergence Requires

Eliminating states in an unconstrained shooting problem yields a reduced objective $J(U)$ in stacked controls. Exact Newton solves $\nabla^2 J(U) \Delta U = -\nabla J(U)$. With positive-definite Hessian at a stationary point, locally Lipschitz Hessian, sufficiently close initialization, and eventual full unregularized steps, its standard local result is

$$\|U^{(i+1)} - U^*\| \leq C \|U^{(i)} - U^*\|^2. \quad (6.23)$$

This measures error from the solution, not successive step size. A strict minimum need not have a positive-definite Hessian; twice continuous differentiability alone does not imply a Lipschitz Hessian.

Full second-order DDP has a closely related local quadratic-convergence theory under suitable smoothness, nonsingular positive control curvature, and step acceptance assumptions [JM70]. Its nonlinear feedback rollout need not equal an open-loop Newton step away from the solution. Holding each costate fixed and independently minimizing its Hamiltonian misses the dependence of later states and costates on that control.

iLQR uses an approximate reduced Hessian. Superlinear convergence is not a general consequence: linear convergence is possible, and faster rates need additional conditions on omitted terms. An exact Jacobian alone establishes neither quadratic nor global convergence. Globalization helps find acceptable steps without guaranteeing the desired local minimum.

6.7 A Reproducible Pendulum Example

For a point mass m on a massless rod of length l , viscous damping $b \geq 0$, torque τ , and angle measured from downward vertical,

$$ml^2 \ddot{\theta} = -mgl \sin \theta - b \dot{\theta} + \tau. \quad (6.24)$$

Hanging is $\theta = 0$ and upright is $\theta = \pi$. With $m = 1$ kg, $l = 1$ m, $g = 10$ m/s², $b = 0.1$ N m s,

$$\dot{\theta} = \omega, \quad \dot{\omega} = -10 \sin \theta - 0.1 \omega + \tau. \quad (6.25)$$

The energy $E = \frac{1}{2} ml^2 \omega^2 + mgl(1 - \cos \theta)$ obeys $\dot{E} = \tau \omega - b \omega^2$, independently checking the damping sign.

A swing-up angle penalty $1 + \cos \theta$ is minimized at upright. An illustrative running cost is $L = 1 + \cos \theta + 0.1 \omega^2 + 0.01 \tau^2$. Near upright, an unwrapped local angle chart allows the balancing cost $100(\theta - \pi)^2 + 10 \omega^2 + 0.1 \tau^2$. These weighted objectives are not energy or metabolic expenditure. A step h gives a running-cost approximation hL ; changing h without scaling it changes the trade-off with terminal cost.

An independently reproducible calculation is infinite-horizon LQR balance for $e = \theta - \pi$ with

$$A = \begin{bmatrix} 0 & 1 \\ 10 & -0.1 \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad Q = \text{diag}(100, 10), \quad R = 0.1. \quad (6.26)$$

For cost $\int_0^\infty (x^T Q x + R \tau^2) dt$, feedback is $\tau = -R^{-1} B^T P x$. Write the symmetric P using entries p_{11}, p_{12}, p_{22} . Its stabilizing solution satisfies

$$p_{12} = 1 + \sqrt{11}, \quad (6.27)$$

$$p_{22} = \frac{-0.2 + \sqrt{0.04 + 40(2p_{12} + 10)}}{20}, \quad (6.28)$$

$$p_{11} = 0.1p_{12} - 10p_{22} + 10p_{12}p_{22}. \quad (6.29)$$

The position and velocity feedback gains are approximately 43.166 and 13.551. The closed-loop polynomial is $s^2 + (0.1 + 13.551)s + (43.166 - 10)$, with negative real-part roots. This establishes linearized local balance, not swing-up or robustness to arbitrary torque limits.

To report a swing-up experiment, publish initial state, integration scheme and step, horizon, bounds, objective, initial controls, solver version, derivative checks, stopping tolerances, and trajectories. Check energy residuals and step convergence. The previous iteration and gain tables did not specify such a reproducible run; they are not evidence for the corrected model.

6.8 Constraints and the Meaning of the Cost

Clamping a trial torque respects box bounds for that trial but does not solve the bound-constrained local problem. Use a box-constrained backward solve or another constrained optimizer. Augmented Lagrangian methods update multipliers as well as penalties; a pure penalty method should not be given that name.

A soft penalty $\rho \max(0, g(x))^2/2$ does not guarantee $g(x) \leq 0$ at finite ρ . A logarithmic barrier $-\mu \log[-g(x)]$, $\mu > 0$, tends to positive infinity when approaching the boundary from inside. It is undefined outside, so the solver must reject infeasible trials. Neither treatment automatically enforces constraints between integration nodes.

Weights encode the question. Normalize by meaningful scales and distinguish impact accuracy, peak load, squared torque, work, and metabolic cost. Squared torque and work have different dimensions and favor different actions. Examine sensitivity to weights. Increasing an effort weight is not a universal method for increasing damping: check poles, constraints, and nonlinear response.

6.9 Continuous-Time Riccati and a Counterexample

The Hamilton–Jacobi–Bellman equation is

$$-V_t = \min_u \{L + \nabla V^T f\}, \quad V(T, x) = \ell_T(x). \quad (6.30)$$

For $\dot{x} = Ax + Bu$, $L = \frac{1}{2}(x^T Q x + u^T R u)$, and $V = \frac{1}{2}x^T S x$,

$$-\dot{S} = Q + A^T S + S A - S B R^{-1} B^T S, \quad S(T) = Q_T, \quad u^* = -R^{-1} B^T S x. \quad (6.31)$$

The time-invariant algebraic equation sets $\dot{S} = 0$ and requires the stabilizing solution under the assumptions stated earlier. For $\dot{x} = x$, $B = 0$, $Q = 1$, $Q_T = 0$, the finite-horizon solution is $S(t) = (e^{2(T-t)} - 1)/2$. It is finite despite uncontrollability and instability. The infinite-horizon cost diverges for nonzero initial state. Finite cost, reachability, and stabilization are different properties.

6.10 Model Predictive Control and Terminal Guarantees

MPC repeatedly solves a finite-horizon problem from the measured state, applies its first control, and replans. DDP and iLQR are possible solvers, alongside other nonlinear and quadratic-programming methods.

Warm-start by shifting old controls one relative horizon index, appending terminal control, and rolling out states from the new measurement. Disturbances and changing active constraints can make this guess poor.

A standard nominal stability argument assumes admissible terminal feedback κ_f , an invariant terminal set $\mathcal{X}_f$, and

$$V_f(f(x, \kappa_f(x))) - V_f(x) \leq -\ell(x, \kappa_f(x)), \quad x \in \mathcal{X}_f. \quad (6.32)$$

With initial feasibility, the terminal constraint, positive-definite stage cost relative to the target, and appropriate regularity, a shifted candidate establishes recursive feasibility and decrease of the optimal value. Exact optimization, or a suboptimal solver preserving that feasibility and decrease, supports the stability conclusion. An arbitrary finite-horizon local solve does not supply those guarantees.

An LQR quadratic is a candidate terminal cost; nonlinear decrease and input admissibility must be checked on the terminal set. Lyapunov decrease toward one equilibrium differs from contraction between trajectories. A differential metric $M(x, t)$ needs uniform positive-definiteness bounds and an inequality involving $\dot{M} + A_{cl}^T M + M A_{cl}$ throughout the region. A cost Hessian is not automatically such a certificate.

6.11 Connecting the Calculation to the Golf Swing

Geometry changes the dynamics Jacobians; accumulated motion sets the state from which the next action operates; joint impedance changes perturbation response; and impact accuracy changes terminal error weights. Riccati propagation connects these effects across time. A small action can matter because it changes a later, highly weighted impact variable. Maximizing instantaneous acceleration is a different objective.

Compare stiff and compliant strategies under the same actuator limits, starting state, impact target, perturbation model, and cost definition. Include the mechanics and energetic cost of changing stiffness. Otherwise an apparent advantage may reflect extra actuator authority or a different objective.

An optimal torque history is a candidate explanation to test. It does not identify muscle co-contraction, prove that a golfer uses an LQR controller, or establish the nervous system's objective. Compare predicted kinematics, forces, perturbation responses, and uncertainty with measurements. This preserves the useful connection between geometry and control without turning an optimizer into an unsupported physiological claim.

Exercises

1. Verify the 7/8 Riccati example with both formulas and show the error from dropping N while retaining the original cost.
2. Substitute the pendulum matrix P into the algebraic Riccati equation; check residual, positive definiteness, and closed-loop roots.
3. Check a discrete pendulum Jacobian and Hessian contractions against finite differences at nonzero states.
4. Compare iLQR and DDP with the same cross-coupled cost, reporting stationarity residual, feasibility, objective, and runtime from several guesses.
5. Explain why a hard endpoint constraint changes feasibility in the uncontrollable finite-horizon counterexample.
6. For $\dot{x} = -x + u$ and cost $\int (x^2 + u^2) dt$, verify $P = -1 + \sqrt{2}$ solves $1 - 2P - P^2 = 0$. Substitute $V = Px^2$, $u^* = -Px$ into $0 = x^2 + (u^*)^2 + 2Px(-x + u^*)$.

Chapter 7

Stability–Optimality Duality

A useful swing should achieve its impact objective with tolerable effort and sensitivity to error. These requirements are related, but none implies the others without a model and a stated criterion. Linear quadratic control gives a particularly clear connection: the same Riccati solution describes the minimum future quadratic cost and supplies a certificate of closed-loop stability. This is a mathematical identity under declared assumptions, not evidence that a golfer solves a Riccati equation or minimizes mechanical energy.

This chapter develops that identity in continuous and discrete time, checks its rates and numerical predictions, and separates it from several tempting overextensions. An optimal-control cost need not be a physical energy; an optimal state path need not be a geodesic; a well-conditioned Riccati matrix need not imply controllability; and an observer-based implementation need not retain full-state feedback robustness. These distinctions sharpen the golf question: which perturbations can the available inputs correct, which can the measurements reveal, and at what cost within the remaining time to impact?

7.1 What the Quadratic Problem Assumes

7.1.1 State, Port and Objective

Consider the continuous-time system

$$\dot{x} = Ax + Bu, \quad J(x_0, u) = \int_0^\infty (x^T Q x + u^T R u) dt, \quad (7.1)$$

where $Q = Q^T \succeq 0$ and $R = R^T \succ 0$. Here x is a deviation from an equilibrium with the equilibrium input removed. For a swing trajectory the analogous variables are deviations from a feasible time-dependent reference; that problem generally has time-dependent matrices and a finite horizon. The actuator port matters: torque, muscle excitation and motor voltage lead to different B , retained actuator states and admissible inputs.

The components of x and u require explicit units or reference scales. If $x = Tz$ and $u = Uv$ for invertible scale matrices, the transformed data are

$$A_z = T^{-1}AT, \quad B_z = T^{-1}BU, \quad Q_z = T^TQT, \quad R_z = U^TRU. \quad (7.2)$$

Consequently $S_z = T^TST$ and $K_z = U^{-1}KT$. The physical policy is unchanged by this consistent conversion. Raw eigenvalues, Euclidean norms and condition numbers of S generally change. Comparing an angle gain with an angular-velocity gain by their numerical magnitudes alone compares quantities with different units.

The quadratic criterion is a choice about performance. Penalizing activation squared can be an effort surrogate; penalizing torque squared is a different surrogate. Neither is automatically metabolic expenditure, joint work, tissue loading or shaft energy. For example, joint mechanical power is torque times angular velocity, with a sign and an energy-transfer interpretation absent from a positive quadratic torque penalty. State exactly which criterion an argument uses.

7.1.2 Existence and Positive Definiteness

For the infinite-horizon continuous-time LQR problem, standard sufficient hypotheses are stabilizability of (A, B) and detectability of $(Q^{1/2}, A)$. Stabilizability means that modes which cannot be controlled are already asymptotically stable. Detectability means that modes invisible to the state penalty are already asymptotically stable. Under these hypotheses the stabilizing algebraic Riccati solution is symmetric positive semidefinite, the feedback stabilizes the system, and the optimal value is $x_0^T S x_0$.

Positive semidefinite is not positive definite. A stable unpenalized state can have zero value, so S can be singular even when the feedback is stabilizing. Assuming $Q \succ 0$ is a convenient sufficient condition for $S \succ 0$ in the setting here. More generally an appropriate observability condition on the penalized state excludes zero-cost directions. We will state $S \succ 0$ explicitly whenever it defines a norm or metric. Detectability alone does not justify an inverse S^{-1} .

The corresponding discrete-time hypotheses replace asymptotic stability by the condition that eigenvalues lie strictly inside the unit circle. These assumptions concern the declared mathematical model. They do not verify that a linearization remains accurate through a large swing, actuator saturation or a contact transition.

7.2 The Continuous-Time Identity

7.2.1 Completing the Square

Let $S = S^T$ solve

$$A^T S + SA - SBR^{-1}B^T S + Q = 0, \quad K = R^{-1}B^T S. \quad (7.3)$$

For $V(x) = x^T Sx$, direct differentiation gives

$$\begin{aligned} \dot{V} &= x^T (A^T S + SA)x + 2x^T SBu, \\ x^T Qx + u^T Ru + \dot{V} &= (u + Kx)^T R(u + Kx). \end{aligned} \quad (7.4)$$

Every sign is consequential. Integrating the second identity over $[0, T]$ gives

$$J_T = V(x_0) - V(x(T)) + \int_0^T (u + Kx)^T R(u + Kx) dt. \quad (7.5)$$

For the stabilizing solution and admissible infinite-horizon comparison controls with the required vanishing terminal value, this proves optimality of $u = -Kx$ and $J^* = V(x_0)$. The terminal term cannot simply be discarded for an arbitrary nondecaying trajectory. The usual LQR existence theorem supplies the admissibility and limiting argument under the preceding hypotheses.

On the optimal closed loop $A_c = A - BK$, define $D = Q + K^T R K$. Then

$$A_c^T S + SA_c = -D, \quad \dot{V} = -x^T D x. \quad (7.6)$$

The feedback effort term is part of the dissipation identity. Dropping it changes the proof and can change a claimed rate. If $S \succ 0$ and $D \succ 0$, this is a strict quadratic Lyapunov certificate. With $D \succeq 0$, a nonpositive derivative alone is insufficient to prove asymptotic convergence; an invariance or detectability argument is needed to exclude nondecaying zero-dissipation motions.

7.2.2 A Value Rate Is Twice a Norm Rate

Suppose $S \succ 0$ and $D \succ 0$. Define

$$\beta = \lambda_{\min}(S^{-1/2} D S^{-1/2}) > 0. \quad (7.7)$$

Since $x^T D x \geq \beta x^T S x$, integration yields

$$V(t) \leq e^{-\beta t} V(0), \quad \|x(t)\|_S \leq e^{-\beta t/2} \|x(0)\|_S, \quad (7.8)$$

where $\|x\|_S = \sqrt{x^T S x}$. In a fixed scaled Euclidean norm,

$$\|x(t)\|_2 \leq \sqrt{\kappa_2(S)} e^{-\beta t/2} \|x(0)\|_2. \quad (7.9)$$

A simpler, potentially more conservative, value rate is $\lambda_{\min}(D)/\lambda_{\max}(S)$. The maximum eigenvalue of S , rather than its minimum, belongs in this denominator. The factor of one half in the norm exponent follows from taking a square root. These are certified bounds, not necessarily the slowest pole or the observed decay along a particular initial direction.

For the scalar system $\dot{x} = x + u$ with $Q = R = 1$, the stabilizing solution is $S = 1 + \sqrt{2}$ and $A_c = -\sqrt{2}$. Hence $x(t) = e^{-\sqrt{2}t} x_0$, while $V(t) = e^{-2\sqrt{2}t} V_0$. Calling $2\sqrt{2}$ the state-norm decay rate would be wrong even in this one-dimensional example. At $t = 0.7$, the state multiplier is approximately 0.371595.

7.3 The Discrete-Time Identity

7.3.1 Bellman Completion and the Riccati Equation

For $x_{k+1} = Ax_k + Bu_k$ with cost $\sum_{k=0}^{\infty} (x_k^T Q x_k + u_k^T R u_k)$, set

$$H = R + B^T S B, \quad K = H^{-1} B^T S A. \quad (7.10)$$

The discrete algebraic Riccati equation is

$$S = Q + A^T S A - A^T S B (R + B^T S B)^{-1} B^T S A. \quad (7.11)$$

It differs from the continuous-time algebraic equation. A fixed point of the discrete backward Riccati recursion solves this discrete equation, not its continuous counterpart. Expanding the quadratic terms gives

$$\begin{aligned} x^T Q x + u^T R u + (Ax + Bu)^T S (Ax + Bu) - x^T S x \\ = (u + Kx)^T H (u + Kx). \end{aligned} \quad (7.12)$$

On $u = -Kx$, therefore,

$$A_c^T S A_c - S = -Q - K^T R K = -D, \quad V_{k+1} - V_k = -x_k^T D x_k. \quad (7.13)$$

The $K^T R K$ term follows from expanding both next-state value and input cost; it cannot be added after using an inconsistent expression for $A_c^T S A_c$.

7.3.2 Discrete Norm and Value Factors

With $S \succ 0$ and $D \succ 0$, define $\delta = \lambda_{\min}(S^{-1/2} D S^{-1/2})$ and $\rho = 1 - \delta$. The identity $S - D = A_c^T S A_c \succeq 0$ ensures $0 < \delta \leq 1$. It follows that

$$V_k \leq \rho^k V_0, \quad \|x_k\|_2 \leq \sqrt{\kappa_2(S)} \rho^{k/2} \|x_0\|_2. \quad (7.14)$$

If $\rho = 0$, the identity implies $A_c = 0$ and the state reaches zero after one step. Otherwise the norm multiplier per step is $\sqrt{\rho}$, not ρ . Replacing δ by $\lambda_{\min}(D)/\lambda_{\max}(S)$ gives another valid, generally looser, bound. A physical decay rate per second also requires the sample period; a discrete multiplier alone has no time unit.

For $A = 1.2$ and $B = Q = R = 1$, the scalar closed-loop multiplier is approximately 0.406472. Its squared value, approximately 0.165219, is the value multiplier. This elementary check catches the same norm/value confusion as the continuous-time example.

7.4 Finite Horizons and Moving References

7.4.1 The Terminal Condition Matters

For a feasible nominal trajectory, the first-order deviation dynamics are $\dot{\xi} = A(t)\xi + B(t)v$. With terminal penalty $\xi(T)^T S_f \xi(T)$, the local quadratic value is $V(t, \xi) = \xi^T S(t) \xi$ and

$$-\dot{S} = A^T S + S A - S B R^{-1} B^T S + Q, \quad S(T) = S_f. \quad (7.15)$$

Here $K(t) = R(t)^{-1} B(t)^T S(t)$. Including $\partial_t V$ restores the same completion identity. Along the local optimal feedback,

$$\frac{d}{dt}(\xi^T S \xi) = -\xi^T (Q + K^T R K) \xi. \quad (7.16)$$

This is the chosen homogeneous quadratic tracking problem in the deviation variables. Expanding a general original cost about a feasible but nonoptimal trajectory can also produce linear terms in the local value and

a feedforward correction. Feasibility alone does not make those terms vanish or make the reference locally optimal. In discrete time use S_{k+1} in $H_k = R_k + B_k^T S_{k+1} B_k$ and $K_k = H_k^{-1} B_k^T S_{k+1} A_k$, then propagate

$$S_k = Q_k + A_k^T S_{k+1} A_k - A_k^T S_{k+1} B_k H_k^{-1} B_k^T S_{k+1} A_k. \quad (7.17)$$

Both formulas run backward from the terminal condition. A finite-horizon optimum does not by itself establish infinite-time stability, recursive feasibility or stability under repeated replanning. With $S_f = 0$, the value vanishes at T for every terminal state. It is then impossible to regard $S(T)$ as a positive-definite metric or infer a nonzero terminal error bound from terminal value alone.

Uniform bounds $mI \preceq S(t) \preceq MI$ and a uniform strict differential inequality are needed for a uniform exponential norm estimate. For a nonlinear swing, the local feedback and quadratic value are approximations near the reference. Higher-order remainders, input limits, estimation error and mode transitions must be controlled on a stated neighborhood before extending the certificate to the nonlinear motion.

7.4.2 Impact Objectives and Remaining Control Authority

An impact objective may penalize predicted clubhead velocity, face orientation and strike location rather than all joint coordinates equally. If $y = H(x)$ is the impact output and $C_T = DH(\bar{x}(T))$, a local terminal penalty takes the form $S_f = C_T^T W C_T$. This matrix is often semidefinite because multiple state changes produce the same first-order impact output. Those null directions are not automatically harmless: they may affect constraints, higher-order outcomes or subsequent dynamics.

This expression is exact for the squared linearized output error. For the nonlinear penalty $(H(x) - y_*)^T W (H(x) - y_*)$, its half-Hessian also contains weighted second derivatives of H multiplied by the nominal output residual. Those additional terms vanish when $H(\bar{x}(T)) = y_*$. Using only $C_T^T W C_T$ at a nonzero residual is a Gauss–Newton approximation, not the full terminal curvature.

The remaining horizon and the state transition matrix determine how a torque change can affect that output. The Riccati solution combines that dynamics with chosen costs; it does not substitute for a controllability calculation. A large gain near impact may demand unavailable torque or bandwidth. For a ball-contact event whose time changes with the trajectory, output sensitivity must include the event-time correction and any reset derivative. A smooth fixed-time terminal model cannot silently stand in for this hybrid calculation.

7.5 A Reproducible Discrete Example

7.5.1 Model and Numerical Authority

Use the declared illustrative matrices

$$A = \begin{bmatrix} 1 & 0.1 \\ 0.981 & 1 \end{bmatrix}, \quad B = \begin{bmatrix} 0.005 \\ 0.1 \end{bmatrix}, \quad Q = \begin{bmatrix} 10 & 0 \\ 0 & 1 \end{bmatrix}, \quad R = 0.1. \quad (7.18)$$

These historical pendulum-like coefficients mix approximation orders: the state matrix resembles a forward-Euler upright-pendulum step, while the position input coefficient retains a second-order term. We treat them as the definition of a discrete example, not an exact zero-order-hold discretization of a continuous pendulum. For a physical application, derive A_d and B_d together from the same declared continuous model and hold assumption, then verify the approximation at the chosen sample period.

The coordinates below are scaled angle and angular-rate deviations and the input is a scaled command. A physical interpretation requires specifying those reference scales and the torque or acceleration port. The normalized initial direction $(1, 0)^T$ is used to display linear homogeneity; it does not validate a one-radian upright-pendulum perturbation or a finite golf-swing intervention. Multiplying that initial direction by ε multiplies the state and input by ε and the value by ε^2 .

Both editions obtain their matrices and table from the same generator, with a separate SciPy Riccati solution and trajectory propagation used in the regression checks. Displayed values are rounded only after calculation; verifying a small residual from the rounded matrices alone is inappropriate.

7.5.2 Computed Matrices and Decay Bound

The stabilizing discrete solution and feedback are

$$S = \begin{bmatrix} 94.9386 & 20.7112 \\ 20.7112 & 7.3663 \end{bmatrix}, \quad K = \begin{bmatrix} 17.1287 & 5.5643 \end{bmatrix}. \quad (7.19)$$

The closed-loop and stage-cost matrices are

$$A_c = \begin{bmatrix} 0.9144 & 0.0722 \\ -0.7319 & 0.4436 \end{bmatrix}, \quad D = \begin{bmatrix} 39.3393 & 9.5310 \\ 9.5310 & 4.0962 \end{bmatrix}. \quad (7.20)$$

The unrounded Riccati residual is below 10^{-10} . The closed-loop eigenvalues are 0.6281 and 0.7298, so the spectral radius is 0.7298. The value matrix has condition number 36.6808. Using the conservative ratio $\lambda_{\min}(D)/\lambda_{\max}(S)$ gives

$$\rho = 0.9831, \quad \|x_k\|_2 \leq 6.0565 \rho^{k/2} \|x_0\|_2. \quad (7.21)$$

7.5.3 Actual Trajectory Versus Its Bound

For the normalized initial direction $x_0 = (1, 0)^T$, direct propagation gives:

Step k	V_k	$\ \delta x_k\ $	V_k/V_{k-1} (actual)	ρ^k (bound)
0	94.9386	1.0000	—	1.0000
1	55.5992	1.1712	0.5856	0.9831
2	33.2717	1.2654	0.5984	0.9665
3	19.9314	1.2015	0.5990	0.9501
4	11.8393	1.0561	0.5940	0.9341
5	6.9497	0.8847	0.5870	0.9183
6	4.0294	0.7177	0.5798	0.9027
7	2.3094	0.5693	0.5731	0.8875
8	1.3099	0.4441	0.5672	0.8725
9	0.7363	0.3421	0.5621	0.8577
10	0.4107	0.2610	0.5578	0.8432

At step ten the actual value ratio V_{10}/V_0 is 0.0043, while its conservative bound is 0.8432.

The Euclidean norm initially grows even though the value decreases at every step. This is compatible with a stable, nonnormal closed loop and an anisotropic value function. It refutes the claim that every norm must decrease whenever a quadratic Lyapunov function does. The bound column is ρ^k , a bound on V_k/V_0 ; the preceding ratio column is the actual one-step ratio V_k/V_{k-1} . Those quantities answer different questions and must not be compared as if both were observations of the same decay factor.

7.6 Geometry Without Overclaiming

7.6.1 When a Value Defines a Metric

For $V(x) = x^T S x$ with constant $S \succ 0$, the Hessian is $2S$, not S . Either S or $2S$ defines a positive-definite inner product after a stated constant normalization. Ellipsoids $x^T S x = c$ have axes determined by the eigenvectors of S , with semi-axis lengths $\sqrt{c/\lambda_i(S)}$. These are not generally eigenvectors of A_c . The state transition maps an initial ellipsoid to another ellipsoid, but does not generally shrink it by a common factor in every direction.

For a nonlinear value function, a Hessian need not be positive definite or even exist across changes of the optimal policy. Moreover an ordinary coordinate Hessian is not automatically a tensor. Under $x = \phi(z)$,

$$\frac{\partial^2 V}{\partial z_i \partial z_j} = \frac{\partial \phi^a}{\partial z_i} \frac{\partial \phi^b}{\partial z_j} \frac{\partial^2 V}{\partial x^a \partial x^b} + \frac{\partial V}{\partial x^a} \frac{\partial^2 \phi^a}{\partial z_i \partial z_j}, \quad (7.22)$$

with repeated indices summed. The second term vanishes at a stationary point; away from it, a coordinate Hessian alone does not define a coordinate-independent Riemannian metric. A covariant Hessian requires

a declared connection and still needs a positivity argument. A family of local Riccati matrices along one reference similarly does not automatically define a smooth positive metric over every state and direction in a neighborhood.

The tangent bundle is the disjoint union $TM = \bigsqcup_{x \in M} T_x M$. A chart provides a local identification with a product; a global identification $TM = M \times \mathbb{R}^n$ requires additional structure and is not true for every manifold. When the state includes orientations or constrained configurations, this distinction prevents a convenient local coordinate representation from becoming a false global statement.

7.6.2 Optimal Paths Are Not Generally Geodesics

A Riemannian geodesic is stationary for an appropriate length or energy functional; sufficiently short regular segments locally minimize length. A geodesic need not globally minimize length or be dynamically stable. LQR minimizes a time integral of state and input penalties subject to dynamics. That functional is not generally the metric length of the state curve.

A concrete counterexample is

$$A = \text{diag}(-1, -2), \quad B = I, \quad Q = \text{diag}(3, 12), \quad R = I. \quad (7.23)$$

The Riccati solution is $S = \text{diag}(1, 2)$ and $A_c = \text{diag}(-2, -4)$. Starting from $(1, 1)^T$, the optimal path is $(e^{-2t}, e^{-4t})^T$, a parabola $x_2 = x_1^2$. Geodesics of the constant metric S are straight lines up to reparameterization. At $t = 0$, velocity $(-2, -4)^T$ and acceleration $(4, 16)^T$ are not collinear, so even a reparameterization cannot make this curve a straight line. Optimality here is exact; the geodesic interpretation fails.

The useful geometric statement is instead local and differential. For a linear closed loop, the separation δx obeys the same dynamics as x , and $\delta x^T S \delta x$ satisfies the Lyapunov inequality. For a nonlinear vector field F_c , a contraction certificate requires a positive metric $M(x, t)$ with uniform bounds and

$$\partial_t M + D_x M[F_c] + (D_x F_c)^T M + M(D_x F_c) \preceq -2\alpha M. \quad (7.24)$$

This is a condition on the full differential dynamics throughout a stated region, together with suitable trajectory and path-domain assumptions for a finite-distance conclusion. It does not follow merely because one reference trajectory has a Riccati solution.

7.6.3 Conditioning Is Not Controllability

Take $A = -I_2$, $B = 0$, $Q = I_2$ and $R = 1$. There is no control authority at all, yet the stable uncontrolled dynamics have $S = I_2/2$ and $\kappa_2(S) = 1$. Conversely, rescaling one state coordinate can make the condition number of a perfectly valid value matrix arbitrarily large without changing the physical closed-loop system. Thus neither a universal condition-number threshold nor a small minimum eigenvalue of S is a test of controllability.

Weak control over an unstable penalized mode can instead make its value very large as input authority tends to zero. A large value can indicate costly correction under the chosen objective; it does not identify the cause without separating dynamics, input scaling and weights. Increasing Q increases value in the positive-semidefinite order for the same admissible problem, but does not necessarily improve its condition number. Nor does a larger S establish a larger nonlinear region of attraction: for a fixed level c , larger quadratic weights can make $\{x : x^T S x \leq c\}$ smaller.

For a swing, inspect finite-horizon controllability or output-reachability measures with declared state and input scales, singular directions, constraints and uncertainty. Report the resulting achievable change in the impact output. The Riccati matrix then explains the chosen tradeoff among those changes rather than serving as a universal scalar measure of coordination quality.

7.7 The Exact Scope of LQR Robustness

7.7.1 A Common Input-Gain Margin

For clarity take $Q \succ 0$ and the continuous-time full-state feedback above. If the actual applied feedback is $u = -\eta Kx$ for a common real scalar η , then

$$(A - \eta BK)^T S + S(A - \eta BK) = -Q - (2\eta - 1)K^T R K. \quad (7.25)$$

Therefore every $\eta \geq 1/2$ yields a strict Lyapunov inequality under these stronger hypotheses. The usual open interval $\eta > 1/2$ is a standard guaranteed sufficient range; boundary and semidefinite- Q conclusions require their own assumptions. It is not a necessary stability condition. For the scalar example $A = B = Q = R = 1$, stability actually requires $\eta > 1/(1 + \sqrt{2}) \approx 0.414214$. Reducing η means weaker feedback, not more aggressive feedback.

This statement concerns a common scalar multiplication at the specified input port. It does not imply stability for every matrix gain perturbation satisfying an arbitrary norm comparison such as $\|\Delta K\| < \|K\|$. For an additive closed-loop perturbation E , the same certificate gives the different sufficient condition

$$E^T S + SE \prec D. \quad (7.26)$$

One conservative scaled Euclidean test is $2\|S\|_2\|E\|_2 < \lambda_{\min}(D)$. If the error is in the feedback gain, then $E = -B\Delta K$. Its direction and interaction with B matter.

7.7.2 The Return-Difference Disk Is Not a Pole Disk

For a single input, write $B = b$, $R = r > 0$ and $k = r^{-1}b^T S$. At a frequency where $j\omega I - A$ is invertible, put $z = (j\omega I - A)^{-1}b$ and $L(j\omega) = kz$. Premultiplying and postmultiplying the Riccati equation by z^* and z , using $Az = j\omega z - b$, gives

$$r(|1 + L(j\omega)|^2 - 1) = z^* Q z \geq 0. \quad (7.27)$$

Thus the Nyquist curve of the nominal return ratio avoids the open unit disk centered at -1 . This is a frequency-response statement, not a claim that the eigenvalues of $A - BK$ lie in a disk centered at -1 with radius $1/2$. Continuous-time pole locations also carry inverse-time units, so a universal unscaled numerical pole disk would already need a declared time scale.

Under the usual well-posed continuous-time single-loop assumptions, the return-difference result yields the classical full-state LQR gain and phase margin guarantees. At a unity-gain crossing, $|1 + e^{j\theta}| \geq 1$ keeps the return ratio at least 60 degrees from the critical negative-real direction. This familiar phase statement uses the negative-feedback return-ratio convention above. Multiple simultaneous input-channel perturbations, structured uncertainty, delays and sampled implementations require appropriately formulated robustness analysis; a SISO circle picture is not a general structured-singular-value or disk-margin certificate.

7.7.3 Saturation and Estimation Change the Question

For $\dot{x} = x + u$, the unconstrained LQR law is $u = -(1 + \sqrt{2})x$. With $|u| \leq 1$, at $x = 2$ the saturated law gives $\dot{x} = 1 > 0$, although the unconstrained law gives $\dot{x} = -2\sqrt{2}$. A local certificate can still be useful on a region where the command stays within limits, but global stability is lost in this example. Noise amplification, torque-rate limits, activation delays and contact changes likewise require an augmented model or an explicit uncertainty analysis.

When the true state is replaced by an estimate, the nominal separation principle discussed below can establish stability under its assumptions. It does not preserve all full-state LQR robustness margins. Doyle's 1978 paper [Guaranteed Margins for LQG Regulators](#) establishes that the general LQG class has no corresponding universal gain or phase margin guarantee. The practical conclusion is to analyze the implemented controller, estimator, sensors and actuators together.

7.8 Dissipativity and Disturbance Attenuation

7.8.1 Storage Depends on the Supply Rate

A dissipativity statement specifies a storage function $V \geq 0$ and a supply rate w such that $V(T) - V(0) \leq \int_0^T w \, dt$. Its meaning depends on that supply rate. It is not an unconditional equivalence between dissipativity and stability. A supply that injects energy or permits state growth does not by itself establish convergence. Conversely, a Lyapunov function can supply a useful dissipativity inequality without being a physical stored energy.

The LQR completion identity relates storage to state and control costs; it does not prove that all optimal controllers stabilize every plant under every criterion. The underlying assumptions and admissible comparisons are essential. Willems's [Dissipative Dynamical Systems, Part I](#) provides the general storage-and-supply framework. Its role here is conceptual: the cost, the storage and any mechanical energy must each be identified rather than merged under one label.

7.8.2 A Normalized Full-State H-Infinity Problem

To make the disturbance claim precise, consider

$$\dot{x} = Ax + Bu + Ew, \quad z = \begin{bmatrix} Q^{1/2}x \\ R^{1/2}u \end{bmatrix}, \quad Q \succeq 0, \quad R \succ 0. \quad (7.28)$$

This normalized full-state setup includes control effort in the regulated output and has no additional feedthrough or cross terms. More general output-feedback plants require different formulas and additional solvability conditions. For a chosen $\gamma > 0$, seek an appropriate stabilizing symmetric solution of the game Riccati equation

$$A^T S + SA + Q - SBR^{-1}B^T S + \gamma^{-2}SEE^T S = 0. \quad (7.29)$$

Choosing any positive matrix root without checking the stabilizing branch is insufficient. In the usual game formulation the associated saddle dynamics involve $A - (BR^{-1}B^T - \gamma^{-2}EE^T)S$; the existence and admissibility conditions must hold. With $u = -R^{-1}B^T Sx$, completing the disturbance square yields

$$\dot{V} + z^T z - \gamma^2 w^T w = -\gamma^2 \|w - \gamma^{-2}E^T Sx\|_2^2 \leq 0. \quad (7.30)$$

Consequently

$$\int_0^T z^T z \, dt \leq \gamma^2 \int_0^T w^T w \, dt + V(x_0) - V(x(T)). \quad (7.31)$$

For zero initial state, nonnegative storage and a well-posed internally stable closed loop, this gives the induced L^2 -gain bound. With nonzero initial state there is an additional initial-storage contribution. This is not a pointwise requirement that $\dot{V} < 0$ for every disturbance. A disturbance can raise storage while the integrated gain bound holds.

For example take $\dot{x} = -x + u + w$, $z = (x, u)^T$ and $\gamma = 2$. The positive stabilizing solution satisfies $-2S + 1 - 3S^2/4 = 0$, giving $S = (-2 + \sqrt{7})/1.5$. At $x = 1$, $w = 3$ and $u = -S$, the storage derivative is approximately $1.35134 > 0$, while $\dot{V} + z^T z - 4w^2 \approx -33.46333$. Both facts are consistent. A smallest feasible attenuation level is generally an infimum; an exactly optimal controller at that boundary need not exist. A worst-case disturbance criterion also does not make the same controller simultaneously optimal for an unrelated expected-energy criterion.

For a golf model, identify the disturbance channel: uncertain joint torque, ground motion, shaft loading and measurement noise enter different equations. The scale of w defines the meaning of γ . A numerical attenuation level with no disturbance units or output normalization cannot support a physical robustness comparison.

7.9 Control and Estimation Duality

7.9.1 The Kalman–Bucy Model

Use an explicit stochastic model,

$$dx = (Ax + Bu) dt + G_w dW_t, \quad dy = Cx dt + R_v^{1/2} dV_t, \quad (7.32)$$

where the Wiener processes are independent, $R_v \succ 0$, and $Q_w = G_w G_w^T$. With a Gaussian initial state independent of the noises, the linear Gaussian filter has

$$\begin{aligned} d\hat{x} &= (A\hat{x} + Bu) dt + PC^T R_v^{-1} (dy - C\hat{x} dt), \\ \dot{P} &= AP + PA^T + Q_w - PC^T R_v^{-1} CP. \end{aligned} \quad (7.33)$$

Here P is an estimation-error covariance and the noise matrices are continuous-time intensities. Writing a white-noise sample as an ordinary differentiable signal obscures those units and the stochastic interpretation. A discrete sensor covariance per sample is not automatically the same matrix as a continuous-time intensity.

The algebraic filter equation is the control Riccati equation with the dual pair (A^T, C^T) and corresponding weights. The time-dependent comparison additionally requires reversing time and the coefficient histories, because the control equation runs backward from a terminal condition while covariance runs forward from an initial condition. A transpose alone does not remove that boundary-value distinction. Stability and bounded covariance require appropriate detectability, stabilizability or uniform time-dependent hypotheses, not merely the existence of a written Riccati differential equation.

7.9.2 Covariance and the Differential Metric

Covariance describes uncertainty; large covariance means a direction is uncertain. If $P \succ 0$, the precision $M = P^{-1}$ provides the inverse weighting of an estimation-error norm. For the deterministic homogeneous error dynamics $A_o = A - PC^T R_v^{-1} C$, differentiate the inverse to obtain

$$\dot{M} = -M\dot{P}M, \quad \dot{M} + A_o^T M + MA_o = -MQ_w M - C^T R_v^{-1} C. \quad (7.34)$$

This identity gives a precise connection between filtering and a differential stability certificate. Uniform positivity, boundedness and an appropriate strictness or observability argument are still needed for a uniform convergence rate. It does not say that a stochastic estimation error converges to zero in the continuing presence of process and measurement noise. Instead one studies its distribution, covariance, moments or the forgetting of different initial estimates under a shared observation record.

7.9.3 Nonlinear Observers Need Their Full Jacobian

For a smooth deterministic observer

$$\dot{\hat{x}} = F(\hat{x}, u) + L(\hat{x}, t)(y - h(\hat{x})), \quad (7.35)$$

the Jacobian with the measured y and commanded u held fixed acts on a variation ξ as

$$J_o \xi = D_x F \xi - L D_x h \xi + D_x L[\xi](y - h(\hat{x})). \quad (7.36)$$

If $F = f + Gu$, then $D_x F = Df + DG[\cdot]u$. Both the input-dependent derivative and the innovation-weighted gain derivative matter. In the scalar example $F(x, u) = x^2 + (1 + x)u$, $h(x) = x$ and $L(x) = x^2$, at $(\hat{x}, u, y) = (0.3, 0.7, 1.2)$ the complete Jacobian is 1.75. Omitting either derivative gives a different variational model.

A contraction calculation uses this complete J_o and the metric derivative along the observer field. Defining the symmetric part as $(J + J^T)/2$ requires consistent factors of two in every rate statement. A transposed nonlinear control law is not automatically an observer, and a local extended Kalman filter covariance is not a global contraction proof. Extended Kalman filters can have conditional local convergence guarantees, but those require assumptions about observability, nonlinear remainder bounds, covariance behavior and initialization. Differential dynamic programming also contains second-order dynamics terms beyond a simple linearized Riccati step; it is not exactly the nonlinear transpose of an extended Kalman filter.

7.9.4 Observability Requires a Sensor Model

For a linearized time-varying measurement $\delta y = C(t)\delta x$ with declared positive noise weighting $R_y(t)$, one information-like finite-horizon Gramian is

$$W_o = \int_{t_0}^T \Phi(t, t_0)^T C(t)^T R_y(t)^{-1} C(t) \Phi(t, t_0) dt. \quad (7.37)$$

Its interpretation requires a consistent continuous measurement model and state scales; a discrete measurement sequence uses a corresponding sum with its sample covariance. A weak direction means the modeled observations poorly distinguish that initial perturbation under the specified experiment. It does not establish that a body segment is intrinsically unobservable in every task.

Multiple muscle attachments are not, by themselves, multiple independent measurements. Claims that a shoulder is well observed while a wrist is poorly observed require a sensor map, retained states, noise assumptions and an experiment. Motion capture, inertial sensors, force plates and shaft measurements constrain different combinations of configuration, velocity and loading. Correlated sensor errors and contact modes can alter the information substantially. State estimation is therefore part of the mechanical argument, not a generic assurance that all required joint states are available.

7.10 Separation, Coupling and the Swing

7.10.1 What Linear Separation Proves

For the deterministic linear plant, use $u = -K\hat{x}$ and $\dot{\hat{x}} = A\hat{x} + Bu + L(y - C\hat{x})$ with $y = Cx$. Writing $e = x - \hat{x}$ gives

$$\frac{d}{dt} \begin{bmatrix} x \\ e \end{bmatrix} = \begin{bmatrix} A - BK & BK \\ 0 & A - LC \end{bmatrix} \begin{bmatrix} x \\ e \end{bmatrix}. \quad (7.38)$$

The nominal eigenvalues are the union of the controller and observer eigenvalues. If both blocks are Hurwitz, the augmented linear system is asymptotically stable. With the linear Gaussian model and appropriate quadratic expected cost, the separation principle also supports the LQG optimality construction. This is a stronger set of hypotheses than simply combining any stable controller with any stable estimator.

Even the triangular case does not inherit the exact smaller exponential rate with a uniform prefactor in every norm. The matrix

$$\begin{bmatrix} -1 & 1 \\ 0 & -1 \end{bmatrix} \quad \text{has transition} \quad e^{-t} \begin{bmatrix} 1 & t \\ 0 & 1 \end{bmatrix}. \quad (7.39)$$

The polynomial factor prevents a bound Ce^{-t} for all t with a finite constant C , although any strictly slower exponential rate admits a bound. Equal block decay rates and coupling can therefore matter even without nonlinearities. In a nonlinear system, bounded coupling, compatible metrics and an appropriate cascade or small-gain argument are needed; independent local contraction claims do not automatically prove stability of their interconnection. General two-way coupling can destabilize otherwise stable isolated components.

7.10.2 A Technically Defensible Golf Argument

The central opportunity is to connect mechanics, control authority and information along a feasible swing. Begin with retained states and input ports, including the shaft and actuator dynamics relevant to the question. Resolve ground and hand constraints, and declare the mode before differentiating. Compute the variational dynamics along the proposed trajectory, then map those perturbations to specified impact outputs. This determines what a local control calculation is trying to correct.

Next identify what is measured and when. An input can be mechanically effective but unavailable within the remaining activation or computation delay. A mechanically important state direction can be hard to estimate. An apparently redundant joint motion can preserve the first-order impact output while changing effort, contact forces or future sensitivity. The Riccati value expresses a selected tradeoff among such consequences; it does not establish a unique biological objective from one observed swing.

Test the proposed policy against finite perturbations in the nonlinear constrained model, with actuator limits and estimation errors included. Report the region, horizon, output changes and uncertainty under which the conclusions hold. Distinguish reducing impact dispersion from driving every joint state toward one reference: several state trajectories can be acceptable if they produce the same task outcome within physical constraints. A universal instruction to make every segment maximally stiff or every state error vanish does not follow from LQR.

Finally compare alternative hypotheses using observable predictions. Changing a weighting matrix can alter a predicted correction strategy without changing the mechanics; changing the plant can alter reachable outcomes even with fixed weights. If multiple objectives explain the same kinematics, additional measurements or perturbation experiments are needed. Technical rigor strengthens the argument by revealing which conclusion comes from mechanics, which from the chosen objective, and which still needs evidence about the golfer.

7.11 Reproducible Counterexamples

The following NumPy/SciPy program checks the scalar rates, the uncontrollable but well-conditioned value, the curved optimal path, the observer cascade, the disturbance balance, the full observer derivative and the saturation failure. Its dimensionless examples isolate mathematical claims; they are not fitted physiological models. The worked discrete table above is separately generated from its declared matrices and checked against an independent algebraic Riccati solver.

```

1 # Duality chapter checks
2 import numpy as np
3 from scipy.linalg import expm, solve_continuous_are, solve_discrete_are
4
5
6 def duality_cases() -> dict[str, object]:
7     """Dimensionless counterexamples; these are not fitted golf models."""
8     one = np.ones((1, 1))
9     scalar_s = float(solve_continuous_are(one, one, one, one).item())
10    scalar_closed = 1.0 - scalar_s
11    scalar_value_rate = (1.0 + scalar_s**2) / scalar_s
12    discrete_a = np.array([[1.2]])
13    discrete_s = solve_discrete_are(discrete_a, one, one, one)
14    discrete_gain = float((discrete_s @ discrete_a / (one + discrete_s)).item())
15    discrete_closed = 1.2 - discrete_gain
16    discrete_value_factor = 1.0 - (1.0 + discrete_gain**2) / discrete_s.item()
17    stable_s = solve_continuous_are(-np.eye(2), np.zeros((2, 1)), np.eye(2), one)
18
19    # Fully actuated, but its optimal state path is a parabola rather than a line.
20    path_a = np.diag([-1.0, -2.0])
21    path_s = solve_continuous_are(path_a, np.eye(2), np.diag([3.0, 12.0]), np.eye(2))
22    path_closed = path_a - path_s
23    velocity = path_closed @ np.ones(2)
24    acceleration = path_closed @ velocity
25
26    # Two decay rates of one, coupled in a triangular observer/controller cascade.
27    cascade = expm(np.array([[-1.0, 1.0], [0.0, -1.0]]) * 4.0)
28
29    # xdot=-x+u+w, z=(x,u), gamma=2; solve the scalar game Riccati equation.
30    gamma = 2.0
31    game_s = (-2.0 + np.sqrt(7.0)) / 1.5
32    state, disturbance = 1.0, 3.0
33    control = -game_s * state
34    storage_rate = 2 * game_s * state * (-state + control + disturbance)
35    balance = storage_rate + state**2 + control**2 - gamma**2 * disturbance**2
36
37    # F=x**2+(1+x)u, h=x, L=x**2, with held u and measured y.
38    estimate, command, measurement = 0.3, 0.7, 1.2
39    observer_jacobian = (
40        2 * estimate + command + 2 * estimate * (measurement - estimate) - estimate**2
41    )
42    return {

```

```

43     "scalar_norm_rate": scalar_value_rate / 2,
44     "scalar_value_rate": scalar_value_rate,
45     "scalar_transition": np.exp(scalar_closed * 0.7),
46     "discrete_closed_loop": discrete_closed,
47     "discrete_value_factor": discrete_value_factor,
48     "discrete_norm_factor": np.sqrt(discrete_value_factor),
49     "uncontrolled_riccati": stable_s,
50     "path_velocity": velocity,
51     "path_acceleration": acceleration,
52     "cascade_transition": cascade,
53     "disturbed_storage_rate": storage_rate,
54     "hinf_balance": balance,
55     "observer_jacobian": observer_jacobian,
56     "saturated_state_rate": 2.0 - min(2 * scalar_s, 1.0),
57     "unsaturated_state_rate": 2.0 - 2 * scalar_s,
58 }
59
60
61 if __name__ == "__main__":
62     for name, result in duality_cases().items():
63         print(name, result)

```

7.12 Summary and Further Reading

The Riccati completion identities make stability and optimality meet in a specific quadratic problem. Their exact content includes the input-effort term, the correct continuous or discrete equation, the boundary condition, and the distinction between value and norm rates. Positive definiteness, uniformity and admissibility are assumptions to establish, not consequences of notation.

Geometry provides norms and differential certificates when the relevant matrices are positive and the coordinate construction is valid. It does not turn every optimal swing into a geodesic. Robustness requires the actual uncertainty channel and implementation; estimation requires a measurement model; and finite-horizon swing performance requires an impact objective and remaining control authority. These connections are useful precisely because their limits can be tested.

The continuous, finite-horizon and discrete LQR derivations can be compared with Russ Tedrake's [Linear Quadratic Regulators](#). The full-state and estimator constructions and return-difference analysis appear in Alexandre Megretski's [Using H2 Optimization](#). Use the explicit negative-feedback algebra in this chapter when comparing sign conventions. Megretski's [Algorithms for H-Infinity Optimization](#) states the additional solvability conditions for more general plants; Tedrake's [Robust and Stochastic Control](#) develops the normalized disturbance-attenuation setting. Bishop and Del Moral's [On the Stability of Kalman–Bucy Diffusion Processes](#) treats the stochastic filter and conditional stability questions. These sources support particular mathematical frameworks, not an empirical identification of the golfer's objective.

7.13 Exercises

1. Derive the continuous completion identity without assuming $u = -Kx$ until the final step. Keep the finite terminal value and specify when the infinite-horizon limit is legitimate. Construct a stable unpenalized state for which the Riccati value is singular.
2. Expand the discrete Bellman identity and recover both Q and $K^T R K$ in the value difference. For $A = 1.2$ and $B = Q = R = 1$, calculate the state and value multipliers and convert the state multiplier to a decay rate for a declared sample period.
3. Recompute every row of the generated example. Compare the actual value ratio, the conservative bound and the spectral radius. Explain the initial Euclidean norm growth without claiming instability. Then derive a consistent exact zero-order-hold pendulum model and quantify how its LQR solution differs.

4. Solve a finite-horizon problem with zero terminal cost. Show why a positive-definite metric bound fails at the endpoint, and identify additional terminal ingredients needed for a proposed receding-horizon stability argument.
5. Rescale one coordinate in the uncontrollable stable example by a factor of one thousand. Transform all matrices consistently, compare the two Riccati condition numbers, and show that the physical trajectories and control authority are unchanged.
6. Verify the curved optimal path in the constant-metric example and calculate its velocity and acceleration determinant. Explain why neither an optimal-control cost nor a quadratic value is automatically the length of that state curve.
7. Derive the common scalar gain certificate and the SISO return-difference identity. For the scalar unstable plant, compare the guaranteed gain interval with the exact stability interval. Explain why the Nyquist disk is not a pole-location disk and why neither result covers actuator saturation.
8. Complete the disturbance square for the normalized H-infinity problem. Reproduce the positive storage derivative example and the negative supply balance. State the initial-state, disturbance-unit and internal-stability assumptions needed to interpret an induced gain.
9. Derive the precision-metric identity from the Kalman–Bucy covariance equation. Distinguish decay of a homogeneous error from nonzero steady-state covariance under persistent noise. Explain the time reversal needed for finite-horizon control/filter Riccati duality.
10. Differentiate the state-dependent observer with held measurements and input, including the gain derivative. Verify the scalar Jacobian by finite differences. Identify the additional assumptions required to turn a pointwise calculation into a regional contraction claim.
11. Propose a swing experiment with declared retained states, actuator port, sensors, noise scales, impact outputs and contact assumptions. Identify one perturbation that is costly to correct and one that is difficult to observe. Explain which measurements could distinguish a change in mechanics from a change in the assumed objective, and which conclusions remain model-dependent.

Chapter 8

Forward Dynamics, Counterfactuals, and Drift

In Plain Language 8.1. Physics vs. The Driver

In a golf swing, a robot arm movement, or a spacecraft maneuver, how much of the motion is “physics doing its thing” and how much is the controller actively steering? This chapter develops tools to answer that question rigorously: forward dynamics models that separate passive drift from active control, and thought experiments (counterfactuals) that ask “What if the input were removed?”

8.1 The Causal Structure of Control-Affine Systems

The control-affine structure has been extensively studied in modern control theory [Kha02, Sas99, MLS94]. It provides a natural framework for understanding the interplay between passive and active dynamics.

The control-affine decomposition from Chapter 3,

$$\dot{\mathbf{x}} = \underbrace{f(\mathbf{x})}_{\text{Drift}} + \underbrace{G(\mathbf{x})\mathbf{u}}_{\text{Input}}, \quad (8.1)$$

is not merely a mathematical convenience. It encodes a *causal structure*:

Definition 8.1 (Drift). The **drift vector field** $f(\mathbf{x})$ is the instantaneous state derivative when all active inputs are zero: $\dot{\mathbf{x}}|_{\mathbf{u}=0} = f(\mathbf{x})$. It captures the passive dynamics arising from accumulated state: inertia (velocity-dependent forces), gravity (configuration-dependent), elastic storage (deformation-dependent), and dissipation.

Definition 8.2 (Input). The **input vector field** $G(\mathbf{x})\mathbf{u}$ is the additional contribution from active control. Because this enters linearly in $\mathbf{u}$ at fixed $\mathbf{x}$, its effect is instantaneous and separable from the drift.

The crucial structural property is **drift invariance**:

$$\frac{\partial f(\mathbf{x})}{\partial \mathbf{u}} = 0. \quad (8.2)$$

The drift does not depend on the current input. This is the differential version of the superposition principle: the passive dynamics are a fixed “background” on which the input is superposed.

8.2 The Zero-Torque Counterfactual (ZTCF) Family

Definition 8.3 (Zero Torque Counterfactual). Given a system in state $\mathbf{x}_0$ at time t_0 , the **forward Zero-Torque Counterfactual (ZTCF)** trajectory is $\mathbf{x}^{(0)}(t)$ obtained by setting the declared applied control $\mathbf{u} \equiv 0$ for all $t \geq t_0$:

$$\dot{\mathbf{x}}^{(0)} = f(\mathbf{x}^{(0)}), \quad \mathbf{x}^{(0)}(t_0) = \mathbf{x}_0. \quad (8.3)$$


This is the integral curve of the drift vector field starting from the current state.

The forward ZTCF trajectory asks what the declared effective plant would do if its declared applied-control channel were removed. This does not imply zero muscle activation or removal of retained passive impedance.

For a mechanical system with state $\mathbf{x} = (\mathbf{q}, \dot{\mathbf{q}})$, the ZTCF represents the “passive shadow”—the motion that emerges purely from current velocities, gravity, elastic forces, and inertial coupling, with zero active muscular or motor effort.

Geometric Intuition

The ZTCF is like releasing the steering wheel of a car on a hilly road. The car continues to move—driven by its momentum and the terrain—but without any active guidance. Comparing the actual trajectory to the ZTCF reveals exactly how much the “driver” (controller) contributed at each instant.

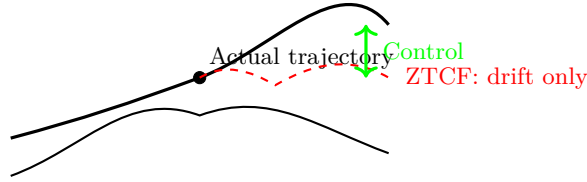

Difference = active control contribution

8.2.1 Mathematical Foundations: Existence, Uniqueness, and Smoothness

The well-posedness of the ZTCF rests on classical existence and uniqueness theorems for ordinary differential equations. We formally state the conditions here.

Theorem 8.4 (Picard–Lindelöf Existence and Uniqueness). *Let $f : \mathbb{R}^n \rightarrow \mathbb{R}^n$ be a vector field that is continuously differentiable (i.e., $f \in C^1$). Then for any initial condition $\mathbf{x}_0 \in \mathbb{R}^n$, there exists a unique, continuously differentiable trajectory $\mathbf{x}^{(0)}(t)$ satisfying the initial value problem*

$$\dot{\mathbf{x}}^{(0)} = f(\mathbf{x}^{(0)}), \quad \mathbf{x}^{(0)}(t_0) = \mathbf{x}_0 \quad (8.4)$$

defined on some open interval $(t_0 - \epsilon, t_0 + \epsilon)$ for some $\epsilon > 0$.

Proof sketch: The Picard–Lindelöf theorem follows from the contraction mapping principle. Define the sequence of successive approximations

$$\mathbf{x}^{(k+1)}(t) = \mathbf{x}_0 + \int_{t_0}^t f(\mathbf{x}^{(k)}(s)) \, ds, \quad (8.5)$$

starting with $\mathbf{x}^{(0)}(t) = \mathbf{x}_0$. If f is Lipschitz continuous (which holds under C^1), this sequence converges uniformly to the unique solution on a sufficiently small interval.

Corollary 8.5 (Smoothness of ZTCF). *If $f \in C^k$ (i.e., f is k times continuously differentiable), then the ZTCF trajectory $\mathbf{x}^{(0)}(t)$ is also C^k in both t and the initial condition $\mathbf{x}_0$.*

This means that if the drift is smooth (which it is for mechanical systems with smooth mass matrices and smooth potential energy functions), then the ZTCF is smooth. This justifies our use of ZTCF trajectories in subsequent numerical and analytical work.

8.2.2 The Flow Map and Properties

For systems where f is defined on all of $\mathbb{R}^n$ or an open domain $\mathcal{X}$, we define the **flow map** (or **solution map**):

$$\phi_t^f(\mathbf{x}_0) := \mathbf{x}^{(0)}(t; \mathbf{x}_0), \quad (8.6)$$

where $\mathbf{x}^{(0)}(t; \mathbf{x}_0)$ is the solution of the IVP (8.4) at time t , starting from $\mathbf{x}_0$ at $t = t_0$ (assuming $t_0 = 0$ for notational simplicity).

The flow map has the following properties:

Proposition 8.6 (Properties of the Flow Map). *Suppose $f \in C^1(\mathbb{R}^n)$ and the solutions of $\dot{\mathbf{x}} = f(\mathbf{x})$ exist for all time. Then:*

1. **Initial condition:** $\phi_0^f(\mathbf{x}_0) = \mathbf{x}_0$.
2. **Composition (group property):** $\phi_{t_1+t_2}^f(\mathbf{x}_0) = \phi_{t_1}^f(\phi_{t_2}^f(\mathbf{x}_0))$.
3. **Inverse:** $\phi_{-t}^f(\phi_t^f(\mathbf{x}_0)) = \mathbf{x}_0$, so ϕ_t^f is a diffeomorphism (invertible and smooth both ways).
4. **Differentiability with respect to initial condition:** $\frac{\partial \phi_t^f(\mathbf{x}_0)}{\partial \mathbf{x}_0}$ is the solution of the **variational equation**

$$\frac{d}{dt} \left(\frac{\partial \phi_t^f}{\partial \mathbf{x}_0} \right) = \frac{\partial f}{\partial \mathbf{x}} \Big|_{\mathbf{x}=\phi_t^f(\mathbf{x}_0)} \cdot \frac{\partial \phi_t^f}{\partial \mathbf{x}_0}, \quad \frac{\partial \phi_0^f}{\partial \mathbf{x}_0} = I. \quad (8.7)$$

The variational equation (8.7) is crucial: it shows how perturbations to the initial state propagate along the ZTCF trajectory. The Jacobian matrix $\frac{\partial \phi_t^f}{\partial \mathbf{x}_0}$ grows or shrinks depending on the eigenvalues of the drift Jacobian $\frac{\partial f}{\partial \mathbf{x}}$ along the trajectory. We will return to this when analyzing contraction.

8.2.3 Mathematical Justification

The ZTCF is well-defined precisely because of drift invariance (8.2) and the input superposition principle (Theorem 3.1). Because $f(\mathbf{x})$ does not depend on $\mathbf{u}$, setting $\mathbf{u} = 0$ does not alter the drift field itself—it only removes the input contribution. The subtraction

$$G(\mathbf{x})\mathbf{u} = \dot{\mathbf{x}} - f(\mathbf{x}) \quad (8.8)$$

exactly recovers the active input contribution at each instant.

8.3 The Zero Velocity Counterfactual (ZVCF)

Definition 8.7 (Zero Velocity Counterfactual). The **Zero Velocity Counterfactual** (ZVCF) evaluates the drift at the current configuration $\mathbf{q}$ and declared internal state but with velocity and declared control set to zero:

$$a_{\text{ZVCF}} := -M(\mathbf{q})^{-1}h(\mathbf{q}, 0, z_0; p), \quad \mathbf{u} = 0. \quad (8.9)$$

This reveals the static baseline: the acceleration due to gravity (and elastic preloads) without any velocity-dependent effects.

The difference between the full drift and the ZVCF isolates velocity-dependent forces:

$$a_{\text{drift}} - a_{\text{ZVCF}} = -M(\mathbf{q})^{-1}\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}}, \quad (8.10)$$

which captures Coriolis, centrifugal, and gyroscopic effects. These are the forces that arise purely from the system's inertial memory—the history encoded in $\dot{\mathbf{q}}$.

8.4 Decomposition of the Drift for Mechanical Systems

For mechanical systems without damping, the drift acceleration has a clean decomposition:

$$a_{\text{drift}} = -M(\mathbf{q})^{-1}[\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + \mathbf{g}(\mathbf{q})]. \quad (8.11)$$

We can write this as a sum of two components:

$$a_{\text{grav}} := -M(\mathbf{q})^{-1} \mathbf{g}(\mathbf{q}), \quad (8.12a)$$

$$a_{\text{cor}} := -M(\mathbf{q})^{-1} \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}}, \quad (8.12b)$$

so that $a_{\text{drift}} = a_{\text{grav}} + a_{\text{cor}}$.

Common Misconception

This form assumes the system is unconstrained. Equation (8.11) and the input field $G(\mathbf{x}) = M(\mathbf{q})^{-1} \mathbf{B}$ both change the moment a kinematic constraint is present — ground contact, a closed chain, a fixed clubhead path.

The reason is worth stating, because it is easy to get wrong in a way that leaves the formulas looking fine. Under a constraint $J_c \ddot{\mathbf{q}} + \dot{J}_c \dot{\mathbf{q}} = 0$, the multiplier $\boldsymbol{\lambda}$ is itself *affine in $\mathbf{u}$* . Carrying $J_c^T \boldsymbol{\lambda}$ into the drift therefore makes the drift depend on the input, and $\partial f / \partial \mathbf{u} = 0$ — the property this entire construction rests on — silently fails. The ZTCF is defined by setting the input to zero and integrating the drift; that is only meaningful if the drift does not contain the input.

Chapter 10 eliminates the multiplier properly and gives the constrained drift and input fields, which satisfy $\partial f / \partial \mathbf{u} = 0$ by construction. **Use those whenever the system has a constraint;** the decomposition above applies only when it does not. The golf models in this book are unconstrained during the downswing, so the form here is the right one for them — but a golfer analysed with ground reaction forces is not.

8.4.1 Superposition of Drift Components

This decomposition is valid because $M(\mathbf{q})^{-1}$ is a linear operator (in the sense that it acts linearly on vectors). Therefore:

$$M(\mathbf{q})^{-1} [\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + \mathbf{g}(\mathbf{q})] = M(\mathbf{q})^{-1} \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + M(\mathbf{q})^{-1} \mathbf{g}(\mathbf{q}), \quad (8.13)$$

and the two contributions add exactly, with no interaction terms. This is a mechanical manifestation of superposition at the drift level.

Geometric Intuition

Gravitational acceleration a_{grav} represents the component of drift that pulls the system toward lower potential energy (e.g., a pendulum hanging downward). It depends only on the configuration $\mathbf{q}$, not on velocities.

Coriolis/centrifugal acceleration a_{cor} represents inertial effects that arise from the system's motion. For example, in a rotating coordinate frame, a moving object experiences fictitious forces. Here, these emerge from the kinetic energy structure encoded in $\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})$.

8.4.2 Magnitude Scaling

Because a_{grav} is independent of velocity while $a_{\text{cor}} \propto \dot{\mathbf{q}}$, we have:

$$\|a_{\text{grav}}\| \approx \text{const} \sim g \text{ (gravitational acceleration scale)}, \quad (8.14)$$

$$\|a_{\text{cor}}\| \sim \dot{\mathbf{q}}^2 / L \text{ (for a system with length scale } L). \quad (8.15)$$

At low speeds, gravity dominates the drift. At high speeds, Coriolis dominates. This explains why a fast-swinging pendulum experiences primarily centrifugal effects, while a slowly tilting pendulum experiences primarily gravity.

8.4.3 Worked Decomposition Table: Double Pendulum Example

We will compute these components explicitly for the double pendulum in Section 8.12. For now, we show a schematic table of how the decomposition looks at various states:

q_1	q_2	$\dot{q}_1$	$\dot{q}_2$	$a_{\text{grav},1}$	$a_{\text{cor},1}$	$a_{\text{drift},1}$
0	0	0	0	(grav)	0	(grav)
0	0	2	0	(grav)	(small)	(grav+cor)
$\pi/4$	$\pi/6$	2	-1	(smaller)	(significant)	(sum)

Table 8.1: Schematic table showing the decomposition of drift acceleration into gravitational and Coriolis components. The exact values depend on the system parameters (masses, lengths) computed in Section 8.12. The key insight is that a_{cor} grows with velocity, while a_{grav} remains constant.

8.5 The Drift-Control Ratio

Definition 8.8 (Drift-Control Ratio). At state $\mathbf{x}$, in a declared acceleration or task-projected space, the **Drift-Control Ratio (DCR)** is

$$\text{DCR}_{W,\mathcal{U}}(\mathbf{x}) := \frac{\|W a_{\text{drift}}(\mathbf{x})\|}{\sup_{u \in \mathcal{U}(\mathbf{x})} \|W B_a(\mathbf{x})u\| + \varepsilon}. \quad (8.16)$$

The drift-control ratio quantifies the *relative dominance* of passive versus active dynamics:

- $\rho \ll 1$: The system is “control-dominated.” The controller can dictate the motion. Linearization and feedback design are straightforward.
- $\rho \approx 1$: Drift and control are comparable. The controller must work with the passive dynamics, not against them.
- $\rho \gg 1$: The system is “drift-dominated.” Passive dynamics overwhelm available control authority. The controller can steer but cannot fundamentally alter the motion. This is the regime of high-speed underactuated systems.

Common Misconception

In drift-dominated regimes ($\rho \gg 1$), the mathematical fact that inputs enter linearly can be misleading. The *mechanism* is linear, but the *magnitude* of influence is tiny relative to the drift. Knowing that superposition holds exactly does not mean the controller has significant authority—it means we can precisely *quantify* how little authority remains.

8.5.1 Velocity Scaling

For mechanical systems, the drift scales quadratically with velocity (due to $\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}}$ terms), while maximum torque is roughly constant. Therefore:

$$\rho \sim \frac{\dot{\mathbf{q}}^2}{\text{const}} \rightarrow \infty \quad \text{as} \quad \|\dot{\mathbf{q}}\| \rightarrow \infty. \quad (8.17)$$

At high speeds, every mechanical system becomes drift-dominated. This is why elite athletes “ride the physics” in the fast phases of movement: their skill lies in *setting up* the state so that the passive drift naturally produces the desired outcome.

8.6 Forward Dynamics as a Thought Experiment Engine

Forward dynamics simulation—integrating (8.1) given $\mathbf{x}_0$ and $\mathbf{u}(t)$ —becomes a powerful analytical tool when combined with counterfactuals:

8.6.1 Attribution Analysis

Given an observed trajectory $\mathbf{x}(t)$ with known input $\mathbf{u}(t)$:

1. Compute the ZTCF from each time instant: “What would happen without input?”
2. Compute the input contribution: $\Delta\dot{\mathbf{x}} = G(\mathbf{x})\mathbf{u}$ at each instant.
3. Decompose the drift into gravitational, Coriolis, and elastic components.
4. Track the drift–control ratio $\rho(t)$ along the trajectory.

8.6.2 Sensitivity Counterfactuals

- “**What if actuator j failed?**”: Set $u_j = 0$ and re-simulate. Because input enters linearly, the effect of removing one channel is exactly $-g_j(\mathbf{x})u_j$ —no need to re-solve the full dynamics.
- “**What if gravity changed?**”: Modify $\mathbf{g}(\mathbf{q})$ in the drift and re-simulate. This is a drift modification, not an input modification.
- “**What if the mass distribution changed?**”: Modify $M(\mathbf{q})$ and recompute both drift and input matrices. This changes the superposition structure itself.

8.7 Attribution Methodology: A Formal Procedure

To systematically attribute motion to drift versus control, we propose a five-step procedure that can be implemented as an algorithm or protocol.

Input: Observed state trajectory $\mathbf{x}(t)$ for $t \in [0, T]$, input signal $\mathbf{u}(t)$, system matrices $\mathbf{f}(\mathbf{x})$ and $G(\mathbf{x})$, maximum input magnitude $\|\mathbf{u}_{\max}\|$.

Output: Drift–control ratio history $\rho(t)$, input contribution $G(\mathbf{x})\mathbf{u}(t)$, drift contribution $\mathbf{f}(\mathbf{x}(t))$, ZTCF trajectories at key time points.

for each time step t_i in the trajectory **do**:

1. **Record** state $\mathbf{x}(t_i)$ and input $\mathbf{u}(t_i)$.
2. **Evaluate** drift $\mathbf{f}(\mathbf{x}(t_i))$ and input contribution $G(\mathbf{x}(t_i))\mathbf{u}(t_i)$.
3. **Compute ZTCF**: integrate $\dot{\mathbf{x}}^{(0)} = \mathbf{f}(\mathbf{x}^{(0)})$ from $\mathbf{x}(t_i)$ for a short horizon (e.g., 0.2 sec).
4. **Compute drift–control ratio**:

$$\rho(t_i) = \frac{\|\mathbf{f}(\mathbf{x}(t_i))\|}{\|G(\mathbf{x}(t_i))\mathbf{u}_{\max}\|}.$$

5. **Classify phase**: If $\rho(t_i) < 0.5$, mark as *control-dominated*; if $0.5 \leq \rho(t_i) \leq 2$, mark as *transition*; if $\rho(t_i) > 2$, mark as *drift-dominated*.

end for

Algorithm 8.1: Drift–Control Attribution Protocol

This protocol produces a complete picture of when the controller is actively steering versus when it is passively managing drift. In practice, the protocol is implemented as a post-hoc analysis tool: you have a recorded trajectory and input, and you run the protocol offline to understand the causal roles of drift and control.

8.8 Sensitivity Counterfactuals: Detailed Mathematics

8.8.1 Single Actuator Failure

Suppose actuator j fails, so u_j drops from its nominal value to zero. The change in state derivative is:

$$\Delta \dot{\mathbf{x}} := \dot{\mathbf{x}}|_{u_j=0} - \dot{\mathbf{x}}|_{\text{nominal}} = -g_j(\mathbf{x})u_j, \quad (8.18)$$

where $g_j(\mathbf{x})$ is the j -th column of $G(\mathbf{x})$. This is exact because of the linearity of $G(\mathbf{x})\mathbf{u}$ in $\mathbf{u}$. No re-solving of the dynamics is needed; the effect is instantaneous and quantifiable.

8.8.2 Parameter Perturbation

When a system parameter p (e.g., a mass, length, or damping coefficient) changes, the effect propagates via the sensitivity equation. From Chapter 2, we have:

$$\frac{\partial \dot{\mathbf{x}}}{\partial p} = \frac{\partial f}{\partial p} + \frac{\partial G}{\partial p}\mathbf{u}. \quad (8.19)$$

This equation shows that the sensitivity is a linear combination of the drift sensitivity and the input matrix sensitivity. Over time, these sensitivities compound, so a small parameter error leads to a growing state error. The ZTCF at perturbed parameters can be computed by integrating the modified drift, providing a sensitivity counterfactual.

8.8.3 Gravity Modification

Gravity affects *only* the drift, not the input matrix $G(\mathbf{x})$. If we change the gravitational acceleration from g to g' , then:

$$a'_{\text{drift}} = -M(\mathbf{q})^{-1}[\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + g'(\mathbf{q})], \quad G(\mathbf{x})' = G(\mathbf{x}) \quad (\text{unchanged}). \quad (8.20)$$

The input contribution $G(\mathbf{x})\mathbf{u}$ is unaffected, so the change in behavior comes entirely from the ZTCF:

$$\text{Motion under gravity } g' = \text{Motion under } g + \text{Effect of } (g' - g) \text{ via ZTCF}. \quad (8.21)$$

This decomposition is notably clean because gravity is a pure drift effect.

8.8.4 Mass Redistribution

If the mass distribution changes (e.g., a robot carrying an object), then *both* $M(\mathbf{q})$ and therefore both $f(\mathbf{x})$ and $G(\mathbf{x})$ change. We have:

$$f(\mathbf{x})' = -M'(\mathbf{q})^{-1}[\mathbf{C}'(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + g(\mathbf{q})], \quad G(\mathbf{x})' = \begin{bmatrix} 0_n \\ M'(\mathbf{q})^{-1} \end{bmatrix}. \quad (8.22)$$

Now the superposition structure itself changes: the input matrix G is no longer the same, and the drift cannot be simply subtracted. The effect is multiplicative, not additive. This breaks the simple linear decomposition and shows why mechanical changes (like adding inertia) are more subtle than external force changes (like changing gravity).

8.9 Data-Driven Drift Estimation

In many practical scenarios, the analytical model is unavailable or too complex to derive by hand. We must estimate $f(\mathbf{x})$ and $G(\mathbf{x})$ from data.

8.9.1 The Regression Approach

Suppose we have collected N triples of data: $\{(\mathbf{x}_i, \mathbf{u}_i, \dot{\mathbf{x}}_i)\}_{i=1}^N$, where each $\dot{\mathbf{x}}_i$ is the measured state derivative (e.g., from finite differencing of a recorded trajectory). We want to identify the system $\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$.

One approach is to assume a parametric form for f and G (e.g., polynomial or neural network basis functions), and then solve a regression problem:

$$\min_{f, G} \sum_{i=1}^N \|\dot{\mathbf{x}}_i - f(\mathbf{x}_i) - G(\mathbf{x}_i)\mathbf{u}_i\|^2. \quad (8.23)$$

However, this is fundamentally ill-posed unless we have sufficient variation in the input $\mathbf{u}$.

8.9.2 Identification Condition: Input Variation

To separate f from G , we need the input to vary *independently* across the data. Specifically, if we write the regression in matrix form:

$$\dot{\mathbf{x}} = \Theta(\mathbf{x}) \cdot \theta, \quad (8.24)$$

where $\Theta(\mathbf{x})$ is a regressor matrix and θ is a parameter vector, then Θ must have full column rank. For the drift–input problem, this requires:

Persistent Excitation Condition: To identify both drift and input, the input signal $\mathbf{u}(t)$ must explore a region of the input space that is “large enough” relative to the state space. Formally, the data should include states with multiple different input values so that the regression can disentangle their effects.

Without this condition, the regression confounds drift and input: large drift values might be “explained” by small imaginary input contributions, or vice versa.

8.9.3 Practical Considerations

1. **Noise:** Measured state derivatives $\dot{\mathbf{x}}_i$ are corrupted by measurement noise. Regularization (e.g., L_2 penalty on parameters) is essential.
2. **Sampling Rate:** Finite differencing of discrete measurements introduces errors. Higher sampling rates (faster sensors) improve the estimate of $\dot{\mathbf{x}}$.
3. **Excitation Requirements:** The input must visit different regions of the state space with different control actions. A slowly varying or monotonic input signal will not provide sufficient variation.
4. **Model Class:** The choice of basis functions (polynomial, spline, neural network) affects identifiability. More flexible models can fit noise; more rigid models may miss nonlinearities.

8.9.4 Connection to System Identification

The problem of estimating f and G from data is a standard problem in **system identification**. The literature provides well-developed techniques such as:

- Subspace identification methods (Ho–Kalman, Balanced Model Reduction)
- Autoregressive models (ARX, ARMAX)
- Nonlinear regression (SINDy, Dynamic Mode Decomposition)
- Neural network-based identification

For control-affine systems specifically, the key is to ensure that the input variation is rich enough to separately identify the drift and the input gain.

8.10 Contraction Analysis of the Drift

A natural question is: does the drift itself have any stability or contraction properties? If the ZTCF is a contracting system, then the controller's job is simplified—the passive dynamics already provide a restoring force.

8.10.1 Drift Jacobian and Eigenvalue Analysis

Definition 8.9 (Drift Jacobian). The drift Jacobian at state $\mathbf{x}$ is

$$J_f(\mathbf{x}) := \frac{\partial f(\mathbf{x})}{\partial \mathbf{x}}, \quad (8.25)$$

an $n \times n$ matrix whose eigenvalues and singular values determine how perturbations propagate along the ZTCF.

Theorem 8.10 (Drift Contraction via Eigenvalues). *Suppose the drift Jacobian $J_f(\mathbf{x})$ is symmetric and negative definite (all eigenvalues have negative real part) along a trajectory $\mathbf{x}(t)$. Then the ZTCF trajectory is locally contracting: small perturbations $\delta \mathbf{x}$ perpendicular to the flow direction decay exponentially.*

Intuition: If the drift Jacobian has negative eigenvalues, then the drift vector field is “pulling inward”—a hallmark of stability. Examples include:

- A damped pendulum where the velocity term $-c\dot{\mathbf{q}}$ (friction) dominates
- A spring-mass system $\ddot{\mathbf{q}} = -k\mathbf{q} - c\dot{\mathbf{q}}$ with positive damping $c > 0$
- A gene regulatory network with negative feedback

8.10.2 Contraction Implies Low Control Authority

When the drift is contracting, the optimal control strategy is often *minimal intervention*:

Proposition 8.11 (Minimal Intervention in Contracting Drift). *If the ZTCF is contracting (drift Jacobian has negative eigenvalues), then the optimal control in the long term approaches zero: $\mathbf{u}^*(t) \rightarrow 0$ as $t \rightarrow \infty$.*

Rationale: If the passive dynamics already move the state toward a stable attractor, actively fighting these dynamics is wasteful. The optimal controller should allow the drift to do the work and apply control only to correct deviations from the desired attractor.

8.10.3 Proof via Optimal Control

Consider the cost function:

$$J = \int_0^\infty \left(\|\mathbf{x}(t)\|^2 + \lambda \|\mathbf{u}(t)\|^2 \right) dt, \quad (8.26)$$

where $\lambda > 0$ is a regularization weight. The Bellman equation for the value function is:

$$0 = \min_{\mathbf{u}} \left[\|\mathbf{x}\|^2 + \lambda \|\mathbf{u}\|^2 + \nabla V \cdot (f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}) \right]. \quad (8.27)$$

The optimal input minimizes over $\mathbf{u}$:

$$\mathbf{u}^* = -\frac{1}{2\lambda} G(\mathbf{x})^\top \nabla V. \quad (8.28)$$

If the drift is contracting, the value function $V(\mathbf{x})$ has a very small gradient (the state is close to equilibrium), so $\mathbf{u}^*$ is small. This is the mechanism of minimal intervention.

8.11 Energy Interpretation of Counterfactuals

8.11.1 Energy of the ZTCF

For a mechanical system with kinetic energy $T(\mathbf{q}, \dot{\mathbf{q}})$ and potential energy $V(\mathbf{q})$, the total mechanical energy is:

$$E(\mathbf{q}, \dot{\mathbf{q}}) = T(\mathbf{q}, \dot{\mathbf{q}}) + V(\mathbf{q}). \quad (8.29)$$

Along the ZTCF trajectory $(\mathbf{q}^{(0)}(t), \dot{\mathbf{q}}^{(0)}(t))$, the energy is:

$$E_{\text{ZTCF}}(t) = T(\mathbf{q}^{(0)}(t), \dot{\mathbf{q}}^{(0)}(t)) + V(\mathbf{q}^{(0)}(t)). \quad (8.30)$$

8.11.2 Conservative Drift: Energy Conservation

If the drift is conservative (arising from a potential and frictionless kinematics), then $E_{\text{ZTCF}}(t)$ is constant:

$$\frac{dE_{\text{ZTCF}}}{dt} = 0. \quad (8.31)$$

This means that the ZTCF does not lose or gain energy; it oscillates at constant energy.

Example 8.12. An unpowered pendulum released from angle θ_0 will swing back and forth, with the energy divided between kinetic and potential as it swings. The ZTCF energy is constant: as it swings down, potential energy converts to kinetic; as it swings up, kinetic converts back to potential.

8.11.3 Dissipative Drift: Energy Decay

If the drift includes damping (e.g., friction or aerodynamic drag), then:

$$\frac{dE_{\text{ZTCF}}}{dt} = -\mathcal{D}(t) < 0, \quad (8.32)$$

where $\mathcal{D}(t) \geq 0$ is the dissipation rate (power lost to friction).

For a linear damping model $\mathbf{f}_{\text{damp}} = -C\dot{\mathbf{q}}$, the dissipation rate is:

$$\mathcal{D}(t) = \dot{\mathbf{q}}^{(0)}(t)^\top C \dot{\mathbf{q}}^{(0)}(t). \quad (8.33)$$

8.11.4 Control Energy Input

Along the actual trajectory (with control), the energy change due to control input is:

$$\left. \frac{dE}{dt} \right|_{\text{control}} = \mathbf{u}(t)^\top \dot{\mathbf{q}}(t) = P_{\text{control}}(t), \quad (8.34)$$

the power supplied by the controller (work per unit time).

The energy added by control over the time interval $[0, T]$ is:

$$\Delta E_{\text{control}} := \int_0^T \mathbf{u}(t)^\top \dot{\mathbf{q}}(t) dt. \quad (8.35)$$

If $\Delta E_{\text{control}} > 0$, the controller added energy (e.g., by accelerating the system). If $\Delta E_{\text{control}} < 0$, the controller removed energy (e.g., by braking).

8.11.5 Energy Comparison Counterfactual

We can directly compare the energy of the actual trajectory to the ZTCF:

$$\Delta E_{\text{actual}} := E(t) - E_{\text{ZTCF}}(t). \quad (8.36)$$

This difference quantifies how much the control has altered the energy budget. For example:

- If $\Delta E_{\text{actual}} > 0$, the controller added energy (likely accelerating).
- If $\Delta E_{\text{actual}} < 0$, the controller removed energy (likely braking).
- If $\Delta E_{\text{actual}} \approx 0$, the controller is purely steering without changing energy (a skillful balance).

Design Implication

Energy-optimal control often seeks to minimize the total energy input $\Delta E_{\text{control}}$ while achieving a goal. The ZTCF provides a baseline for comparison: in the best case, the controller can guide the motion without adding energy, exploiting gravity and momentum. This is the principle behind energy-efficient movement in biomechanics and efficient trajectory planning in robotics.

8.12 Worked Example: Underactuated Double Pendulum

We now provide a complete worked example with explicit numerical computation. Consider a double pendulum with a motor at joint 1 only.

8.12.1 System Parameters and Equations

$$m_1 = 1 \text{ kg}, \quad m_2 = 1 \text{ kg}, \quad l_1 = 1 \text{ m}, \quad l_2 = 1 \text{ m}, \quad g = 9.81 \text{ m/s}^2. \quad (8.37)$$

The state is $\mathbf{x} = (q_1, q_2, \dot{q}_1, \dot{q}_2)$, where q_i is the angle of joint i measured from the upright vertical position (positive downward).

8.12.2 Mass Matrix

The kinetic energy is:

$$T = \frac{1}{2} m_1 l_1^2 \dot{q}_1^2 + \frac{1}{2} m_2 [l_1^2 \dot{q}_1^2 + l_2^2 \dot{q}_2^2 + 2l_1 l_2 \dot{q}_1 \dot{q}_2 \cos(q_1 - q_2)] \quad (8.38)$$

$$= \frac{1}{2} \begin{bmatrix} \dot{q}_1 & \dot{q}_2 \end{bmatrix} \begin{bmatrix} m_1 l_1^2 + m_2 l_1^2 & m_2 l_1 l_2 \cos(q_1 - q_2) \\ m_2 l_1 l_2 \cos(q_1 - q_2) & m_2 l_2^2 \end{bmatrix} \begin{bmatrix} \dot{q}_1 \\ \dot{q}_2 \end{bmatrix}. \quad (8.39)$$

Thus the mass matrix is:

$$M(\mathbf{q}) = \begin{bmatrix} (m_1 + m_2) l_1^2 & m_2 l_1 l_2 \cos(q_1 - q_2) \\ m_2 l_1 l_2 \cos(q_1 - q_2) & m_2 l_2^2 \end{bmatrix}. \quad (8.40)$$

With the given parameters:

$$M(\mathbf{q}) = \begin{bmatrix} 2 & \cos(q_1 - q_2) \\ \cos(q_1 - q_2) & 1 \end{bmatrix}. \quad (8.41)$$

The determinant is:

$$\det M = 2 - \cos^2(q_1 - q_2) = 1 + \sin^2(q_1 - q_2) \geq 1, \quad (8.42)$$

so M is always invertible. The inverse is:

$$M(\mathbf{q})^{-1} = \frac{1}{1 + \sin^2(q_1 - q_2)} \begin{bmatrix} 1 & -\cos(q_1 - q_2) \\ -\cos(q_1 - q_2) & 2 \end{bmatrix}. \quad (8.43)$$

8.12.3 Coriolis Matrix

The Coriolis matrix can be computed from the kinetic energy. For this system:

$$\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) = \begin{bmatrix} 0 & m_2 l_1 l_2 \sin(q_1 - q_2) \dot{q}_2 \\ -m_2 l_1 l_2 \sin(q_1 - q_2) \dot{q}_1 & 0 \end{bmatrix}. \quad (8.44)$$

With parameters:

$$\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) = \begin{bmatrix} 0 & \sin(q_1 - q_2) \dot{q}_2 \\ -\sin(q_1 - q_2) \dot{q}_1 & 0 \end{bmatrix}. \quad (8.45)$$

The off-diagonal signs are opposite, and that asymmetry is the point: it is what makes $\dot{M} - 2\mathbf{C}$ skew-symmetric, and hence what makes the unforced system conserve energy. Writing both entries with the same sign — an easy slip, since the two terms look symmetric — injects energy at a rate comparable to the total energy of the swing over a single second, so it is worth checking numerically rather than by inspection.

8.12.4 Gravitational Vector

The potential energy is:

$$V(\mathbf{q}) = -m_1 g l_1 \cos q_1 - m_2 g (l_1 \cos q_1 + l_2 \cos q_2). \quad (8.46)$$

The gravitational vector is:

$$\mathbf{g}(\mathbf{q}) = -\frac{\partial V}{\partial \mathbf{q}} = \begin{bmatrix} -(m_1 + m_2) g l_1 \sin q_1 \\ -m_2 g l_2 \sin q_2 \end{bmatrix}. \quad (8.47)$$

With parameters:

$$\mathbf{g}(\mathbf{q}) = \begin{bmatrix} -19.62 \sin q_1 \\ -9.81 \sin q_2 \end{bmatrix}. \quad (8.48)$$

8.12.5 Drift Components

The full drift acceleration is:

$$a_{\text{drift}} = -M(\mathbf{q})^{-1} [\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + \mathbf{g}(\mathbf{q})]. \quad (8.49)$$

The gravitational component is:

$$a_{\text{grav}} = -M(\mathbf{q})^{-1} \mathbf{g}(\mathbf{q}). \quad (8.50)$$

The Coriolis component is:

$$a_{\text{cor}} = -M(\mathbf{q})^{-1} \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}}. \quad (8.51)$$

8.12.6 Input Matrix

The input (torque τ_1 at joint 1) produces acceleration via:

$$G(\mathbf{x}) = \begin{bmatrix} 0 \\ 0 \\ [M(\mathbf{q})^{-1}]_1 \\ [M(\mathbf{q})^{-1}]_2 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ \frac{1}{1 + \sin^2(q_1 - q_2)} \\ \frac{-\cos(q_1 - q_2)}{1 + \sin^2(q_1 - q_2)} \end{bmatrix}. \quad (8.52)$$

8.12.7 Numerical Simulation

Initial condition:

$$q_1(0) = \pi/4 \approx 0.785 \text{ rad}, \quad q_2(0) = \pi/6 \approx 0.524 \text{ rad}, \quad (8.53)$$

$$\dot{q}_1(0) = 2 \text{ rad/s}, \quad \dot{q}_2(0) = -1 \text{ rad/s}. \quad (8.54)$$

Applied input:

$$\tau_1(t) = 5 \text{ N} \cdot \text{m} \quad (\text{constant torque}). \quad (8.55)$$

We integrate both:

1. The actual trajectory with $\tau_1 = 5 \text{ N} \cdot \text{m}$,
 2. The ZTCF trajectory with $\tau_1 = 0$.
- over $T = 2$ seconds.

8.12.8 Results: ZTCF vs. Actual Trajectory

Both trajectories are integrated with RK4 at 5,000 steps, using the Coriolis matrix derived from $M(\mathbf{q})$ by its Christoffel symbols rather than a separately maintained expression. Table 8.2 gives the actual trajectory under $\tau_1 = 5 \text{ N} \cdot \text{m}$.

$t \text{ (s)}$	q_1	q_2	$\dot{q}_1$	$\dot{q}_2$	$a_{\text{drift},1}$	$\tau_1[M^{-1}]_{11}$	$\rho(t)$
0.0	0.7854	0.5236	2.0000	-1.0000	-9.742	4.686	2.079
0.5	0.9514	0.3060	-1.4024	0.1886	-10.707	3.672	2.916
1.0	-0.0516	0.2870	-0.8654	-2.2171	4.953	4.503	1.100
1.5	-0.0242	-1.0481	-0.1023	-1.0901	-2.871	2.891	0.993
2.0	-0.0517	-0.5357	-0.3469	3.1249	-6.586	4.110	1.602

Table 8.2: Actual trajectory, integrated. $a_{\text{drift},1}$ and $\tau_1[M^{-1}]_{11}$ are evaluated at each sampled state, and $\rho(t)$ is their ratio — the drift-control ratio at joint 1.

$t \text{ (s)}$	q_1	q_2	$\dot{q}_1$	$\dot{q}_2$	$\ \Delta\mathbf{q}\ $
0.0	0.7854	0.5236	2.0000	-1.0000	0.0000
0.5	0.5263	0.6641	-2.7217	1.2024	0.5558
1.0	-0.2760	-0.2033	0.4717	-4.6111	0.5393
1.5	-0.4161	-1.3513	-0.5783	0.2386	0.4955
2.0	-0.5652	-0.2543	0.6854	2.8132	0.5855

Table 8.3: The ZTCF, integrated from the same initial state with $\tau_1 = 0$. The final column is the configuration-space separation $\|\mathbf{q}_{\text{actual}} - \mathbf{q}_{\text{ZTCF}}\|$ between the two trajectories at that instant.

The two trajectories part quickly and then stay apart: the separation reaches 0.5558 rad within the first half-second and is 0.5855 rad at $t = 2$ s, having oscillated around that value in between rather than growing steadily. That is worth noting, because the intuitive picture — a counterfactual that drifts further and further from the actual motion — is not what a bounded oscillatory system does. Both trajectories are confined to the same energy shell, so their separation is bounded too. What the ZTCF isolates is not a widening gap but the *portion of the motion attributable to the torque*, which here is substantial from the outset and does not accumulate.

Common Misconception

An earlier revision of this table filled the state columns by hand and left $a_{\text{drift},1}$, $\tau_1[M^{-1}]_{11}$ and $\rho(t)$ as the literal placeholder “(eval)”, with a caption saying the values “would be computed via ODE integration”.

The hand-filled states were not a solution of the system stated above: integrating it gives values differing by up to 1.74 rad. They also disagreed internally — q_1 moved 0.202 rad over the first half-second, implying an average rate near 0.40 rad/s, while the $\dot{q}_1$ column read 2.0 to 2.34, about five times larger. And the velocity increments were constant to three decimals (0.341, 0.346, 0.345, 0.339), which is the signature of a straight-line extrapolation rather than an integration of a pendulum that actually swings.

8.12.9 Decomposition: Gravity vs. Coriolis

At $t = 1.0$ s the actual trajectory is at $q_1 = -0.0516$ rad, $q_2 = 0.2870$ rad, $\dot{q}_1 = -0.8654$ rad/s, $\dot{q}_2 = -2.2171$ rad/s. Evaluating the two drift components there:

1. Gravitational acceleration, from (8.50):

$$a_{\text{grav}} = -M^{-1}\mathbf{g} = (3.271, -5.862)^\top \text{ rad/s}^2. \quad (8.56)$$

2. Coriolis acceleration, from (8.51):

$$a_{\text{cor}} = -M^{-1}\mathbf{C}\dot{\mathbf{q}} = (1.682, -1.835)^\top \text{ rad/s}^2. \quad (8.57)$$

3. Total drift:

$$a_{\text{drift}} = a_{\text{grav}} + a_{\text{cor}} = (4.953, -7.698)^\top \text{ rad/s}^2. \quad (8.58)$$

Both components matter here, and neither dominates the other by an order of magnitude — which is the point of decomposing them rather than quoting a single drift figure.

8.12.10 Drift–Control Ratio Evolution

As the system evolves:

- Initially ($t = 0$): ρ depends on the velocity magnitude and gravitational loading.
- Mid-trajectory ($t = 1$): As $\dot{\mathbf{q}}$ increases, Coriolis terms grow, and ρ increases.
- Late trajectory ($t = 2$): High velocities make $\rho \gg 1$ (drift-dominated regime).

This demonstrates the principle: at high speeds, the motor at joint 1 has less and less ability to steer the passively driven joint 2.

8.12.11 ZTCF Trajectory

We also compute the ZTCF by integrating $\dot{\mathbf{x}}^{(0)} = f(\mathbf{x}^{(0)})$ from the same initial condition with $\tau_1 = 0$. The ZTCF represents the passive shadow: how the system would evolve if we released the control at $t = 0$.

Qualitatively:

- The ZTCF will swing down due to gravity, accelerating faster than the controlled case (since gravity pulls harder than the control torque in the initial phase).
- The Coriolis coupling will cause joint 2 to accelerate and decelerate in a complex manner.
- The ZTCF energy is conserved (for this frictionless system), but the energy is distributed differently across the joints.

8.13 Connection to Contraction and Optimal Control (Detailed Proofs)

8.13.1 Contraction of Drift via Lyapunov Methods

We now provide a formal proof of the condition under which the drift itself is contracting.

Theorem 8.13 (Drift Contraction via Negative Eigenvalues). *Let $f \in C^1(\mathcal{X})$ be the drift vector field on a domain $\mathcal{X}$. Suppose the drift Jacobian $J_f(\mathbf{x}) := \frac{\partial f}{\partial \mathbf{x}}$ is symmetric and has all eigenvalues in the left half-plane (i.e., $\lambda_i(J_f) < 0$ for all i). Then the ZTCF trajectory is exponentially stable: for any two initial conditions $\mathbf{x}_1, \mathbf{x}_2$ close to a trajectory, the distance between the solutions satisfies*

$$\|\mathbf{x}_1(t) - \mathbf{x}_2(t)\| \leq e^{-\alpha t} \|\mathbf{x}_1(0) - \mathbf{x}_2(0)\| \quad (8.59)$$

for some $\alpha > 0$.

Proof: Consider the Lyapunov function $V(\delta\mathbf{x}) = \frac{1}{2}\|\delta\mathbf{x}\|^2$, where $\delta\mathbf{x} = \mathbf{x}_1 - \mathbf{x}_2$ is the perturbation. Along the ZTCF, the time derivative is:

$$\dot{V} = \delta\mathbf{x}^\top \frac{\partial f}{\partial \mathbf{x}} \bigg|_{\mathbf{x}_2(t)} \delta\mathbf{x} + O(\|\delta\mathbf{x}\|^2). \quad (8.60)$$

If J_f is symmetric with all eigenvalues negative, then:

$$\dot{V} \leq -\alpha \|\delta\mathbf{x}\|^2 = -2\alpha V, \quad (8.61)$$

where $\alpha = -\max_i \lambda_i(J_f) > 0$. Solving the differential inequality yields:

$$V(t) \leq e^{-2\alpha t} V(0), \quad (8.62)$$

which implies equation (8.59). $\square$

8.13.2 Minimal Intervention in Drift-Dominated Regimes

We now prove that when drift dominates, the optimal control approaches zero.

Theorem 8.14 (Minimal Intervention Control Law). *Consider the cost functional*

$$J = \int_0^\infty \left[\|\mathbf{x}(t) - \mathbf{x}^*\|_Q^2 + \|\mathbf{u}(t)\|_R^2 \right] dt, \quad (8.63)$$

where $\mathbf{x}^*$ is a desired attractor, Q and R are positive definite weights, and $\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$.

If $\|f(\mathbf{x})\| / \|G(\mathbf{x})\mathbf{u}_{\max}\|$ is very large (drift-dominated regime), then the optimal control is approximately

$$\mathbf{u}^* \approx -K(\mathbf{x})[\mathbf{x} - \mathbf{x}^*], \quad (8.64)$$

where the gain matrix $K(\mathbf{x})$ is small: $\|K(\mathbf{x})\| \rightarrow 0$ as the drift-control ratio $\rightarrow \infty$.

Sketch of proof: The Hamilton–Jacobi–Bellman equation is:

$$0 = \min_{\mathbf{u}} \left[\|\mathbf{x} - \mathbf{x}^*\|_Q^2 + \|\mathbf{u}\|_R^2 + \nabla V \cdot (f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}) \right]. \quad (8.65)$$

The minimizer over $\mathbf{u}$ is:

$$\mathbf{u}^* = -\frac{1}{2} R^{-1} G(\mathbf{x})^\top \nabla V. \quad (8.66)$$

In the drift-dominated regime, the term $\nabla V \cdot f(\mathbf{x})$ dominates, and ∇V is small (the state is already close to the attractor). Therefore $\mathbf{u}^*$ is small, and the control law reduces to a small correction term. The full solution requires solving the HJB equation numerically, but the insight is clear: when drift dominates, the optimal control is minimal.

8.13.3 Stability Without Control

Proposition 8.15 (ZTCF Stability Implies Easy Stabilization). *If the ZTCF is exponentially stable (all drift Jacobian eigenvalues in the left half-plane), then any feedback law $\mathbf{u} = K[\mathbf{x} - \mathbf{x}^*]$ with K sufficiently small will stabilize the closed-loop system.*

Rationale: If the drift already moves toward $\mathbf{x}^*$, then a small feedback perturbation will not destabilize the system; the drift does the work, and the feedback just fine-tunes the convergence.

8.14 Summary Table: Key Concepts and Relationships

8.15 Example: Counterfactual Analysis of a Multisegment Swing

The golf swing provides a compelling example of the counterfactual framework because it exhibits all three drift-control regimes within a single motion lasting roughly one second. We sketch how the ZTCF, ZVCF, and drift-control ratio apply to a simplified kinematic chain (e.g., shoulder, elbow, wrist), noting that concrete numerical predictions require a calibrated biomechanical model with experimentally validated segment parameters.

Concept	Equation	Interpretation	Regime
Control-affine form	$\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$	Superposition of drift and input	All
ZTCF	$\dot{\mathbf{x}}^{(0)} = f(\mathbf{x}^{(0)})$	Passive shadow (no control)	All
ZVCF	$a_{\text{ZVCF}} = -M^{-1}g(\mathbf{q})$	Static equilibrium acceleration	All
Drift decomposition	$a_{\text{drift}} = a_{\text{grav}} + a_{\text{cor}}$	Gravity + inertial coupling	Mechanical
Drift-control ratio	$\rho = \ f\ / \ Gu_{\text{max}}\ $	Relative dominance	All
Drift Jacobian	$J_f = \partial f / \partial \mathbf{x}$	Local stability of ZTCF	All
Minimal intervention	$\mathbf{u}^* \approx -K[\mathbf{x} - \mathbf{x}^*], K \rightarrow 0$	Optimal control when $\rho \gg 1$	Drift-dominated
ZTCF energy (conservative)	$E_{\text{ZTCF}} = \text{const}$	Energy conservation	No damping
ZTCF energy (dissipative)	$\dot{E}_{\text{ZTCF}} = -\mathcal{D} < 0$	Energy decay due to friction	With damping
Control power input	$P = \mathbf{u}^T \dot{\mathbf{q}}$	Energy added by actuators	All

Table 8.4: A reference table of the major concepts introduced in this chapter, their defining equations, physical interpretations, and the regimes in which they apply.

8.15.1 Qualitative ZTCF Structure

At each instant during the swing, the ZTCF (Definition 8.3) answers: *what would happen if the golfer released all muscular effort?* The qualitative behavior follows directly from the equations of this chapter:

1. **Early motion (low velocity):** The drift field $f(\mathbf{x})$ is dominated by $a_{\text{grav}} = -M(\mathbf{q})^{-1}g(\mathbf{q})$, which is small when the segments are near their resting configuration. The ZTCF trajectory barely moves, so $\|\mathbf{x}(t) - \mathbf{x}^{(0)}(t)\|$ (the gap between actual and passive motion) is large. All motion is attributable to active control: $\rho \ll 1$.
2. **Transition (direction reversal):** Near the top of the backswing, the system passes through a low-velocity state. The ZTCF from this point is dominated by gravitational acceleration pulling the arms back down—closely resembling the actual trajectory. The gap $\|\mathbf{x} - \mathbf{x}^{(0)}\|$ is small.
3. **Fast phase (high velocity):** As velocities grow, the Coriolis term $a_{\text{cor}} = -M(\mathbf{q})^{-1}\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}}$ dominates the drift because it scales as $\dot{\mathbf{q}}^2$. The ZTCF closely tracks the actual trajectory: removing control barely changes the motion because the available muscle torque $\|G(\mathbf{x})\mathbf{u}_{\text{max}}\|$ is small compared to $\|f(\mathbf{x})\|$. The drift-control ratio satisfies $\rho \gg 1$.

This qualitative pattern—large ZTCF divergence early, small divergence late—follows from the velocity scaling of the drift-control ratio (Eq. 8.17) and holds for any multisegment mechanical system with bounded actuator torques.

8.15.2 Structural Argument: Why Active Torque Is Negligible at Impact

The argument is structural and does not depend on specific parameter values. For a mechanical system with state $\mathbf{x} = (\mathbf{q}, \dot{\mathbf{q}})$ and input torque τ , the control contribution to acceleration is:

$$a_{\text{control}} = M(\mathbf{q})^{-1}B(\mathbf{q})\tau, \quad (8.67)$$

which is bounded by

$$\|a_{\text{control}}\| \leq \|M(\mathbf{q})^{-1}B(\mathbf{q})\| \cdot \|\tau_{\text{max}}\|. \quad (8.68)$$

Meanwhile, the centrifugal acceleration from the drift scales as:

$$\|a_{\text{cor}}\| \sim \|M(\mathbf{q})^{-1}\mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}}\| \sim O(\|\dot{\mathbf{q}}\|^2). \quad (8.69)$$

Since $\|\tau_{\text{max}}\|$ is bounded (physiological or actuator limits) while $\|\dot{\mathbf{q}}\|$ grows during acceleration phases, there necessarily exists a velocity threshold $\dot{q}^*$ beyond which $\|a_{\text{cor}}\| \gg \|a_{\text{control}}\|$, i.e., $\rho(\mathbf{x}) \gg 1$. For fast athletic motions such as throwing, striking, or swinging, this threshold is typically reached well before the moment of peak velocity.

Geometric Intuition

The ZTCF analysis captures a principle recognized in biomechanics: in fast ballistic movements, active muscular contribution is concentrated early, while the late phase is governed by passive inertial dynamics. The counterfactual framework gives this observation a precise mathematical formulation via the drift-control ratio $\rho(\mathbf{x})$ and the ZTCF divergence $\|\mathbf{x}(t) - \mathbf{x}^{(0)}(t)\|$.

Common Misconception

Any numerical predictions of ZTCF divergence, phase timings, or drift-control ratios depend on the specific segment masses, lengths, inertias, and torque capacities of the system under study. These must be obtained from experimental measurements (e.g., motion capture combined with inverse dynamics). The structural argument above holds generically, but the quantitative details are model-dependent.

8.16 Chapter Summary

1. The drift-input decomposition $\dot{\mathbf{x}} = f(\mathbf{x}) + G(\mathbf{x})\mathbf{u}$ is a causal structure: drift is the passive “memory” of the state; input is instantaneous active intervention.
2. The Zero Torque Counterfactual (ZTCF) is the trajectory under zero input, obtained by integrating the drift vector field. It is well-defined and smooth by the Picard–Lindelöf theorem and reveals the passive shadow—what happens without control.
3. The Zero Velocity Counterfactual (ZVCF) isolates static forces from velocity-dependent forces, decomposing the drift into gravitational and Coriolis components.
4. For mechanical systems, the drift decomposes linearly into gravitational and Coriolis contributions because the mass matrix inverse is a linear operator. This decomposition is clean and holds exactly.
5. The drift-control ratio ρ quantifies how much of the motion is determined by physics versus steered by the controller. At high speeds, $\rho \rightarrow \infty$ for all mechanical systems, shifting the system into a drift-dominated regime.
6. Forward dynamics simulation with counterfactuals provides a “thought experiment engine” for attribution analysis (Step 1–5 protocol), sensitivity studies (actuator failures, gravity changes, mass modifications), and controller design.
7. Data-driven drift estimation allows us to identify $f(\mathbf{x})$ and $G(\mathbf{x})$ from data when analytical models are unavailable. The key requirement is persistent excitation: the input must vary independently to separate drift from control.
8. Contraction analysis of the drift reveals whether the passive dynamics are stable. If the drift Jacobian has all negative eigenvalues, the system naturally contracts, and the controller’s job is to apply minimal intervention.
9. The optimal control law in drift-dominated regimes ($\rho \gg 1$) approaches zero: the controller should allow physics to do the work. This is the principle of energy-efficient control and explains skillful movement in biomechanics and athletics.
10. Energy interpretation of counterfactuals: the ZTCF energy is conserved (for frictionless systems) or decays (for damped systems). Comparing ZTCF energy to actual energy reveals how much the controller is adding or removing energy.
11. A complete worked example of the underactuated double pendulum demonstrates the decomposition of drift into gravity and Coriolis, computation of the drift-control ratio, and the ZTCF trajectory. At high speeds, the single actuator at joint 1 can barely steer the passive joint 2.

12. The deepest design principle: the best controllers exploit the drift rather than oppose it, shaping the state so that passive dynamics produce the desired behavior. This is “effort-to-ease transition” in biomechanics and energy-efficient trajectory design in robotics.

This chapter has established that the drift–input decomposition is not merely algebraic bookkeeping but a causal framework for understanding, predicting, and attributing motion. The counterfactual machinery—ZTCF, ZVCF, and their energy interpretations—transforms abstract dynamics into actionable engineering insight: what would happen without control, and therefore what the controller must actually accomplish.

Exercises

1. **ZTCF of a simple system.** For $\ddot{x} + x^3 = u$ (Duffing oscillator), compute the ZTCF starting from $(x_0, \dot{x}_0) = (1, 0)$. Plot the actual trajectory under $u = -2x$ and the ZTCF side by side. Compute $\rho(t)$.
2. **ZVCF computation.** For the same system, compute the ZVCF at $t = 0$. Compare the ZVCF acceleration with the full acceleration. In what regime does gravity dominate?
3. **Drift-control ratio scaling.** For the double pendulum of the worked example, show analytically that $\rho \propto \|\dot{\mathbf{q}}\|^2 / \|\mathbf{u}\|$ when Coriolis forces dominate. What happens when $\|\dot{\mathbf{q}}\| \rightarrow 0$?
4. **Energy decomposition.** For a 2-DOF system with known mass matrix, decompose the total kinetic energy change $\Delta T = \int \dot{\mathbf{q}}^T \boldsymbol{\tau} dt$ into drift and control contributions. Verify the identity $\Delta T = W_{\text{drift}} + W_{\text{control}}$.
5. **Data-driven drift estimation.** Generate simulated data from a known pendulum system under random inputs. Estimate the drift acceleration using the SINDy-type procedure described earlier in this chapter. Compare with the analytical drift.
6. **Contraction of the drift.** Compute the drift Jacobian for the undamped double pendulum at several configurations. Where is the drift contracting? Where is it expanding? Relate to the physical behavior of the system.
7. **Sensitivity counterfactual.** For the pendulum, compute $\frac{\partial \mathbf{x}(t_f)}{\partial \mathbf{u}(t_0)}$ using the sensitivity STM. Which initial torque direction has the largest effect on the terminal state?
8. **Attribution in a 3-link chain.** For a 3-DOF chain (torso–arm–forearm), compute the off-diagonal mass matrix terms M_{ij} and the inertial torques $\tau_{\text{inertial},j}$ during a prescribed deceleration of the torso. Which link receives the most inertial energy?

Chapter 9

Applications: Biomechanics, Robotics, and Beyond

9.1 What a Shared Mathematical Language Can Explain

A golf swing combines an actively driven body, a deforming club, changing contact forces, and a brief collision. A useful explanation must connect those parts without replacing them with a single slogan. Geometry determines how joint motion becomes club motion. Inertia determines how forces produce acceleration. Muscle activation, contact, and equipment determine which forces are available. Perturbation dynamics describe how errors evolve. An impact model translates the arriving club state into a ball outcome. Measurements then test this chain of predictions.

Control-affine equations and tangent maps help connect these questions, but they answer different questions. An instantaneous acceleration decomposition is not an energy budget. A local optimal controller is not automatically a contraction certificate throughout a swing. A contracting state error need not minimize impact error. A flexible shaft can change both the motion of the head relative to the grip and the motion of the grip itself. Those distinctions make the combined explanation stronger: each proposed mechanism has an equation, a stated intervention, and an observable consequence.

The golf example below is a manufactured teaching model. Its numerical values are reproducible, but they are not fitted to a golfer or offered as measured anatomical limits. The robot, spacecraft, and vehicle examples establish additional boundaries: task redundancy, orbital reference dynamics, and nonholonomic motion. They demonstrate transferable methods, rather than a universal theory of skilled human movement.

9.2 A Mechanically Consistent Golf Teaching Model

9.2.1 Coordinates, States, and Rigid-Body Inertia

Consider a planar serial chain with three revolute coordinates $q = (q_1, q_2, q_3)$. The first angle is measured from the horizontal; the second and third are relative joint angles. The absolute link orientations are $\theta_i = \sum_{j=1}^i q_j$. Three configuration degrees of freedom require six first-order states $(q, \dot{q})$. Adding two bending amplitudes $\eta = (\eta_1, \eta_2)$ requires ten states $(q, \eta, \dot{q}, \dot{\eta})$, not a six-state system with a different mass matrix.

Let l_i be link lengths, r_i the distances from each proximal joint to its center of mass, m_i the masses, and I_i the moments of inertia about those centers. With translational and angular Jacobians $J_{v,i}$ and $J_{\omega,i}$,

$$T_r = \frac{1}{2} \sum_{i=1}^3 (m_i \|J_{v,i} \dot{q}\|^2 + I_i (J_{\omega,i} \dot{q})^2), \quad M_r = \sum_{i=1}^3 (m_i J_{v,i}^\top J_{v,i} + I_i J_{\omega,i}^\top J_{\omega,i}). \quad (9.1)$$

This expression includes both translation and rotation. Replacing each link by a point mass changes the model and must be stated. For independent coordinates and positive link inertias, nonzero joint velocity produces positive kinetic energy; a singular end-point position Jacobian does not make this joint-space inertia indefinite.

An explicit formula provides a useful independent check. Define

$$\begin{aligned} a &= I_1 + I_2 + I_3 + m_1 r_1^2 + m_2(l_1^2 + r_2^2) + m_3(l_1^2 + l_2^2 + r_3^2), \\ b &= I_2 + I_3 + m_2 r_2^2 + m_3(l_2^2 + r_3^2), \quad d = I_3 + m_3 r_3^2, \\ h &= l_1(m_2 r_2 + m_3 l_2) \cos q_2, \\ j &= m_3 l_1 r_3 \cos(q_2 + q_3), \quad k = m_3 l_2 r_3 \cos q_3. \end{aligned} \quad (9.2)$$

Then

$$M_r(q) = \begin{bmatrix} a + 2(h + j + k) & b + h + j + 2k & d + j + k \\ b + h + j + 2k & b + 2k & d + k \\ d + j + k & d + k & d \end{bmatrix}. \quad (9.3)$$

The cross terms are not optional corrections: they express the velocity of a distal mass produced by several joints simultaneously. In particular, the coefficient of k in the first two entries includes contributions from both participating velocities. Energy computed from this matrix must agree with energy computed directly from the moving centers of mass.

Use $m = (10, 5, 0.81)$ kg, $l = (0.30, 0.35, 1.15)$ m, $r_i = l_i/2$, and $I = (0.25, 0.08, 0.089)$ kg m². These represent a rigid carrier for the calculation; labeling its coordinates as particular anatomical joints does not validate that identification. At $q = (60, -30, -20)$ degrees, the reproducible result is

$$M_r = \begin{bmatrix} 2.7750 & 1.3863 & 0.5998 \\ 1.3863 & 0.9955 & 0.5100 \\ 0.5998 & 0.5100 & 0.3568 \end{bmatrix} \text{ kg m}^2. \quad (9.4)$$

Its determinant is approximately 0.0682 in the corresponding cubed inertia units; its smallest eigenvalue is approximately 0.0501 kg m². These are checks on this numerical model, not clinical or performance measures.

9.2.2 A Flexible Appendage Must Contribute All Its Kinetic Energy

For an illustrative flexible extension, add a beam of mass $m_s = 0.30$ kg along the third link. This mass is additional to the specified rigid carrier. It must not also be counted inside m_3 when interpreting the combined model. No separate clubhead mass moving with the flexible tip is included here. A physical club would require that mass and its rotational inertia, along with an appropriate shaft model and grip boundary condition.

Let $s \in [0, l_3]$, $t = (\cos \theta_3, \sin \theta_3)$, and $n = (-\sin \theta_3, \cos \theta_3)$. Write a beam material point as

$$p(s, q, \eta) = p_h(q) + s t(q) + n(q) \sum_{a=1}^2 \phi_a(s) \eta_a. \quad (9.5)$$

At the undeformed configuration $\eta = 0$, its velocity has the form $J_q(s)\dot{q} + J_\eta(s)\dot{\eta}$, with $J_\eta = n[\phi_1 \ \phi_2]$. The same material-point integral must generate every block:

$$\begin{aligned} A &= M_r + \int_0^{l_3} \rho_l J_q^\top J_q ds, \\ C &= \int_0^{l_3} \rho_l J_q^\top J_\eta ds, \quad D = \int_0^{l_3} \rho_l J_\eta^\top J_\eta ds, \\ M_f &= \begin{bmatrix} A & C \\ C^\top & D \end{bmatrix}, \quad \rho_l = m_s/l_3. \end{aligned} \quad (9.6)$$

Including C and D while omitting the beam contribution to A does not describe that kinetic energy. It can even produce an indefinite matrix for otherwise positive physical parameters. Such a failure is an assembly error, not evidence of a kinematic singularity.

With dimensionless mode shapes and amplitudes in meters, A has units kg m², C has units kg m, and D has units kg. Positive definiteness is preserved by invertible coordinate changes, but raw eigenvalues and

condition numbers of the full mixed-unit matrix depend on the amplitude scales. Compare them only after declaring those scales.

For the displayed posture, numerical integration gives

$$A = \begin{bmatrix} 3.2056 & 1.7293 & 0.8220 \\ 1.7293 & 1.2780 & 0.6990 \\ 0.8220 & 0.6990 & 0.4891 \end{bmatrix}, \quad C = \begin{bmatrix} 0.1594 & -0.0496 \\ 0.1368 & -0.0371 \\ 0.0981 & -0.0157 \end{bmatrix}, \quad D \simeq \begin{bmatrix} 0.0750 & 0.0000 \\ 0.0000 & 0.0750 \end{bmatrix}. \quad (9.7)$$

The units follow the preceding definitions. Rounding makes D appear exactly diagonal; the underlying quadrature has a small off-diagonal residual.

The shape functions are the first two clamped-free, uniform Euler–Bernoulli beam shapes without a tip mass. They can be derived from $EI\phi'''' = \rho_l\omega^2\phi$ with $\phi(0) = \phi'(0) = \phi''(l_3) = \phi'''(l_3) = 0$. With $z = \beta_a s/l_3$,

$$\begin{aligned} \tilde{\phi}_a(s) &= \cosh z - \cos z - \sigma_a(\sinh z - \sin z), \\ \sigma_a &= \frac{\cosh \beta_a + \cos \beta_a}{\sinh \beta_a + \sin \beta_a}, \quad \cosh \beta_a \cos \beta_a = -1, \\ \phi_a(s) &= \tilde{\phi}_a(s)/\tilde{\phi}_a(l_3). \end{aligned} \quad (9.8)$$

The first two positive roots are approximately 1.875104 and 4.694091. Dividing by the signed tip value makes both $\phi_a(l_3) = 1$; dividing by a common positive constant leaves the second mode with the opposite sign. Either sign convention is physically acceptable if the amplitude and every coupling term transform consistently. It is inconsistent to claim a unit positive tip while using the other convention.

Here the reduced spring matrix is defined separately as $K_\eta = \text{diag}(D_{11} 40^2, D_{22} 120^2)$, approximately $\text{diag}(120, 1080)$ N/m. It is symmetric and positive. These are prescribed reduced-model frequencies in rad/s. They do not correspond to one uniform beam stiffness: that beam would have $\omega_2/\omega_1 = (\beta_2/\beta_1)^2 \simeq 6.267$, rather than 3. A measured nonuniform shaft, head inertia, axial loading, and rotation may require different modes and additional terms. The displayed inertia and springs alone are not a complete flexible forward-dynamics simulator.

9.2.3 Eliminate Accelerations Without Losing the Bias Terms

For a fully specified flexible model, collect gravity, velocity-dependent forces, elastic forces, and damping in h_q and h_η , using a consistent sign convention:

$$A\ddot{q} + C\ddot{\eta} + h_q = Bu, \quad C^\top \ddot{q} + D\ddot{\eta} + h_\eta = 0. \quad (9.9)$$

Here C denotes an inertia cross block. It is distinct from the conventional Coriolis matrix in the product $C\dot{q}_{\text{sys}}$, where $q_{\text{sys}} = (q, \eta)$. A notation change cannot remove that velocity-dependent force from the model.

Define $S_q = A - CD^{-1}C^\top$, $H = S_q^{-1}$, and $\Gamma = -D^{-1}C^\top$. Direct substitution gives

$$\begin{aligned} \ddot{q} &= H(Bu - h_q + CD^{-1}h_\eta), \\ \ddot{\eta} &= -D^{-1}h_\eta + \Gamma\ddot{q}. \end{aligned} \quad (9.10)$$

Thus the acceleration input blocks are HB and ΓHB . The definition of Γ contains no H ; including H there and multiplying by it again counts the mobility twice. The drift also contains the modal bias h_η . Removing it would remove elastic restoring forces and any other unactuated modal forces assigned to that term.

For the ten-state ordering $x = (q, \eta, \dot{q}, \dot{\eta})$, define $a_0 = H(-h_q + CD^{-1}h_\eta)$. The first-order affine model is

$$f(x) = \begin{bmatrix} \dot{q} \\ \dot{\eta} \\ a_0 \\ -D^{-1}h_\eta + \Gamma a_0 \end{bmatrix}, \quad G(x) = \begin{bmatrix} 0 \\ 0 \\ HB \\ \Gamma HB \end{bmatrix}. \quad (9.11)$$

Each row has the appropriate derivative units. In particular, angles cannot be subtracted from gravity torques inside a state derivative.

At the example posture,

$$S_q = \begin{bmatrix} 2.8340 & 1.4142 & 0.6032 \\ 1.4142 & 1.0103 & 0.5123 \\ 0.6032 & 0.5123 & 0.3574 \end{bmatrix}, \quad H = \begin{bmatrix} 1.3860 & -2.7604 & 1.6179 \\ -2.7604 & 9.1216 & -8.4168 \\ 1.6179 & -8.4168 & 12.1323 \end{bmatrix}. \quad (9.12)$$

Positive definiteness follows structurally: for any nonzero v , substitute the velocity pair $(v, -D^{-1}C^T v)$ into the positive kinetic-energy quadratic form to obtain $v^T S_q v > 0$. This proof requires the full, consistently assembled $M_f \succ 0$. Numerical inversion cannot rescue an inconsistent kinetic energy.

9.2.4 A Rigid Counterfactual Is a Different Model

The supplied zero-torque trajectory uses the six-state rigid chain, with

$$M_r(q)\ddot{q} + c_r(q, \dot{q}) + g_r(q) = u, \quad a_{\text{drift}} = -M_r^{-1}(c_r + g_r). \quad (9.13)$$

It uses M_r , not the flexible Schur complement. Mixing the latter with rigid-only bias terms would generally break the energy balance. With conservative gravity and $u = 0$, the rigid model conserves $E = \frac{1}{2}\dot{q}^T M_r \dot{q} + V_r(q)$. Its fixed base can exert reaction forces even when the generalized joint torques are zero.

Initialize $q = (60, -30, -20)$ degrees and $\dot{q} = (12, -18, -25)$ rad/s. The absolute angular velocities are $(12, -6, -31)$ rad/s; interpreting the three relative rates as independent measured segment speeds would be incorrect. At this state,

$$\begin{aligned} g_r &= (30.25, 14.34, 4.50)^T \text{ N m}, \\ c_r &= (120.25, 11.14, -17.42)^T \text{ N m}, \\ a_{\text{drift}} &= (-118.58, 70.47, 134.83)^T \text{ rad/s}^2. \end{aligned} \quad (9.14)$$

The velocity-force contribution exceeds gravity in the first component at this state. That observation neither establishes dominance in every coordinate nor proves a universal transition during human downswing.

A fourth-order Runge–Kutta integration over 0.10 s uses 400 steps of 0.00025 s. Selected outputs are shown below. “Rigid tip” is the endpoint of this chain, not a separately modeled flexible clubhead.

t (s)	q_3 (rad)	$\dot{q}_3$ (rad/s)	Rigid-Tip Speed (m/s)	$\ a_{\text{drift}}\ _2$ (rad/s ²)
0.000	-0.3491	-25.00	35.37	192.9
0.050	-1.2301	-8.29	33.26	473.8
0.100	-0.9462	24.21	21.66	900.9

The tip speed decreases from 35.37 to 21.66 m/s in this particular calculation while the acceleration norm increases. Those two facts can coexist because acceleration changes direction as well as speed, and because energy redistributes between kinetic and potential terms. This table supplies no controlled comparison and no evidence that a golfer should relax their muscles. Numerical credibility requires step refinement and an energy check; physiological credibility would additionally require validated masses, contacts, passive tissues, muscle forces, and initial conditions.

9.3 From Drift Decomposition to a Testable Golf Argument

9.3.1 Declare the Intervention and the Quantity Being Compared

At a fixed state of a torque-driven rigid model, acceleration separates exactly as $\ddot{q} = a_0(q, \dot{q}) + M_r^{-1}u$. This is additivity in the input at one state. It does not imply that the trajectories produced by two different input histories add, because their evolving states change both terms.

A dimensionless drift-to-control ratio can be defined for a chosen acceleration output:

$$\rho_a = \frac{\|W_a a_0\|_2}{\|W_a M_r^{-1}u\|_2}. \quad (9.15)$$

Here W_a specifies component scales or a declared projection and normalization. If the denominator is zero and the numerator is nonzero, the ratio is infinite; if both vanish, it is undefined. A numerical epsilon changes the definition and must be reported. The unforced trajectory above therefore cannot be assigned a finite drift-to-control ratio from its acceleration norm alone.

The full first-order drift $f = (\dot{q}, a_0)$ combines rates and accelerations. Its Euclidean norm is not $\|a_0\|$, and its comparison with $(0, M_r^{-1}u)$ depends on arbitrary units unless a state metric is specified. A metric-based ratio of full vector fields is a different quantity. Even acceleration itself changes nontrivially under nonlinear coordinates: for $z = \psi(q)$,

$$\ddot{z} = D\psi(q)\ddot{q} + D^2\psi(q)[\dot{q}, \dot{q}]. \quad (9.16)$$

The second term belongs to the transformed zero-input acceleration. Consequently, a large coordinate ratio is not an invariant amount of physiological effort or mechanical energy.

Velocity-dependent forces are often quadratic in velocity at fixed posture. Under $\dot{q} \mapsto s\dot{q}$, the rigid c_r scales as s^2 , but it can vanish or cancel gravity in particular components. Meanwhile the applied torque and posture can change with speed. No theorem therefore makes this ratio increase through every swing or makes a particular numerical threshold a universal phase boundary.

A finite counterfactual should instead specify the same initial state, model parameters, contact rules, and future input intervention, then compare a stated output. “Set generalized active torques to zero” is one mathematical intervention. Removing neural feedback, reducing activation, removing all muscle force, and removing contact forces are different interventions. Already developed muscle force and an ongoing motor command do not disappear merely because a new sensory correction cannot arrive before impact. A meaningful claim about late control must include the actuator and delay model.

9.3.2 Acceleration Sequences Are Not Energy-Transfer Measurements

For the rigid chain, actuator power is $u^T \dot{q}$ and the total energy balance is $\dot{E} = u^T \dot{q}$ under the conservative assumptions above. For a single segment, power also enters through joint forces acting at moving points and moments acting with that segment’s absolute angular velocity. At an ideal joint with a shared point velocity, equal and opposite joint-force powers cancel in the combined energy balance while transferring energy between the individual segments. If the application-point velocities differ, as in a sliding contact, their sum need not vanish. Joint moments have distinct proximal and distal powers whose sum corresponds to the relative-coordinate actuator power.

A proximal angular-speed decrease can accompany distal acceleration, but it does not, by itself, identify where the distal kinetic energy came from. Translational energy, potential energy, active work, and energy exchange with other segments can all matter. To establish transfer, define the bodies, reference points, sign conventions, and interval; calculate the force and moment powers; integrate them; and check each segment’s energy balance. The temporal order of speed peaks is useful descriptive information, not a substitute for that accounting.

This distinction also resolves an apparent paradox in the teaching trajectory. A large acceleration norm can coexist with decreasing endpoint speed, while mechanical energy stays constant. A velocity component, an endpoint speed, a segment kinetic energy, and the total system energy are four different observables. An argument must identify which one it explains.

9.3.3 Shaft Recovery Depends on Phase and on the Moving Grip

For a frozen-coefficient linear bending model, write

$$D\ddot{\eta} + D_d\dot{\eta} + K_\eta\eta = -C^T\ddot{q}. \quad (9.17)$$

With constant symmetric $D, K_\eta \succ 0$ and $D_d \succeq 0$, the modal energy obeys

$$E_\eta = \frac{1}{2}\dot{\eta}^T D \dot{\eta} + \frac{1}{2}\eta^T K_\eta \eta, \quad \dot{E}_\eta = -\dot{\eta}^T C^T \ddot{q} - \dot{\eta}^T D_d \dot{\eta}. \quad (9.18)$$

The sign of the base acceleration alone does not determine the direction of energy exchange; modal velocity and coupling orientation also enter. In a rotating, deforming model, coefficient derivatives and additional

inertial terms must be included before using an energy balance. The frozen equation cannot silently replace the full flexible equations during a large swing.

For one mode driven harmonically at frequency Ω , the displacement response to force has transfer function $(k - m\Omega^2 + ic\Omega)^{-1}$. Stiffness changes amplitude and phase; damping and excitation timing matter as well. The velocity contribution at impact depends on the response at that particular instant. A greater stored elastic energy earlier in the swing does not guarantee a greater final clubhead speed or a preferred face orientation.

MacKenzie and Boucher’s 2016 experiment tested two shafts with similar inertial properties in 33 male golfers, using 14 drives per shaft. The more flexible shaft produced a larger deflection-related speed contribution, accompanied by lower grip angular velocity at impact; the group difference in total clubhead speed was not statistically significant ($p = 0.14$). Shaft bending and grip orientation also contributed differently to delivered club orientation. The authors considered both mechanical reactions and changed motor patterns as possible explanations. This study supports analyzing the coupled golfer–club system. It does not establish equivalence between shafts, identify one neural mechanism, or guarantee an individual fitting response. Individual significance tests from one session also require attention to multiple comparisons and repeatability. See [MacKenzie and Boucher, The Influence of Golf Shaft Stiffness on Grip and Clubhead Kinematics](#).

The important modeling question is what is held fixed. Prescribing identical grip motion for two shafts estimates an equipment response under a kinematic constraint. Prescribing identical applied forces allows the grip motion to change. Allowing the golfer’s controller to adapt defines a third experiment. Differences among those results are scientifically informative; they should not be collapsed into a single claim that a shaft either adds or does not add speed.

9.3.4 Carry Uncertainty Through the Impact Event

Let $\Phi(t, t_0)$ propagate infinitesimal state perturbations along a specified smooth trajectory. At a fixed time T , an output $y = h(x(T), T)$ has initial-state sensitivity $h_x \Phi(T, t_0)$. Ball contact, however, generally occurs at a state-dependent time defined by $g(x, t) = 0$. Put $n = \nabla_x g$, let F^- be the pre-impact vector field, and evaluate quantities at the nominal event. If $d = g_t + n^\top F^- \neq 0$, then

$$\delta t_e = -\frac{n^\top \Phi \delta x_0}{d}, \quad \delta x_e = \left(I - \frac{F^- n^\top}{d} \right) \Phi \delta x_0. \quad (9.19)$$

For an explicitly time-dependent impact output, $\delta y = h_x \delta x_e + h_t \delta t_e$. These are sensitivities of the state and output evaluated at each perturbed trajectory’s own event. Comparing post-impact trajectories at a common later time instead requires the reset derivative and saltation correction. Near grazing contact, d can be small and the linear event sensitivity can become large or cease to apply.

An error direction invisible in today’s club-position Jacobian can affect tomorrow’s impact through Φ . Conversely, reducing every joint error equally can waste effort on directions that have little influence on the chosen outcome. To compare sensitivities, specify scales: if $\delta x = D_x \delta \bar{x}$ and $\delta \bar{y} = D_y^{-1} \delta y$, use the singular values of $D_y^{-1} J D_x$, not an unscaled matrix mixing meters, radians, and rates. A singular value is a local worst-case directional gain under those scales, not the expected error of a population of swings.

Parameter uncertainty enters alongside state uncertainty. For $\delta y = J_x \delta x + J_p \delta p$, propagate both covariance blocks and their cross covariance:

$$\Sigma_y \simeq J_x \Sigma_x J_x^\top + J_p \Sigma_p J_p^\top + J_x \Sigma_{xp} J_p^\top + J_p \Sigma_{xp} J_x^\top. \quad (9.20)$$

Mass properties, shaft stiffness, contact location, face orientation, ball properties, and collision assumptions can alter the final prediction. This first-order expression requires small uncertainties and a differentiable local model; it does not cover unmodeled contact changes or large distribution tails. A high-quality golf model should report which uncertainty dominates the output it seeks to explain.

9.4 Robotics: Reachability, Redundancy, and a Verifiable Controller

9.4.1 Check the Reference Before Designing Its Controller

For a planar three-link robot with $l_i = 0.30$ m, the end position is

$$p(q) = \sum_{i=1}^3 l_i \begin{bmatrix} \cos \theta_i \\ \sin \theta_i \end{bmatrix}, \quad \theta_i = \sum_{j=1}^i q_j. \quad (9.21)$$

A circle centered at $(0.60, 0.60)$ m with radius 0.20 m is not entirely reachable: its farthest point is about 1.049 m from the base, beyond the 0.90 m total link length. No feedback gain makes that reference feasible.

Instead choose the manufactured two-second reference

$$p_d(t) = \begin{bmatrix} 0.45 + 0.05 \cos(\pi t) \\ 0.15 + 0.05 \sin(\pi t) \end{bmatrix} \text{ m}, \quad \psi_d = \pi/4, \quad 0 \leq t \leq 2 \text{ s}. \quad (9.22)$$

At a quarter period, $t = 0.50$ s, the position is $(0.45, 0.20)$ m. Subtract the last link to obtain the wrist target $w = p_d - 0.30(\cos \psi_d, \sin \psi_d)^\top$. Its distance from the base stays between approximately 0.196 and 0.296 m, strictly within the two-link workspace and away from its folded and extended singularities.

A continuous elbow branch is

$$\begin{aligned} q_{2,d} &= \arccos \left(\frac{w_x^2 + w_y^2 - 0.18}{0.18} \right), \\ q_{1,d} &= \text{atan2}(w_y, w_x) - \text{atan2}(0.30 \sin q_{2,d}, 0.30 + 0.30 \cos q_{2,d}), \\ q_{3,d} &= \psi_d - q_{1,d} - q_{2,d}. \end{aligned} \quad (9.23)$$

Angles must be unwrapped consistently when differentiating the reference. Substituting these angles into forward kinematics verifies the pose; differentiating the resulting smooth branch supplies reference velocities and accelerations. Workspace feasibility alone does not establish torque feasibility, joint-limit clearance, or collision avoidance.

9.4.2 A Position Pullback Has a Nullspace

The position Jacobian has columns

$$J_{p,:j} = \sum_{i=j}^3 l_i \begin{bmatrix} -\sin \theta_i \\ \cos \theta_i \end{bmatrix}. \quad (9.24)$$

It is a 2×3 matrix. At a regular configuration it has rank two, so the position-error pullback $Q_q = J_p^\top W_p J_p$, for $W_p \succ 0$, has rank two and a one-dimensional nullspace. It cannot have three positive eigenvalues merely because the robot is away from a position singularity. A determinant of J_p itself is not defined; manipulability can instead use $\det(J_p J_p^\top)$ with declared units and scales.

Adding orientation yields the square pose Jacobian with third row $(1, 1, 1)$. It is nonsingular when the first two links are not collinear. These are different tasks with different nullspaces. In a humanoid swing, the same distinction appears when a cost constrains club position while leaving face orientation or redundant body motion weakly penalized.

Adding ϵI to Q_q makes that particular coordinate quadratic form positive definite for $\epsilon > 0$. It changes the cost in every direction, not only the nullspace. It does not create a physical barrier against singularities, guarantee a feasible trajectory, or prove contraction. A state metric for a torque-driven three-joint robot also needs six-state treatment; a 3×3 posture penalty alone does not measure velocity error.

9.4.3 An Exact Local Example With Its Assumptions Exposed

For an ideal fully actuated robot with known dynamics $M(q)\ddot{q} + h(q, \dot{q}) = u$, computed torque can impose a desired acceleration:

$$u = M(q)(\ddot{q}_d + v) + h(q, \dot{q}), \quad \ddot{e} = v, \quad e = q - q_d. \quad (9.25)$$

Use normalized angle and time coordinates to consider one error channel $z = (e, e')$, where the prime denotes differentiation with respect to dimensionless time $\tau = t/t_s$. The physical virtual acceleration is $(q_s/t_s^2)v$ when $e = (q - q_d)/q_s$. In these normalized variables,

$$z' = A_0 z + B_0 v, \quad A_0 = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix}, \quad B_0 = \begin{bmatrix} 0 \\ 1 \end{bmatrix}. \quad (9.26)$$

For the infinite-horizon objective $\int_0^\infty (z^\top z + v^2) d\tau$, direct substitution into the continuous Riccati equation gives

$$S = \begin{bmatrix} \sqrt{3} & 1 \\ 1 & \sqrt{3} \end{bmatrix}, \quad K = B_0^\top S = [1 \quad \sqrt{3}], \quad v = -Kz. \quad (9.27)$$

This standard double-integrator example is also derived in [MIT's Linear Quadratic Regulators notes](#). The cost is on normalized error and virtual acceleration; it is not a claim about actual motor electrical energy or a human's physiological objective.

Let $A_c = A_0 - B_0 K$ and $W = I + K^\top K$. The Riccati identity is

$$A_c^\top S + S A_c = -W. \quad (9.28)$$

It follows that the metric length of an error difference contracts at any rate $\lambda \leq \frac{1}{2} \lambda_{\min}(W, S)$ in normalized time, where the generalized eigenvalue uses $Wv = \mu Sv$. Here the smallest generalized eigenvalue is $\sqrt{3} - 1/\sqrt{2}$, so $\lambda = (\sqrt{3} - 1/\sqrt{2})/2$. Physical-time rate is λ/t_s . The other common quantity, the real part of a closed-loop eigenvalue, is not interchangeable with this particular metric's instantaneous bound.

For three independent ideal error channels, repeat this block in a six-state metric after fixing the state ordering. The exact error equation makes the certificate valid in the chosen unwrapped coordinate chart as long as computed torque remains realizable and the model is exact. Saturation, contact changes, uncertain inertia, actuator dynamics, and branch changes invalidate that exact cancellation and require a new residual analysis. The certificate should not be advertised as a verified global property of an arbitrary robot or human.

9.4.4 Finite-Horizon and Sampled Certificates Need Their Own Equations

For a time-varying linear error system with the finite-horizon Riccati solution $S(t)$ and $K(t) = R^{-1}B^\top S$, the closed-loop identity is

$$\dot{S} + A_c^\top S + S A_c = -Q - K^\top R K. \quad (9.29)$$

Uniform positive definiteness of S and a uniform generalized lower bound on the right-hand quadratic form are needed for a uniform contraction statement. A zero terminal cost can make S degenerate at the horizon. Plotting a decreasing Riccati trace is neither that test nor a substitute for it.

For sampled error dynamics $z_{k+1} = A_{c,k} z_k$, the corresponding requirement is $A_{c,k}^\top S_{k+1} A_{c,k} \preceq \rho^2 S_k$ with $\rho < 1$. In the fixed-metric case, compute ρ^2 as the largest generalized eigenvalue of $(A_c^\top S A_c, S)$. It is not generally the squared spectral radius of A_c . These distinctions matter whenever a controller designed in continuous time is executed on sampled measurements.

9.5 Spacecraft: Respect the Orbit and the Meaning of the Cost

9.5.1 Relative Motion About a Circular Chief Orbit

Let x be radial displacement, y along-track displacement, and z normal displacement in the rotating frame of a circular chief orbit. For small relative separation, the Clohessy–Wiltshire linearization is

$$\ddot{x} = 3n^2 x + 2n\dot{y} + u_x, \quad \ddot{y} = -2n\dot{x} + u_y, \quad \ddot{z} = -n^2 z + u_z. \quad (9.30)$$

The inputs are accelerations. The circular-orbit and small-separation assumptions are part of the model; a different axis convention changes the displayed signs. See [MIT Astrodynamics, Lecture 26](#) for the relative-motion derivation.

For radius $r_0 = 6.7 \times 10^6$ m and $\mu = 3.98600435507 \times 10^{14}$ m³/s², $n = \sqrt{\mu/r_0^3} \simeq 0.001151$ rad/s and $T = 2\pi/n \simeq 5458$ s, about 90.96 minutes. This is a low Earth orbit, not a geosynchronous orbit. The Earth gravitational parameter is from [JPL's DE440 astrodynamic parameters](#).

For $X = (x, y, z, \dot{x}, \dot{y}, \dot{z})$, write $\dot{X} = AX + Bu$ with

$$A = \begin{bmatrix} 0 & I_3 \\ N & C_o \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ I_3 \end{bmatrix}, \quad N = \text{diag}(3n^2, 0, -n^2), \quad C_o = \begin{bmatrix} 0 & 2n & 0 \\ -2n & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}. \quad (9.31)$$

The blocks act on position and velocity with different units; it is misleading to attach a single dimensional unit to every entry of this unscaled state matrix.

A reproducible reference can be manufactured rather than claimed as flight validation. Over $t_f = 900$ s, set $s = t/t_f$, $p(s) = 10s^3 - 15s^4 + 6s^5$, and $y_d = 1000 - 990p(s)$ m, with $x_d = z_d = 0$. Then $u_{x,d} = -2n\dot{y}_d$, $u_{y,d} = \ddot{y}_d$, and $u_{z,d} = 0$ satisfy the linear equations. The reference starts and ends at rest, with zero endpoint acceleration, and ends at a 10 m along-track standoff. It is not a completed docking maneuver. Thruster limits, approach corridors, collision geometry, navigation error, and nonlinear orbital-model error still require evaluation.

9.5.2 Quadratic Effort Is Not Propellant Consumption

An LQR objective $\int (e^T Q e + \delta u^T R \delta u) dt$ balances weighted tracking error and squared control effort around a feasible reference. Position and velocity weights require scales; Q here is a cost weight, not a process-noise covariance. A terminal penalty is a soft cost, not an exact terminal docking constraint.

For an ideal thruster with constant specific impulse, $\dot{m} = -\|F\|/(I_{sp}g_0)$ describes propellant use. The actual thruster allocation and operating model can require modifications. With $F = mu$, mass changes can enter the dynamics. The time integral of squared acceleration is therefore not a direct fuel measurement. A fuel-optimal or fuel-limited claim requires the appropriate objective, thrust model, mass evolution, and constraints. Neither a quadratic regulator nor an unreported simulation establishes a numerical percentage of fuel savings.

To implement a sampled controller under zero-order-held acceleration, compute

$$\exp\left(\begin{bmatrix} A & B \\ 0 & 0 \end{bmatrix} \Delta t\right) = \begin{bmatrix} A_d & B_d \\ 0 & I_3 \end{bmatrix}. \quad (9.32)$$

Design a discrete regulator for (A_d, B_d) and evaluate $A_d - B_d K_d$. Subtracting a discrete gain from the continuous matrix and interpreting the result as a sampled stability certificate mixes two different systems. A covariance propagation or Monte Carlo study can then test navigation uncertainty, but it must report its noise model and cannot validate unmodeled thruster or contact physics.

9.6 Vehicles: Input Coordinates and Speed Change the Argument

9.6.1 An Exact Affine Bicycle Model

For the kinematic bicycle with rear-axle position (x, y) , heading ψ , speed v , wheelbase L , steering angle δ , and longitudinal acceleration a ,

$$\dot{x} = v \cos \psi, \quad \dot{y} = v \sin \psi, \quad \dot{\psi} = \frac{v}{L} \tan \delta, \quad \dot{v} = a. \quad (9.33)$$

This model is nonlinear in the steering-angle input. With curvature $\kappa = \tan \delta/L$, it is exactly control affine:

$$\dot{X} = \begin{bmatrix} v \cos \psi \\ v \sin \psi \\ 0 \\ 0 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} a + \begin{bmatrix} 0 \\ 0 \\ v \\ 0 \end{bmatrix} \kappa. \quad (9.34)$$

Alternatively, append steering angle to the state and use steering rate as an input. A Taylor expansion in δ around a reference gives a local input approximation, not the exact original affine model. Steering limits transform to curvature limits, and steering-rate constraints do not disappear under this reparameterization.

The no-side-slip condition restricts velocities. It does not by itself reduce the dimension of the configuration space: sequences of admissible motions can produce displacements not available instantaneously. Lie brackets describe this local mechanism, as illustrated in [Modern Robotics, Controllability of Wheeled Mobile Robots](#). A rank calculation alone should not be turned into an unrestricted global parking guarantee; reversibility, admissible controls, obstacles, and the particular controllability theorem's assumptions matter.

9.6.2 A Speed Schedule Requires Its Own Dynamics

For a straight reference and small heading error, with fixed $v > 0$, the lateral error equations are $\dot{e}_y = ve_\psi$ and $\dot{e}_\psi = v\kappa$. The curvature feedback

$$\kappa = -\frac{\omega_n^2}{v^2}e_y - \frac{2\zeta\omega_n}{v}e_\psi \quad (9.35)$$

gives $\ddot{e}_y + 2\zeta\omega_n\dot{e}_y + \omega_n^2e_y = 0$. For positive ω_n and ζ , this linearized constant-speed model is stable. The position and heading gains decrease as speed increases for this fixed target polynomial. There is no general rule that all gains should increase with speed.

If v varies, differentiation introduces $(\dot{v}/v)\dot{e}_y$, and simply inserting the current speed into the same law no longer gives the stated constant-coefficient equation. The gain formula is singular at zero speed. Reverse motion, curved references, steering dynamics, and saturation also need separate treatment. Frozen-speed eigenvalues do not certify stability under arbitrary switching or rapid scheduling.

At fixed steering angle, yaw rate scales as v and the no-slip lateral acceleration as $v^2 \tan \delta / L$. For $L = 3$ m, $\delta = 0.10$ rad, and $v = 25$ m/s, the latter is about 20.9 m/s². That requested acceleration signals that the simple kinematic assumptions need scrutiny; the equation does not establish that the tires can supply it. A dynamic tire model and friction constraints determine feasibility. Comparing unscaled norms that mix position rates, heading rate, and longitudinal acceleration cannot establish control dominance at high speed.

The connection to golf is methodological. A parameter change can alter the dynamics, input map, feasible controls, and error metric simultaneously. A gain schedule or equipment change must be evaluated within that coupled system; conclusions from a fixed-parameter calculation do not automatically survive the change.

9.7 Reproducible Computation and Evidence

9.7.1 Check an Equation Before Interpreting Its Output

The following complete Python example checks the normalized double-integrator result. It requires NumPy and SciPy. The residual verifies the equation solved; the generalized eigenvalue verifies the stated metric inequality. Neither check validates an unmodeled actuator.

```

1 import numpy as np
2 from scipy.linalg import eigvalsh, solve_continuous_are
3
4 A = np.array([[0.0, 1.0], [0.0, 0.0]])
5 B = np.array([[0.0], [1.0]])
6 Q = np.eye(2)
7 R = np.eye(1)
8 S = solve_continuous_are(A, B, Q, R)
9 K = np.linalg.solve(R, B.T @ S)
10 Ac = A - B @ K
11 W = Q + K.T @ R @ K
12 residual = Ac.T @ S + S @ Ac + W
13 assert np.linalg.norm(residual) < 1e-10
14 rate = 0.5 * eigvalsh(W, S)[0]
15 assert np.isclose(rate, (np.sqrt(3.0) - 1.0 / np.sqrt(2.0)) / 2.0)
    
```

For an equilibrium regulator, the physical command includes any nonzero equilibrium input. For a trajectory regulator, it includes a dynamically feasible reference input and the tracking correction. Omitting

that feedforward term changes the error dynamics. Apply limits and actuator dynamics before interpreting simulated performance; clipping an ideal command invalidates an unconstrained certificate unless the resulting residual is bounded in a new analysis.

In MATLAB, `dlqr(A,B,Q,R,N)` solves an infinite-horizon discrete LQR problem; the fifth argument is the state–input cross-weight matrix N , not a horizon length. A finite-horizon problem requires a backward recursion with a declared terminal cost and time-indexed gains. The [MathWorks dlqr documentation](#) specifies the cross term and discrete Riccati equation. Likewise, an outline containing undefined model objects or placeholder matrices is an implementation sketch, not an executable validation.

9.7.2 Separate Verification, Calibration, and Validation

Verification asks whether the equations were implemented and solved correctly. For the golf calculation this includes Cartesian-versus-joint kinetic energy, mass symmetry and definiteness under admissible parameters, correct signed mode normalization, correct Schur elimination, unforced energy conservation, and step refinement. A reproducible table is valuable only after these model identities are satisfied.

Calibration estimates model parameters from data. Validation compares held-out predictions with observations for a declared use. Fitting the same swing used to assess accuracy is not an independent prediction test. A claimed error percentage needs the measured quantity, normalization, sample, uncertainty, and protocol; it cannot be inferred from the apparent plausibility of a simulated trajectory.

For perturbation experiments, align the model and measurement definitions. Separate fixed-time errors from event-time errors, and choose whether the comparison is between two closed-loop trajectories or between a trajectory and its nominal reference. Measurement noise can dominate a ratio with a small initial-error denominator. A worst-case contraction bound need not be attained by typical perturbations, and a confidence interval containing a predicted bound is not a validation criterion by itself. Test the inequality with appropriate uncertainty, check the assumed region and disturbances, and report violations as well as agreement.

For the golf swing, an informative progression is to verify rigid-body energy accounting, add and identify shaft dynamics, verify contact and impact behavior, then assess the coupled model on held-out swings and equipment conditions. Measure grip and head motion together when studying shaft effects. Include force or moment information when testing an energy-transfer explanation. Include event timing and output uncertainty when testing an accuracy explanation. Each additional model component should resolve a stated discrepancy or prediction need rather than merely increase the number of states.

9.8 Exercises That Test the Argument

1. Derive the six independent entries of M_r from Cartesian center-of-mass velocities. Check at random postures and velocities that both kinetic-energy calculations agree. Explain why an endpoint singularity need not make M_r singular.
2. Assemble the beam's three inertia blocks from the same material-point velocity. Repeat with twice the beam mass. Show which rigid-coordinate diagonal term gains $m_s l_3^2/3$, and test the complete kinetic energy rather than only a matrix determinant.
3. Change the sign of the second mode and transform its amplitude and coupling consistently. Show that physical displacement and kinetic energy are unchanged. Explain why assigning two arbitrary frequencies does not identify a uniform beam's EI .
4. Verify the two block acceleration equations by substituting the Schur solution. Include a nonzero modal bias so an omitted elastic term cannot pass the check. Distinguish this test from integrating the rigid six-state counterfactual.
5. Refine the rigid zero-torque integration step and report both endpoint convergence and mechanical-energy error. Explain why the displayed acceleration norm is not a finite drift-to-control ratio or an estimate of muscular effort.

6. Construct a motion with decreasing proximal angular speed but no positive distal energy transfer across the chosen joint. State the external powers and show the segment energy balance. Identify the extra measurements required to interpret a human speed-peak sequence.
7. For two shaft stiffnesses, compare identical prescribed grip motion, identical applied force histories, and an adapting controller. State which causal question each comparison addresses and which output would distinguish the hypotheses.
8. Reconstruct the robot circle using the given inverse kinematics. Compute the nullspace of J_p and compare position and pose pullbacks. Test whether adding ϵI imposes any obstacle or joint-limit constraint.
9. Verify the exact Riccati solution and its generalized metric rate. Add a torque limit to the computed-torque model and identify where the ideal proof ceases to apply rather than extending its rate by assertion.
10. Substitute the quintic spacecraft reference into the relative-motion equations. Compare integrated squared acceleration with a declared propellant model. Report the assumptions needed before calling the final standoff a docking solution.
11. Derive the additional lateral-error term for variable vehicle speed. Test a rapid speed change and a steering limit. Explain why frozen-speed eigenvalues and kinematic lateral acceleration do not establish dynamic feasibility.
12. For a transverse impact event, compare finite-difference sensitivities with the event-time formula and a fixed-time formula. Repeat near grazing. Propagate parameter as well as state uncertainty, using declared input and output scales.

Chapter 10

Parallel Mechanisms, Constrained Dynamics, and Geometric Control

10.1 What the Geometry Explains

Holding a club with both hands closes a mechanical loop. Ground contact closes further loops through the legs and pelvis. These connections restrict relative motion and transmit loads, but they do not uniquely prescribe muscle forces, determine a neural control policy, or supply energy merely by exerting a force. The useful geometric question is how configuration, inertia, constraints, and actuation jointly determine feasible motion and load transmission.

We develop that question in a smooth, fixed contact mode. Let q have n local configuration coordinates, $v = \dot{q}$, and $u \in \mathbb{R}^m$ denote specified applied inputs. There are c independent, stationary, ideal holonomic constraints $\Phi(q) = 0$. Their Jacobian is $J_c = D\Phi \in \mathbb{R}^{c \times n}$, and $M(q) \succ 0$ is the mass matrix. These assumptions permit exact identities. Grip compliance, sliding, lift-off, tissue activation, and ball impact require additional constitutive states or contact modes; they cannot be inferred from the identities alone.

The mechanics below follows the vector/covector and virtual-work treatment of constrained systems [BL04, MLS94]. Its worked examples are mathematical checks, not measurements of a golfer. The final sections explain what measurements would be needed to turn the framework into an empirical account of a swing.

10.2 Configuration, Constraints, and Regularity

10.2.1 Configuration Is Different From State

For N unconstrained spatial rigid bodies, $Q_{\text{free}} = SE(3)^N$ has dimension $6N$; planar bodies contribute three configuration dimensions each. Joint coordinates reduce this description before contact constraints are imposed. Angles have periodic topology: a pair of revolute angles lives on $S^1 \times S^1$, with intervals used only as coordinate charts. The mechanical state is in the tangent bundle TQ , with local coordinates (q, v) and twice the configuration dimension. Activation and flexible coordinates may enlarge it further.

If J_c has rank c on the level set, the regular level-set theorem gives

$$Q_c = \{q : \Phi(q) = 0\}, \quad \dim Q_c = n - c =: d, \quad T_q Q_c = \ker J_c(q). \quad (10.1)$$

The admissible state satisfies both $\Phi(q) = 0$ and $J_c v = 0$. A configuration constraint does not imply $J_c \dot{v} = 0$: differentiating again gives

$$J_c \dot{v} + \dot{J}_c v = 0. \quad (10.2)$$

Thus admissible velocities form a linear tangent space at fixed q , whereas admissible coordinate accelerations form an affine set at fixed (q, v) .

Rank loss invalidates the regular-level-set argument; it does not by itself prove that the physical set is singular or unstabilizable. The equation $x^2 = 0$ has zero derivative at its solution, although its solution set is the smooth zero-dimensional set $\{0\}$. Redundant constraint equations can also lose rank without a change in physical mobility. At a true mechanism singularity, inspect independent coordinates, higher-order compatibility, actuator directions, and contact inequalities before drawing a control conclusion.

10.2.2 A Movable Planar Closed Chain

Take a two-link arm based at the origin and a third link based at (a, b) . Let all three angles be absolute angles from the same horizontal axis. Loop closure is

$$\Phi_1 = \ell_1 \cos \theta_1 + \ell_2 \cos \theta_2 - \ell_3 \cos \theta_3 - a, \quad (10.3)$$

$$\Phi_2 = \ell_1 \sin \theta_1 + \ell_2 \sin \theta_2 - \ell_3 \sin \theta_3 - b. \quad (10.4)$$

The Jacobian has columns $\ell_1(-\sin \theta_1, \cos \theta_1)^\top$, $\ell_2(-\sin \theta_2, \cos \theta_2)^\top$, and $\ell_3(\sin \theta_3, -\cos \theta_3)^\top$. At rank two, three free angles minus two independent constraints leave one local degree of freedom. If instead there were only two grounded links meeting at their tips, two angles minus two regular closure constraints would leave isolated configurations. Equal link lengths alone would not establish a movable chain; coincident bases and compatible geometry would matter too.

For the two-grounded-link Jacobian with columns $\ell_1(-\sin \theta_1, \cos \theta_1)^\top$ and $\ell_2(\sin \theta_2, -\cos \theta_2)^\top$, its determinant is $\ell_1 \ell_2 \sin(\theta_1 - \theta_2)$. This detects first-order rank loss when the links align, but finite mobility still requires examination of the closure equations.

10.2.3 A Revolute Joint and Its Frames

Choose frames at the joint pivot, with their local z axes along the joint axis. The allowed relative transform has $p_{\text{rel}} = 0$ and $R_{\text{rel}} = R_z(\theta)$. Locally near aligned axes, five independent constraints are the three components of p_{rel} , $R_{13} = 0$, and $R_{23} = 0$, on the branch $R_{33} > 0$. In contrast, setting $R_{12} = R_{21} = 0$ would prohibit ordinary rotation about z , because those entries are $-\sin \theta$ and $\sin \theta$. The relative motion has one degree of freedom; two free bodies connected by this joint have seven total configuration degrees of freedom, including the common spatial pose.

10.2.4 Integrability Needs More Than a Derivative Test

For a nonvanishing one-form $\alpha = \sum_i a_i(q) dq_i$, the velocity constraint $\alpha(v) = 0$ defines a distribution. Locally, its codimension-one integrability condition is $\alpha \wedge d\alpha = 0$. When integrable, it can be written $\alpha = \mu d\phi$ with a nonzero integrating factor μ ; α itself need not be exact. For example, $e^x dy = 0$ means $dy = 0$ even though $d(e^x dy) = e^x dx \wedge dy \neq 0$. Closed forms are locally exact on a contractible neighborhood, but global exactness requires topological conditions. For several independent forms, use the Frobenius involutivity condition on their common kernel.

A wheel with planar heading θ has the lateral no-slip constraint $-\sin \theta \dot{x} + \cos \theta \dot{y} = 0$. Its distribution is nonintegrable. Rolling on a fixed straight track can instead give $x - r\varphi = \text{constant}$. Rolling is therefore not universally nonholonomic. Sliding friction, unilateral joint limits, and contact opening are different phenomena again; they are not all smooth equality constraints.

10.3 Mass Metric, Forces, and Inertial Terms

10.3.1 Vectors and Covectors Have Different Roles

Velocity $v \in T_q Q$ is a vector. A generalized load $F \in T_q^* Q$ is a covector: $F^\top v$ is power. The mass matrix maps velocity to momentum and defines $\langle a, b \rangle_M = a^\top M b$. Ideal stationary constraint reactions are covectors in range $J_c^\top$, because

$$(J_c^\top \lambda)^\top v = \lambda^\top J_c v = 0. \quad (10.5)$$

Their associated mass-metric normal vectors are in a different space:

$$(\ker J_c)^{\perp_M} = \text{range}(M^{-1} J_c^\top). \quad (10.6)$$

Indeed $v^\top M(M^{-1} J_c^\top \lambda) = 0$ for every tangent v . With $M = \text{diag}(2, 1)$ and $J_c = (1, 1)$, the vector $(1, -1)$ is tangent. Its mass inner product with $(1, 1)$ is one, but its mass inner product with $(1/2, 1)$ is zero. Omitting M^{-1} changes the orthogonality claim.

10.3.2 Constructing the Mass Matrix

For rigid link k , let $J_{v,k}$ map generalized rates to center-of-mass velocity in a fixed spatial frame, and let $J_{\omega,k}$ map them to angular velocity in that same frame. If R_k maps body coordinates to that frame and $I_{b,k}$ is inertia about the center of mass in body coordinates, then

$$M(q) = \sum_k (m_k J_{v,k}^\top J_{v,k} + J_{\omega,k}^\top R_k I_{b,k} R_k^\top J_{\omega,k}). \quad (10.7)$$

Every summand is an $n \times n$ matrix. Positive definiteness requires a nondegenerate model with independent coordinates and positive inertias in its physical directions. Redundant orientation parameters require their own constraints; one cannot assume an unconstrained positive-definite mass matrix in arbitrary redundant coordinates.

With upward height z_k and downward gravity of magnitude $g > 0$, use $V = \sum_k m_k g z_k$. Kinetic energy is $T = \frac{1}{2} v^\top M v$. It measures energy at a velocity, not an unspecified physiological cost of acceleration.

10.3.3 Coriolis Loads and the Energy Identity

Write the forced equations as

$$M\dot{v} + h(q, v) = Bu + J_c^\top \lambda, \quad h = c(q, v) + \nabla V, \quad (10.8)$$

with any additional known nonconservative loads added explicitly on the right. The inertial velocity load is

$$c_i = \sum_{j,k} \Gamma_{ijk} v_j v_k, \quad (10.9)$$

$$\Gamma_{ijk} = \frac{1}{2} (\partial_k M_{ij} + \partial_j M_{ik} - \partial_i M_{jk}). \quad (10.10)$$

One valid matrix representation is $C_{ij} = \sum_k \Gamma_{ijk} v_k$, so $c = C v$. It satisfies $\dot{M} - 2C$ skew-symmetric and

$$v^\top c = \frac{1}{2} v^\top \dot{M} v. \quad (10.11)$$

In general $C \neq \dot{M}$. The matrix representation is not unique, while the load c for the specified coordinates is fixed. The second-kind connection coefficients are $\Gamma_{jk}^i = \sum_\ell (M^{-1})_{i\ell} \Gamma_{\ell jk}$, giving $M^{-1}c$ component $\sum_{j,k} \Gamma_{jk}^i v_j v_k$. There is no extra minus sign in this identity; the minus appears when solving the force-free equation for acceleration.

For a simple abstract two-coordinate metric, introduce a length scale ℓ so the entries have angular inertia units:

$$M = \ell^2 \begin{bmatrix} m_1 + m_2 & m_2 \cos q_2 \\ m_2 \cos q_2 & m_2 \end{bmatrix}, \quad m_1, m_2 > 0. \quad (10.12)$$

Its determinant is $\ell^4(m_1 m_2 + m_2^2 \sin^2 q_2) > 0$. Direct differentiation gives $c = (-\ell^2 m_2 \sin q_2 v_2^2, 0)^\top$. Thus $\Gamma_{22}^1 = -m_2^2 \sin q_2 / (m_1 m_2 + m_2^2 \sin^2 q_2)$ and $\Gamma_{12}^1 = 0$. Substitution verifies the energy identity. This is a metric example, not a derived anthropometric two-link arm.

Connection coefficients can be nonzero in curvilinear coordinates on a flat space. Their presence does not establish nonzero intrinsic curvature. Coordinate-free equations retain covariant acceleration; they do not eliminate the physical inertial coupling. Curvature concerns how covariant differentiation fails to commute, a separate question from whether a coordinate expression contains centrifugal terms.

10.4 Eliminating Reactions Without Losing Their Input Dependence

Define $K_c = J_c M^{-1} J_c^\top \succ 0$ and $\gamma = \dot{J}_c v$. The acceleration constraint and force balance give

$$\lambda = -K_c^{-1} [J_c M^{-1} (Bu - h) + \gamma]. \quad (10.13)$$

The reaction changes when the input changes, even at the same (q, v) . It cannot be held at its measured value and called an input-independent drift.

Define a vector projector and its dual force projector:

$$P_v = I - M^{-1}J_c^\top K_c^{-1}J_c, \quad P_F = P_v^\top. \quad (10.14)$$

These projectors act on different spaces. They satisfy $P_v^2 = P_v$, $J_c P_v = 0$, $P_v^\top M = M P_v$, and $P_F J_c^\top = 0$. A load decomposes as $F = P_F F + (I - P_F)F$; the second part belongs to the reaction covector space. This algebraic partition is not a label for useful versus wasted physiological effort.

The reduced acceleration equation is

$$\dot{v} = f(q, v) + G(q)u, \quad (10.15)$$

$$f = -P_v M^{-1}h - M^{-1}J_c^\top K_c^{-1}\gamma, \quad (10.16)$$

$$G = P_v M^{-1}B. \quad (10.17)$$

Here f is an acceleration function in a coordinate chart. The first-order vector fields on TQ_c are $F_0(q, v) = (v, f)$ and $F_i(q, v) = (0, G_i)$. This distinction matters for Lie brackets and state dimension. All columns of G are tangent, while $J_c f = -\gamma$ supplies the normal acceleration required by the changing tangent plane.

For $\Phi(q) = \frac{1}{2}(q^\top q - R^2)$ on a circle with $M = I$, $J_c = q^\top$ and $\gamma = v^\top v$. The admissible acceleration for an unconstrained candidate a_0 is

$$a = P_v a_0 - \frac{q}{R^2} \|v\|^2. \quad (10.18)$$

At $q = (1, 0)$ and $v = (0, 2)$, its radial component must be -4 . Projecting a_0 onto the tangent line alone gives radial component zero and violates the acceleration constraint. Acceleration-level satisfaction also does not guarantee that an ordinary numerical integrator preserves position and velocity constraints.

A zero-input counterfactual evaluates $u = 0$ with the chosen constitutive model and contact mode, then evolves its own state. The drift includes the zero-input reaction computed above. If a computed reaction violates a friction cone or requires tensile ground contact, the assumed mode is infeasible and must change. A prescribed measured base motion is an external boundary intervention, not an isolated passive swing.

10.5 Three Different Forms of Redundancy

10.5.1 Constraint Freedom, Task Freedom, and Input Freedom

Constraint-compatible velocity freedom is $\ker J_c$. For a task map $y = \psi(q)$ with Jacobian J_t , task-preserving velocity freedom is $\ker J_c \cap \ker J_t$. Neither is automatically an unactuated direction. Input redundancy is the kernel of the effective acceleration map G ; its elements change input without changing instantaneous acceleration in this ideal model, though reactions can change.

For desired acceleration a_d , let $b = a_d - f$. Exact instantaneous tracking requires $b \in \text{range } G$ and some feasible $u \in \mathcal{U}$ with $Gu = b$. At rank r , the unconstrained algebraic solution family is

$$u = G^+ b + (I - G^+ G)z, \quad z \in \mathbb{R}^m, \quad (10.19)$$

provided the range condition holds. Its input redundancy dimension is $m - r$. If $m < d$ and G has full column rank, the system is instantaneously underactuated and each feasible b has a unique input. Fewer inputs do not create an infinite family of solutions. Bounds, force signs, actuator rates, and friction restrictions can eliminate an otherwise algebraically feasible solution.

If reduced coordinates give a full-row-rank acceleration map $\bar{G} \in \mathbb{R}^{d \times m}$ and the objective is $\frac{1}{2}u^\top W u$, $W \succ 0$, Lagrange multipliers give

$$u_W = W^{-1} \bar{G}^\top (\bar{G} W^{-1} \bar{G}^\top)^{-1} \bar{b}. \quad (10.20)$$

For $\bar{G} = (1, 1)$, $\bar{b} = 1$, and $W = \text{diag}(1, 4)$, this is $(0.8, 0.2)$, not the Euclidean minimum-norm allocation $(0.5, 0.5)$. Differentiating W with respect to posture is not a substitute for solving this fixed-state allocation problem. State planning and instantaneous input allocation are distinct optimizations.

10.5.2 Minimum-Energy Velocity and Muscle Allocation

To find a velocity with task rate $\dot{y}_d$ while preserving the constraint, stack $A = (J_c^\top, J_t^\top)^\top$ and $b_y = (0, \dot{y}_d)^\top$. With independent rows, the minimizer of $\frac{1}{2}v^\top M v$ subject to $Av = b_y$ is

$$v_* = M^{-1}A^\top(AM^{-1}A^\top)^{-1}b_y. \quad (10.21)$$

The Euclidean pseudoinverse minimizes Euclidean norm; it minimizes kinetic energy only under the corresponding metric choice. Position-level feasibility and finite-time task execution still require integration and input checks.

Muscle allocation is another inverse problem. If a signed moment-arm matrix $R(q)$ maps muscle forces s to required joint load τ , one may solve $Rs = \tau$ with $0 \leq s \leq s_{\max}$ and a chosen objective such as $\sum_i (s_i/A_i)^p$. For $p = 2$ and fixed positive areas this is a convex quadratic objective with linear constraints. A nonzero-load solution is not in $\ker R$; differences between unconstrained solutions lie in $\ker R$. Capacity limits and activation dynamics can remove that freedom. Selecting one solution with an objective supplies a modeling assumption, not a measurement of the nervous system's objective [Zaj89].

10.6 Twists, Wrenches, and a Two-Hand Grip

10.6.1 Consistent Frame Transformations

Let $g_{AB} = (R, p)$ map coordinates in frame B into frame A . Use twist ordering $\xi = (\omega, v)$, where v is the linear component associated with the chosen frame origin. Then

$$\xi_A = \text{Ad}_{g_{AB}} \xi_B, \quad \text{Ad}_{g_{AB}} = \begin{bmatrix} R & 0 \\ [p]_\times R & R \end{bmatrix}. \quad (10.22)$$

In particular $v_A = Rv_B + p \times R\omega_B$. The equivalent matrix identity is $\hat{\xi}_A = g_{AB}\hat{\xi}_B g_{AB}^{-1}$. The translation term must be retained. A six-dimensional twist cannot be transformed by a four-dimensional homogeneous matrix acting directly on its column of components.

For wrench ordering $W = (\tau, F)$, invariance of $W^\top \xi$ requires

$$W_A = \text{Ad}_{g_{AB}}^{-\top} W_B = \begin{bmatrix} R\tau_B + p \times RF_B \\ RF_B \end{bmatrix}. \quad (10.23)$$

The reverse transformation is $W_B = \text{Ad}_{g_{AB}}^\top W_A$. Stating the direction of the frame map avoids ambiguous uses of the word coadjoint. Screw reciprocity between a wrench and an admissible twist means $W^\top \xi = 0$, not $\xi^\top M \eta = 0$ between two velocities.

For integrated twist coordinates $\zeta = (\omega, v)$ and $\theta = \|\omega\|$, the exponential is

$$\exp \hat{\zeta} = \begin{bmatrix} e^{[\omega]_\times} & J(\omega)v \\ 0 & 1 \end{bmatrix}, \quad (10.24)$$

$$J(\omega) = I + \frac{1 - \cos \theta}{\theta^2} [\omega]_\times + \frac{\theta - \sin \theta}{\theta^3} [\omega]_\times^2. \quad (10.25)$$

Use the continuous limit $J(0) = I$, with series evaluation for small θ . The last coefficient has denominator θ^3 because ω already contains the rotation magnitude; mixing unit-axis and integrated-coordinate formulas changes the translation. A time-varying twist generally requires an ordered integration, not the exponential of its simple time integral [MLS94].

10.6.2 Different Contact Points Have Different Velocities

At hand contact i , let r_i be the vector from the club reference point O to that contact, expressed in one spatial frame. No translational slip imposes

$$J_{h,i}(q)\dot{q} = v_O + \omega_c \times r_i. \quad (10.26)$$

The left and right hand point velocities are generally unequal when the club rotates. Full rigid attachment also constrains relative angular velocity; point-contact and soft-finger models constrain fewer components. If limb Jacobians are converted to the same club reference point and frame, equality of their full twists can be used. Equating unshifted velocities at different grip points is incorrect.

For two point forces on the club, the resultant wrench at O is

$$F = f_L + f_R, \quad \tau_O = r_L \times f_L + r_R \times f_R. \quad (10.27)$$

Adding $\delta f_L = a(r_L - r_R)$ and $\delta f_R = -\delta f_L$ changes neither resultant component. An internal squeeze along the hand separation can therefore be invisible to a measured resultant wrench. Distributed contact moments, compliance, and friction alter the admissible internal-load set, but they do not make bilateral force inference unique without further evidence. Internal grip loading may affect stiffness and future contact behavior even when its instantaneous net wrench is zero.

10.6.3 Singular Values Need Physical Scaling

For a task Jacobian, $\sqrt{\det(J_t J_t^T)}$ measures the volume of its Euclidean velocity ellipsoid when rows are independent. It is not a complete condition-number measure: $\text{diag}(100, 0.01)$ has determinant one but condition number 10^4 . Translational and rotational components need declared scales before such measures can be compared. Report singular values and physical input limits, not just a determinant.

A rank- k screw span defines a point of $\text{Gr}(k, 6)$. When the spanning matrix loses rank, it ceases to represent a k -plane; the rank-deficient set is not a collection of points inside that same Grassmannian with reduced dimension. Rank-loss codimension depends on the matrix family. Neither arm alignment nor a small manipulability determinant by itself proves high geometric curvature, loss of feedback stabilizability, or beneficial energy transfer.

10.7 Ground Contact, Momentum, and Power

10.7.1 Count the Floating Base Before Subtracting Constraints

As an explicitly idealized model, give each leg seven joint coordinates and the pelvis a six-dimensional floating pose. There are then $6 + 7 + 7 = 20$ free configuration dimensions. One rigid stationary foot supplies up to six independent constraints, leaving 14; two such feet supply up to 12, leaving eight at regular configurations. Starting with 14 joint coordinates and subtracting foot constraints while also allowing a floating pelvis omits the base. Anatomical joint models may use different joint counts. Point contacts, rolling contacts, deformable shoes, and dependent constraints also change the count.

A rigid bilateral contact model remains admissible only while its calculated wrench respects nonpenetration, compressive normal force, friction, and the support region. A formal equality solution that pulls a foot into the ground or requires excessive tangential traction is not a feasible physical prediction.

10.7.2 Center of Pressure and Reference-Point Conventions

Express the force exerted by the plate on the body in a right-handed frame with z upward, and shift its measured moment to an origin in the contact plane. For $F_z \neq 0$, a resultant applied at $(x_c, y_c, 0)$ with a remaining vertical free moment gives

$$x_c = -\frac{M_y}{F_z}, \quad y_c = \frac{M_x}{F_z}, \quad M_{z,\text{free}} = M_z - x_c F_y + y_c F_x. \quad (10.28)$$

These signs follow from $r_c \times F = (y_c F_z, -x_c F_z, x_c F_y - y_c F_x)$. A plate origin below the surface requires a moment shift first; a manufacturer may report the opposite action-reaction convention. Near zero normal load the ratios become ill-conditioned. A center of pressure does not replace the complete wrench, especially its free moment.

10.7.3 Inverse Dynamics With All Loads Declared

For a body-fixed offset r from a moving reference point to the center of mass, expressed spatially,

$$a_C = a_O + \alpha \times r + \omega \times (\omega \times r). \quad (10.29)$$

The last term has a plus sign; its double cross product already points inward for circular motion. Sum all applied forces and all moments about the center of mass:

$$\sum F = ma_C, \quad \sum \tau_C = I_C \alpha + \omega \times (I_C \omega), \quad (10.30)$$

with I_C represented in the same frame. Gravity, measured contact loads, distal and proximal joint loads, and their moment arms belong in these sums. A backward Newton–Euler recursion is a systematic application of these balances with explicit action-reaction signs and frame shifts. Kinematic accelerations come from the motion model or measurements; measured ground force is a load boundary condition, not an acceleration measurement.

Inverse dynamics gives the required net generalized load after known loads are accounted for. Unknown bilateral load sharing and muscle redundancy remain inverse problems. Recursive inverse dynamics is linear in the number of links for a tree of fixed-size joints; recursive forward-dynamics algorithms can also avoid assembling and inverting a dense mass matrix. Closed loops add constraint solves and cannot be assigned the same computational cost without specifying the solver.

10.7.4 Support Can Redirect Motion Without Supplying Work

With matching reference point and frame, contact power is $P_c = F_c^\top v_c + \tau_c^\top \omega_c$. A stationary rigid foot has zero twist, so its ideal ground wrench delivers zero mechanical power, even if its forces and moments are large. A moment does not supply rotational energy when angular velocity is zero. A foot pivoting or deforming needs the actual contact motion and traction distribution; no-slip at one point does not mean the entire foot is stationary.

Nevertheless, the ground can change total linear and angular momentum. About a fixed inertial origin, $\dot{H}_O$ equals the total external moment, including ground reactions and gravity where applicable. Zero work does not imply zero impulse or zero angular impulse. This is central to the golf swing: support reactions can redirect motion and enable muscles to do work elsewhere without being an independent source of mechanical energy.

For stationary ideal constraints, stored mechanical energy $E = T + V$ obeys

$$\dot{E} = u^\top y + P_{\text{other}} - D, \quad y = B^\top v, \quad D \geq 0, \quad (10.31)$$

when dissipation is modeled by D and all other power sources are declared. Passivity is a storage inequality, $E(t) - E(0) \leq \int u^\top y dt$ for the chosen port when other sources are absent and storage is bounded below. Equality is the lossless special case. Torque dotted with torque is not power. Muscle activation can maintain force with nonzero metabolic cost even at zero joint power. Mechanical work, squared torque, metabolic expenditure, and fatigue therefore define different optimization problems.

10.8 Reachability and Optimal Control

10.8.1 Instantaneous Rank Does Not Decide Finite-Time Motion

For smooth first-order fields, $[X, Y] = DYX - DX Y$. If $X = (x_2, -x_1)$ and $Y = (0, 1)$, then $[X, Y] = (-1, 0)$. This is a second state direction relative to the single input Y , not a third independent direction in a two-dimensional space.

The Chow–Rashevskii bracket-generating condition concerns driftless systems with reversible admissible controls on an appropriate connected region. Mechanical dynamics have drift, so distinguish accessibility, small-time local controllability, and reachability over a prescribed forward-time horizon. For $\dot{x} = 1$, $\dot{y} = u$, the drift and input span the plane but no forward trajectory can decrease x . For second-order mechanics,

input fields $(0, G_i(q))$ have zero mutual brackets when they depend only on q ; brackets with the drift (v, f) are essential. Checking the acceleration columns alone against the full state dimension is invalid.

As a driftless example, car kinematics have $g_1 = (\cos \theta, \sin \theta, \tan \varphi/L, 0)$ and $g_2 = (0, 0, 0, 1)$. Their bracket $[g_2, g_1] = (0, 0, \sec^2 \varphi/L, 0)$ first gives a heading direction; further brackets produce lateral displacement directions. Steering while stationary does not translate the car. Maneuvers realizing bracket effects use sequences of controls and, for the usual reversible argument, both forward and reverse travel.

10.8.2 Necessary Conditions in Independent State Coordinates

Use a local chart of TQ_c with independent state $z \in \mathbb{R}^{2d}$ and dynamics $\dot{z} = \mathcal{F}(z, u)$. This avoids silently treating dependent ambient position and velocity coordinates as independent. For fixed final time, terminal cost $\phi(z(T))$, and running cost ℓ , define the normal minimization Hamiltonian

$$H = \ell + p^\top \mathcal{F}, \quad \dot{p} = -H_z, \quad u_* \in \arg \min_{u \in \mathcal{U}} H. \quad (10.32)$$

For a free terminal state, $p(T) = \nabla \phi$; endpoint constraints change transversality. These are necessary conditions under the usual regularity assumptions, not a general sufficient certificate. Abnormal extremals need the cost multiplier formulation. Ambient formulations must handle both position and velocity consistency and cannot obtain all costate conditions by adding one unexplained position multiplier.

For a control-linear Hamiltonian $H = H_0 + \sigma^\top u$ on a box, minimization selects $u_i = u_{i,\min}$ when $\sigma_i > 0$ and $u_i = u_{i,\max}$ when $\sigma_i < 0$. A switching function that vanishes on an interval requires higher-order conditions and may admit a singular arc. With $\ell = \ell_0 + u^\top R u$, $R \succ 0$, the unconstrained minimizer is $-\frac{1}{2} R^{-1} \mathcal{G}^\top p$ for $\mathcal{F} = \mathcal{F}_0 + \mathcal{G}u$. Under bounds, solve the resulting convex quadratic program. Componentwise clipping is exact for a separable diagonal R and independent box bounds, not for an arbitrary coupled R .

Torque input, muscle force input, excitation input, and activation state are different model choices. Smooth activation does not refute a bang-bang excitation solution when activation dynamics filter that excitation. A torque optimum does not establish that muscle activation follows the same profile or that the nervous system optimizes the chosen objective.

10.8.3 Value Functions and Local Numerical Methods

Where differentiable, the finite-horizon value $\mathcal{V}(z, t)$ satisfies

$$-\mathcal{V}_t = \min_{u \in \mathcal{U}} (\ell + \nabla \mathcal{V}^\top \mathcal{F}), \quad \mathcal{V}(z, T) = \phi(z). \quad (10.33)$$

Nonsmooth value functions need an appropriate generalized, typically viscosity, solution. Autonomous dynamics do not remove finite-horizon time dependence. A stationary HJB equation belongs to a separately specified infinite-horizon or stationary problem. A grid with ten values in each of 28 independent state dimensions has 10^{28} nodes, illustrating why direct grids become impractical; the dimension must come from the chosen constrained model.

For a discrete full-state transition $z_{k+1} = F_k(z_k, u_k)$, iLQR uses $\delta z_{k+1} = A_k \delta z_k + B_k \delta u_k$ and second-order cost terms. Its backward pass produces both a feedforward step and feedback gain, and its forward pass rolls out $u_k^{\text{new}} = u_k + \alpha k_k + K_k(z_k^{\text{new}} - z_k)$. DDP additionally retains value-gradient-weighted second derivatives of the dynamics. Both need regularization, step acceptance, feasibility handling, and convergence checks. Projecting a cost gradient alone does not enforce a nonlinear contact constraint. Chapter 6 derives the Riccati and local quadratic calculations; neither algorithm automatically proves a global nonlinear optimum.

10.9 What Measurements Can Identify

With known parameters and an explicit zero-input contact model, $f(q, v)$ is computable from an estimated state. That is model evaluation, not a theorem that kinematics alone identify the physical drift. The acceleration constraint supplies c equations for n accelerations and generally leaves d tangent directions undetermined. Actual reactions additionally depend on applied inputs. Unknown inertias, tendon state, compliance, and loads cannot be made known by writing them as functions of q .

Observability asks whether different initial states can yield distinguishable output histories under specified inputs. For an autonomous smooth system, full rank of differentials of sufficiently many output Lie derivatives is a sufficient local condition under appropriate hypotheses. Controlled systems require the relevant input fields or a specified known-input trajectory. A local rank condition does not prove global uniqueness, numerical conditioning, or parameter identifiability. Parameters may be augmented as constant states, but adequate excitation and sensitivity remain necessary.

Nonlinear indistinguishable sets need not be affine subspaces. For $\dot{x} = 0$ and output $y = x_1^2 + x_2^2$, a nonzero output level is a circle. The kernel of Dy gives its tangent line, not the entire set of indistinguishable states. Linearized null directions describe first-order sensitivity; they must not be promoted to exact finite-state equivalence.

Motion capture and force plates can constrain inverse dynamics when synchronized, calibrated, and accompanied by inertial estimates. Surface EMG adds electrical observations with muscle-specific processing and activation dynamics; integrating its signal does not directly yield force or activation. A universal fixed delay is not an adequate constitutive law. Optimization can select among feasible muscle patterns, but selection by a prior or cost function does not resolve ambiguity empirically [Zaj89].

For the two-hand grip, report which sensors constrain the net club wrench and which constrain the internal hand-load family. For the feet, report separate contact wrenches rather than assuming a unique bilateral distribution from a combined resultant. Compare alternative parameter sets and input allocations that fit the same observations; test whether the proposed conclusion survives that ambiguity.

10.10 Symmetry, Mechanical Connections, and Geometric Phase

10.10.1 Momentum Conservation Has a Boundary Condition

A cyclic coordinate has conserved conjugate momentum only when the Lagrangian is independent of that coordinate and its generalized applied force vanishes. Constraints and external loads must respect the symmetry. A grounded golfer generally receives external angular impulse, so total angular momentum of the golfer-plus-club subsystem is not automatically conserved. Conservation in a freely floating model cannot be asserted for the grounded experiment.

For a local planar symmetry coordinate θ and shape s , consider

$$T = \frac{1}{2}I(s)\dot{\theta}^2 + \dot{\theta}a(s)^\top \dot{s} + \frac{1}{2}\dot{s}^\top H(s)\dot{s}. \quad (10.34)$$

The conjugate momentum is $p_\theta = I\dot{\theta} + a^\top \dot{s}$. If it is conserved, reconstruction gives

$$\dot{\theta} = I^{-1}p_\theta - A(s)\dot{s}, \quad A = I^{-1}a^\top. \quad (10.35)$$

The locked inertia is $I = \partial^2 T / \partial \dot{\theta}^2$; there is no additional factor of one half. The connection needs the group–shape cross block a , not the derivative of I alone. At fixed momentum, a conventional Routhian is $L - p_\theta \dot{\theta}$ with $\dot{\theta}$ eliminated; forced or noncyclic systems require a modified reduction [BL04].

10.10.2 Separate Dynamic and Geometric Contributions

For a closed shape loop in this planar model,

$$\Delta\theta = \int_0^T I(s(t))^{-1} p_\theta dt - \oint A(s) ds. \quad (10.36)$$

The first term is a dynamic phase and the second a geometric contribution with the sign fixed by the reconstruction equation. At zero momentum, only the latter remains. On a suitable planar shape patch, Stokes' theorem converts $\oint A$ to an integral of dA . General noncommuting spatial rotations require a group reconstruction and ordered transport; a scalar area formula does not directly apply.

For a checkable example, choose $I = 1$, $a = (0, ks_1)^\top$, and $H = I_2 + aa^\top$. The full kinetic metric is positive definite because its Schur complement is I_2 . At zero momentum, $\dot{\theta} = -ks_1\dot{s}_2$. A counterclockwise rectangular shape loop of side lengths a_0, b_0 gives $\Delta\theta = -ka_0b_0$. This proves a geometric effect in the specified model. It does not identify an analogous contribution in a golf swing until the inertia blocks, external moment, and measured shape trajectory have been established.

10.11 Numerical Methods That Preserve the Stated Problem

The position-constrained first-order mechanical DAE is ordinarily differentiation index three under regularity assumptions. Differentiating position once yields velocity consistency and twice yields an algebraic equation for λ ; differentiating that relation yields a differential equation for the multiplier. Position to velocity to acceleration is two differentiations, not three. This terminology does not make a twice-differentiated constraint automatically stable under time stepping.

Baumgarte stabilization replaces the acceleration equation by $J_c \dot{v} + \gamma + 2\alpha J_c v + \beta^2 \Phi = 0$. In continuous arithmetic the violation obeys $\ddot{\Phi} + 2\alpha \dot{\Phi} + \beta^2 \Phi = 0$. Positive gains damp errors, but α and β have inverse-time units, and large gains can make integration stiff. Constraint scaling and time-step studies are necessary. Stabilization introduces corrective forces and does not guarantee exact energy conservation.

A local Newton correction for position may use

$$q^{j+1} = q^j - M(q^j)^{-1} J_c(q^j)^\top [J_c(q^j) M(q^j)^{-1} J_c(q^j)^\top]^{-1} \Phi(q^j). \quad (10.37)$$

It requires a suitable initial guess and stopping criterion. After correcting position, velocity projection is $v = P_v(q)v_{\text{pred}}$. These are projection operations; by themselves they do not specify SHAKE or RATTLE. Those methods combine particular constrained position/momentum updates with an underlying integration scheme. Their symplectic properties require their actual assumptions and solve tolerances; arbitrary after-step projection is not equivalent [HLW06].

For constant mass, a RATTLE-style velocity-Verlet step first computes a half-step momentum with a constraint impulse along $J_c(q_n)^\top$, chooses its multiplier so the updated position satisfies $\Phi(q_{n+1}) = 0$, then updates momentum with the new applied force and a second multiplier so $J_c(q_{n+1})M^{-1}p_{n+1} = 0$. The half-step factors, old/new Jacobians, and both multipliers are part of the method. Configuration-dependent inertia and velocity-dependent forces require an appropriate generalized scheme, not a direct substitution into that separable formula.

SVD can reveal the numerical rank of a scaled J_c and supply a tangent basis N . The Euclidean projector $NN^\top$ assumes Euclidean-orthonormal columns; the kinetic-metric projector is $N(N^\top MN)^{-1}N^\top M$. Neither tangent projector alone includes the acceleration offset $-M^{-1}J_c^\top K_c^{-1}\gamma$. Solve linear systems instead of explicitly forming inverses in numerical code.

Validation should report position, velocity, and acceleration residuals separately; input/reaction feasibility; changes under tighter solve tolerances and smaller time steps; and the energy balance including applied work and dissipation. Energy constancy is a test for an isolated lossless model, not for every passive, driven, or damped system. Good energy behavior is not proof of correct contact geometry or scientifically valid parameters.

10.12 Connecting the Pieces in a Golf Investigation

Begin with a measurable outcome, such as delivered clubhead speed and face orientation at the model's own impact event. Specify the body/club model, coordinate frames, grip model, foot contact modes, and inputs. Estimate state and parameter uncertainty before decomposing effects. A useful same-state calculation compares the drift acceleration and individual projected input contributions; a forward intervention branches the state and recomputes reactions and contact events.

Then ask distinct questions. How does posture change the effective input map? Which internal hand loads leave the net wrench unchanged while altering grip compliance? How much mechanical work has already entered the system, and where is it stored? How does ground impulse redirect momentum while doing little or no work in an ideal stationary-contact model? Which feedback corrections remain feasible under torque, activation, and contact limits? Impact depends on the delivered state, so differences earlier in the swing matter through their effects on that state and its uncertainty.

These questions are intertwined without being interchangeable. A favorable configuration may improve load transmission while increasing sensitivity to parameter error. Co-contraction can change impedance without changing the instantaneous net joint torque, yet it can have metabolic cost and change later behavior. A zero-torque continuation can retain substantial speed because of stored momentum and energy, while still being an unrealistic intervention on activation or grip. A force plate can measure a large ground moment

without showing that the ground supplied rotational work. An optimizer can expose a feasible strategy without establishing that a golfer uses it.

For a defensible argument, report the model identity, the empirical observation, and the proposed causal mechanism separately. Publish the equations and reference-point conventions, reproducible numerical counterexamples, uncertainty ranges, and interventions that would falsify the proposed explanation. A prediction should survive reasonable alternative contact models and muscle allocations before being presented as a robust swing mechanism. Coaching conclusions require their own outcome evidence; geometric feasibility alone does not establish a beneficial instruction for a person.

10.12.1 Exercises and Reproducible Checks

1. Verify $P_v^2 = P_v$ and $P_v^\top M = MP_v$ for the unequal-mass example. Compare vector and force projections and explain their different domains.
2. Derive the circle's normal acceleration and show why a tangent-only acceleration update fails at nonzero speed.
3. Differentiate the two-coordinate metric to recover c and verify $v^\top c = \frac{1}{2}v^\top \dot{M}v$ for arbitrary rates.
4. Derive the weighted allocation (0.8, 0.2) and identify input bounds that make the requested acceleration infeasible.
5. Transform an arbitrary twist and wrench between translated, rotated frames and verify power invariance. Then construct a nonzero internal hand-force pair with zero resultant wrench.
6. Derive the force-plate center-of-pressure signs from $r \times F$ and explain why the free moment must be retained.
7. Integrate the rectangular geometric-phase example and reverse the loop orientation. Add a known external torque and identify the extra momentum-dependent contribution.
8. Simulate a constrained system at successively smaller time steps. Report constraint residuals and the work-inclusive energy balance rather than certifying accuracy from one plot.

Glossary of Important Concepts

These definitions distinguish geometric objects, physical models, and the guarantees obtained from a calculation. A definition does not establish that a particular golf model satisfies its assumptions.

Articulated Body Algorithm

A recursive forward-dynamics algorithm for a rigid-body tree. With bounded joint dimension, its arithmetic cost scales linearly with the number of bodies. Closed-loop constraints and contact require additional treatment; the tree algorithm alone does not solve every constrained contact problem.

Configuration Space

The set of configurations allowed by a model, including positions, orientations, and declared geometric constraints. It is a smooth manifold when suitable regularity conditions hold; redundant coordinates and constraint singularities require care. Velocities are additional state information.

Contraction Analysis

Analysis of convergence between trajectories under stated common inputs or closed-loop dynamics, in a specified metric and domain. A differential contraction inequality needs regularity, metric bounds, and domain/existence conditions to imply the corresponding finite-distance result. Contraction does not by itself prove input feasibility or a desired contact outcome.

Control Contraction Metric (CCM)

A positive-definite differential metric satisfying control-dependent contraction conditions that support feedback construction for feasible reference trajectories. The result depends on the theorem's domain, regularity, metric bounds, and controller construction. Actuator saturation and state constraints require explicit treatment.

Degrees of Freedom (DOF)

The number of locally independent coordinates needed to specify a configuration. Independent constraints can reduce it; redundant parameters can exceed it. The number of actuators and the dimension of the full state space are different quantities.

Drift

The evolution of the declared effective plant when the declared control channel is zero. It includes the configuration-velocity kinematics and all retained uncontrolled dynamics, such as gravity, inertial coupling, passive elasticity, and damping. Its meaning depends on the chosen state, control channel, and environment; zero control does not mean zero acceleration or zero velocity.

Drift-Control Ratio (DCR)

A model-based comparison of drift and bounded control authority in a declared acceleration or task-projected space:

$$\text{DCR}_{W,\mathcal{U}}(x) = \frac{\|W a_{\text{drift}}(x)\|_2}{\sup_{u \in \mathcal{U}(x)} \|W B_a(x)u\|_2 + \varepsilon}.$$

State the projection/scaling W , admissible input set $\mathcal{U}$, acceleration input map B_a , and regularizer ε , with compatible units. This scalar magnitude ratio omits directional alignment and does not by itself establish controllability, cancellation feasibility, or a universal coaching threshold.

Euler Angles

Three parameters describing an orientation using a declared sequence of rotations. Different sequences have different singular sets. Angle rates are related to angular velocity by a configuration-dependent map and are not generally its Cartesian components.

Exponential Map

For a Lie group, the map from a Lie-algebra element to the group element reached at parameter one along

its generated one-parameter subgroup; for a matrix Lie group it is the matrix exponential. It need not be globally one-to-one. It is not general integration of an arbitrary time-varying velocity. The Riemannian exponential defined by geodesics is a related but distinct construction requiring a connection or metric.

Flow

The solution map of an ordinary differential equation where solutions exist uniquely. For an autonomous smooth vector field it forms a local one-parameter family with the composition property. Time-dependent systems use a two-time solution map; hybrid resets need not belong to a single smooth flow.

Gimbal Lock

A singularity of an Euler-angle rate-to-angular-velocity map. The parameterization loses local rank; the rigid body's physical rotational freedom does not disappear. Quaternions or overlapping coordinate charts handle orientation differently and have their own representation conventions.

Jacobian

The derivative of a map expressed in coordinates. For a task map $y = h(q)$, $\dot{y} = J(q)\dot{q}$. Acceleration also contains $\dot{J}\dot{q}$. Spatial and body Jacobians use different frame conventions, which must match the represented velocities and forces.

Kinematics

Description of position, orientation, velocity, and acceleration relationships without using forces to determine the motion. A kinematically allowed path is not automatically dynamically feasible under available actuation.

Lagrangian Mechanics

A formulation using a Lagrangian, often $L = T - U$, together with applied generalized forces and any constraints. For unconstrained coordinates, $d(\partial L / \partial \dot{q}) / dt - \partial L / \partial q = Q$. Dissipation, actuation, nonconservative loads, and contact must be specified; kinetic and potential energy alone do not determine a forced system's motion.

Lie Algebra

A vector space equipped with a bilinear antisymmetric bracket satisfying the Jacobi identity. For a Lie group, it is the tangent space at the identity with the induced bracket. Brackets of smooth vector fields are another important example; accessibility arguments require the appropriate system and theorem assumptions.

Lie Group

A smooth manifold that is also a group, with smooth multiplication and inversion. Examples include the rotation group $SO(3)$ and rigid-transformation group $SE(3)$. A choice of coordinates represents these objects without changing the group itself.

Lyapunov Stability

For an equilibrium, the property that sufficiently small initial perturbations remain small for all future times of the stated system. It does not require return to equilibrium. Asymptotic stability additionally requires attraction; orbital and finite-horizon stability statements refer to different targets and must be defined separately.

Manifold

A space locally described by Euclidean coordinates, with the usual topological regularity conditions. A smooth manifold also has smoothly compatible charts. Its dimension is local and does not depend on how many coordinates are used to embed or redundantly represent it.

Screw Axis

For a rigid-body twist with nonzero angular velocity, an instantaneous axis and pitch describing rotation together with translation along that axis. Pure translation is a limiting case, often represented as an axis at infinity; a finite unique rotational axis is then unavailable.

State Space

The set of variables sufficient to determine future evolution under specified inputs and a model. Mechanical

models often include configuration and velocity or momentum, and may additionally include actuator states, flexible modes, estimators, or discrete contact modes.

Tangent Bundle

The union of tangent spaces $T_q Q$ over configurations $q \in Q$, with its bundle and smooth-manifold structure. For an n -dimensional smooth configuration manifold, TQ has dimension $2n$. It represents configuration-velocity states for a basic mechanical model; momentum states instead lie in the cotangent bundle T^*Q .

Tangent Space

The vector space of instantaneous derivatives of smooth curves through a point on a manifold. Its vectors are local velocities, not finite displacements between arbitrary configurations. Applied differential constraints can restrict the admissible velocities further.

Twist

A six-component representation of an instantaneous rigid-body velocity field, combining angular and linear terms with a declared reference point and frame. In one frame, $v(r) = v_0 + \omega \times (r - r_0)$. Spatial and body representations are related by the appropriate adjoint transformation; the linear term must not be confused with the velocity of an unspecified point.

Wrench

The dual force representation consisting of a moment about a declared reference point and a resultant force in a declared frame. With matching twist conventions, mechanical power is $\tau \cdot \omega + F \cdot v_0$. Changing point or frame requires the corresponding moment shift and dual transformation so that power is unchanged.

Zero-Torque Counterfactual (ZTCF) Family

Model interventions setting the declared applied generalized-control channel to zero while preserving the declared effective plant. Pointwise samples, stitched traces, forward trajectories, and branched trajectories answer different questions. A stitched pointwise acceleration trace is not automatically a feasible unforced trajectory.

Zero-Velocity Counterfactual (ZVCF)

The instantaneous acceleration after the declared velocity and control intervention:

$$a_{\text{ZVCF}}(q, z) = -M(q)^{-1}h(q, 0, z_0; p).$$

Specify the auxiliary-state reset z_0 , retained loads, parameters, and contact mode. This separates the retained configuration-dependent loads under that intervention; it is not necessarily gravity alone, and it is not a forward simulation of a stationary body.

Further Reading and References

The following books develop complementary parts of the framework used here. Choose a source for the particular claim or calculation being investigated, and consult its assumptions, notation, edition, and errata. A robotics or control theorem does not become evidence about human golf performance merely because it can be applied to a simplified swing model.

Geometry, Kinematics, and Mechanical Models

- **A Mathematical Introduction to Robotic Manipulation**, Murray, Li, and Sastry [MLS94], treats rigid-body motion, manipulator and hand kinematics, dynamics, and nonholonomic motion planning. The [authors' companion site](#) provides chapter information and corrections. Use it to connect Lie groups and Jacobians to explicitly defined frames and mechanical systems.
- **Geometric Control of Mechanical Systems**, Bullo and Lewis [BL04], develops differential-geometric modeling and control of mechanical systems. Its [companion page](#) includes contents, selected material, examples, and errata. This is a suitable route into connections, mechanical control structures, and the hypotheses behind geometric analysis.
- **Robot Modeling and Control**, Spong, Hutchinson, and Vidyasagar [SHV06], covers kinematics, Jacobians, trajectory planning, dynamics, joint and multivariable control, force control, and vision-based methods. The [publisher's chapter listing](#) identifies the scope of the cited edition. Its robot models still require adaptation and validation before supporting a biomechanical interpretation.

Computational Rigid-Body Dynamics

- **Rigid Body Dynamics Algorithms**, Featherstone [Fea08], develops spatial-vector conventions and recursive dynamics algorithms. The [author's teaching materials](#) and [software resources](#) support implementation. Distinguish the linear-cost articulated-body calculation for a tree from the additional work needed for closed loops, constraints, and contacts.

Nonlinear Stability and Feedback

- **Applied Nonlinear Control**, Slotine and Li [SL91], develops nonlinear stability and feedback methods. [Slotine's accompanying course materials](#) identify the relevant book sections and separate the later contraction lectures and papers. Check the domain and model conditions of a stability argument before extending it to saturated or hybrid systems.
- **Contraction Theory for Dynamical Systems**, Bullo [Bul24], develops contractivity and incremental stability using specified norms and metrics. The [author's book page](#) provides version information and materials. The bibliography cites the 2024 edition; later revisions may reorganize or extend the treatment. Contraction claims must retain their metric, input, domain, and existence assumptions.

The chapter-level primary references supply more specialized results for transverse dynamics, phase constraints, nonlinear funnels, stochastic models, and learning. Keep mathematical derivations, numerical verification, model calibration, and experimental validation identifiable when combining those sources.

Index

Contraction Analysis, 51, 95

Contraction Metric, 56

Flow (Dynamical System), 88, 89

Jacobian, 3, 5, 52, 89

Kinematics, 10

Lagrangian Mechanics, 3, 10

Lyapunov Stability, 14, 51, 100, 101

Manifold, 8

Tangent Space, 6, 10

Underactuated System, 97

Notation Reference

Symbol	Meaning
$\mathbf{x} = (\mathbf{q}, \dot{\mathbf{q}})$	State vector (generalized coordinates and velocities)
$\mathbf{u} \in \mathbb{R}^m$	Control input vector
$f(\mathbf{x})$	Drift vector field (passive dynamics)
$G(\mathbf{x})$ or $g_i(\mathbf{x})$	Input (control) vector fields
$\mathbf{A}(t)$	State Jacobian $\partial f / \partial \mathbf{x}$ along nominal trajectory
$\mathbf{B}(t)$	Input Jacobian $\partial(G\mathbf{u}) / \partial \mathbf{u}$ along nominal trajectory
$\mathbf{M}(\mathbf{x}, t) \succ 0$	Contraction metric (positive definite)
$\mathbf{S}_t$	Riccati (cost-to-go curvature) matrix
$\mathbf{K}_t$	Feedback gain matrix
$\mathbf{Q}_t \succeq 0$	State cost weight
$\mathbf{R}_t \succ 0$	Input cost weight
$\Phi(t_1, t_0)$	State transition matrix
$T_{\bar{\mathbf{x}}} \mathcal{M}$	Tangent space at $\bar{\mathbf{x}}$ on manifold $\mathcal{M}$
$\delta \mathbf{x}, \delta \mathbf{u}$	Infinitesimal perturbations in state and input
$\lambda > 0$	Contraction rate
$H(\mathbf{q})$ or $M(\mathbf{q})$	Mass/inertia matrix of mechanical system
$C(\mathbf{q}, \dot{\mathbf{q}})$	Coriolis/centrifugal matrix
$\mathbf{g}(\mathbf{q})$	Generalized gravity vector
$\mathbf{J}(\mathbf{q})$	Jacobian (task or constraint)
$\preceq, \succeq$	Matrix inequality (Loewner order)
$[f, g]$	Lie bracket of vector fields f and g
$L_f h$	Lie derivative of h along f
$\mathbf{P}(t)$	Estimation error covariance matrix
$\mathbf{L}(t)$	Observer (Kalman) gain
$\mathcal{W}_o$	Observability Gramian
$H(\mathbf{x})$	Hamiltonian (total energy)
$J(\mathbf{x}), R(\mathbf{x})$	Port-Hamiltonian interconnection and dissipation matrices
$\rho(t)$	Drift-control ratio
$\varphi(t)$	Funnel boundary

Differential Geometry Primer

This appendix collects the key definitions from differential geometry used throughout the text. The presentation is deliberately concrete; for full generality, see do Carmo [dC92] or Abraham and Marsden [AM78].

.1 Smooth Manifolds

A *smooth manifold* $\mathcal{M}$ of dimension n is a topological space that locally looks like $\mathbb{R}^n$. Formally, it is equipped with an atlas of charts $\{(U_\alpha, \phi_\alpha)\}$ where each $U_\alpha \subset \mathcal{M}$ is open and $\phi_\alpha : U_\alpha \rightarrow \mathbb{R}^n$ is a homeomorphism, with smooth transition maps $\phi_\beta \circ \phi_\alpha^{-1}$ on overlaps.

Examples used in this book:

- $\mathbb{R}^n$ (state space of most control systems)
- S^1 (circle; configuration space of a revolute joint)
- $\mathbb{T}^n = (S^1)^n$ (torus; configuration space of an n -joint robot)
- $\text{SO}(3)$ (rotation group; attitude of a rigid body)
- $\text{SE}(3)$ (rigid-body pose: rotation + translation)

.2 Tangent Spaces and Tangent Bundles

The *tangent space* $T_p\mathcal{M}$ at a point $p \in \mathcal{M}$ is the vector space of all tangent vectors at p . It can be defined as the set of equivalence classes of curves through p , or as the set of derivations on smooth functions at p . In either case, $T_p\mathcal{M} \cong \mathbb{R}^n$.

The *tangent bundle* $T\mathcal{M} = \bigcup_{p \in \mathcal{M}} T_p\mathcal{M}$ is itself a smooth manifold of dimension $2n$. A point in $T\mathcal{M}$ is a pair (p, v) with $p \in \mathcal{M}$ and $v \in T_p\mathcal{M}$. For mechanical systems, $T\mathcal{M}$ is the *state space* $(\mathbf{q}, \dot{\mathbf{q}})$.

.3 Vector Fields and Flows

A *vector field* f on $\mathcal{M}$ assigns a tangent vector $f(p) \in T_p\mathcal{M}$ to each point p . In coordinates, $f = (f_1(\mathbf{x}), \dots, f_n(\mathbf{x}))^T$. The ODE $\dot{\mathbf{x}} = f(\mathbf{x})$ defines the *flow* $\varphi_t : \mathcal{M} \rightarrow \mathcal{M}$, which maps initial conditions to their time- t images.

.4 Riemannian Metrics

A *Riemannian metric* on $\mathcal{M}$ is a smoothly varying inner product $\langle \cdot, \cdot \rangle_p$ on each tangent space $T_p\mathcal{M}$. In coordinates, it is represented by a positive-definite matrix $\mathbf{G}(p)$:

$$\langle v, w \rangle_p = v^T \mathbf{G}(p) w.$$

For mechanical systems, the mass matrix $M(\mathbf{q})$ is a Riemannian metric on configuration space. The contraction metric $\mathbf{M}(\mathbf{x})$ of Chapter 5 is a Riemannian metric on state space.

.5 Lie Groups and Lie Algebras

The most important manifolds in rigid-body control are matrix Lie groups. A Lie group is both a smooth manifold and a group, with smooth multiplication and inversion.

- $\text{SO}(3) = \{\mathbf{R} \in \mathbb{R}^{3 \times 3} : \mathbf{R}^T \mathbf{R} = \mathbf{I}, \det(\mathbf{R}) = 1\}$ (rotations)
- $\text{SE}(3) = \left\{ \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0}^T & 1 \end{bmatrix} : \mathbf{R} \in \text{SO}(3), \mathbf{p} \in \mathbb{R}^3 \right\}$ (poses)

Their Lie algebras are tangent spaces at identity:

$$\mathfrak{so}(3) = \{\boldsymbol{\Omega} \in \mathbb{R}^{3 \times 3} : \boldsymbol{\Omega}^T = -\boldsymbol{\Omega}\}, \quad \mathfrak{se}(3) = \left\{ \begin{bmatrix} \boldsymbol{\Omega} & \mathbf{v} \\ \mathbf{0}^T & 0 \end{bmatrix} \right\}.$$

Using the hat map $\hat{\cdot}$, angular velocity vectors become algebra elements. This is the algebraic backbone of variational dynamics in Chapter 2 and motion composition in Chapter 9.

.6 Exponential and Logarithmic Maps

The exponential map converts tangent directions into finite motions. For $\text{SO}(3)$:

$$\exp(\hat{\boldsymbol{\omega}}\theta) = \mathbf{I} + \frac{\sin \theta}{\theta} \hat{\boldsymbol{\omega}} + \frac{1 - \cos \theta}{\theta^2} (\hat{\boldsymbol{\omega}}\theta)^2.$$

Given $\mathbf{R} \in \text{SO}(3)$ with $\theta = \cos^{-1}\left(\frac{\text{tr}(\mathbf{R})-1}{2}\right)$, the log map recovers axis-angle:

$$\log(\mathbf{R}) = \frac{\theta}{2 \sin \theta} (\mathbf{R} - \mathbf{R}^T).$$

For $\text{SE}(3)$, the exponential combines rotation with translated screw motion and is used directly in product-of-exponentials kinematics and geodesic interpolation.

Example .1. Python Example: $\text{SO}(3)$ Exp/Logapp-so3-exp-log

```

1 import numpy as np
2 from scipy.linalg import expm, logm
3
4 def hat(w: np.ndarray) -> np.ndarray:
5     return np.array([[0, -w[2], w[1]],
6                     [w[2], 0, -w[0]],
7                     [-w[1], w[0], 0]], dtype=float)
8
9 w = np.array([0.3, -0.2, 0.5])
10 R = expm(hat(w))           # exp map to SO(3)
11 w_hat = logm(R).real       # log map back to so(3)

```

.7 Adjoint Representation

Adjoint operators transport twists and wrenches across frames:

$$\text{Ad}_{(\mathbf{R}, \mathbf{p})} = \begin{bmatrix} \mathbf{R} & \mathbf{0} \\ [\mathbf{p}]_{\times} \mathbf{R} & \mathbf{R} \end{bmatrix}, \quad \text{ad}_{(\boldsymbol{\omega}, \mathbf{v})} = \begin{bmatrix} [\boldsymbol{\omega}]_{\times} & \mathbf{0} \\ [\mathbf{v}]_{\times} & [\boldsymbol{\omega}]_{\times} \end{bmatrix}.$$

In Chapter 9, this map explains why equivalent perturbations look different between body-fixed and world-fixed coordinates.

.8 Fiber Bundles

Tangent and cotangent bundles are canonical fiber bundles:

$$\pi_T : T\mathcal{M} \rightarrow \mathcal{M}, \quad \pi_T(p, v) = p, \quad \pi_{T^*} : T^*\mathcal{M} \rightarrow \mathcal{M}.$$

The base point is configuration; the fiber stores admissible velocities ($T\mathcal{M}$) or covectors/momenta ($T^*\mathcal{M}$). This viewpoint clarifies why state and costate evolve on different but coupled geometric objects in Chapters 6 and 7.

.9 Connections and Parallel Transport

A connection specifies how to compare tangent vectors at different points. In local coordinates, the Levi-Civita connection of metric $\mathbf{G}$ has Christoffel symbols Γ_{ij}^k . Covariant acceleration is

$$\frac{D\dot{q}^k}{dt} = \ddot{q}^k + \Gamma_{ij}^k \dot{q}^i \dot{q}^j.$$

Parallel transport ($Dv/dt = 0$ along a curve) is the right way to carry perturbations when curvature is nonzero. This geometric correction underlies stable trajectory tracking on curved configuration manifolds.

.10 Curvature and Trajectory Sensitivity

Curvature quantifies how geodesics separate. Sectional curvature $K(u, v)$ for a 2-plane $\text{span}\{u, v\} \subset T_p\mathcal{M}$ predicts local sensitivity:

- $K > 0$: geodesics tend to reconverge (spherical-like geometry)
- $K < 0$: geodesics diverge faster (hyperbolic-like sensitivity)

Contraction analysis in Chapter 5 can be interpreted as enforcing metric dynamics that dominate this geometric divergence.

Linear Algebra for Control

.11 Matrix Inequalities and the Loewner Order

For symmetric matrices $\mathbf{A}, \mathbf{B} \in \mathbb{R}^{n \times n}$, we write:

- $\mathbf{A} \succ 0$ ($\mathbf{A}$ is *positive definite*): $v^T \mathbf{A} v > 0$ for all $v \neq 0$.
- $\mathbf{A} \succeq 0$ ($\mathbf{A}$ is *positive semidefinite*): $v^T \mathbf{A} v \geq 0$ for all v .
- $\mathbf{A} \succeq \mathbf{B}$: $\mathbf{A} - \mathbf{B} \succeq 0$.

Key property: The set of positive semidefinite matrices forms a *convex cone*. This is why LMI-based searches for contraction metrics (Chapter 5) are convex optimization problems.

.12 Schur Complement

For a block matrix $\mathbf{M} = \begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^T & \mathbf{C} \end{bmatrix}$ with $\mathbf{C} \succ 0$:

$$\mathbf{M} \succ 0 \quad \Leftrightarrow \quad \mathbf{A} - \mathbf{B}\mathbf{C}^{-1}\mathbf{B}^T \succ 0. \quad (38)$$

The matrix $\mathbf{A} - \mathbf{B}\mathbf{C}^{-1}\mathbf{B}^T$ is the *Schur complement* of $\mathbf{C}$ in $\mathbf{M}$. This identity is used extensively in Riccati equation derivations (Chapters 6 and 7) and in the mass matrix decomposition for flexible systems (Chapter 9).

.13 Singular Value Decomposition

Every matrix $\mathbf{A} \in \mathbb{R}^{m \times n}$ has an SVD: $\mathbf{A} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^T$, where $\mathbf{U}$ and $\mathbf{V}$ are orthogonal and $\mathbf{\Sigma}$ is diagonal with non-negative entries $\sigma_1 \geq \sigma_2 \geq \dots \geq 0$. The SVD is used in this book for:

- Analyzing the STM $\Phi(t_1, t_0)$: singular values quantify amplification of perturbations (Chapter 2).
- Impact sensitivity analysis: singular values of $J_{\text{impact}} \cdot \mathbf{C} \cdot \Phi$ reveal the most sensitive perturbation directions (Chapter 9).
- Condition number $\kappa(\mathbf{A}) = \sigma_1/\sigma_n$: measures sensitivity to perturbations.

.14 Matrix Exponential

For $\mathbf{A} \in \mathbb{R}^{n \times n}$, the matrix exponential is:

$$e^{\mathbf{A}t} = \sum_{k=0}^{\infty} \frac{(\mathbf{A}t)^k}{k!}.$$

It satisfies $\frac{d}{dt}e^{\mathbf{A}t} = \mathbf{A}e^{\mathbf{A}t}$ and is the state transition matrix for LTI systems: $\Phi(t, t_0) = e^{\mathbf{A}(t-t_0)}$.

Caution: For time-varying $\mathbf{A}(t)$, $\Phi(t, t_0) \neq e^{\int_{t_0}^t \mathbf{A}(s) ds}$ in general. Equality holds only when $[\mathbf{A}(t_1), \mathbf{A}(t_2)] = 0$ for all t_1, t_2 (the commutativity condition for matrix exponentials).

.15 Kronecker Products

The Kronecker product $\mathbf{A} \otimes \mathbf{B}$ expands block structure and is essential for vectorized Lyapunov/Riccati equations:

$$\text{vec}(\mathbf{AXB}) = (\mathbf{B}^T \otimes \mathbf{A})\text{vec}(\mathbf{X}).$$

For $\mathbf{A}^T \mathbf{P} + \mathbf{PA} + \mathbf{Q} = 0$, vectorization yields

$$(\mathbf{I} \otimes \mathbf{A}^T + \mathbf{A}^T \otimes \mathbf{I})\text{vec}(\mathbf{P}) = -\text{vec}(\mathbf{Q}),$$

which is directly useful in Chapter 7.

.16 Matrix Calculus

Control derivations repeatedly require gradients with respect to vectors and matrices:

$$\frac{\partial}{\partial x}(x^T \mathbf{A}x) = (\mathbf{A} + \mathbf{A}^T)x, \quad \frac{\partial}{\partial \mathbf{X}} \text{tr}(\mathbf{A}^T \mathbf{X}) = \mathbf{A}.$$

These identities support second-order expansions in DDP and local quadratic models in Chapter 6.

.17 Generalized Eigenvalue Problems

Many stability questions appear as matrix pencils:

$$\mathbf{A}v = \lambda \mathbf{B}v, \quad \det(\mathbf{A} - \lambda \mathbf{B}) = 0.$$

Generalized eigenanalysis is required when constraints, descriptor dynamics, or mass matrices lead to non-identity state weighting.

.18 Perturbation Theory and Pseudospectra

Eigenvalues can be highly sensitive in non-normal systems. The ε -pseudospectrum is

$$\Lambda_\varepsilon(\mathbf{A}) = \{z \in \mathbb{C} : \|(z\mathbf{I} - \mathbf{A})^{-1}\| > 1/\varepsilon\}.$$

This captures transient growth that eigenvalues alone miss, which is directly relevant to “small perturbation, large excursion” behavior in Chapter 2.

.19 Sparse Matrix Methods

Large-scale discretizations produce sparse operators. Storing sparse matrices in CSR/CSC formats reduces memory and enables scalable iterative solvers (CG, GMRES, MINRES). This matters for trajectory optimization and model predictive control where linear solves dominate runtime.

.20 LMI Fundamentals

Linear Matrix Inequalities (LMIs) take the form $\mathbf{A}_0 + \sum_i x_i \mathbf{A}_i \prec 0$. These are convex constraints. Tools like cvxpy and SciPy can solve LMI optimization problems efficiently.

Example .2. Python Example: Sparse Solve with SciPyapp-sparse-solve

```
1 import nu
```


Bibliography

- [AM78] R. Abraham and J. E. Marsden. *Foundations of Mechanics*. Benjamin/Cummings, 2nd edition, 1978.
- [Arn89] Vladimir I. Arnold. *Mathematical Methods of Classical Mechanics*. Springer, 2nd edition, 1989.
- [AS04] Andrei A. Agrachev and Yuri L. Sachkov. *Control Theory from the Geometric Viewpoint*, volume 87 of *Encyclopaedia of Mathematical Sciences*. Springer, 2004.
- [Bel57] R. Bellman. *Dynamic Programming*. Princeton University Press, 1957.
- [BL04] F. Bullo and A. D. Lewis. *Geometric Control of Mechanical Systems*. Springer, 2004.
- [Bul24] F. Bullo. *Contraction Theory for Dynamical Systems*. Kindle Direct Publishing, 2024.
- [Cha11] John H. Challis. An induced acceleration index for examining joint couplings. *Journal of Biomechanics*, 44(12):2320–2322, 2011.
- [CTC⁺16] Elena J. Caruthers, Julie A. Thompson, Ajit M. W. Chaudhari, Laura C. Schmitt, Thomas M. Best, Katherine R. Saul, and Robert A. Siston. Muscle forces and their contributions to vertical and horizontal acceleration of the center of mass during sit-to-stand transfer in young, healthy adults. *Journal of Applied Biomechanics*, 32(5):487–503, 2016.
- [dC92] M. P. do Carmo. *Riemannian Geometry*. Birkhäuser, 1992.
- [Dem61] B. P. Demidovich. Dissipativity of a nonlinear system of differential equations. *Vestnik Moscow State University, Ser. Mat. Mekh.*, 6:19–27, 1961.
- [Fea08] R. Featherstone. *Rigid Body Dynamics Algorithms*. Springer, 2008.
- [GPS02] Herbert Goldstein, Charles Poole, and John Safko. *Classical Mechanics*. Addison-Wesley, 3rd edition, 2002.
- [Hir11] Masaya Hirashima. Induced acceleration analysis of three-dimensional multi-joint movements and its application to sports movements. In *Theoretical Biomechanics*, pages 303–318. IntechOpen, 2011.
- [HKWO07] Masaya Hirashima, Kazutoshi Kudo, Koji Watarai, and Tatsuyuki Ohtsuki. Control of 3D limb dynamics in unconstrained overarm throws of different speeds performed by skilled baseball players. *Journal of Neurophysiology*, 97(1):680–691, 2007.
- [HLW06] E. Hairer, C. Lubich, and G. Wanner. *Geometric Numerical Integration*. Springer, 2nd edition, 2006.
- [HO08] Masaya Hirashima and Tatsuyuki Ohtsuki. Exploring the mechanism of skilled overarm throwing. *Exercise and Sport Sciences Reviews*, 36(4):205–211, 2008.
- [HYNO08] Masaya Hirashima, Katsu Yamane, Yoshihiko Nakamura, and Tatsuyuki Ohtsuki. Kinetic chain of overarm throwing in terms of joint rotations revealed by induced acceleration analysis. *Journal of Biomechanics*, 41(13):2874–2883, 2008.
- [JM70] D. H. Jacobson and D. Q. Mayne. *Differential Dynamic Programming*. American Elsevier Publishing Company, 1970.
- [Kha87] O. Khatib. A unified approach for motion and force control of robot manipulators: The operational space formulation. *IEEE Journal on Robotics and Automation*, 3(1):43–53, 1987.

- [Kha02] H. K. Khalil. *Nonlinear Systems*. Prentice Hall, 3rd edition, 2002.
- [KSS97] Thomas M. Kepple, Karen L. Siegel, and Steven J. Stanhope. Relative contributions of the lower extremity joint moments to forward progression and support during gait. *Gait & Posture*, 6(1):1–8, 1997.
- [LS98] W. Lohmiller and J.-J. E. Slotine. On contraction analysis for non-linear systems. *Automatica*, 34(6):683–696, 1998.
- [MLS94] R. M. Murray, Z. Li, and S. S. Sastry. *A Mathematical Introduction to Robotic Manipulation*. CRC Press, 1994.
- [MS17] I. R. Manchester and J.-J. E. Slotine. Control contraction metrics: Convex and intrinsic criteria for nonlinear feedback design. *IEEE Transactions on Automatic Control*, 62(6):3046–3053, 2017.
- [NKZ01] Richard R. Neptune, Steven A. Kautz, and Felix E. Zajac. Contributions of the individual ankle plantar flexors to support, forward progression and swing initiation during walking. *Journal of Biomechanics*, 34(11):1387–1398, 2001.
- [PBG62] L. S. Pontryagin, V. G. Boltyanskii, R. V. Gamkrelidze, and E. F. Mishchenko. *The Mathematical Theory of Optimal Processes*. Interscience, 1962.
- [RK99] Patrick O. Riley and D. Casey Kerrigan. Kinetics of stiff-legged gait: Induced acceleration analysis. *IEEE Transactions on Rehabilitation Engineering*, 7(4):420–426, 1999.
- [Sas99] S. Sastry. *Nonlinear Systems: Analysis, Stability, and Control*. Springer, 1999.
- [SFG10] A. S. Shiriaev, L. B. Freidovich, and S. V. Gusev. Transverse linearization for controlled mechanical systems with several passive degrees of freedom. *IEEE Transactions on Automatic Control*, 55(4):893–906, 2010.
- [SHV06] M. W. Spong, S. Hutchinson, and M. Vidyasagar. *Robot Modeling and Control*. Wiley, 2006.
- [Sil18] Anne K. Silverman. Induced acceleration and power analyses of human motion. In *Handbook of Human Motion*, pages 309–325. Springer International Publishing, 2018.
- [SL91] J.-J. E. Slotine and W. Li. *Applied Nonlinear Control*. Prentice Hall, 1991.
- [SRZG93] Lisa M. Schutte, Mary M. Rodgers, Felix E. Zajac, and Roger M. Glaser. Improving the efficacy of electrical stimulation-induced leg cycle ergometry: An analysis based on a dynamic musculoskeletal model. *IEEE Transactions on Rehabilitation Engineering*, 1(2):109–125, 1993.
- [Zaj89] F. E. Zajac. Muscle and tendon: properties, models, scaling, and application to biomechanics and motor control. *Critical Reviews in Biomedical Engineering*, 17(4):359–411, 1989.
- [ZG89] Felix E. Zajac and Michael E. Gordon. Determining muscle’s force and action in multi-articular movement. *Exercise and Sport Sciences Reviews*, 16:187–230, 1989.
- [ZNK02] Felix E. Zajac, Richard R. Neptune, and Steven A. Kautz. Biomechanics and muscle coordination of human walking—Part I: Introduction to concepts, power transfer, dynamics and simulations. *Gait and Posture*, 16(3):215–232, 2002.
- [ZNK03] Felix E. Zajac, Richard R. Neptune, and Steven A. Kautz. Biomechanics and muscle coordination of human walking—Part II: Lessons from dynamical simulations and clinical implications. *Gait and Posture*, 17(1):1–17, 2003.