
Shot-Endpoint Density Conditional on Supported Airborne Shots

Pilot: Driver · Lean 5° · Curve ×2 · Shaft Twist SD 2°

Protocol: driver-control-speed-bounds/1 | Stage: 32-Shot Pilot; No Final Inference | Population: Individually Supported Endpoints | Path SD: 0.5° | Speed SD: 2 mph | Strike SD: 0.25 in on Each Axis | Valid/Total: Straight 32/32 valid; Draw 32/32 valid; Fade 32/32 valid

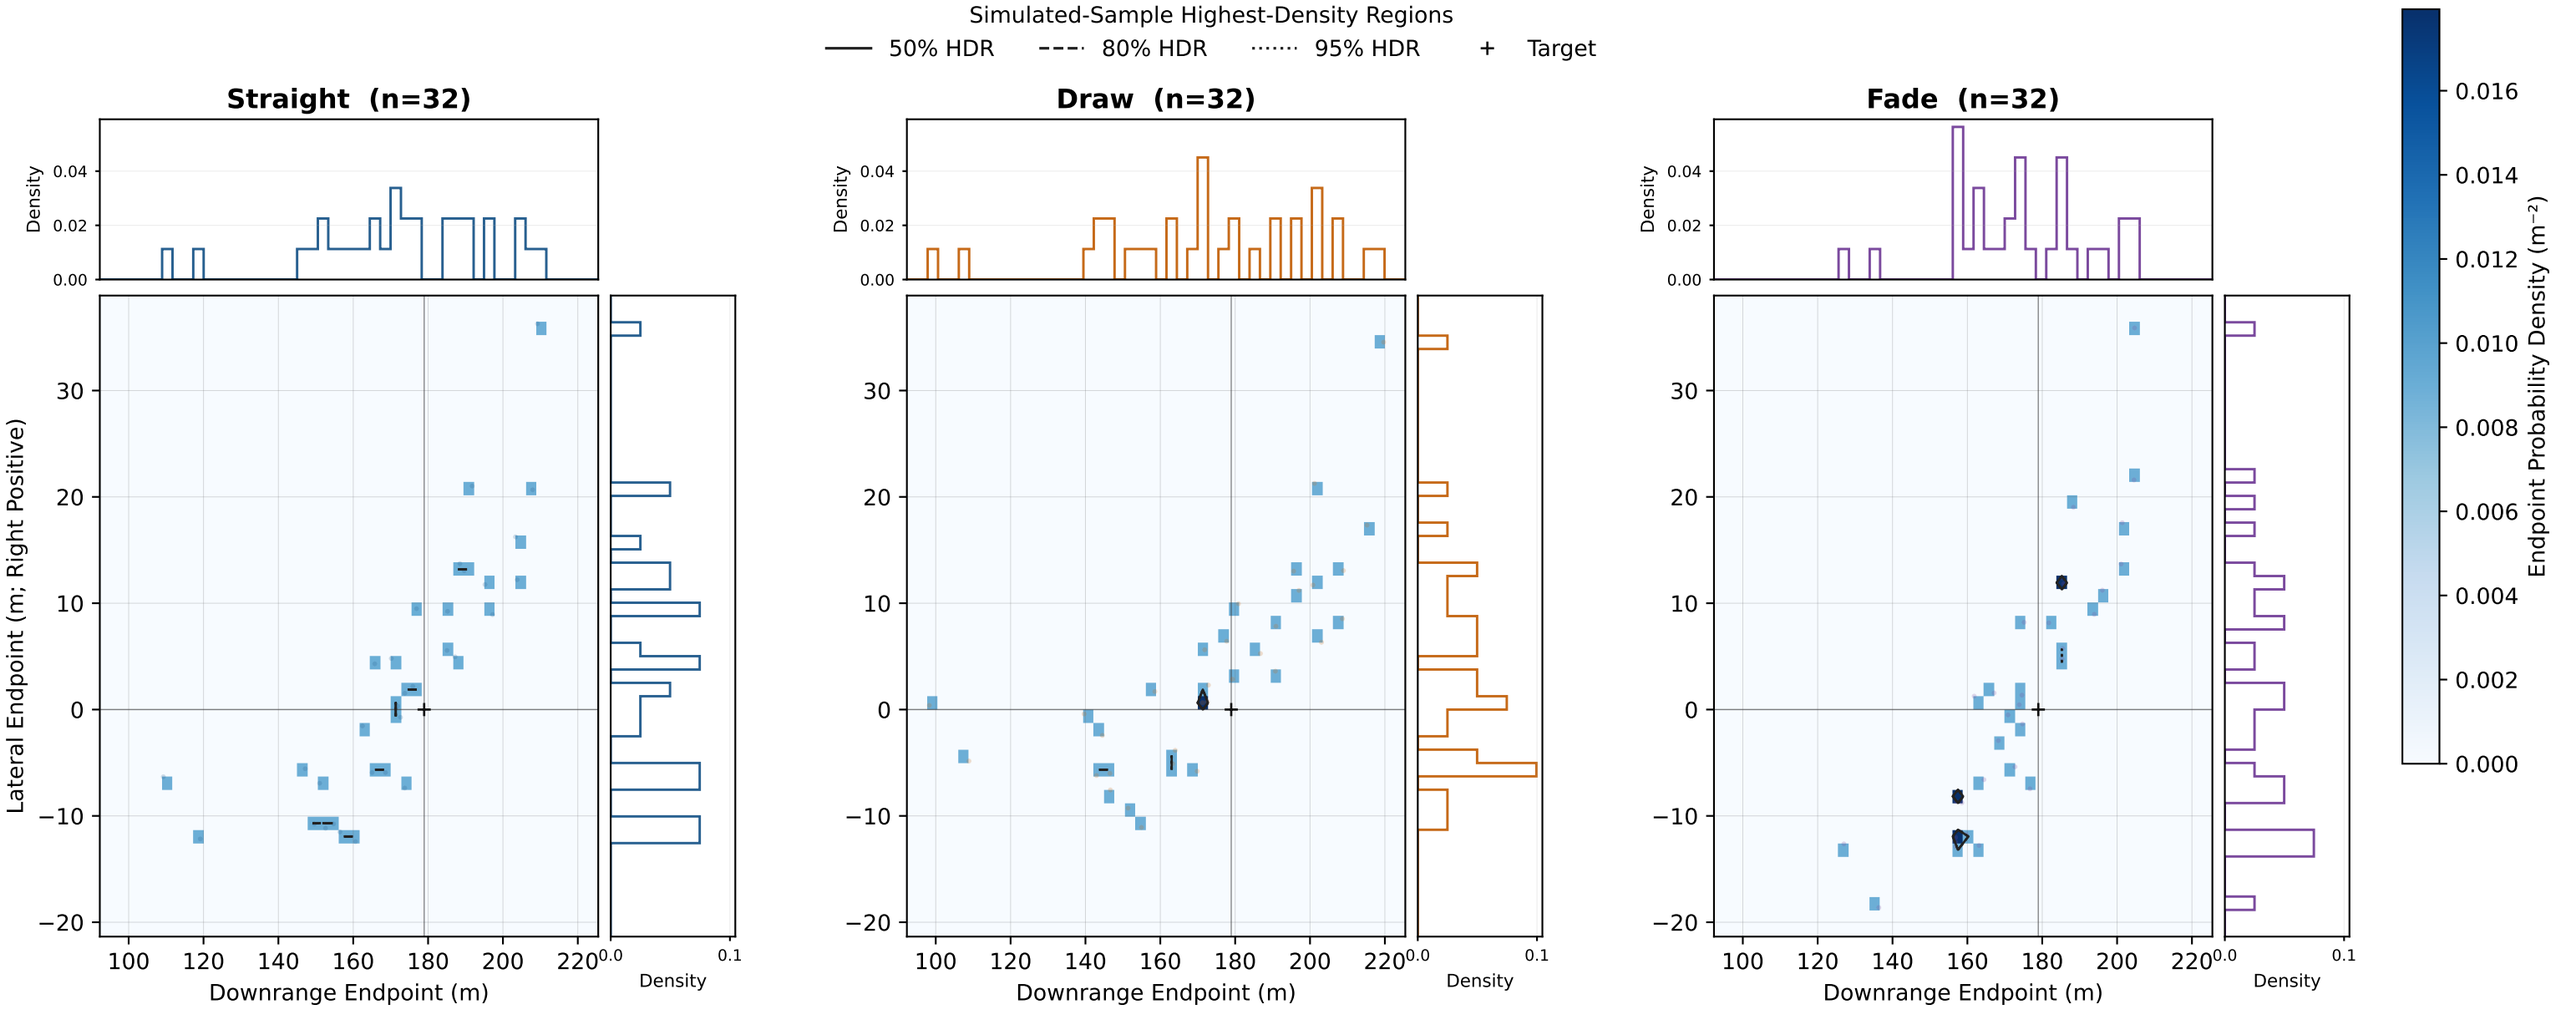

Illustrative Simulation • Assumed Head Properties • Carry Only. HDR mass is sample-derived from simulated endpoints. Colored Dots Shown/Valid: Straight 32/32; Draw 32/32; Fade 32/32; density, HDR, and marginals use every valid endpoint. Histogram only; no KDE or synthetic covariance spread; not calibrated player precision. Bin resolution: 2.77 × 1.26 m. Achieved HDR Mass By Pattern (Discrete Ties May Exceed Request): Straight 68.8%/90.6%/100.0% | Draw 53.1%/81.2%/96.9% | Fade 56.2%/87.5%/100.0%