
Shot-Endpoint Density Conditional on Supported Airborne Shots

Pilot: Pitching Wedge · Lean 5° · Curve ×2 · Shaft Twist SD 2°

Protocol: pw-control-face-bounds/1 | Stage: 32-Shot Pilot; No Final Inference | Population: Individually Supported Endpoints | Path SD: 0.5° | Speed SD: 2 mph | Strike SD: 0.25 in on Each Axis | Valid/Total: Straight 32/32 valid; Draw 32/32 valid; Fade 32/32 valid

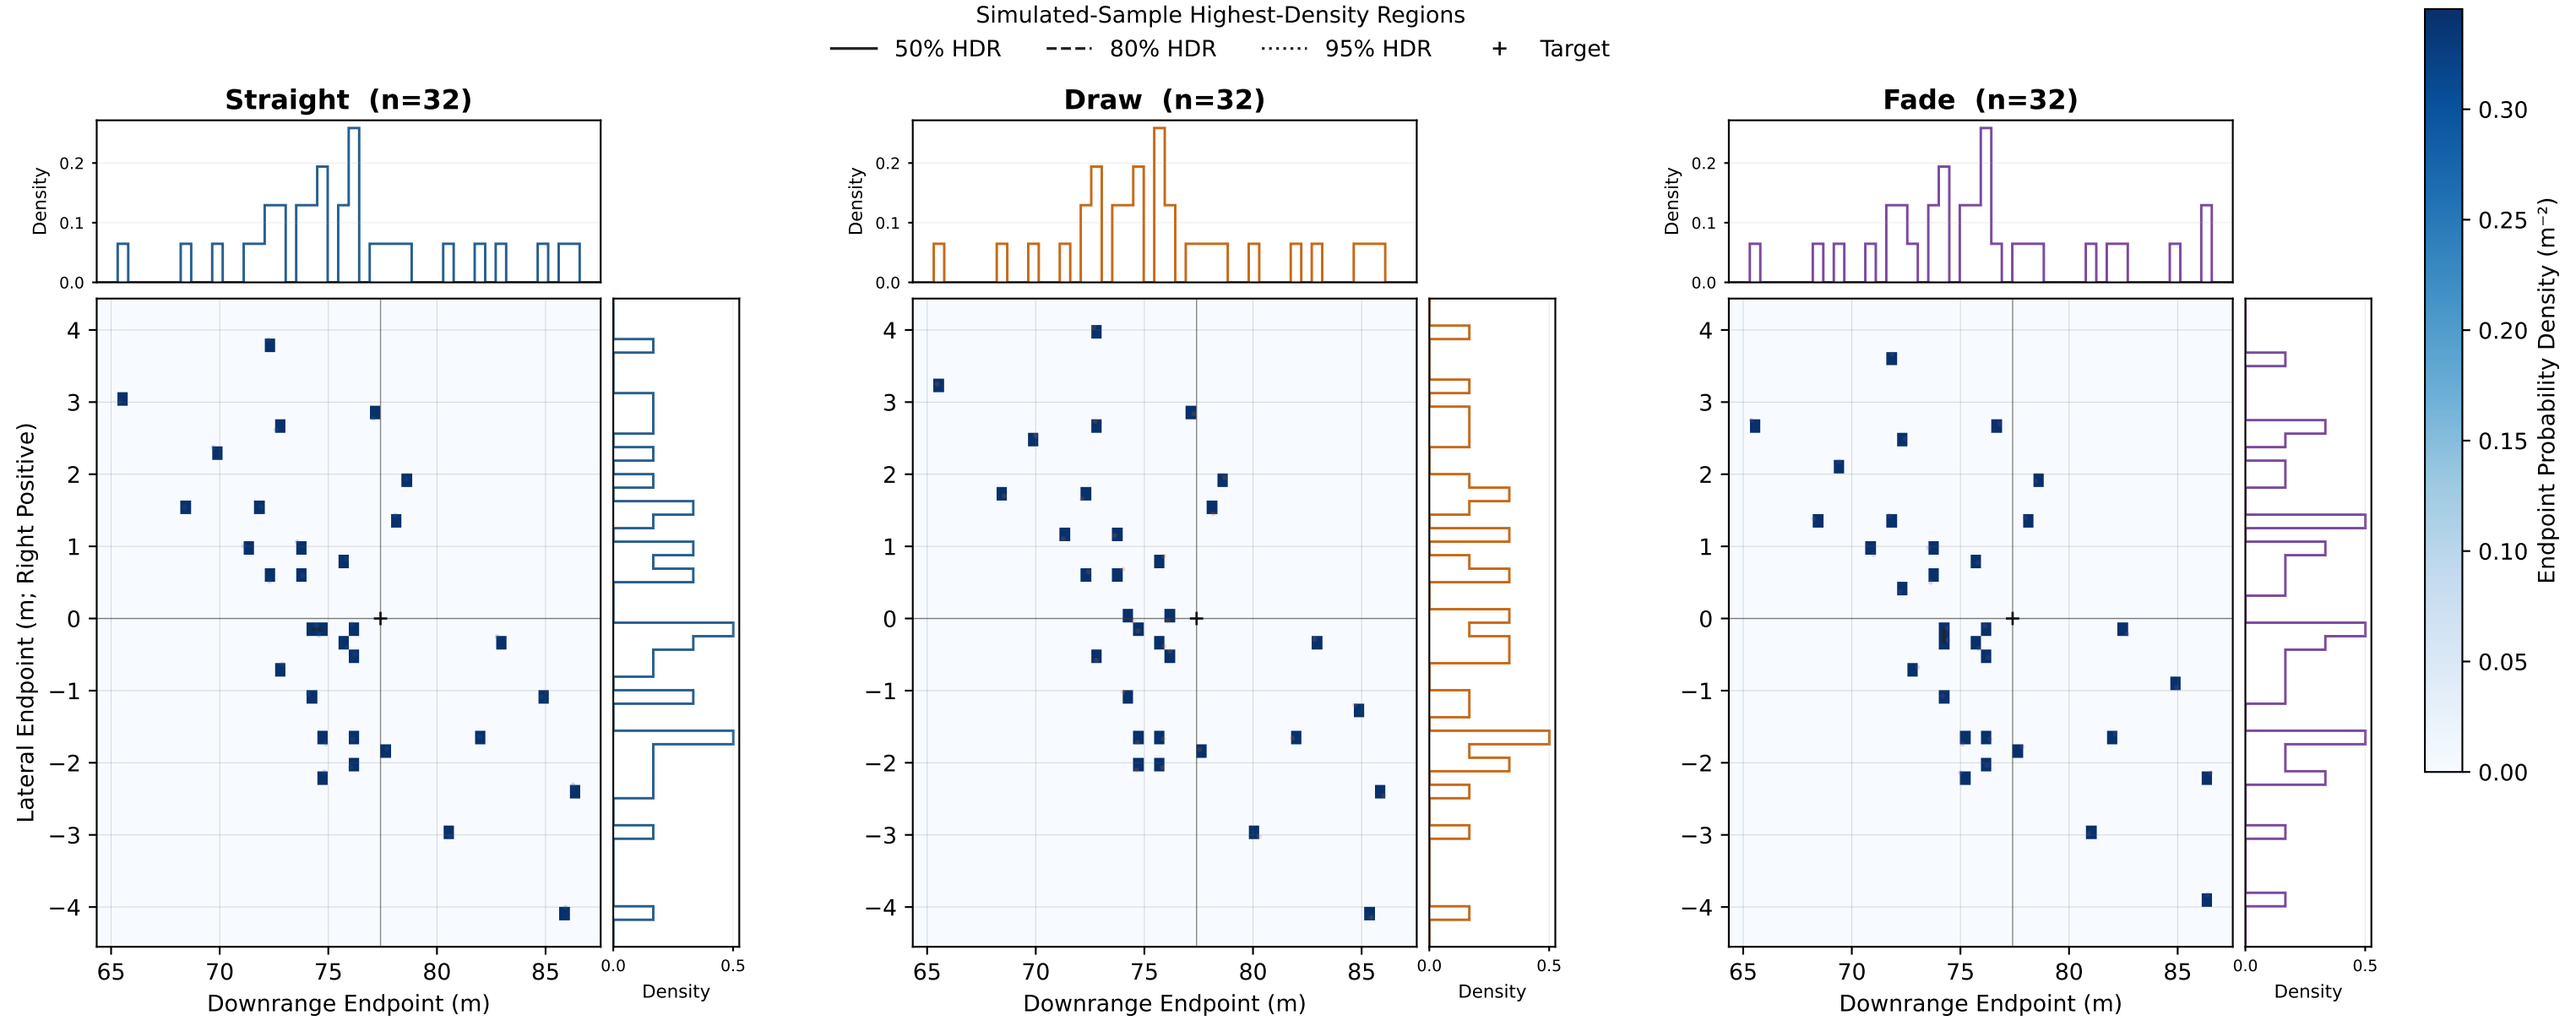

Illustrative Simulation • Assumed Head Properties • Carry Only. HDR mass is sample-derived from simulated endpoints. Colored Dots Shown/Valid: Straight 32/32; Draw 32/32; Fade 32/32; density, HDR, and marginals use every valid endpoint. Histogram only; no KDE or synthetic covariance spread; not calibrated player precision. Bin resolution: 0.483 × 0.187 m. Achieved HDR Mass By Pattern (Discrete Ties May Exceed Request): Straight 56.2%/90.6%/96.9% | Draw 65.6%/84.4%/96.9% | Fade 71.9%/93.8%/96.9%