
Shot-Endpoint Density Conditional on Supported Airborne Shots

Pilot: Pitching Wedge · Lean 0° · Curve ×2 · Shaft Twist SD 2°

Protocol: pw-primary-face-bounds/1 | Stage: 32-Shot Pilot; No Final Inference | Population: Individually Supported Endpoints | Path SD: 0.5° | Speed SD: 2 mph | Strike SD: 0.25 in on Each Axis | Valid/Total: Straight 32/32 valid; Draw 32/32 valid; Fade 32/32 valid

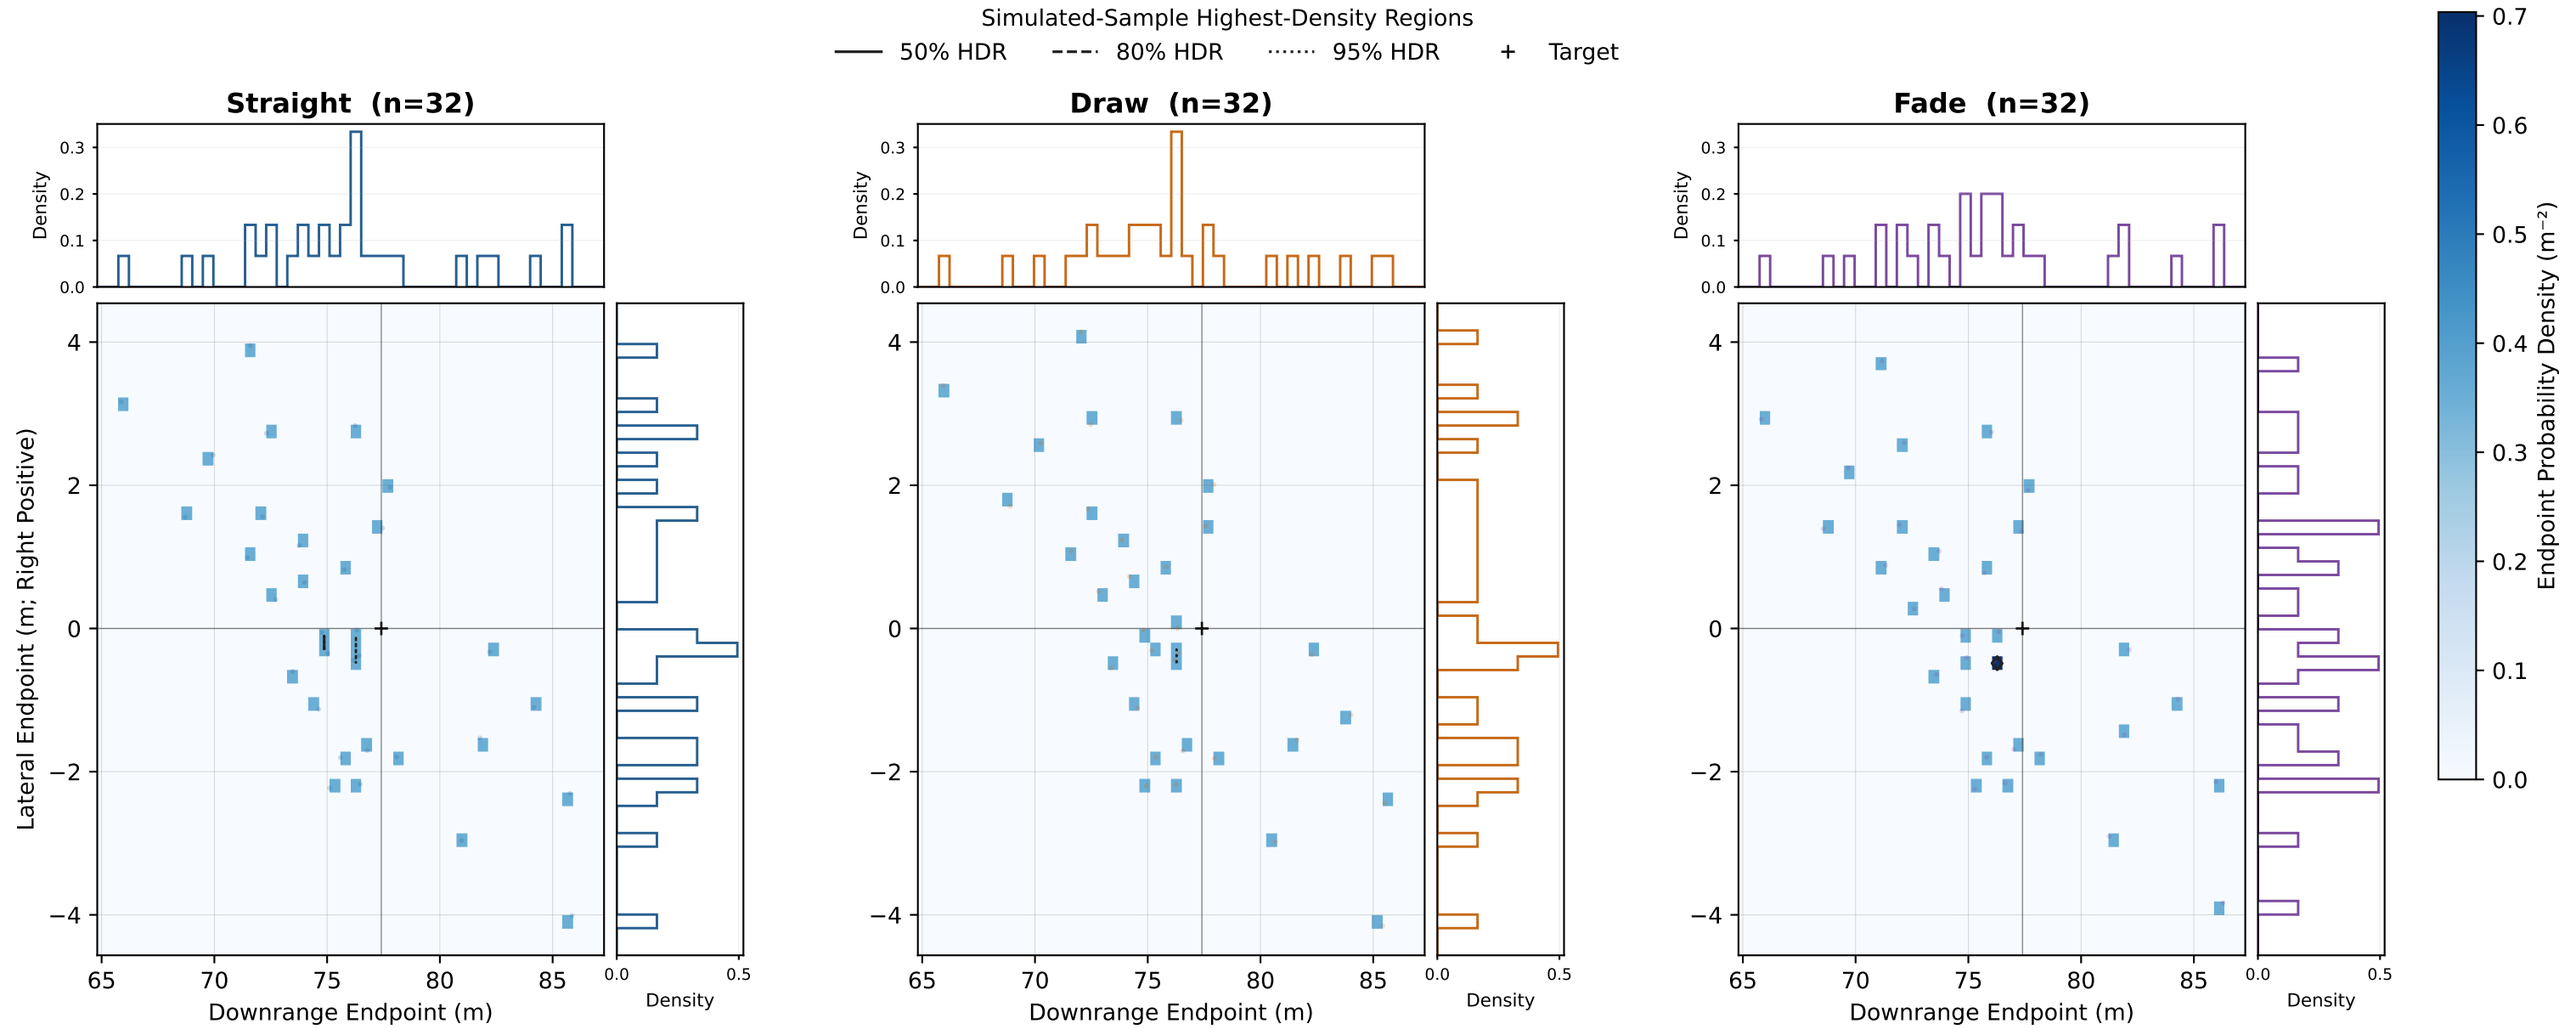

Illustrative Simulation • Assumed Head Properties • Carry Only. HDR mass is sample-derived from simulated endpoints. Colored Dots Shown/Valid: Straight 32/32; Draw 32/32; Fade 32/32; density, HDR, and marginals use every valid endpoint. Histogram only; no KDE or synthetic covariance spread; not calibrated player precision. Bin resolution: 0.468 × 0.19 m. Achieved HDR Mass By Pattern (Discrete Ties May Exceed Request): Straight 50.0%/93.8%/100.0% | Draw 50.0%/93.8%/96.9% | Fade 59.4%/93.8%/96.9%