
Shot-Endpoint Density Conditional on Supported Airborne Shots

driver_lean0_curve1_rotation1_combined2 — driver — combined2; shaft rotation SD 1°; curve ×1; Matched Raw Landing

club: driver | delivery mode: Matched Raw Landing | contact law: incremental_coulomb_energetic | reference club speed mps: 45.0 | static loft deg: 10.0 | nominal shaft lean deg: 0.0 | curve scale: 1.0 | random seed: 20261009 | attempts per pattern: 10000 | target residual max m: 2e-13 | nominal pattern solutions: Straight: face +0.000°, path +0.000°, speed 45.000 m/s; Draw: face +2.029°, path +3.529°, speed 45.063 m/s; Fade: face -2.029°, path -3.529°, speed 45.063 m/s | noise SDs: shaft rotation=1, path=0.5, speed=0.89408, horizontal contact=0.00635, vertical contact=0.00635, shaft lean=0, attack angle=0 | Valid/Total: Straight 10,000/10,000 valid; Draw 10,000/10,000 valid; Fade 10,000/10,000 valid

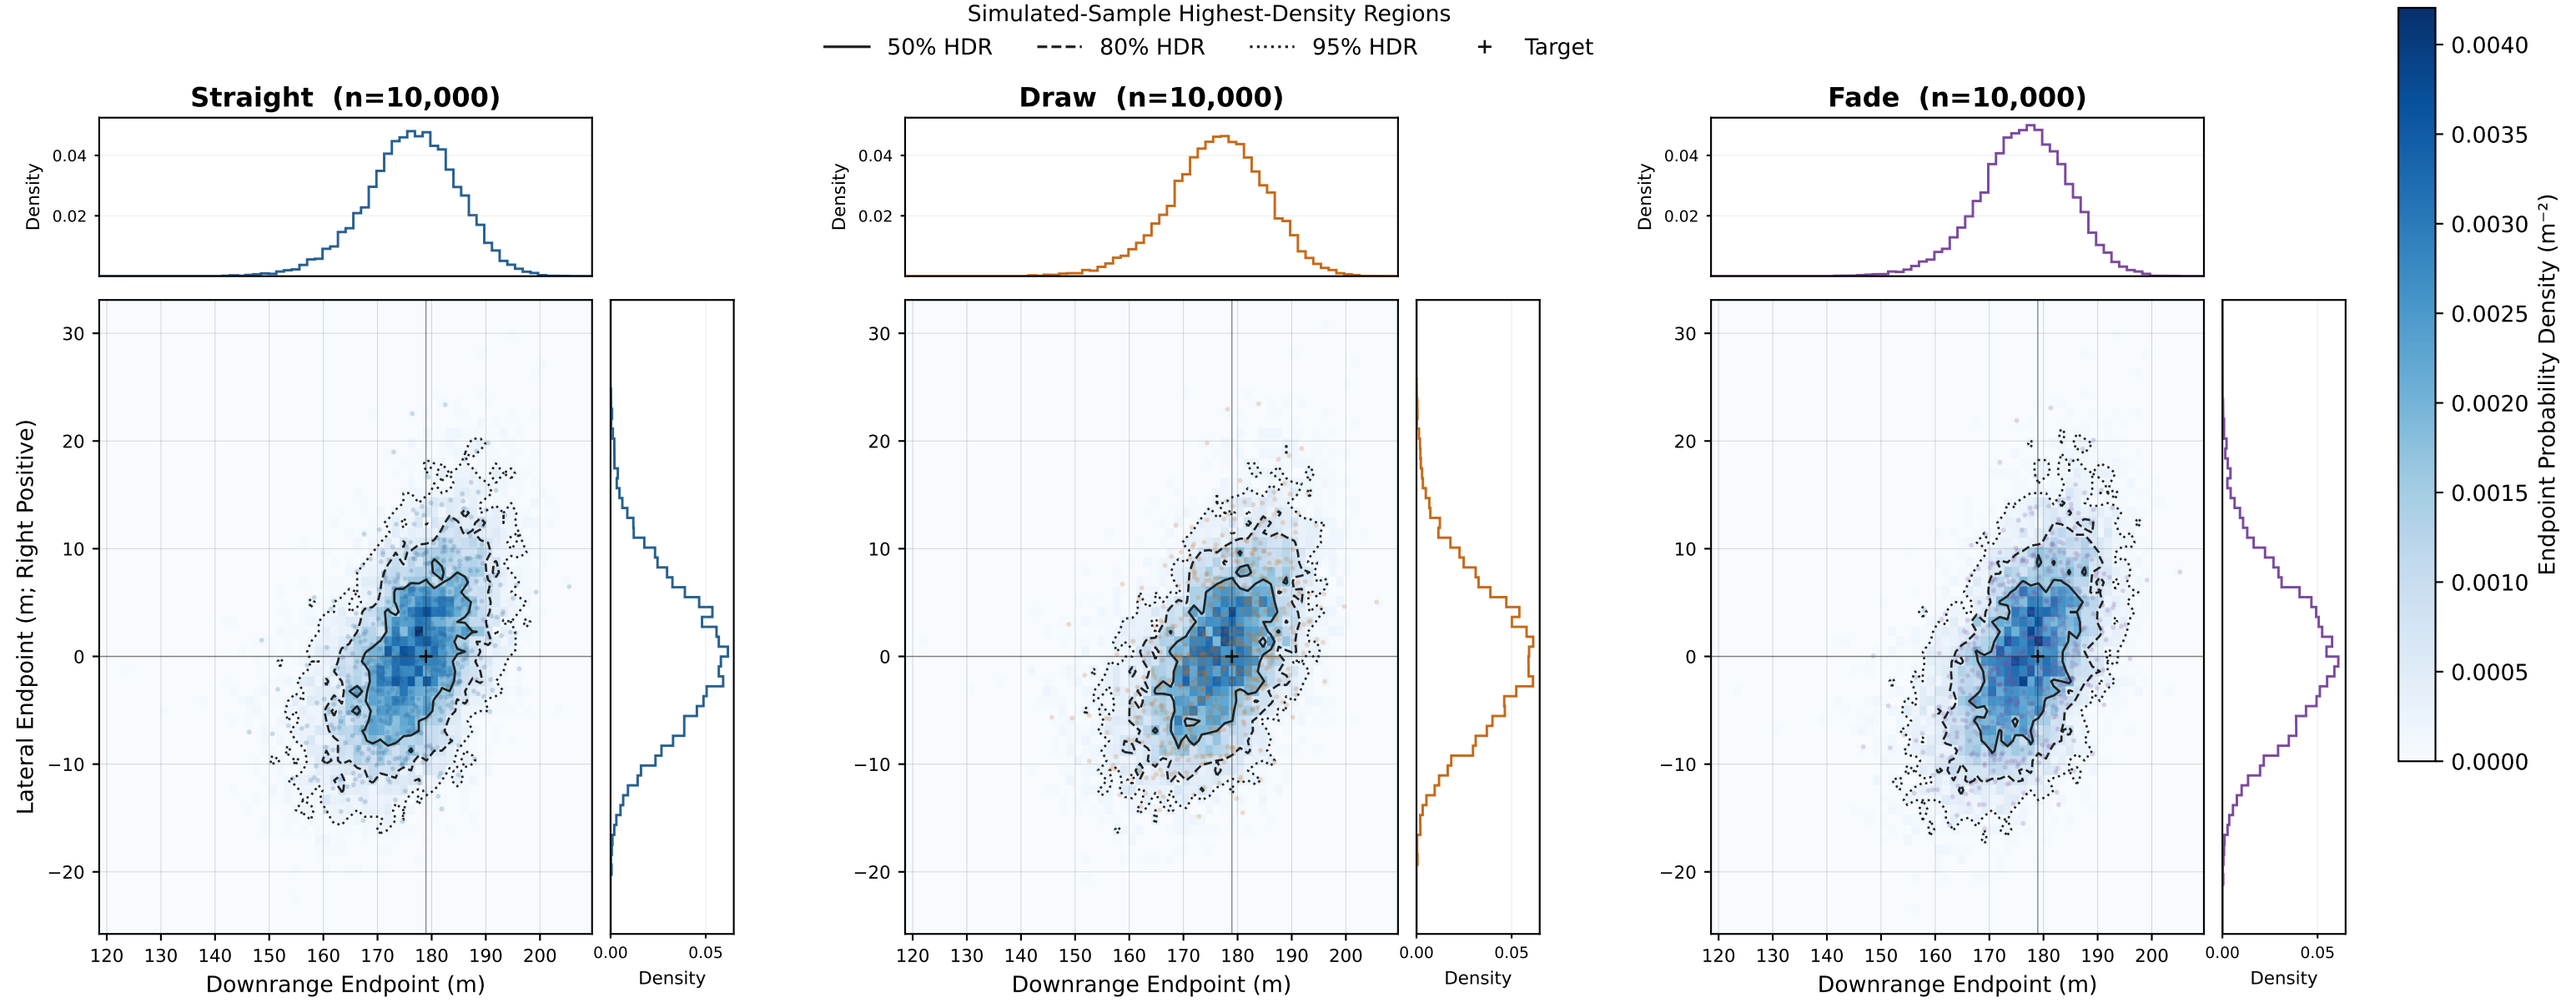

Illustrative Simulation • Assumed Head Properties • Carry Only. HDR mass is sample-derived from simulated endpoints. Colored Dots Shown/Valid: Straight 600/10,000; Draw 600/10,000; Fade 600/10,000; density, HDR, and marginals use every valid endpoint. Histogram only; no KDE or synthetic covariance spread; not calibrated player precision. Bin resolution: 1.42 × 0.92 m. Achieved HDR Mass By Pattern (Discrete Ties May Exceed Request): Straight 50.4%/80.3%/95.0% | Draw 50.6%/80.6%/95.0% | Fade 50.3%/80.3%/95.0%