
Driver: Shot Dispersion

Draw • Curve ×1 vs Curve ×2 • Shaft Twist SD 2° • Combined Delivery Noise

Protocol: Original Matched-Delivery Protocol | Target: 178.95 m downrange | Static Loft: 10° | Nominal Lean: 0° | Noise: Path SD 0.5° • Speed SD 2 mph • Strike SD 6.35/6.35 mm horizontal/vertical | Match Residuals: 2e-13 vs 3.03e-14 m | Valid/Total: Draw | Curve ×1 10,000/10,000 valid; Draw | Curve ×2 10,000/10,000 valid

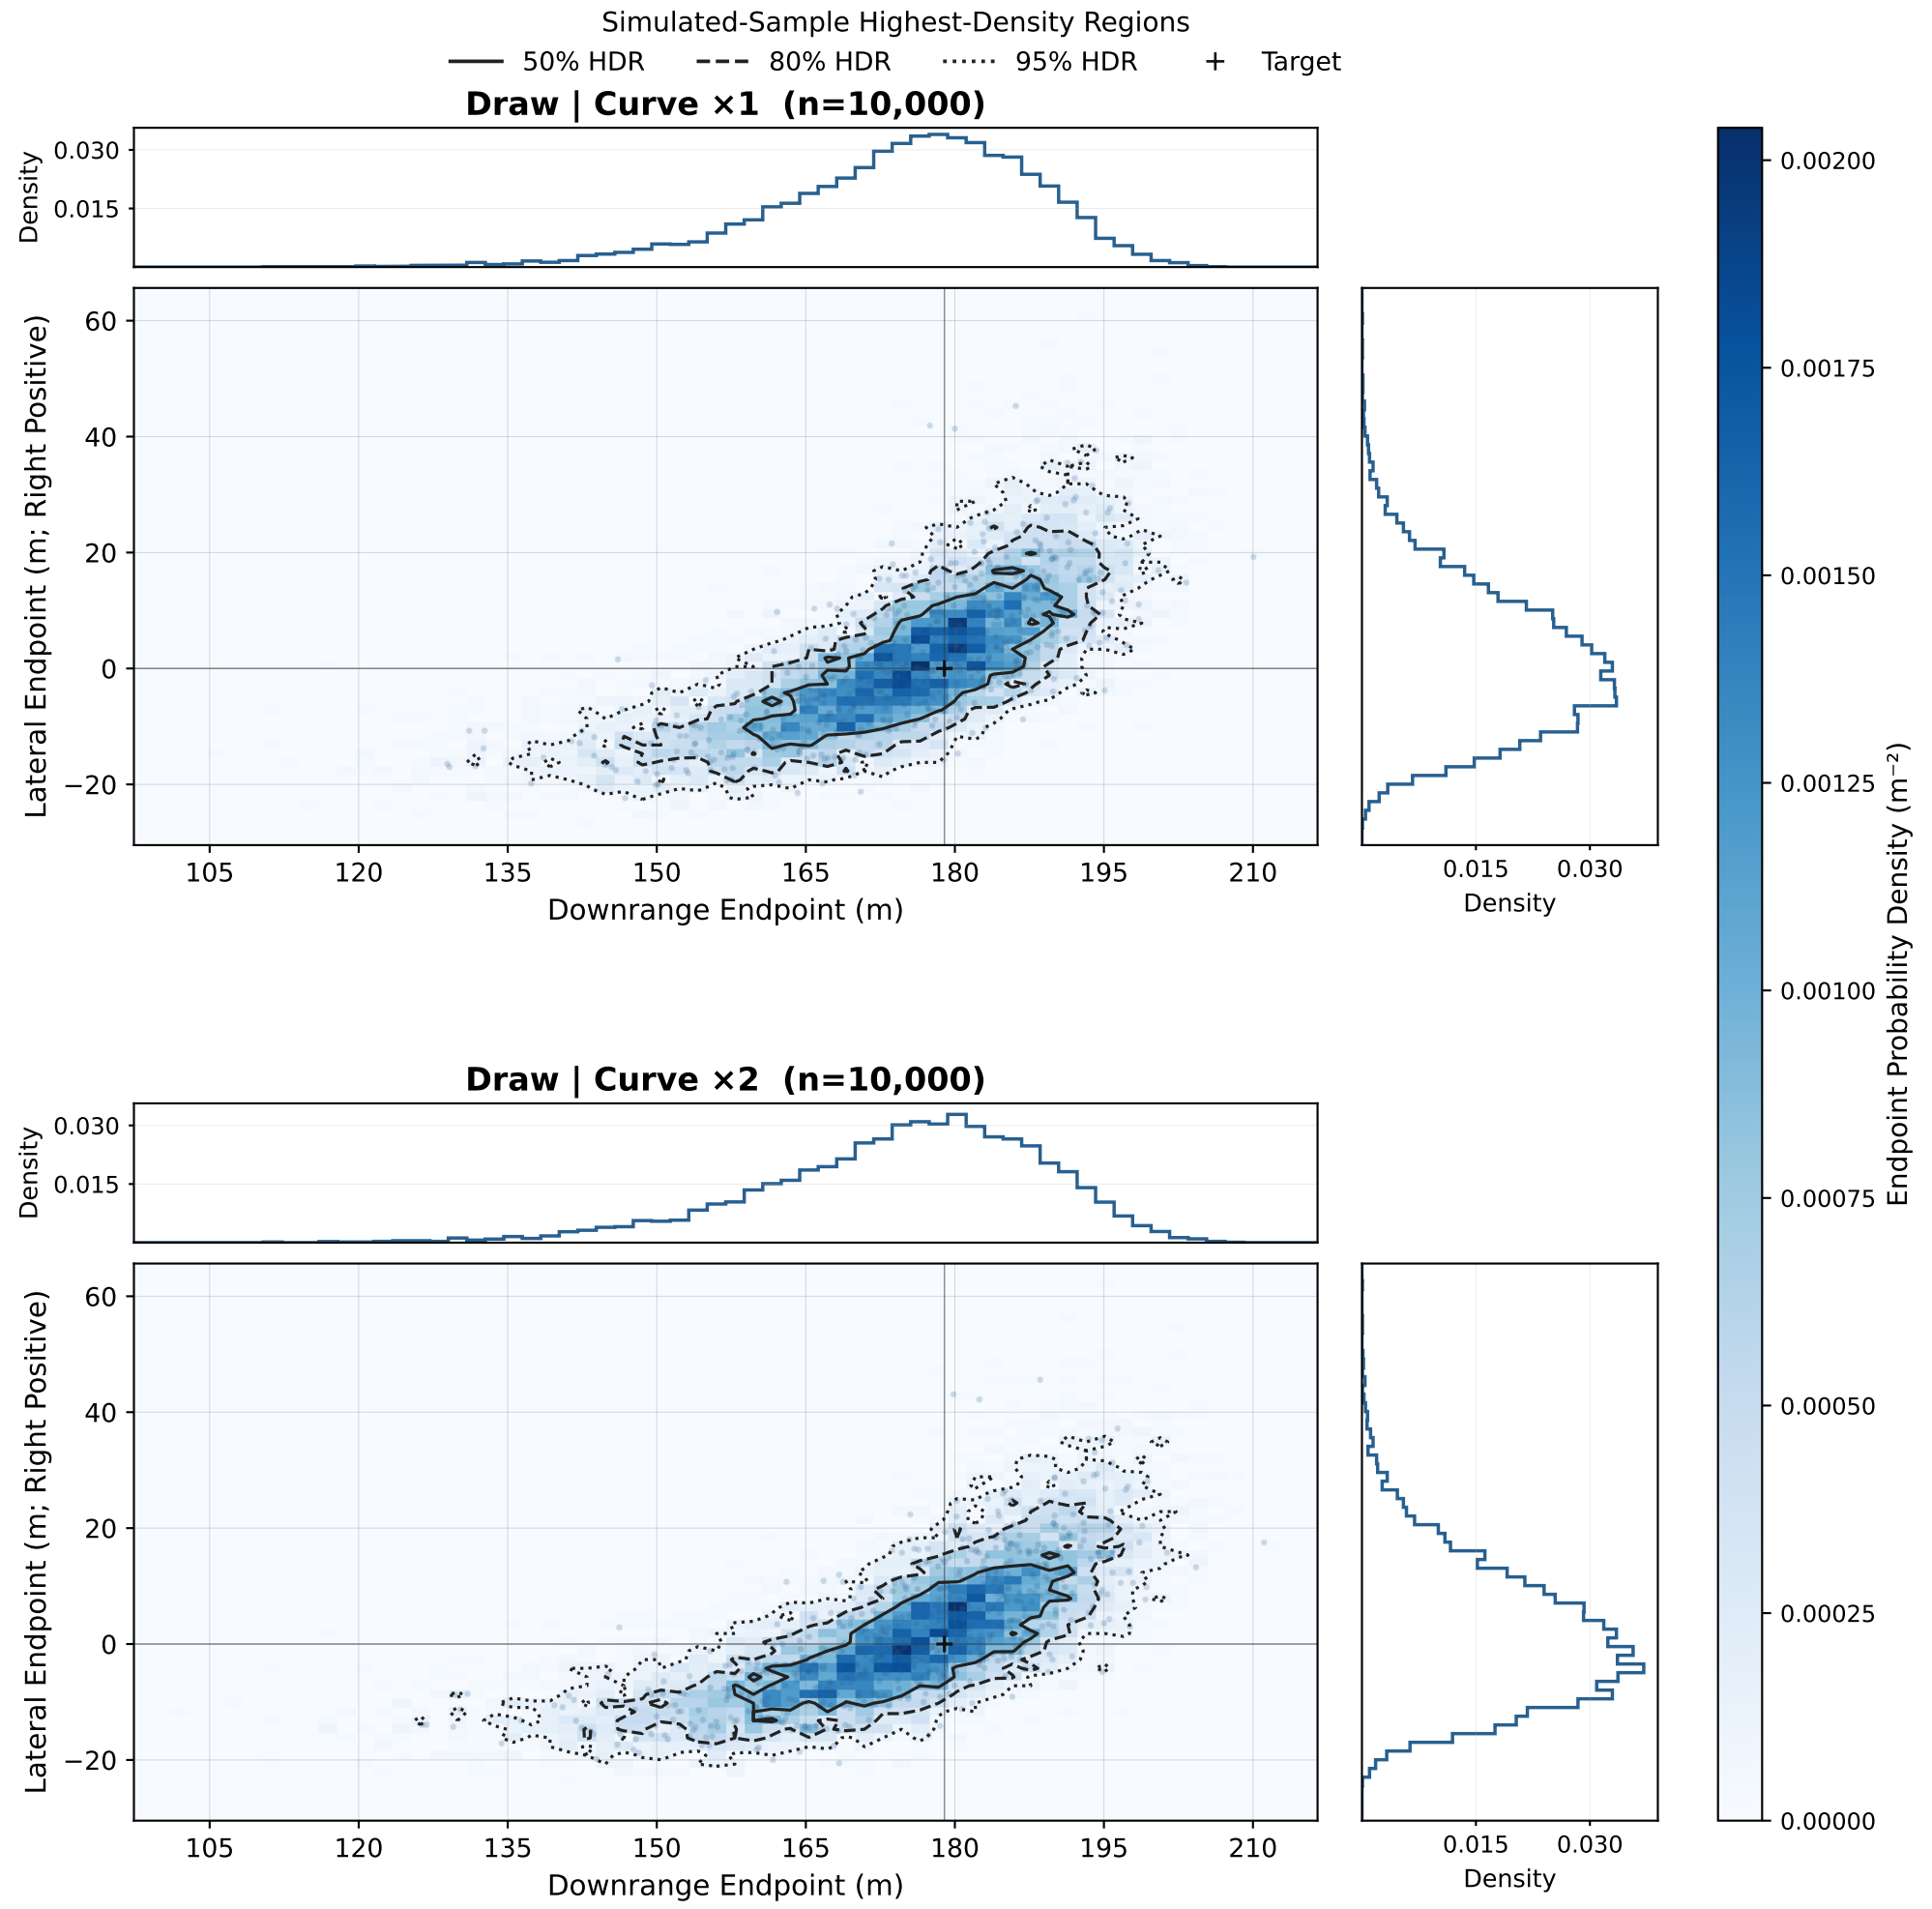

Model-Conditional Simulation • Carry Only • Not Calibrated Player Precision. Colored Dots Shown/Valid: Draw | Curve ×1 600/10,000; Draw | Curve ×2 600/10,000. Density, HDR, and marginals use every valid endpoint. Shared axes and density scale; contours are simulated-sample HDR.