
Driver: Shot Dispersion

Draw • Shaft Twist SD 1° vs SD 2° • Curve ×1 • Combined Delivery Noise

Protocol: Original Matched-Delivery Protocol | Target: 178.95 m downrange | Static Loft: 10° | Nominal Lean: 0° | Noise: Path SD 0.5° • Speed SD 2 mph • Strike SD 6.35/6.35 mm horizontal/vertical | Match Residuals: 2e-13 vs 2e-13 m | Valid/Total: Draw | SD 1° 10,000/10,000 valid; Draw | SD 2° 10,000/10,000 valid

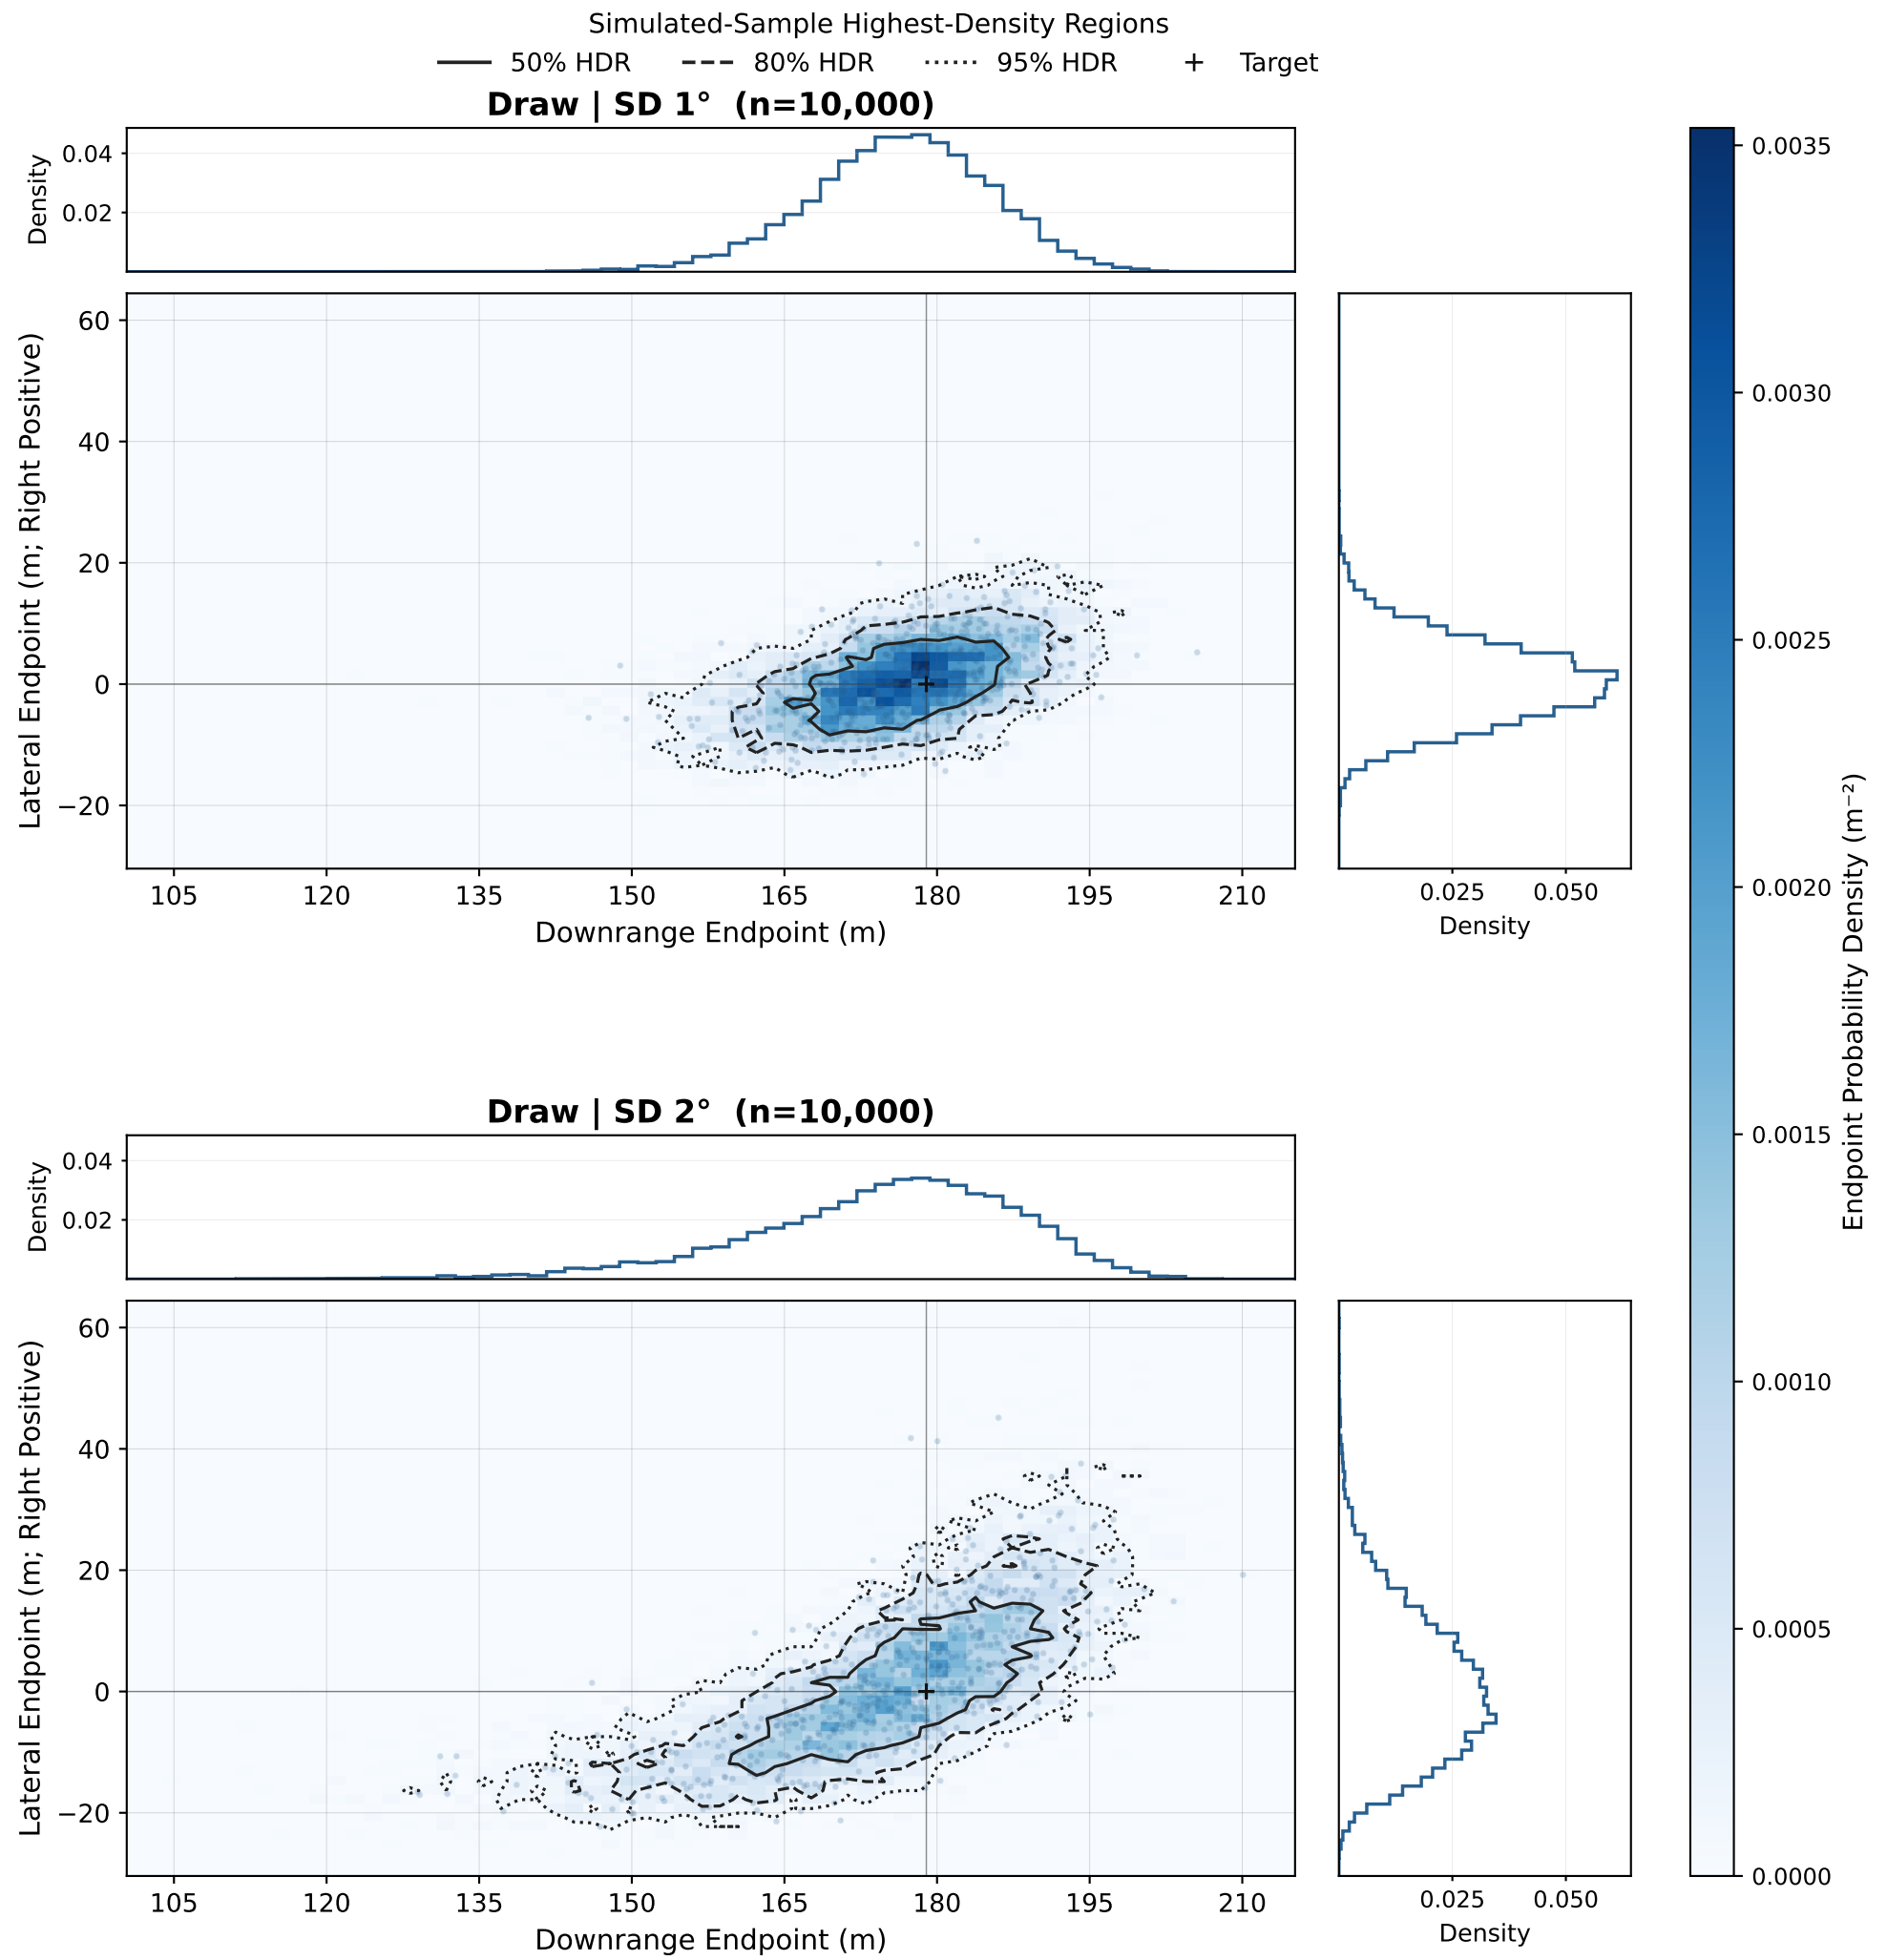

Model-Conditional Simulation • Carry Only • Not Calibrated Player Precision. Colored Dots Shown/Valid: Draw | SD 1° 600/10,000; Draw | SD 2° 600/10,000. Density, HDR, and marginals use every valid endpoint. Shared axes and density scale; contours are simulated-sample HDR.