
Driver: Shot Dispersion

Lean 0° • Shaft Twist SD 1° • Curve ×1

Protocol: Original Matched-Delivery Protocol | Noise: Path SD 0.5° • Speed SD 2 mph • Strike SD 6.35/6.35 mm horizontal/vertical | Matched Target: 178.95 m downrange | Valid/Total: Straight 10,000/10,000 valid; Draw 10,000/10,000 valid; Fade 10,000/10,000 valid

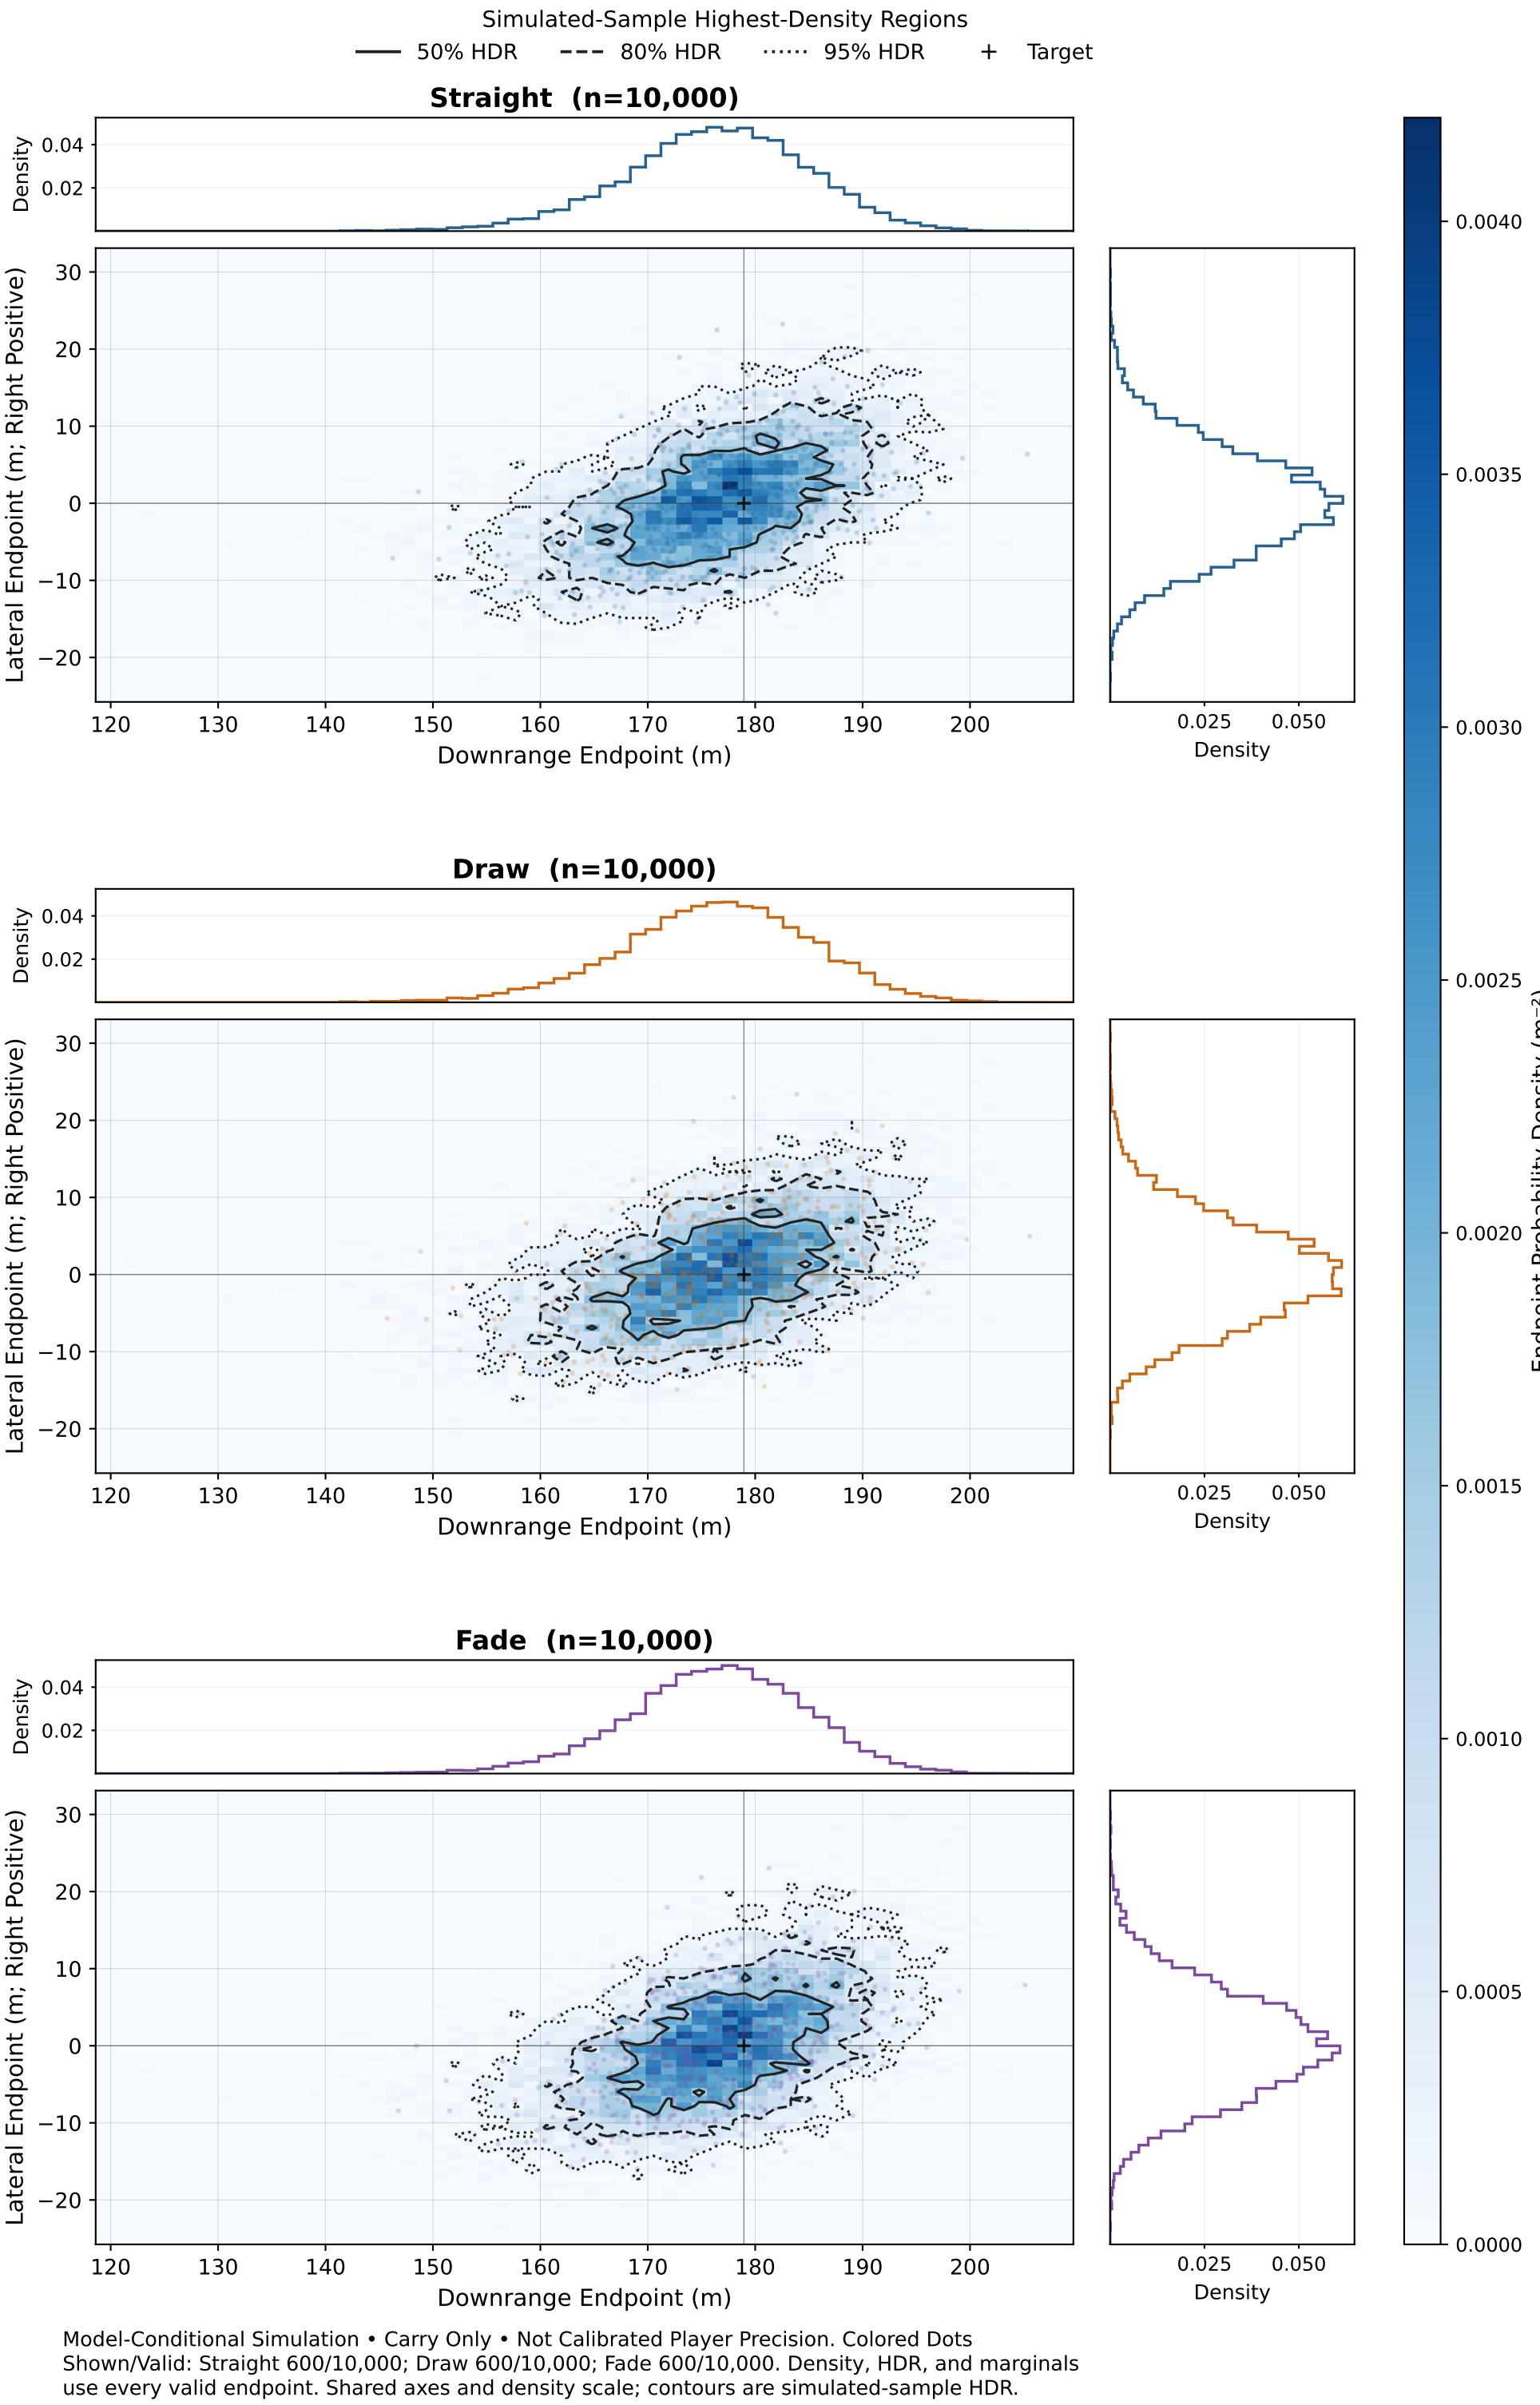

Model-Conditional Simulation • Carry Only • Not Calibrated Player Precision. Colored Dots Shown/Valid: Straight 600/10,000; Draw 600/10,000; Fade 600/10,000. Density, HDR, and marginals use every valid endpoint. Shared axes and density scale; contours are simulated-sample HDR.