
Shot-Endpoint Density Conditional on Supported Airborne Shots

pitching_wedge_lean0_curve1_rotation1_combined2 — pitching_wedge — combined2; shaft rotation SD 1°; curve ×1; Matched Raw Landing

club: pitching_wedge | delivery mode: Matched Raw Landing | contact law: incremental_coulomb_energetic | reference club speed mps: 32.0 | static loft deg: 46.0 | nominal shaft lean deg: 0.0 | curve scale: 1.0 | random seed: 20261009 | attempts per pattern: 10000 | target residual max m: 1.42e-14 | nominal pattern solutions: Straight: face +0.000°, path +0.000°, speed 32.000 m/s; Draw: face -0.130°, path +1.370°, speed 32.011 m/s; Fade: face +0.130°, path -1.370°, speed 32.011 m/s | noise SDs: shaft rotation=1, path=0.5, speed=0.89408, horizontal contact=0.00635, vertical contact=0.00635, shaft lean=0, attack angle=0 | Valid/Total: Straight 9,999/10,000 valid; Draw 9,999/10,000 valid; Fade 9,999/10,000 valid

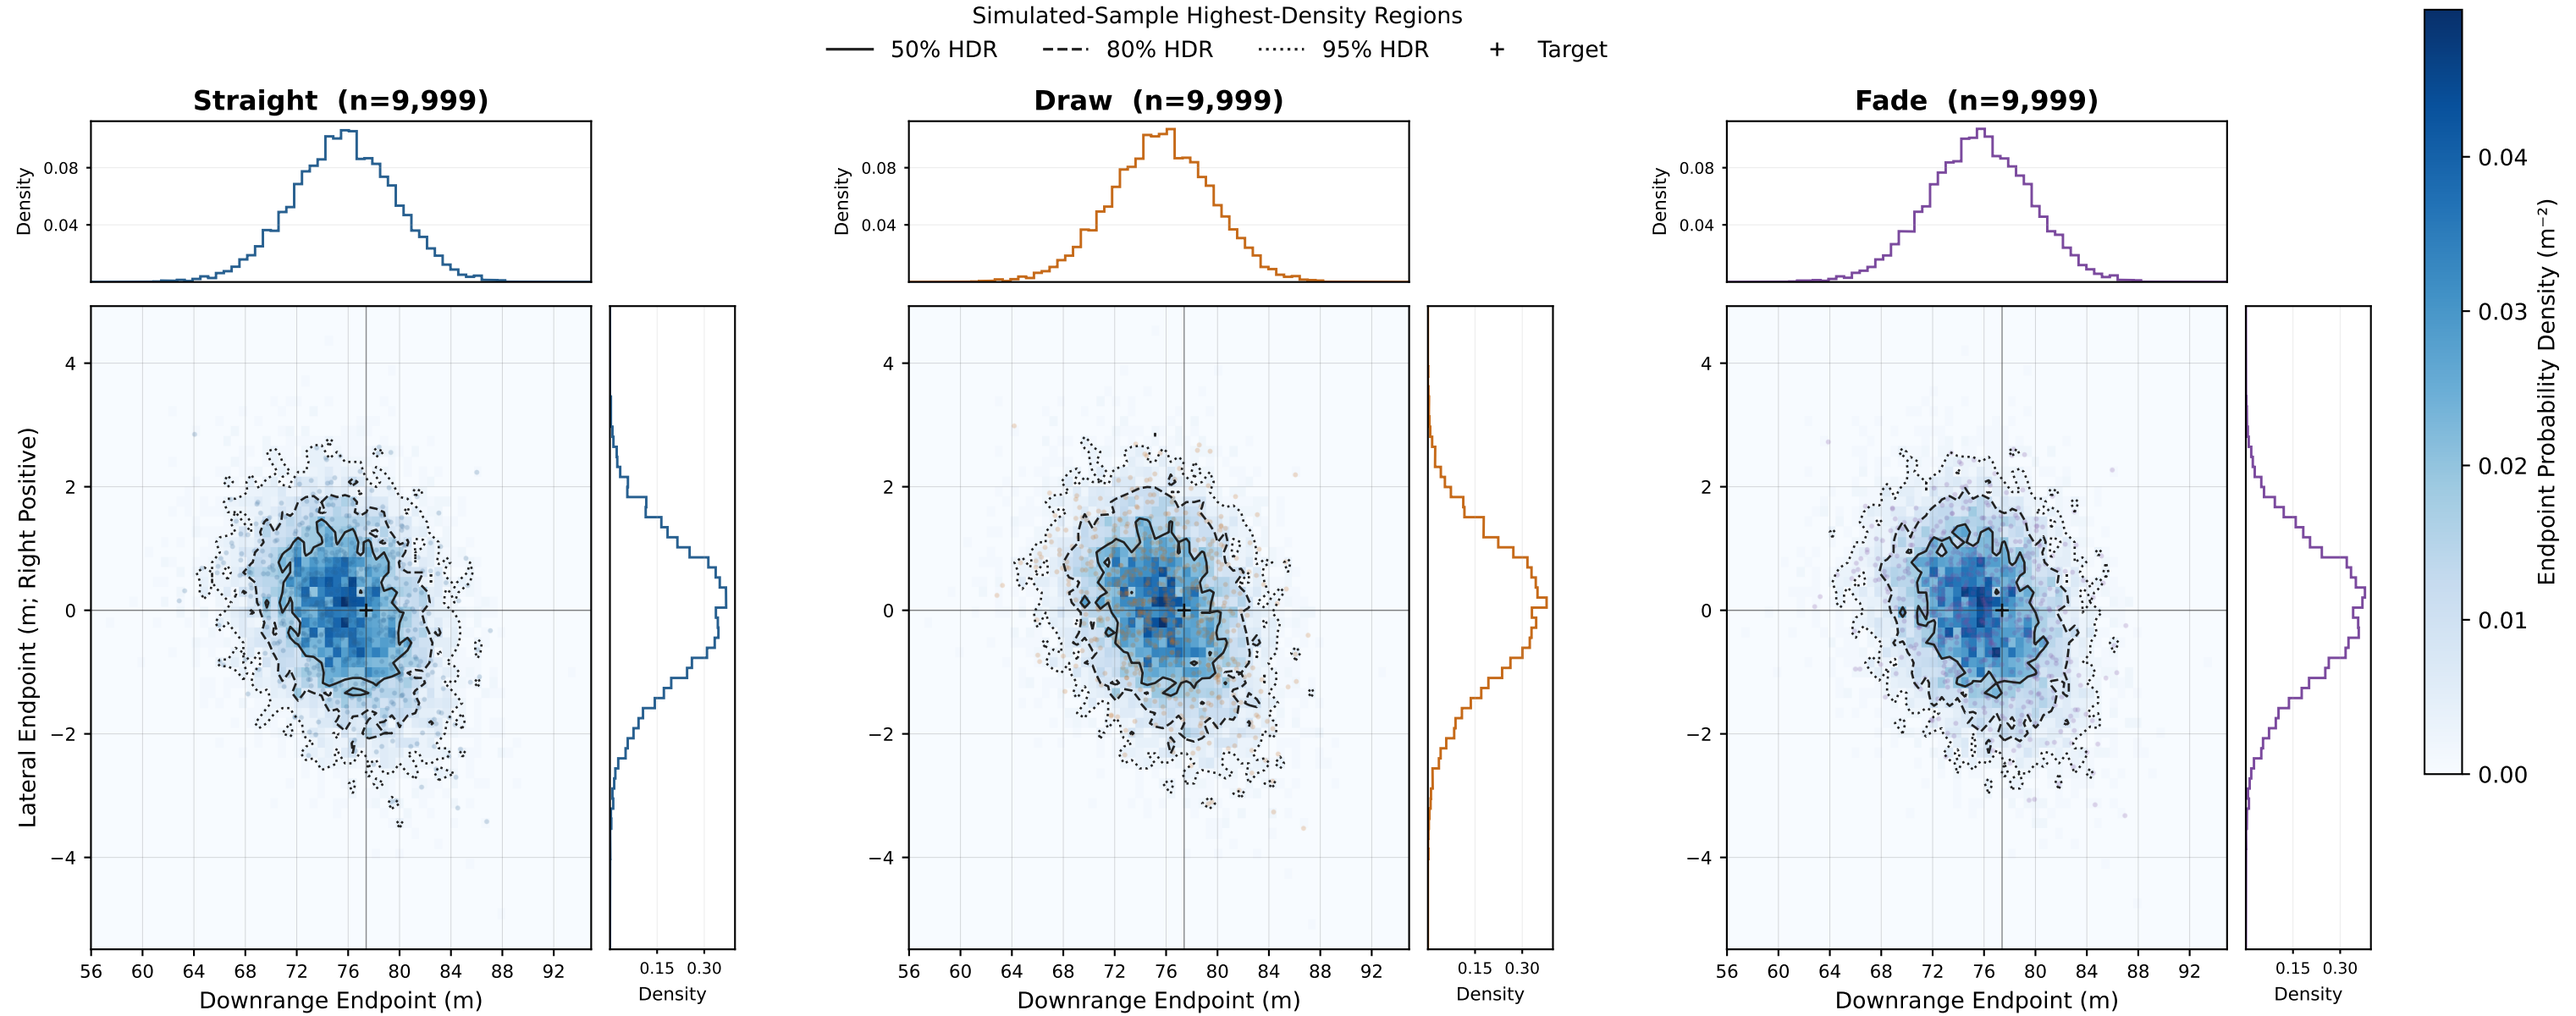

Illustrative Simulation • Assumed Head Properties • Carry Only. HDR mass is sample-derived from simulated endpoints. Colored Dots Shown/Valid: Straight 600/9,999; Draw 600/9,999; Fade 600/9,999; density, HDR, and marginals use every valid endpoint. Histogram only; no KDE or synthetic covariance spread; not calibrated player precision. Bin resolution: 0.608 × 0.163 m. Achieved HDR Mass By Pattern (Discrete Ties May Exceed Request): Straight 50.1%/80.1%/95.8% | Draw 51.1%/80.4%/95.8% | Fade 51.0%/81.0%/95.8%