REVISE / CHANGE	
ORIGINAL ISSUE	A
AMEND. Nov.28,2023/Songsyuan	B
AMEND. Feb.18,2025/Songsyuan	C

11.8" [300]

19.7" [500]

POWER TRANSFORMER

3Phase, 60Hz		MVA RATING 65°C Rise		
VOLTAGE RATING		ONAN	ONAF1	ONAF2
HV WINDING	230,000 V	66	88	110
LV WINDING	34,500 V	66	88	110
TV WINDING	12,470 V	23.1	30.8	38.5

BIL OF WINDING		
	HV	750 kV
	HVN	110 kV
	LV	200 kV
	LVN	110 kV
	TV	110 kV

% IMPEDANCE @85°C			
HV–LV	RATED TAP:	%	AT 66 MVA

MATERIAL	
INSULATING OIL	MINERAL OIL
WINDING	COPPER

APPLIED STANDARD : CSA–C88–M


SERIAL NO. :


MANUFACTURE DATE :

COOLING METHOD	ONAN/ONAF1/ONAF2

WEIGHT		
INSULATING OIL	(59,000 Liters) 53,100	kg
CORE & COIL	89,700	kg
TANK & FITTING	41,200	kg
TOTAL	184,000	kg


TEMPERATURE RISE (ONAN/ONAF1/ONAF2)	
TOP OIL	60°C
WINDING	65°C

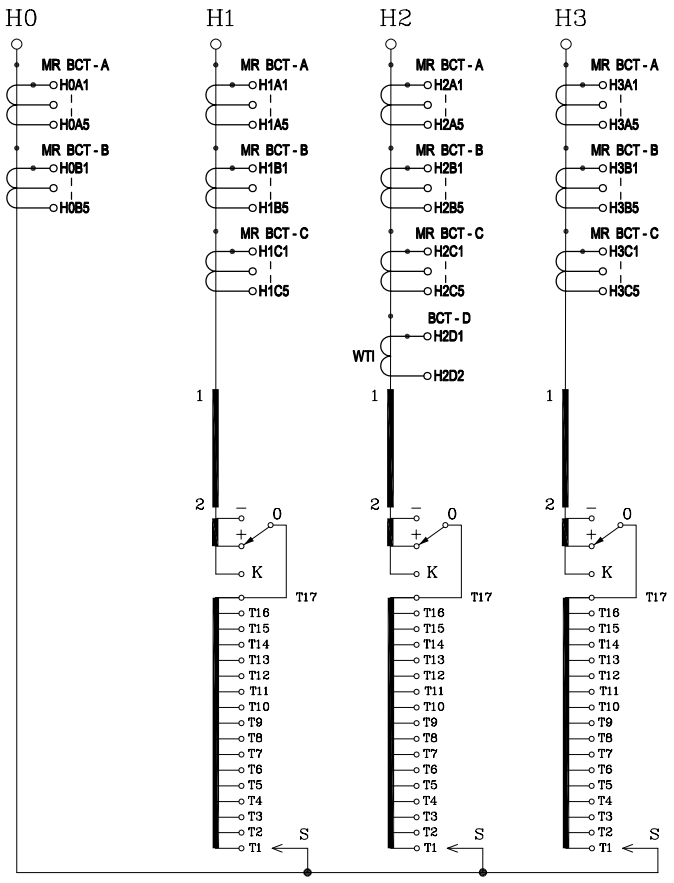

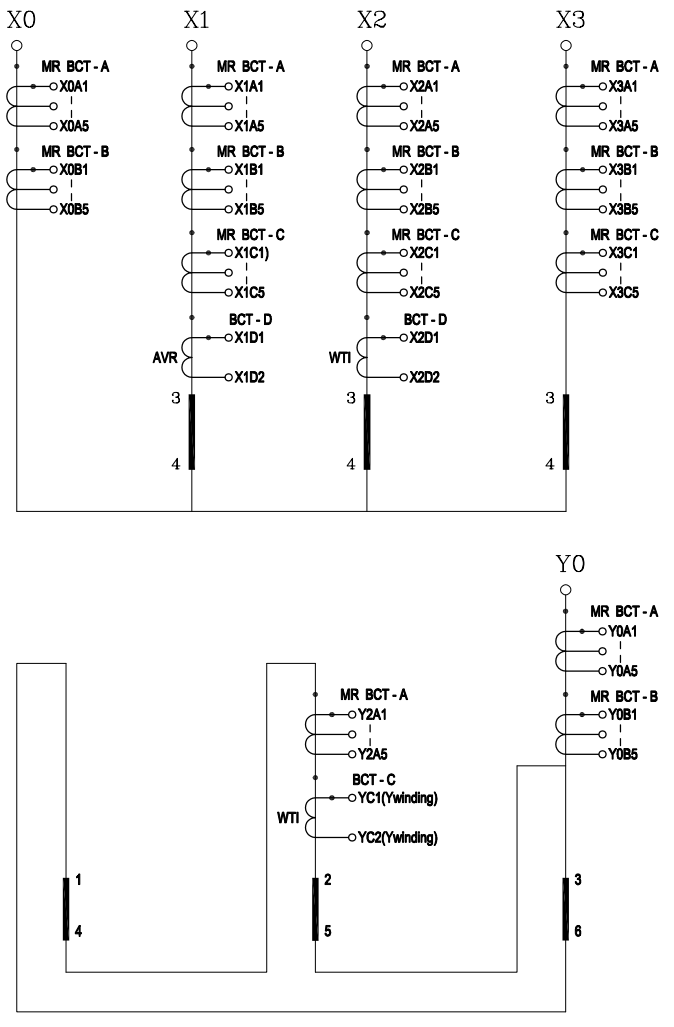

WIN-DING	VOLTS(V)	AMPERES(A) 65° RISE 66 MVA	88 MVA	110 MVA	ON-LOAD TAP CHANGER POSITION	0	S
HV	253,000	150.6	200.8	251.0	1		T1
	251,563	151.5	202.0	252.5	2		T2
	250,125	152.3	203.1	253.9	3		T3
	248,688	153.2	204.3	255.4	4		T4
	247,250	154.1	205.5	256.9	5		T5
	245,813	155.0	206.7	258.4	6		T6
	244,375	155.9	207.9	259.9	7		T7
	242,938	156.9	209.1	261.4	8		T8
	241,500	157.8	210.4	263.0	9	+	T9
	240,063	158.7	211.6	264.5	10		T10
	238,625	159.7	212.9	266.1	11		T11
	237,188	160.7	214.2	267.8	12		T12
	235,750	161.6	215.5	269.4	13		T13
	234,313	162.6	216.8	271.0	14		T14
	232,875	163.6	218.2	272.7	15		T15
	231,438	164.6	219.5	274.4	16		T16
	230,000	165.7	220.9	276.1	17A		T17
					17B		K
					17C		T1
	228,563	166.7	222.3	277.9	18		T2
	227,125	167.8	223.7	279.6	19		T3
	225,688	168.8	225.1	281.4	20		T4
	224,250	169.9	226.6	283.2	21		T5
	222,813	171.0	228.0	285.0	22		T6
	221,375	172.1	229.5	286.9	23		T7
	219,938	173.3	231.0	288.8	24		T8
	218,500	174.4	232.5	290.7	25	–	T9
	217,063	175.5	234.1	292.6	26		T10
	215,625	176.7	235.6	294.5	27		T11
	214,188	177.9	237.2	296.5	28		T12
	212,750	179.1	238.8	298.5	29		T13
	211,313	180.3	240.4	300.5	30		T14
	209,875	181.6	242.1	302.6	31		T15
	208,438	182.8	243.8	304.7	32		T16
	207,000	184.1	245.4	306.8	33		T17
LV	34,500	1,105	1,473	1,841	–		

WIN-DING	VOLTS(V)	AMPERES(A) 23.1 MVA	30.8 MVA	38.5 MVA	–
TV	12,470	1,070	1,426	1,782	

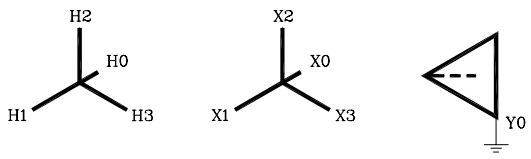

VECTOR GROUP YNyn0d1

H.V. SIDE MULTI - RATIO CT 600 / 5A								
C.T. NO.	RATIO & CONNECTION				ACCURACY	VA	TRF	
	x1	x2	x3	x4	x5			
A, B,	100	50	250	200		C400	100	2.0
C						0.3B2.0	50	

H.V.N. SIDE MULTI - RATIO CT 600 / 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
A	100	50	250	200		C400	100	2.0
B						C800	200	

L.V. SIDE MULTI - RATIO CT 3,000 / 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
A, B,	1000	1200	300	500		C400	100	2.0
C						0.2sB2.0 C	50	

L.V.N. SIDE MULTI - RATIO CT 600 / 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
A, B,	100	50	250	200		C400	100	2.0

T.V. SIDE MULTI - RATIO CT 3000 / 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
A	1000	1200	300	500		C400	100	2.0

T.V. SIDE MULTI - RATIO CT 600 / 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
A, B	100	50	250	200		C400	100	2.0

H.V. SIDE SINGLE - RATIO CT 350/ 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
C (W.T.I.)	350					C100	25	2.0

L.V. SIDE SINGLE - RATIO CT 1,900/ 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
D (A.V.R.)	1,900					C100	25	2.0
D (W.T.I.)						C100	25	

T.V. SIDE SINGLE - RATIO CT 1,900 / 5A								
C.T. NO.	RATIO & CONNECTION					ACCURACY	VA	TRF
	x1	x2	x3	x4	x5			
D (W.T.I.)	1,900					C100	25	2.0

SHIHLIN ELECTRIC & ENGINEERING CORP.

MADE IN TAIWAN

TE335511

TITLE	NAMEPLATE		
DWG. No.	TE335511	REV.	C
DRAWN	Songsyuan	3RD ANGLE PROJECTION	
DESIGNED	Songsyuan	DIM.	inch / [mm]
CHECKED	Kenny	SCALE	1/1
APPROVED	Asam	DATE	Oct. – 30 – 2023

Shihlin Electric & Engineering Corporation