

SEMAFOR


Vypracovali: Aleš Hrehuř, Tomáš Nyulassy

Slovne zadanie/fotka modelu


Zadanie:

- naprogramovať simulátor svetelnej križovatky

Fotka:

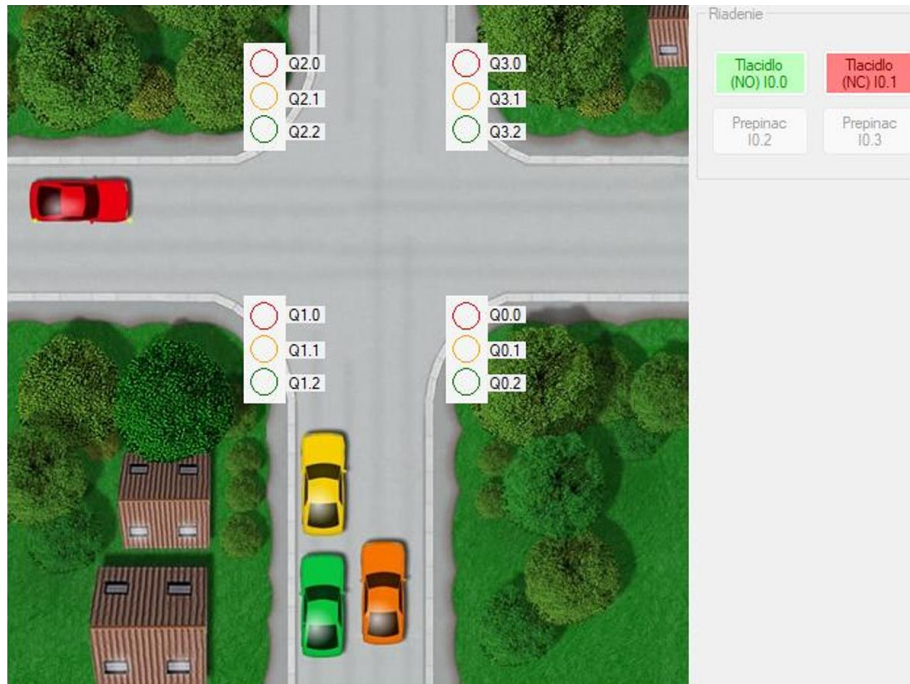

Hardverová konfigurácia PLC

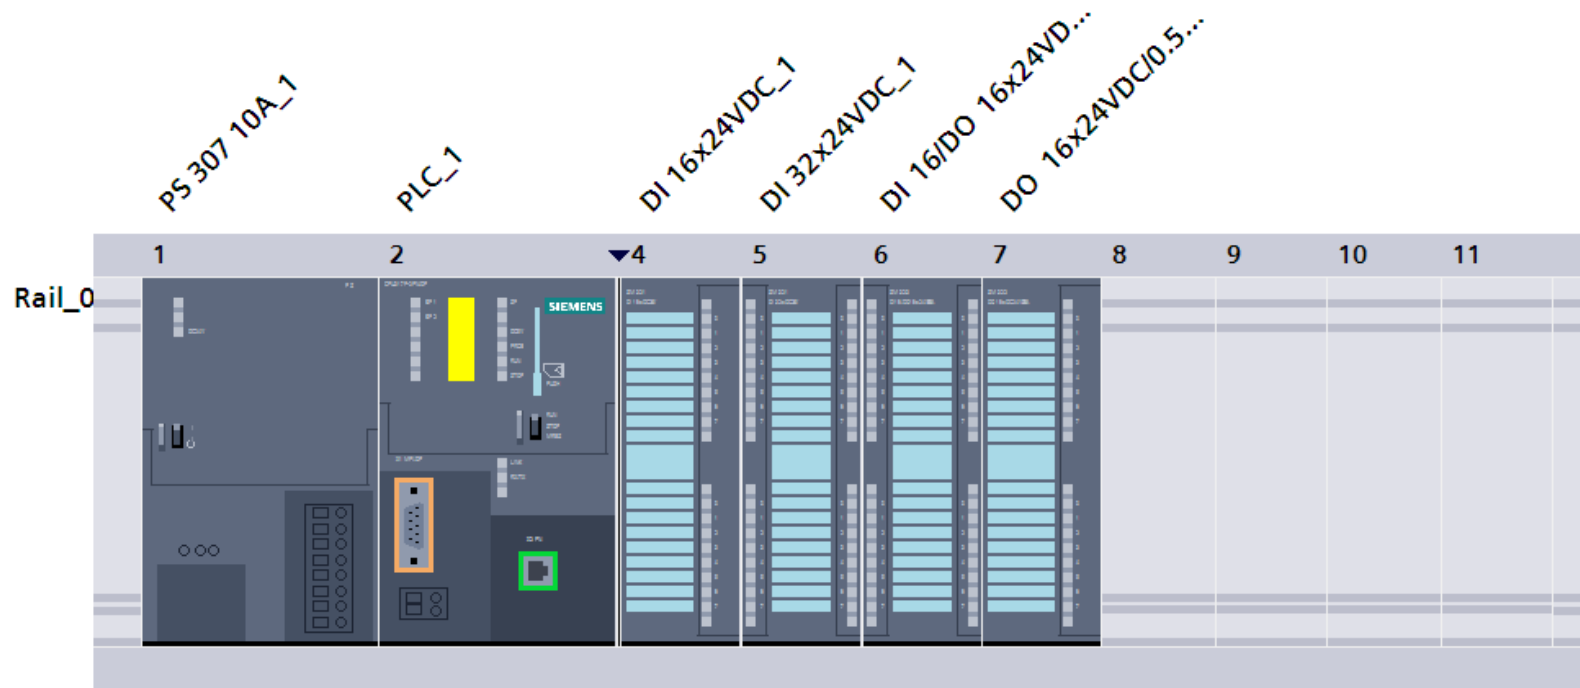

PLC tags

PLC tags

PLC tags												
	Name	Data type	Address	Retain	Accessi- ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi- neering	Supervision			Comment	
	reset	Bool	%M0.0		True	True	True					
	cervena semafor 1	Bool	%Q0.0		True	True	True					
	oranzova semafor 1	Bool	%Q0.1		True	True	True					
	tlacidlo 1	Bool	%I0.0		True	True	True					
	main counter	Counter	%C1		True	True	True					
	prepinac	Bool	%I0.2		True	True	True					
	tlacidlo 2	Bool	%I0.1		True	True	True					
	Tag_10	Bool	%M100.5		True	True	True					
	pocitadlo	Int	%MW10		True	True	True					
	zelena semafor 1	Bool	%Q0.2		True	True	True					
	oranzova semafor 2	Bool	%Q1.1		True	True	True					
	oranzova semafor 3	Bool	%Q2.1		True	True	True					
	oranzova semafor 4	Bool	%Q3.1		True	True	True					
	poistka	Bool	%M1.0		True	True	True					
	cervena semafor 2	Bool	%Q1.0		True	True	True					
	zelena semafor 2	Bool	%Q1.2		True	True	True					
	cervena semafor 3	Bool	%Q2.0		True	True	True					
	zelena semafor 3	Bool	%Q2.2		True	True	True					
	cervena semafor 4	Bool	%Q3.0		True	True	True					
	zelena semafor 4	Bool	%Q3.2		True	True	True					


PLC tags

	Name	Data type	Address	Retain	Accessi- ble from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi- neering	Supervision				Comment
	Tag_1	Byte	%QB0		True	True	True					
	Tag_3	Byte	%QB2		True	True	True					
	helper	Bool	%M0.1		True	True	True					
	prepinac 2	Bool	%I0.3		True	True	True					
	Tag_6	Bool	%M0.3		True	True	True					
	Tag_7	Counter	%C2		True	True	True					
	Tag_8	Int	%MW20		True	True	True					
	Tag_9	Bool	%M30.0		True	True	True					

OB1 [main]

Network 1:


hlavny network pre pocitanie "pulzov"

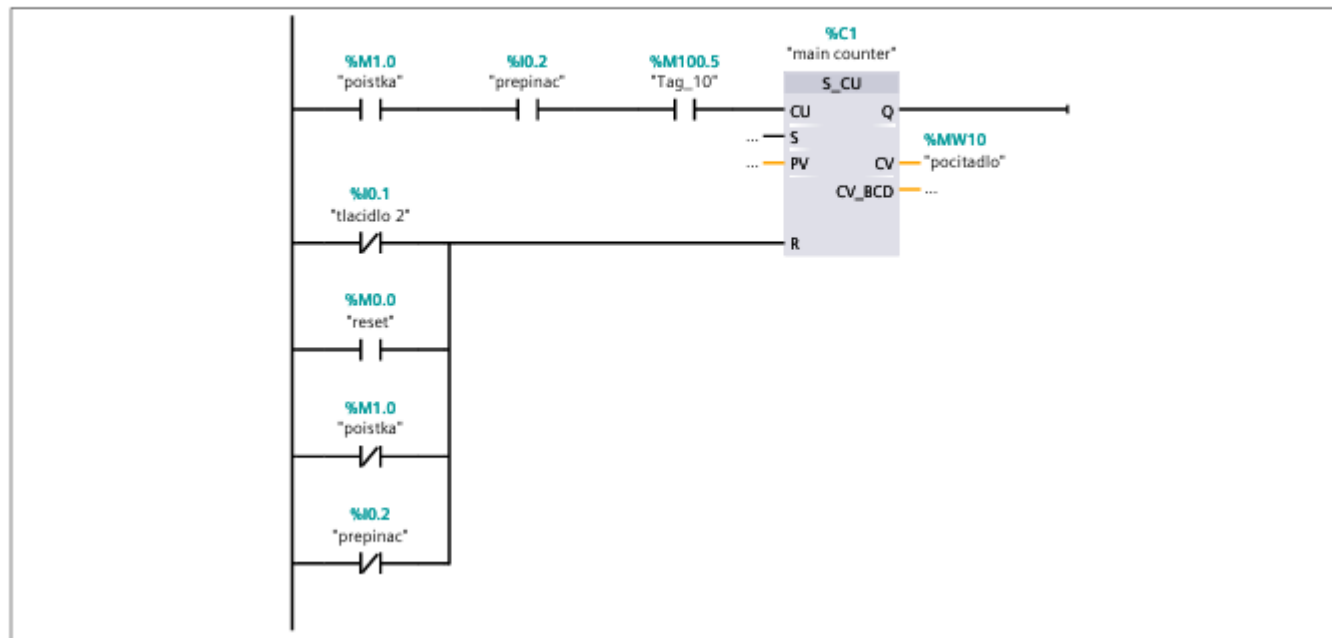

OB1 [main]


Network 2:

podmienka pre spustenie semaforov

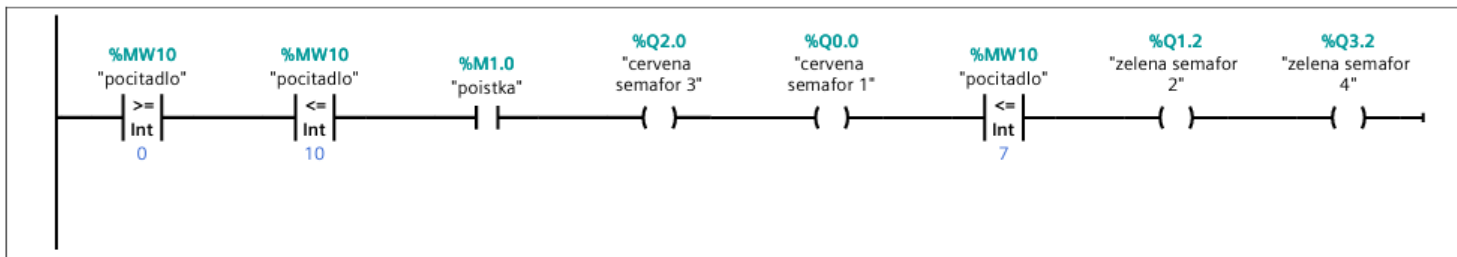

Network 3:


podmienka pre cerenu

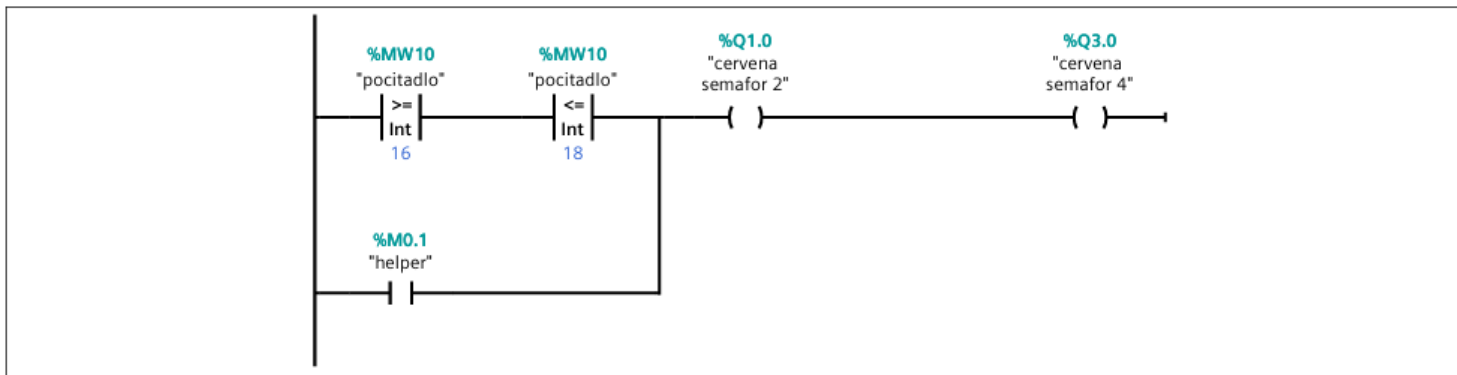

OB1 [main]

Network 4:

podmienka pre oranzovu

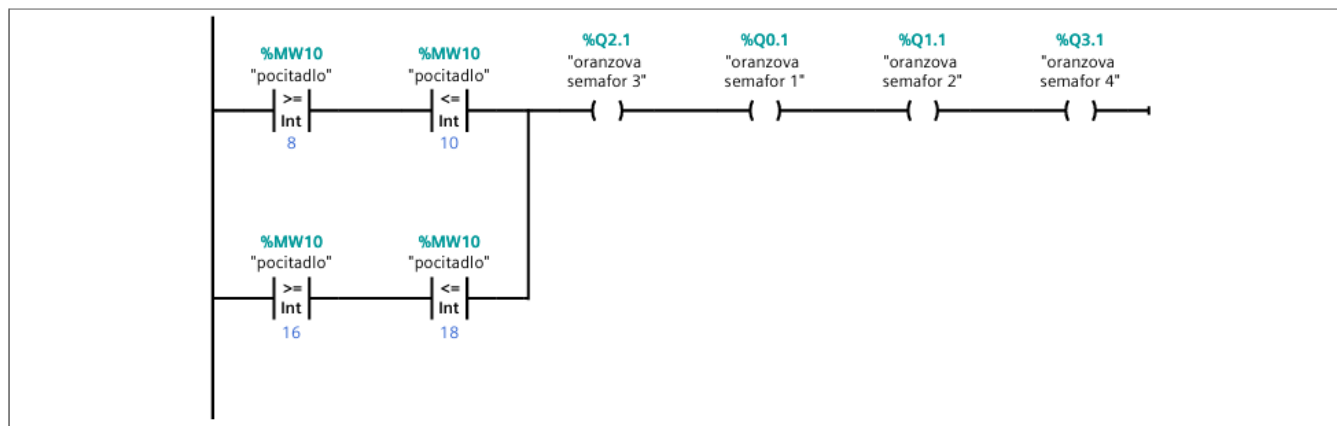

Network 5:


podmienka pre zelenu + helper pre cervenu



OB1 [main]


Network 6:

reset

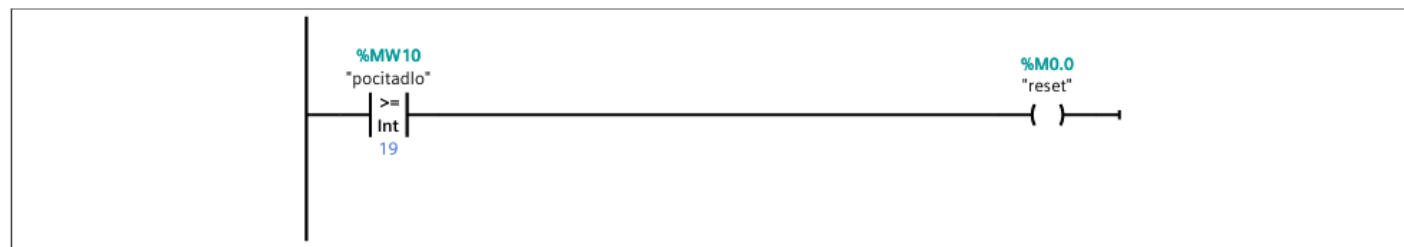

Network 7:


vykonavanie funkcie blikania o pol noci

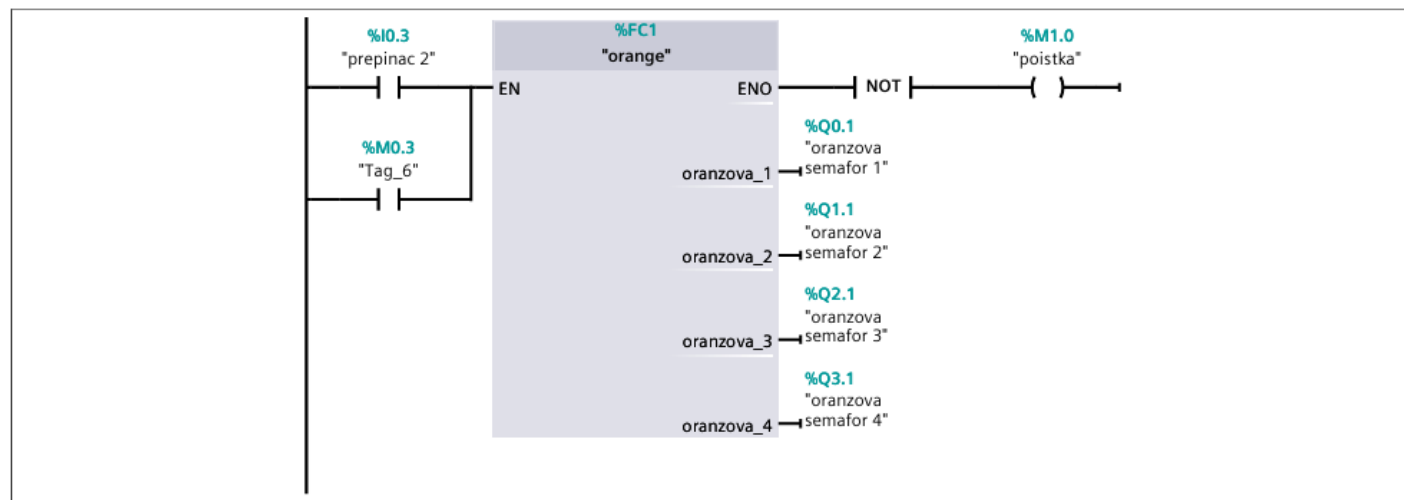

OB1 [main]

Network 8:

time travel

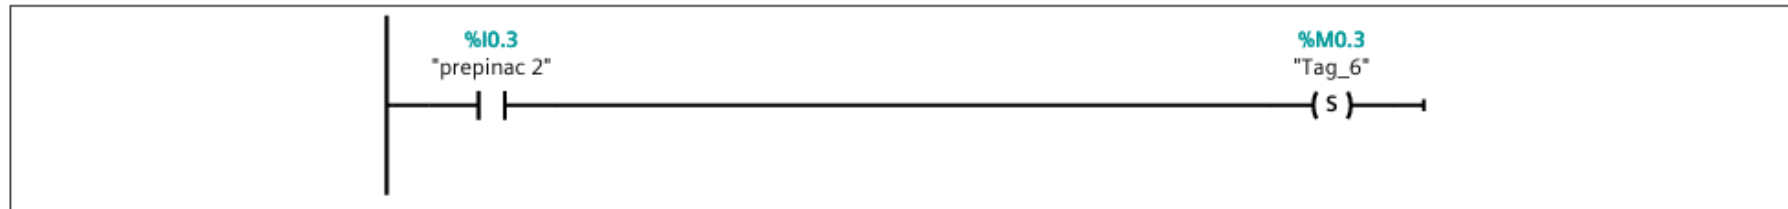

OB35 [CYC_INT5]


Network 1:

"counter" iteracii ob35



Network 2:

ak reachneme stanoveny cas vynulujeme counter a spat do normal mode

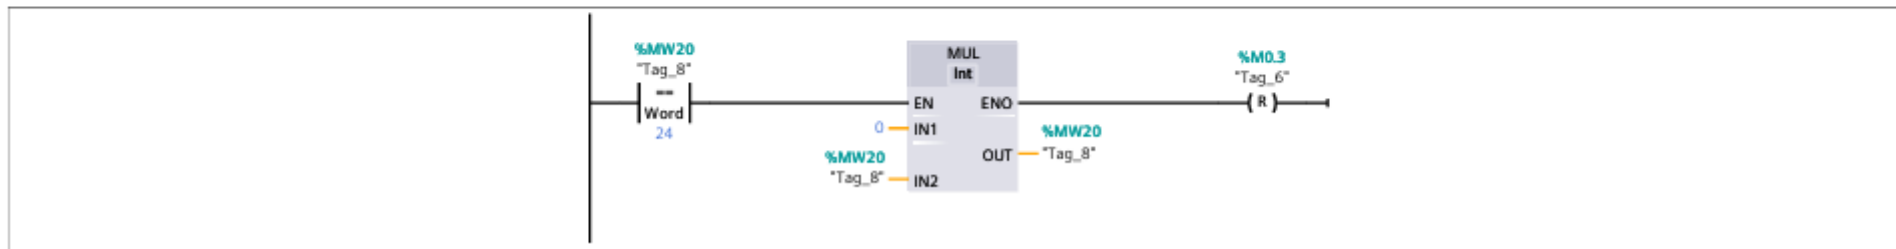

OB10 [TOD_INT0]

Network 1:

zopnutie pre ob35 o pol noci pre blikanie oranzovych



FC1 [orange]

