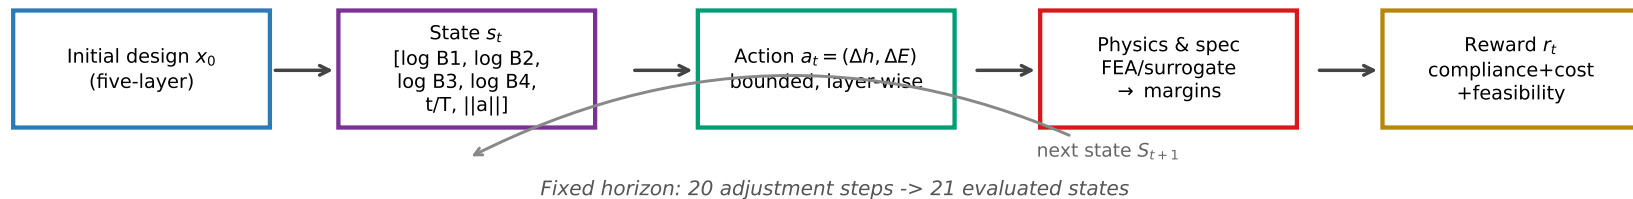
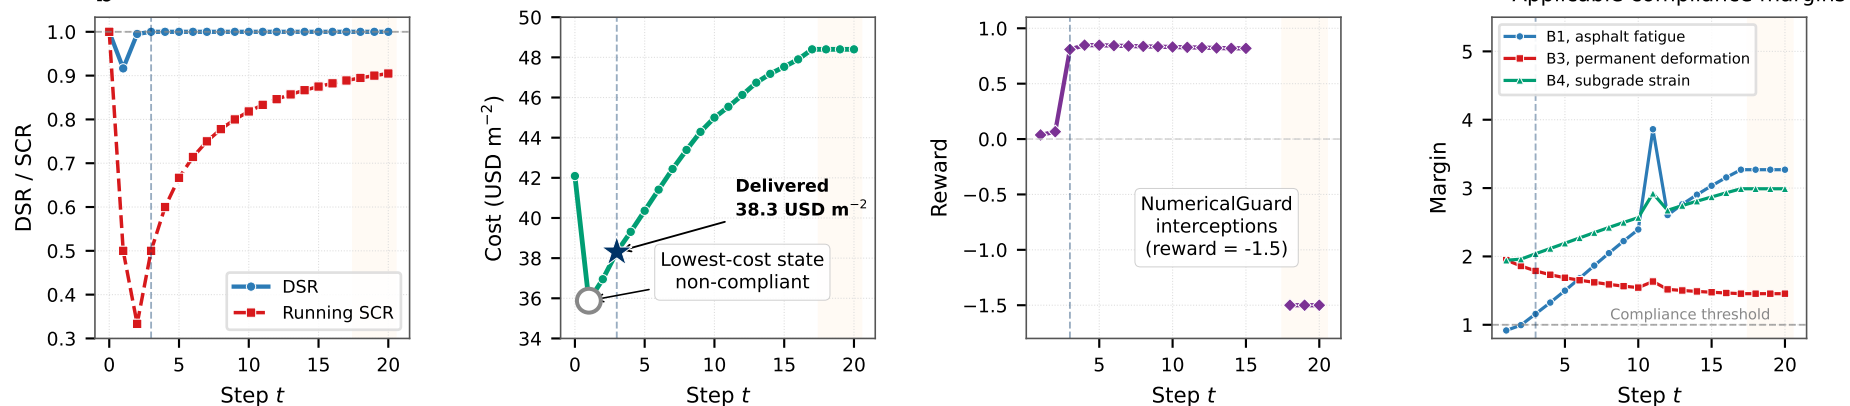
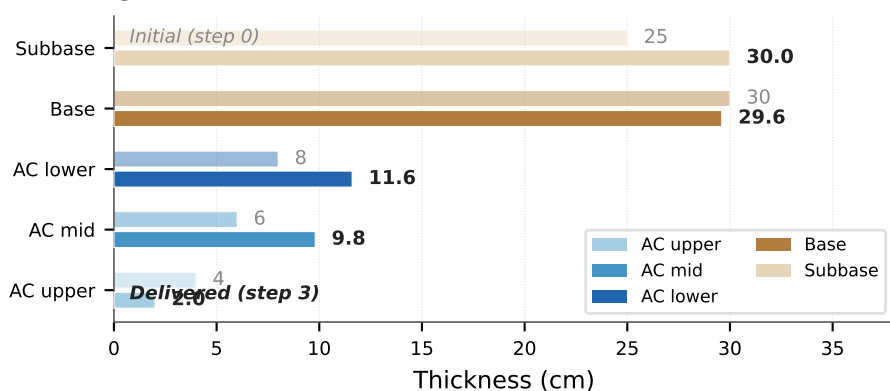


a**b****c**

16_1010 (flexible, $E_{\text{sub}} = 78 \text{ MPa}$)

Initial DSR: 1.000
 Lowest DSR: 0.917 (step 1)
 Final DSR: 1.000 (step 3+)
 Final SCR: 0.905
 Delivered cost: 38.3 USD m⁻²

AC thickness: 18.0 -> 17.3 cm
 AC-1 (upper): 4.0 -> 2.0 cm
 AC-2 (mid): 6.0 -> 6.7 cm
 AC-3 (lower): 8.0 -> 8.6 cm
 Base (GAB): 30.0 -> 29.8 cm
 Subbase (GAB): 25.0 -> 25.6 cm

Guard interceptions: 3 (steps 18-20)
 Policy probes lower bound
 of base modulus; Guard holds
 design, preventing unsafe action.