


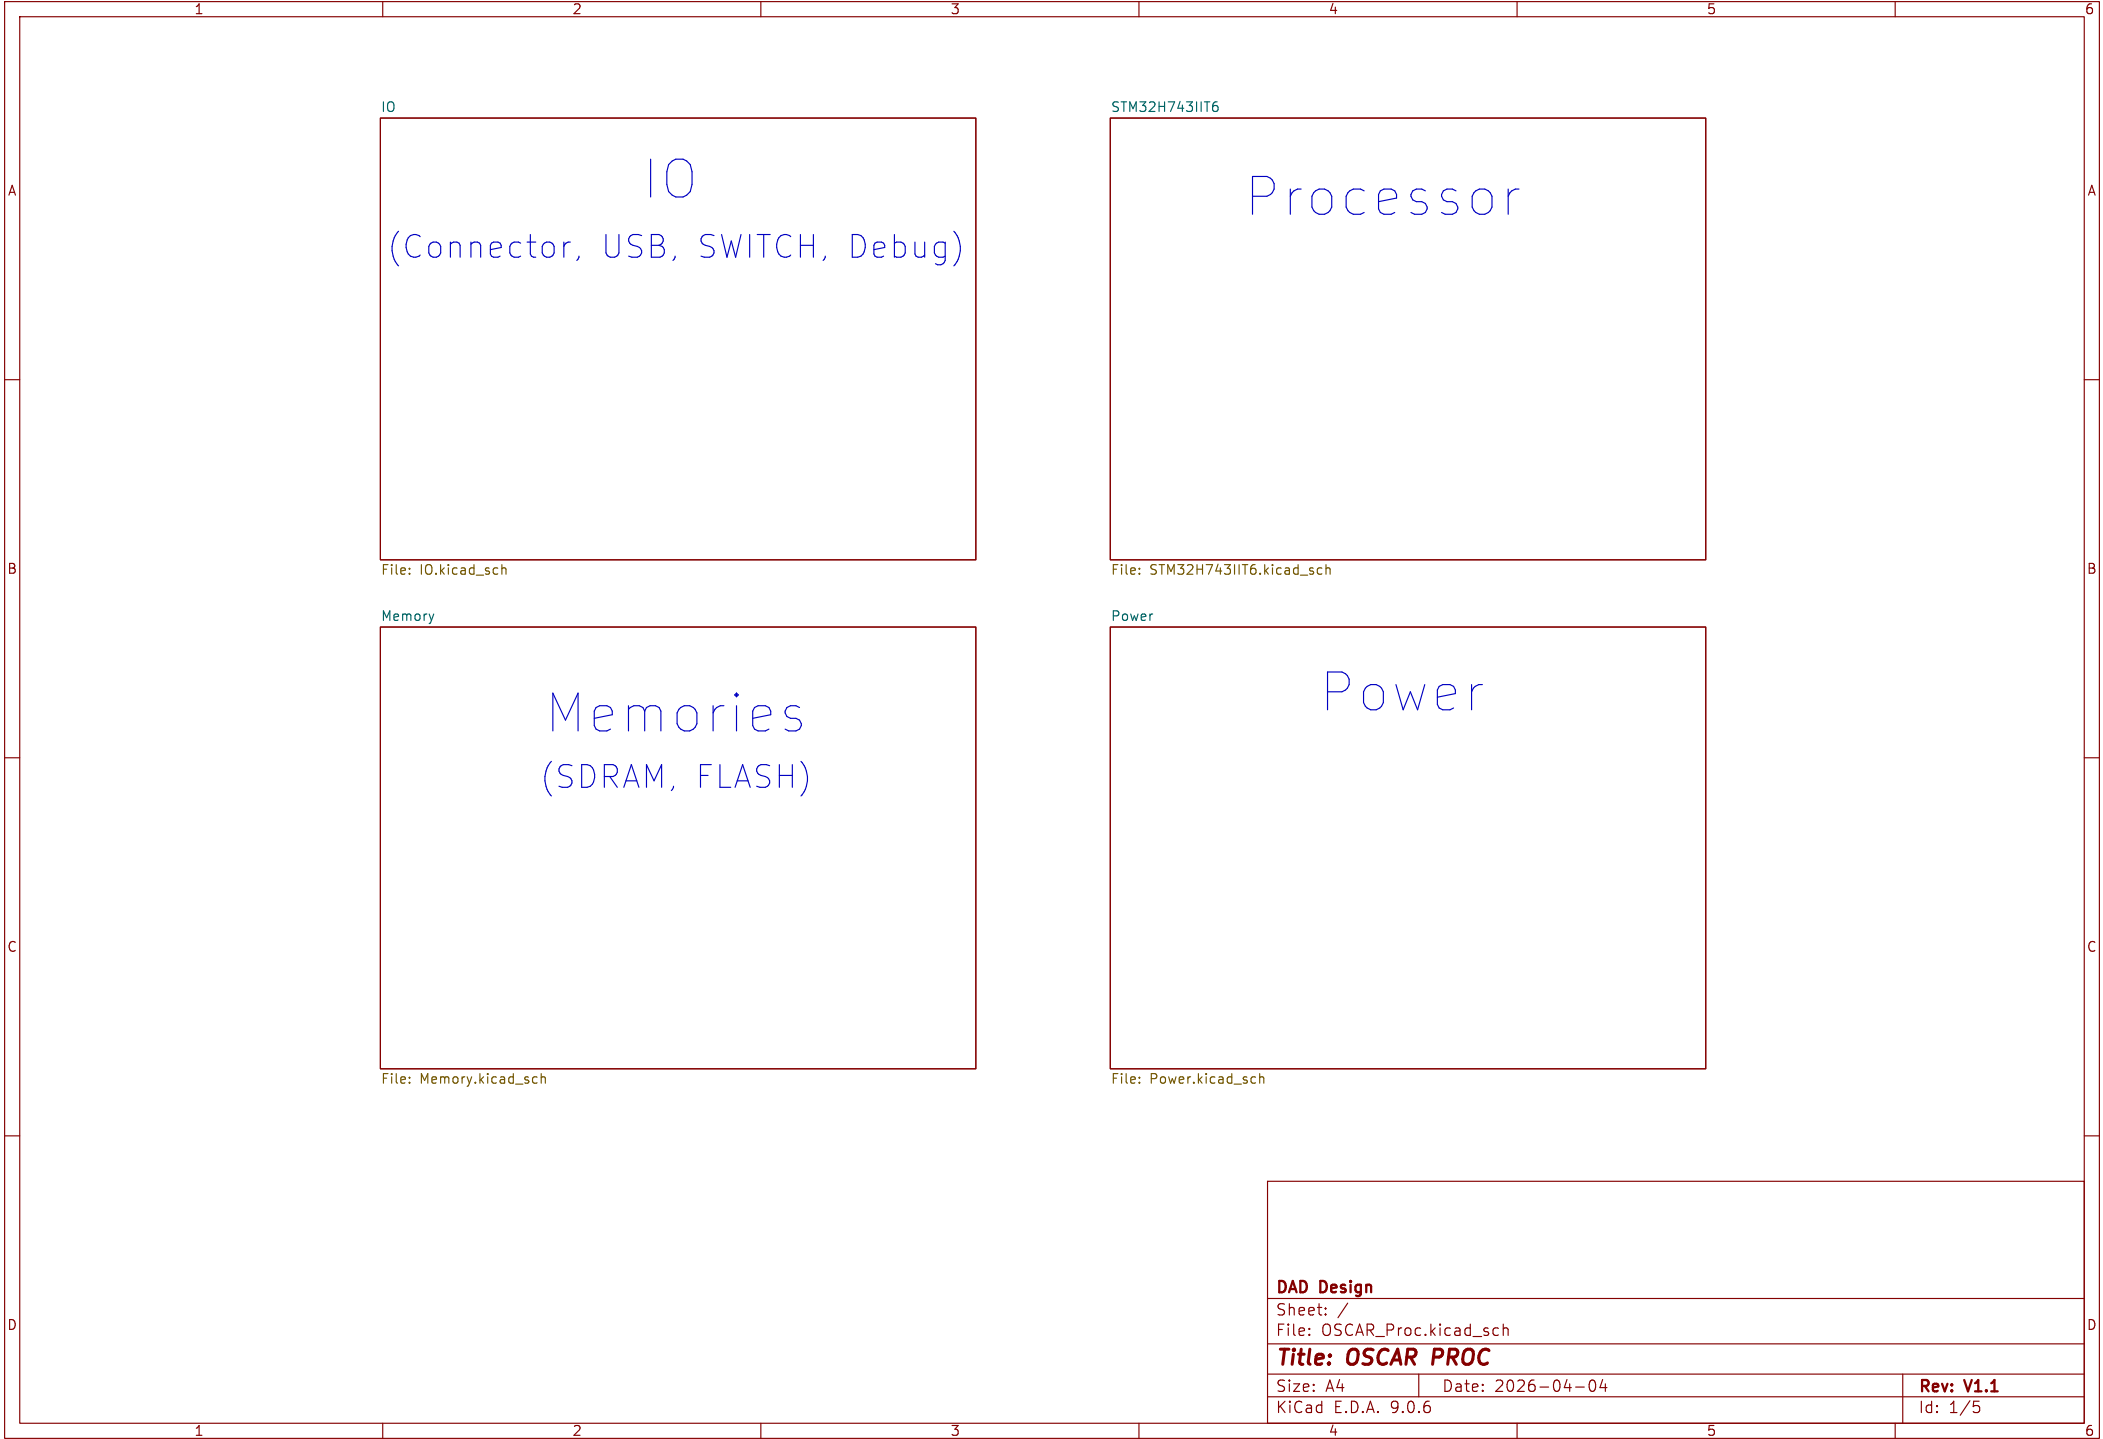

DAD Design

Sheet: /
File: OSCAR_Proc.kicad_sch


Title: OSCAR PROC

Size: A4 Date: 2026-04-04

KiCad E.D.A. 9.0.6

Rev: V1.1

Id: 1/5

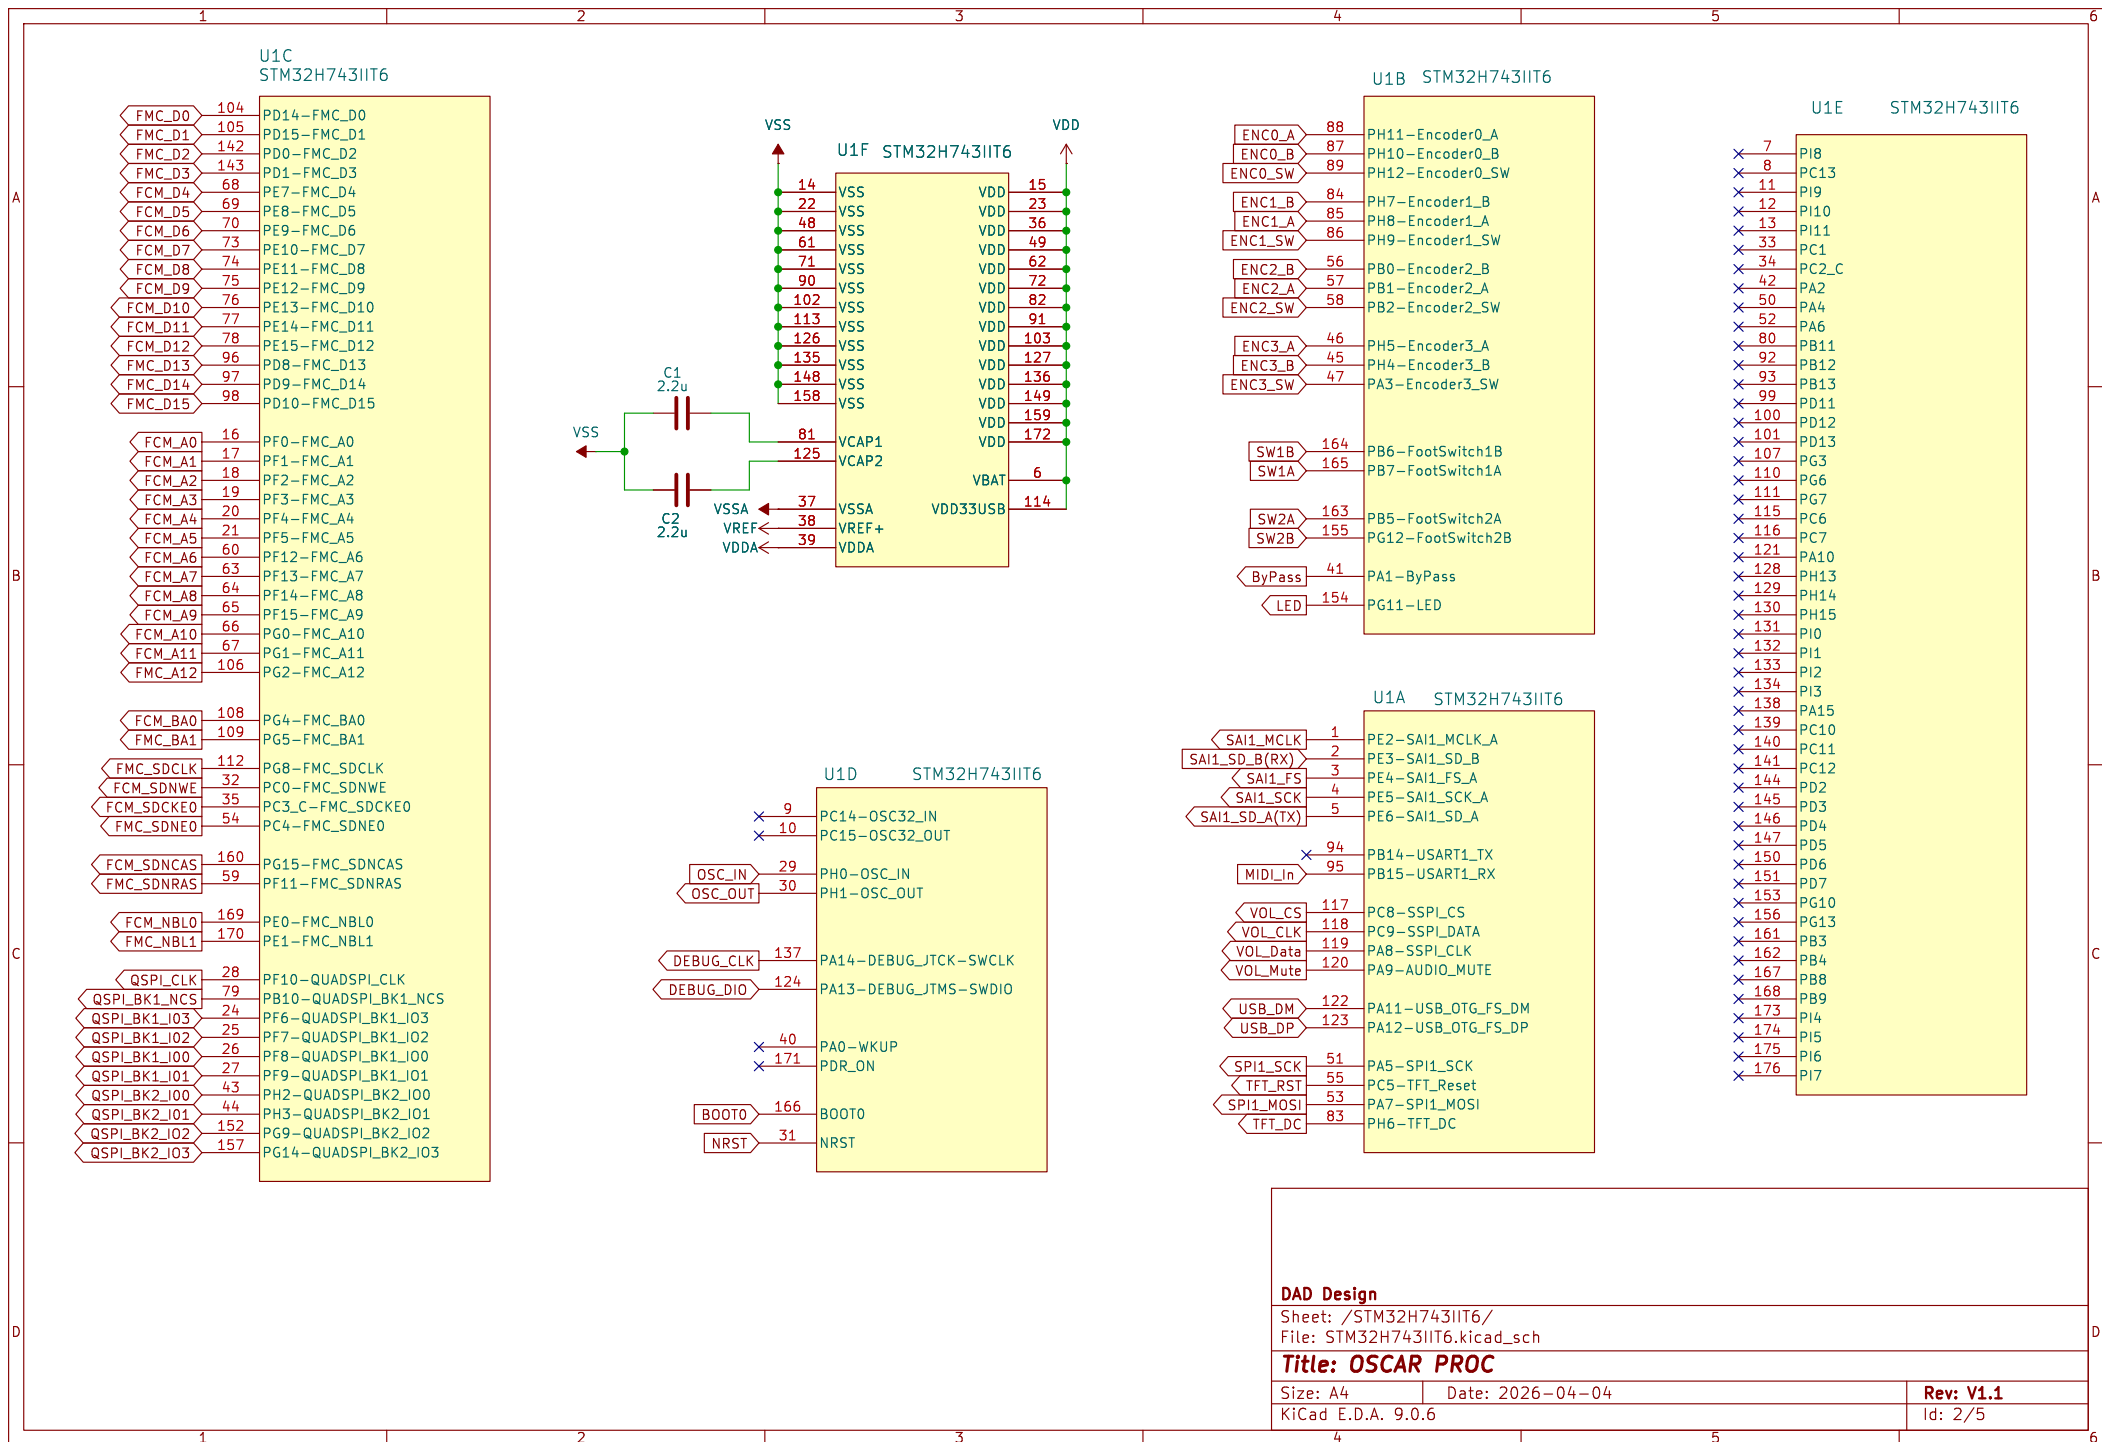

DAD Design

Sheet: /STM32H743IIT6/
File: STM32H743IIT6.kicad_sch



Title: OSCAR PROC

Size: A4 Date: 2026-04-04

KiCad E.D.A. 9.0.6

Rev: V1.1

Id: 2/5

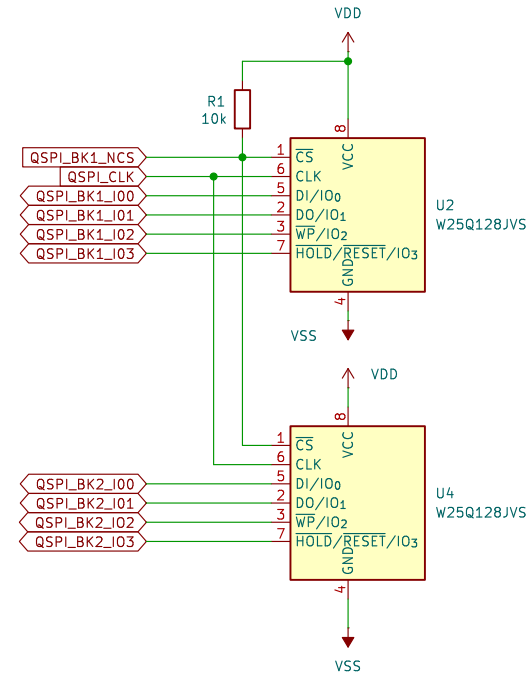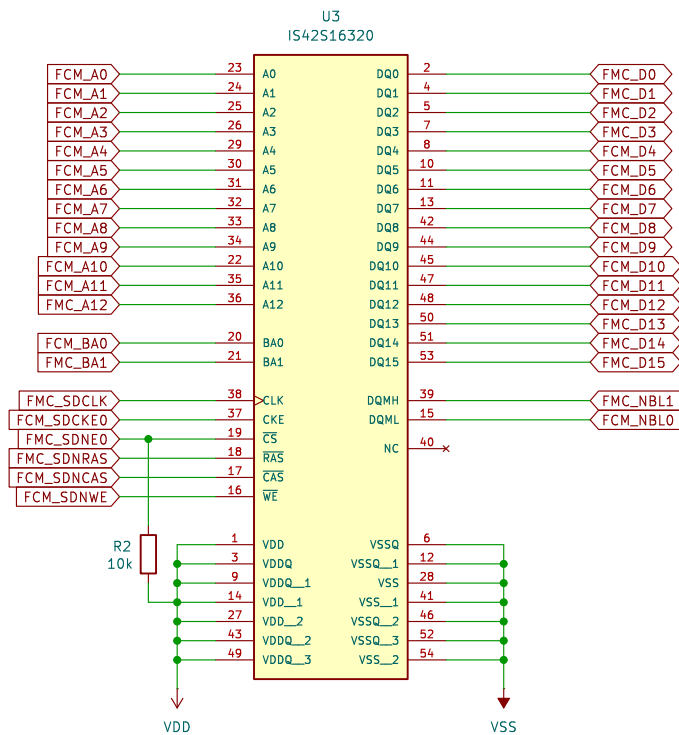

DAD Design

Sheet: /Memory/

File: Memory.kicad_sch

Title: OSCAR PROC


Size: A4 Date: 2026-04-04

KiCad E.D.A. 9.0.6


Rev: V1.1

Id: 3/5


Encoder

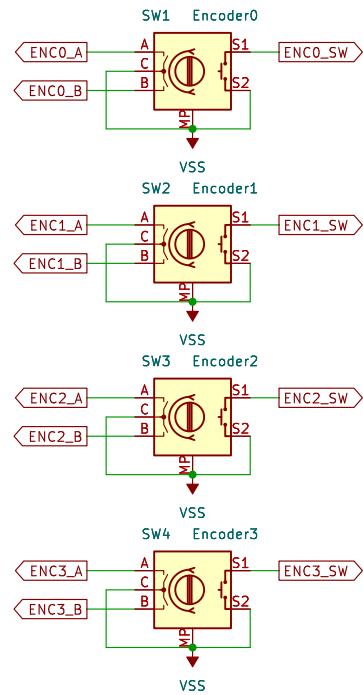


Switch

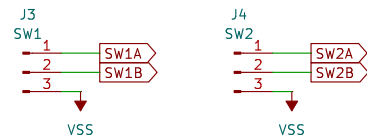


Midi

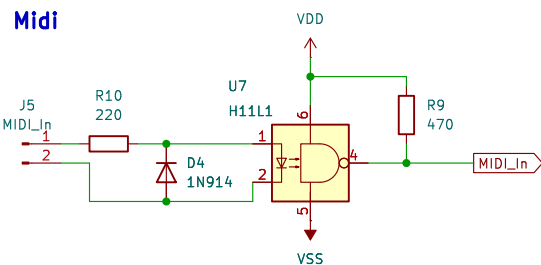


Debug




TFT

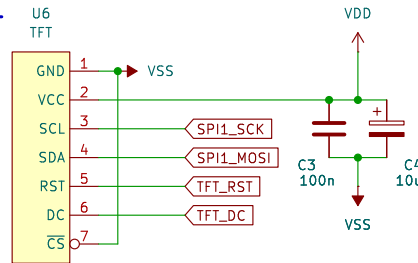


Boot/Reset

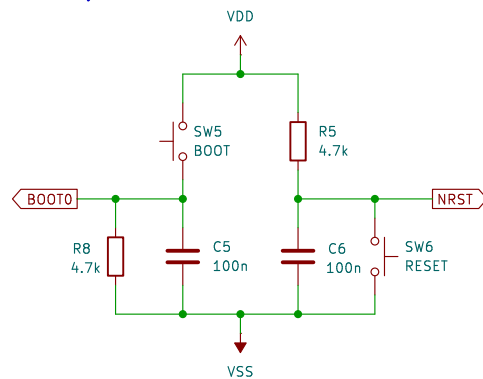


Clock




USB

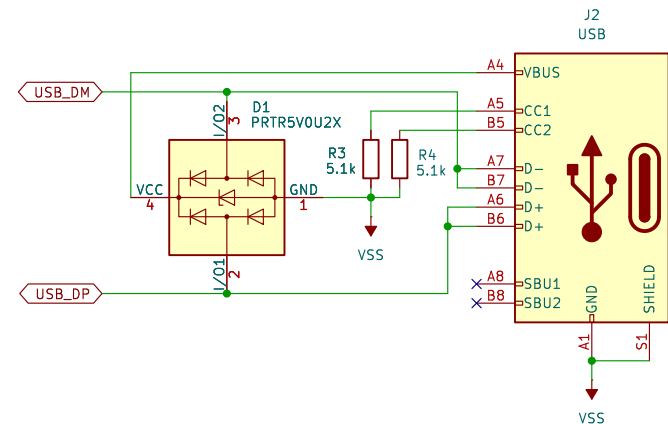


Connector Audio

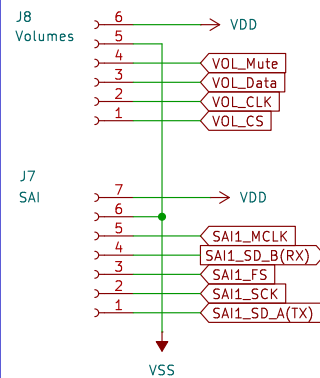

Power



LED



Note N1:
Resistance value
to be adjusted
(2.7k - 15k)
based on the LED
used and the
desired brightness.

DAD Design

Sheet: /IO/
File: IO.kicad_sch

Title: OSCAR PROC

Size: A4 Date: 2026-04-04

KiCad E.D.A. 9.0.6

Rev: V1.1

Id: 4/5

