
ESP32-S31 dev board — fabrication drawing

Viewed from the top. Scale 3:1. All dimensions in mm.

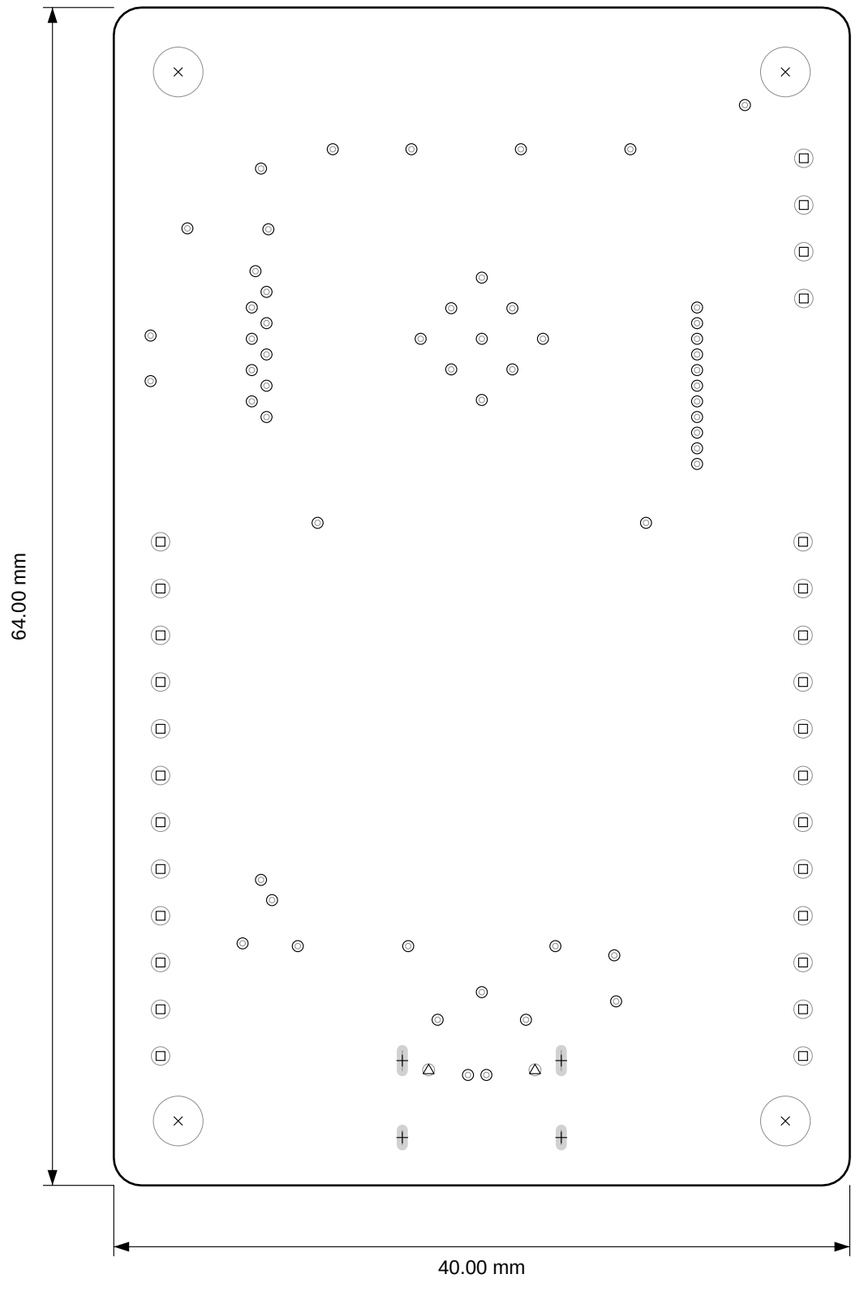

Drill table (93 holes, finished sizes)

Sym	Tool	Ø mm	Plated	Kind	Use	Count
◯	P1	0.300	yes	hole	via	55
┼	P2	0.600	yes	slot	component	4
□	P3	1.005	yes	hole	component	28
△	N1	0.650	no	hole	mechanical	2
×	N2	2.700	no	hole	mechanical	4

Stackup (4 copper layers, 1.74 mm over copper)

Layer	Material	mm
Top legend	white ink	—
Top mask	green solder mask	—
Top copper	35 µm Cu	0.035
Prepreg 1	FR-4 2116	0.200
Inner 1 copper	35 µm Cu	0.035
Core 1	FR-4 7628	1.200
Inner 2 copper	35 µm Cu	0.035
Prepreg 2	FR-4 2116	0.200
Bottom copper	35 µm Cu	0.035
Bottom mask	green solder mask	—
Bottom legend	white ink	—

Notes

1. Finished board thickness 1.74 over copper, 4 copper layers.
2. Copper thickness top to bottom: 35 µm, 35 µm, 35 µm, 35 µm.
3. Minimum track width 0.152, minimum copper gap 0.152.
4. Minimum finished drill 0.3, hole to copper 0.25.
5. Minimum annular ring: vias 0.15, plated holes 0.15.
6. Solder mask: green gloss, expansion 0.05, minimum web 0.1.
7. Legend: white ink, minimum line 0.15, minimum text height 0.6.
8. Surface finish: ENIG.
9. Dimensions in millimetres. Hole sizes are finished sizes.
10. Generated by Pcbcraft; the Gerber job file lists every layer.

ESP32-S31 dev board

Drawing	Fabrication drawing, sheet 1 of 1
Rules	Standard 6/6 (estimated values)
Board	40.00 × 64.00 mm, 4 layers, 1.74 mm
Finish	ENIG
Mask / legend	green / white
Generator	Pcbcraft