



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃




Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 5 seconds)

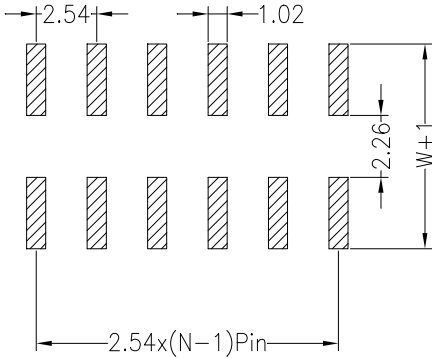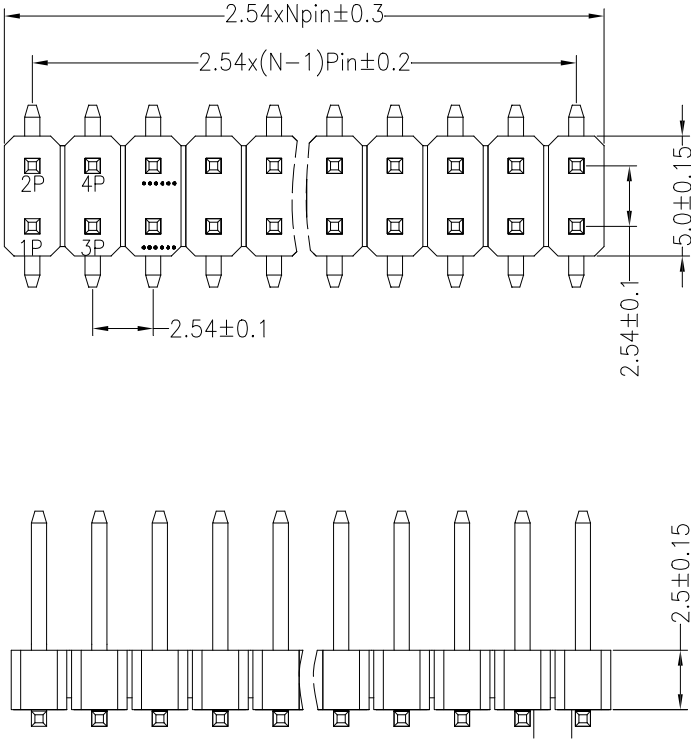

N= W/O Post

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	6.00	3.20	7.50	11.00
Alternate				

				OPERATION		DRAW			SCALE	FIT	深圳市华灿天禄电子有限公司	
				X.X	±0.30							
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	PZ254-2-N-S
				X.XXX	±0.10							
				Angle	±3°	APPROVE			SHEET	1/1	TITLE:	2.54PH 2xNpin H2.5mm SMT
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL						
1		2	3	4	5	6	7	8	9			