

USE

RADIO PANEL :

COM1 : GREEN radio V/UHF, LCD preset + frequency + volume DIAL  
COM2 : RED radio UHF,LCD preset + frequency + volume DIAL  
NAV1 : TACAN  
NAV2 : VOR.ILS  
ACT/STBY : press DOWN + DIAL in NAV1/NAV2 to change MODES & SETTINGS

MULTISWITCH PANEL :

KNOB : START SEQUENCE (fuel boost pump, vent, canopy... )  
UPPER ROW : ELECTRICAL ( battery, alternator,power,fuel pump,emergency pump,pitot heat )  
LOWER ROW : LIGHTS (beacon = formation, taxi = police )

MULTIPANEL PANEL :

AUTOPILOT : AP,HDG,ALT,APR  
KNOB ALT : selected AP altitude with DIAL + LCD & ALT gauge LCD  
VS : selected BINGO with DIAL + LCD & DETOT FUEL LCD  
IAS : AOA (only units not decimal )  
HDG : real HDG  
CRS : selected CALIBRATION BAROMETRIC with DIAL+ LCD

DCSFLIGHTPANEL PROFILE M-2000C SHAN\_AYA

INSTALL

ADD KEYBOARD COMMAND TO DCS

OPTIONS DE COMMANDE

M-2000C

alt

☐ Vue repliable

Réinit. catégorie (défaut)

Effacer catégorie

Effacer tout

Charger profil

Enreg. profil sous

Action	Catégorie	Keyboard	Throttle - HOTAS...	T-Pendular-Rudd...	Joystick - HOTAS ...	Mou
Alternator 1 OFF	Electrical					
Alternator 1 ON	Electrical					
Alternator 2 OFF	Electrical					
Alternator 2 ON	Electrical					
Altimeter Calibration CCW	Navigation	LAlt + LCtrl + Num -				
Altimeter Calibration CW	Navigation	LAlt + LCtrl + Num +				
Altitude Hold Mode	Auto-Pilote		Touche-JOY_BTN28			
HUD Altimeter Power Switch OFF	HUD					
HUD Altimeter Power Switch ON	HUD					
HUD Altimeter Power Switch TEST	HUD					
Maintenir l'altitude de la caméra au sol	Vue étendue	LAlt + Touche-K				
PCN Parameter ALT	INS					
PCN Parameter ΔALT	INS					
Radar Altimeter OFF	HUD					
Radar Altimeter ON	HUD					
Radar Altimeter ON, else OFF	RDI Radar					
Radar Altimeter TEST	HUD					
Selected Alt Combo FL+10	Auto-Pilote	RShift + Num +				
Selected Alt Combo FL-10	Auto-Pilote	RShift + Num -				
Selected Alt FL 1 Dec	Auto-Pilote					
Selected Alt FL 1 Inc	Auto-Pilote					
Selected Alt FL 10 Dec	Auto-Pilote					
Selected Alt FL 10 Inc	Auto-Pilote					
Selected Alt FL 100 Dec	Auto-Pilote					

MODIFICAT.

AJOUTER

EFFACER

DÉFAUT

ASSIGN. AXES

REGL. AXES

REGLAGE FF

CRÉER HTML

le branchement à

nner les périphéi

ANNULER

OK

OPTIONS

M-2000C

bingo

☐ Vue repliable

Réinit. catégorie (défaut)

Effacer catégorie

Effacer tout

Charger profil

Enreg. profil sous

Action	Catégorie	Keyboard	Throttle - HOTAS...	T-Pendular-Rudd...	Joystick - HOTAS ...	Mou
BINGO Fuel 1000kg Dec	Engine & Fuel					
BINGO Fuel 1000kg Inc	Engine & Fuel					
BINGO Fuel 100kg Dec	Engine & Fuel					
BINGO Fuel 100kg Inc	Engine & Fuel					
BINGO Fuel Combo Dec	Engine & Fuel	RAlt + Num -				
BINGO Fuel Combo Inc	Engine & Fuel	RAlt + Num +				

## MODULE RADIO



## M-2000C

V/UHF UHF



**Selector Knobs**  
 COM 1 = V/UHF Preset Channels + Volume  
 COM 2 = UHF Preset Channels + Volume  
 NAV 1 = TACAN  
 NAV 2 = VOR.ILS  
 ADF =  
 ACT/STBY : Press Down + Dial  
 in VOR.ILS and TACAN to change Modes, Settings

VOR / TACAN



**Settings**  
 Frequency Knobs sensitivity  
 0  
 ACT to STBY transfer of freq. delay (ms)  
 3000



## RADIO PANEL :

COM1 : GREEN radio V/UHF, LCD preset + frequency + volume DIAL  
 COM2 : RED radio UHF,LCD preset + frequency + volume DIAL  
 NAV1 : TACAN ,LCD + setup DIAL ( 2 levels )  
 NAV2 : VOR.ILS,LCD + setup DIAL ( 2 levels )




ACT/STBY : press DOWN + DIAL in NAV1/NAV2 to change MODES & SETTINGS

## MODULE MULTISWITCH

START sequence

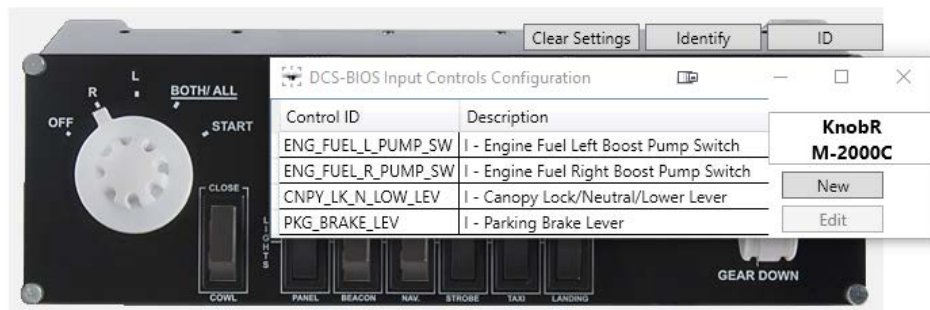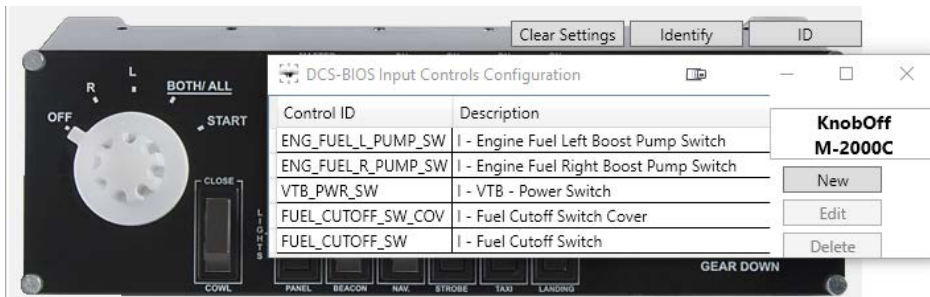

You can press COWL CLOSE for Canopy lock when you want after this point

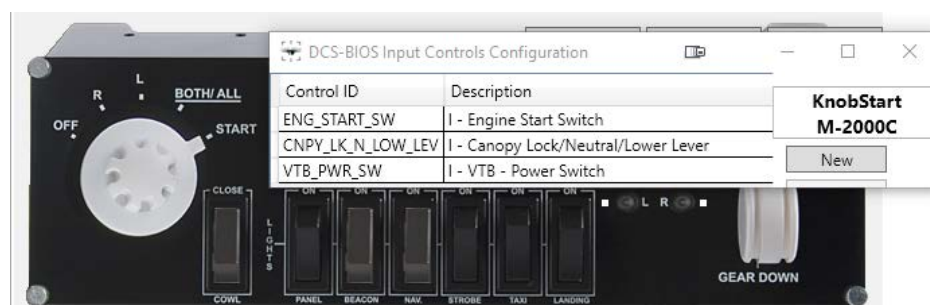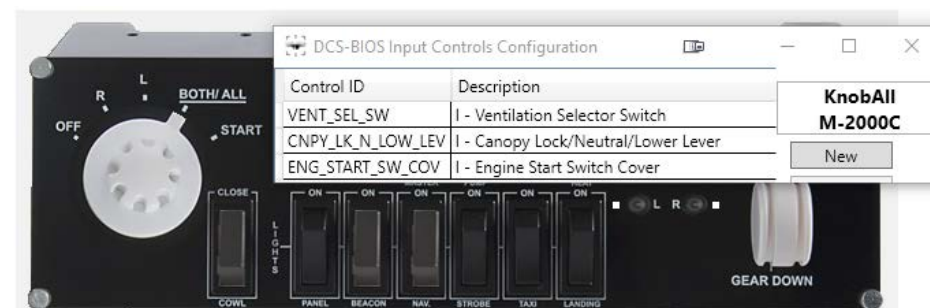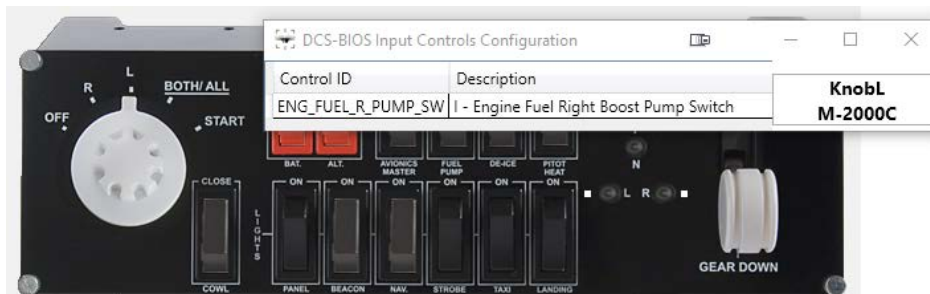

MODULE MULTISWITCH

LANDING GEAR LIGHT



N AUX LANDING GEAR : DARK / GREEN= proceed / RED= GEAR alarm  
L LEFT LANDING GEAR : DARK / GREEN= proceed / RED= BREAK light  
R RIGHT LANDING GEAR : DARK / FREEN= proceed / RED= SPAD light

## MODULE MULTIPANEL

All buttons [AP] [HDG][NAV][IAS][ALT][VAS][APR][REV] have same fonction in all KNOB MODE



### KNOB ALT

Upper LCD : use dial for SELECTED ALT  
Lower LCD : show ALT MSL



### KNOB VS

Upper LCD : use dial for BINGO  
Lower LCD : show FUEL DETOT



### KNOB IAS

Upper LCD : AOA

### KNOB HDG

Upper LCD : Real HDG

### KNOB CRS

Upper LCD : use dial for CALIBRATION BAROMETRIC



## MODULE MULTIPANEL

All buttons [AP] [HDG][NAV][IAS][ALT][VAS][APR][REV] have same fonction in all KNOB MODE



## BUTTONS

AP : AUTOPILOT MASTER  
HDG : ALTITUDE HOLD MODE  
ALT : SELECTED ALTITUDE HOLD MODE  
APR : APPROACH MODE  
REV : AUDIO WARNING RESET

## FLAPS


Down : AUDIO WARNING RESET

OTHER BUTTONS ARE FREE TO ASSIGNATE YOURSELF



## MODULE BIP

TILES are linked to light or button statut in DCS , NOT on keypress SAITEK statut

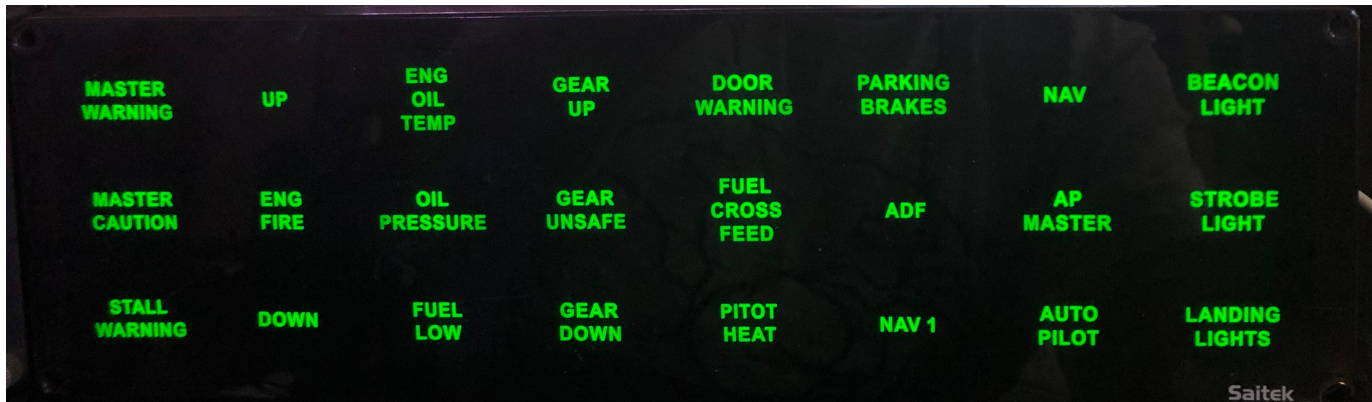

Nothing particular except :

NAV 1 = CONF alarm

PITOT HEAT = 3 states (green : RAS, yellow : cover switch off, red : Pitot OFF)

GEAR = up/down stay green, UNSAFE is RED until DARK=SAFE

ADF = APR is ON and balise found

STROBE LIGHT = is blinking for never forget to OFF before TAKEOFF:)

UP/DOWN = not assignated at this time