



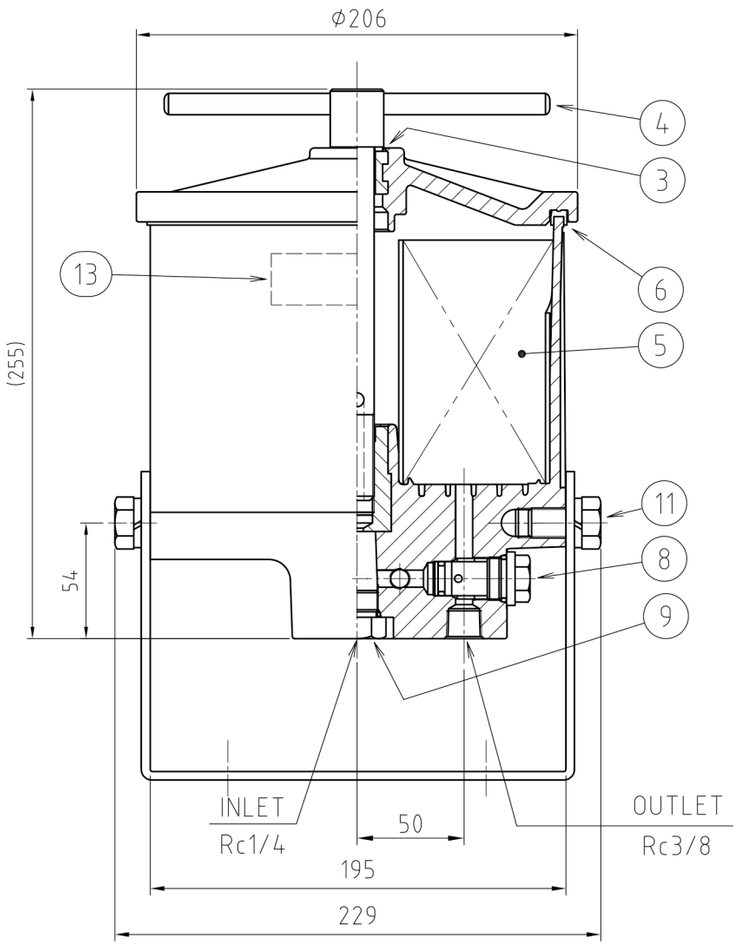


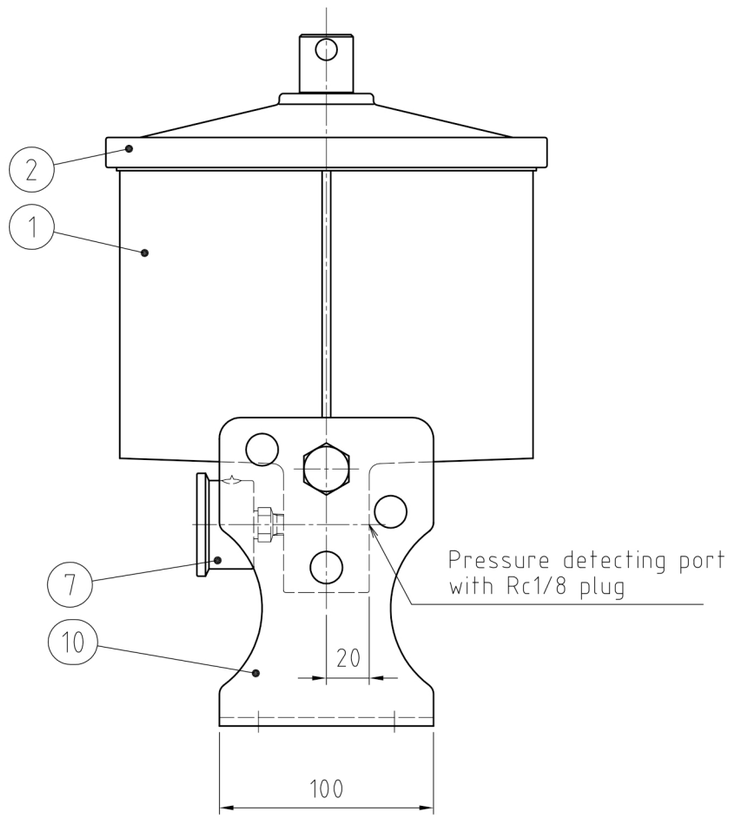

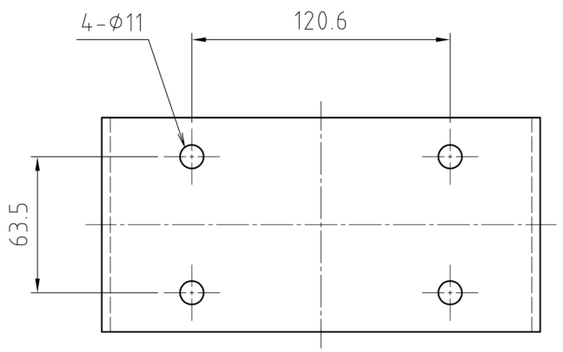





SPECIFICATIONS

Product No.	TR-19580
Application	Mineral oil hydraulic working fluid
Capacity of filtration	1.5～2.0 L/min.
Max pressure with flow	1.2 MPa
Check valve・Relief cracking pressure	0.45MPa
Opening Connection	IN : Rc1/4 OUT : Rc3/8

Parts List

No.	Parts name	Q'ty	TR No.	Remarks
1	BU100E main body	1	301221	ADC12
2	Cap	1	45446	ADC12
3	Bondead seal	1	44116	
4	T-center bolt	1	45346	
5	Element	1	25450	X100 element
6	U-Packing	1	44046	NBR
7	Pressure Gauge	1	49800	φ40 1MPa
8	Check valve	1	44520	
9	Adapter with orifice	1	47896	2 mm orifice
△1 10	Bracket	1	44155	
11	100 model side bolt set	2	45645	
	Hexagon head bolt	(2)	720080	M14× 25
	Spring washer	(2)	722280	M14
12	Hexagon head bolt set	4	45690	
	Hexagon head bolt	(4)	720062	M10× 30
	Hexagon head nut	(4)	722060	M10
	Flat washer	(4)	722160	M10
	Spring washer	(4)	722260	M10
13	Sticker	1	-	

Sticker detail

CAUTION
注意

U字パッキンは必ずキャップより外し
清掃の上、ハウジング本体に装着して
キャップを取り付けて下さい。

Ensure that the U-packing is cleaned
and fit on the housing properly
before you put the lid on it.

	Career	Date	Content	charge
7				
6				
5				
4				
3				
2				
1				

FINISH PAINT .	WEIGHT(Dry) .	WEIGHT(Wet) .	
CUSTOMER .			MODEL No. BU-100E-Wind
APPROVED BY	DRAWN.BY	CHECKED BY	SCALE 1:3
			TITLE BU-100E-Wind
Triple R Europe NV			DRAWING No. MVU-TRE-2022

RRR-A3S