SE-200E MOBILE-High Flow

1. **THE NEW MOBILE OIL TRANSFER, FILLING and CLEANING SYSTEM!**
2. **COMBINES HIGH FLOW (@1500 lit/hour) WITH 3 MICRON DEPTH FILTRATION (@300 lit/hour)**
3. **DESIGNED TO FILL A MACHINE AT HIGH SPEED WHILE ALLOWING MICRO DEPTH FILTRATION TO ASSURE PERFECTLY CLEAN AND DRY OIL.**





CONNECT - TRANSFER - CLEAN!

FEATURES

- Compact mobile bypass oil cleaner that is meant as a high flow filling rig at 25 l/m or 1500 l/hour, but at the same time, it can be used as a depth micron oil cleaning system, down to 1 micron.
- It's the ideal maintenance Oil Cleaner and can also be fitted with an online laser Particle Counter.
- Guaranteed low running cost, easy installation & manipulation.
- Performs 3-in1 Oil Filtration = removing all the particles that are very difficult to remove with full flow filters, and performing absolute Oil Cleaning.

BENEFITS

- Allows quick filling of every kind of machinery.
- Improves productivity and machine reliability.
- Prevents breakdowns to the hydraulic equipments.
- Longer life of all hydraulic components, pumps, servo-valves and other equipment.
- Very important reduction of the oil consumption cost and the resulting waste oil expenses.
- Discharges the very expensive full flow filters and extends their life (50% - 80% cost saving!).
- Significant reduction of maintenance expenditures.

ENVIRONMENTAL PROTECTION

- Triple R filters effectively clean the oil (down to NAS 6 or ISO 17/15/12) and stabilize the oil condition.
- That results in a significant increase of oil life and a significant reduction of oil consumption and oil disposal cost.
- **Remind: 1 liter of oil = 3 kg of CO2!**

TYPICAL APPLICATIONS

- It's a filtration system that is very usefull in every workshop and should be part of your maintenance program. Perfect for oil cleaning during Service interventions and Maintenance activities.
- For cleaning all hydraulic systems fitted with dirt-sensitive pumps and servo-valves.

TRIPLE R EUROPE N.V
www.triple-r-europe.com | info@triple-r-europe.com

SE-200E MOBILE-High Flow

TECHNICAL SPECIFICATIONS


MODEL	SE200E-HF
Article nr. 230V	SE200E-HF
Flow rate	**25,0 l/m**
Motor	230Vx1 or 400Vx3, 50/60Hz
Power	0,37 kW
Thread In/Out	1” IN x 3/4” OUT
Suction filter (spin-on)	60 micron
High Flow main filter (spinn-on)	**3 micron glassfiber**
TRIPLE R Element type	model **V100 (1µ) - M100 (3µ) - D100 (4µ) - X100 (10µ)**
Nr. of elements	2 x spin-on + 2 x Triple R
Max pressure	pressure relief set at 6,0 bar
Weight kg	~85,0 kg
Dimension mm	1200 x 610 x 585

Following setups and combinations are available on request:

- for LUBE oil (L)
- for DIESEL fuel (D)
- Spin-on filter for water absorption
- Laser Particle counter

Please consult your Triple R respresentative for technical details and pricing.

Switch for adding the Triple R oil cleaning

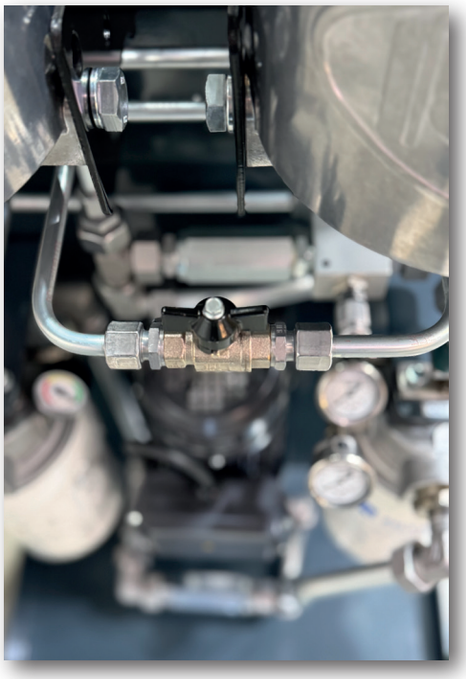

3 micron filter for high flow cleaning (25 l/m)

