STEEL housing SERIES

1. ***3-in-1 absolute Oil Cleaning!***
2. ***Improving production reliability***
3. ***Environmental responsibility***





Designed for cooling compressors!


Features:

- Bypass filter housings made of steel 52-3 and build to withstand up to 25 bar pressure.
- Specially designed for (cooling-)compressors.
- Effectively removes all the particles that are usually very difficult to remove with conventional filters, and performs a total cleaning of the oil by removing **solid particles**, absorbing **water** and eliminating **sludge** and other **oil oxidation residues**.
- Connects directly to the high pressure line. No motor and pump necessary.
- Fitted with M-series 2µ absolute filter elements that withstand ammonia (beta ratio $ß_2$ >400).
- The housings have a port on the lid for allowing to purge the housing before opening the lid. Pressure gauges can be supplied as optional equipment.
- Available in 3 sizes and for systems with an oil content up to 600 litres.
- Every housings is supplied with a pressure test certificate.
- Low running cost, easy installation & maintenance.

Benefits:

- Discharges the expensive full flow filters and extends their life by 3- ~ 5 times.
- Very important reduction of oil consumption and the resulting waste oil.
- Extends oil life by up to 30.000 hrs.
- Prevents component wear and damages.
- Improves machine reliability and productivity.
- Important reduction of maintenance costs.

Typical installation:

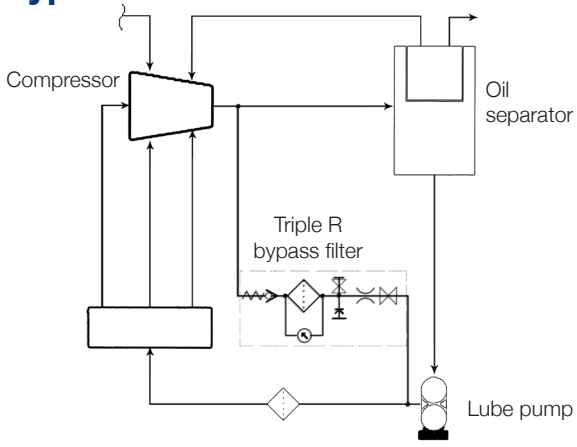

STEEL housing SERIES


Technical specifications

Model	BF-15	BF-20	AL100-HP
Article nr.	TR-18100	TR-18120	TR-10460
Flow rate	~1,5 l/m	~2,0 l/m	~3,0 l/m
Pressure	Max. pressure: 40 bar		
Thread In/Out	1/4" x 1/4" BSPT	1/4" x 3/8" BSPT	1/4" x 1/4" BSP
Element type	M30	M50	M100
Weight kg	8 kg	12 kg	16 kg
Dimension mm	168 x 154	189 x 250	260 x 330
Material	Steel 52/3		


Filter model selection chart

Oil volume	Liter 300	Lit 450	Lit 750
BF-15			
BF-20			
AL100-HP			


BF-15

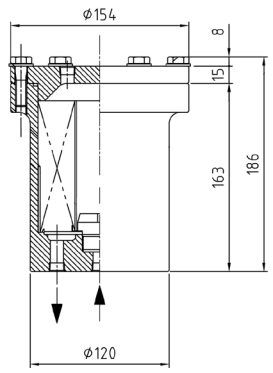

BF-20

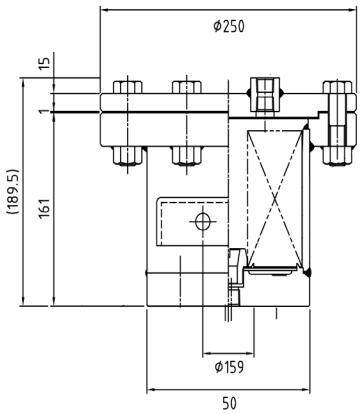

AL100-HP

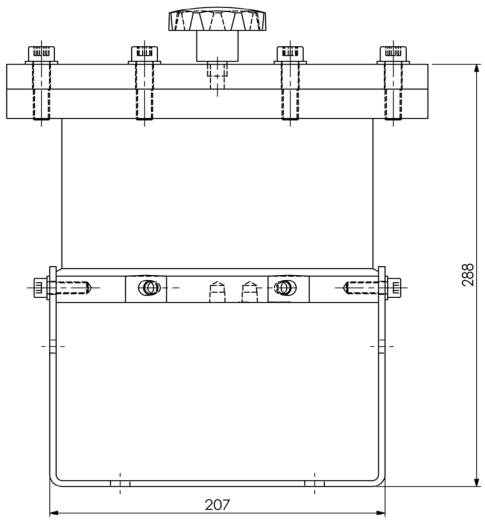

Connecting to the high pressure line.

Always consult our installation instructions first before connecting the bypass filters to the pressure line.

TRIPLE R EUROPE N.V.
www.triple-r-europe.com
Tel +32 (0)3 825 4647

Cockerillkaai 14, B-2000 Antwerpen
info@triple-r-europe.com
Fax +32 (0)3 825 5924