

Vacuum dehydrator



Triple R

- 1 COST SAVING
- 2 IMPROVING PRODUCTION RELIABILITY AND PRODUCT QUALITY
- 3 ENVIRONMENTAL RESPONSIBILITY

Dissolved water: 80%
Free water: 100%
Air bubbles: 100%



FEATURES

- Very fast and highly effective water removing device, meant for high duty applications.
- Easy full automatic operation.
- Removes water, moisture and air bubbles:
 - Dissolved water: 80%
 - Free water: 100%
 - Air bubbles: 100%
- Viscosity range from 10 ~ 600 cSt.
- Oil temperature from 15°C ~ 60°C.



REDUCE



REUSE



RECYCLE

BENEFITS

- Extends oil life:
 - ✓ Important reduction of waste oil & disposal cost.
 - ✓ Reduces the purchasing cost of oil.
- Prevents machine failures and extends machine life:
 - ✓ Prevents pump cavitation.
 - ✓ Prevents machine wear caused by rust.
 - ✓ Reduces the maintenance cost.
 - ✓ Improves the productivity.
- Low running cost
 - ✓ No consumables, one-time investment.


Vacuum dehydrator



TECHNICAL SPECIFICATIONS

Model	Motor	Power	Flow rate	In/Out	Dimensions mm	Weight kg
TRVS-N30E	415Vx3 - 50Hz	0,75 KW	30 l/min	In: 1' 1/4" Out: 1'	L1350 x W670 x H1765	410 kg

WORKING PRINCIPLES

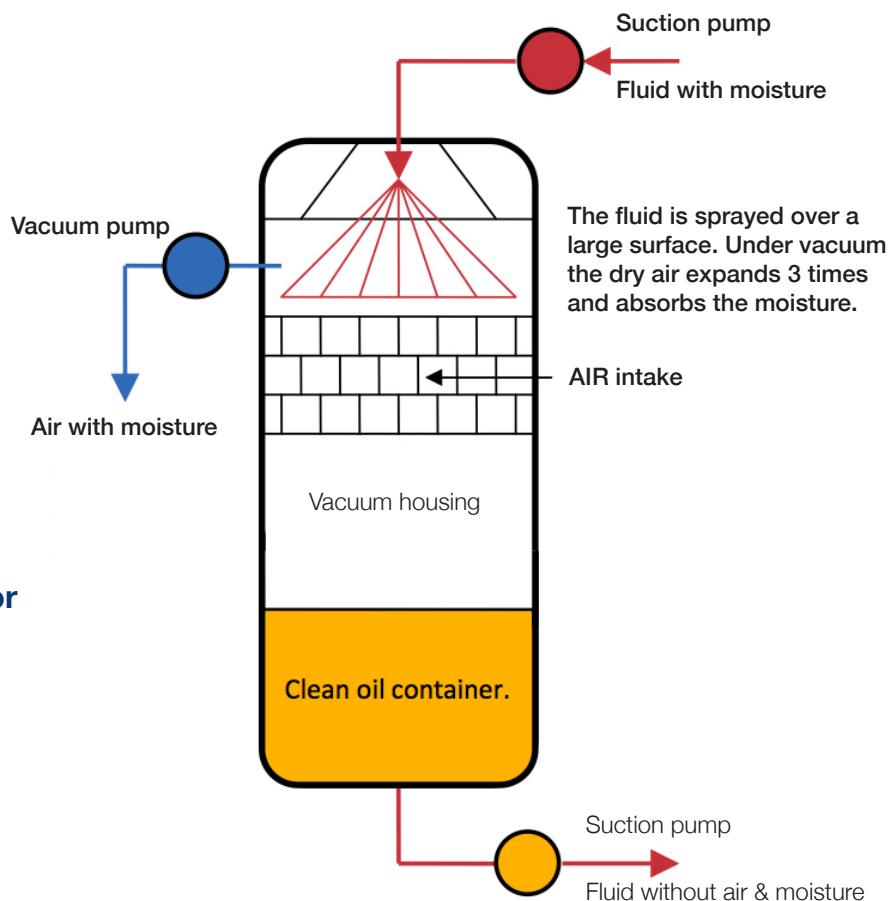

- ✓ Vacuum housing with a unique structure.
- ✓ Very high performance for water removal.
- ✓ Full automatic operation.
- ✓ Wide application range.

PERFORMANCE

Results of a TRVS-N30E test.

- Oil type: VG150
- Oil temperature: 50°C
- Oil volume: 100 litres
- Water concentration: 7.564 PPM or 0,7564%
- Room humidity level: 45%

