

MSPM0G3507 GUIDE VSSOP28

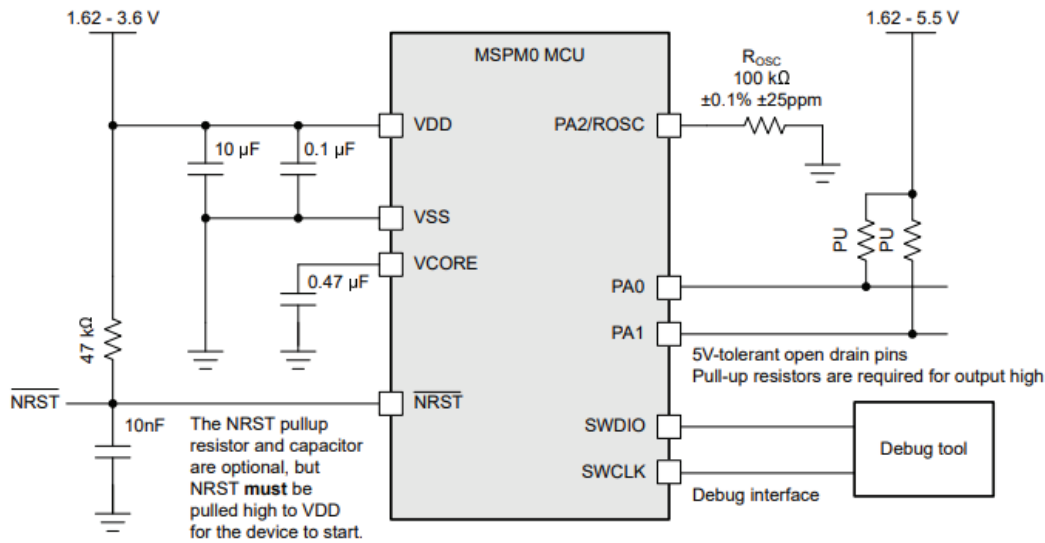


Figure 9-1. Basic Application Schematic


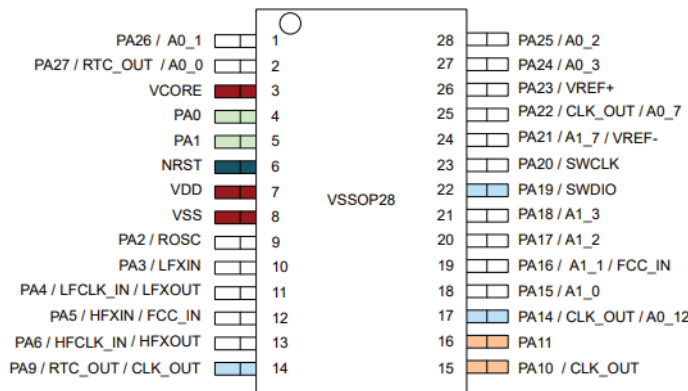


Figure 6-6. 28-Pin DGS28 (VSSOP) (Top View)

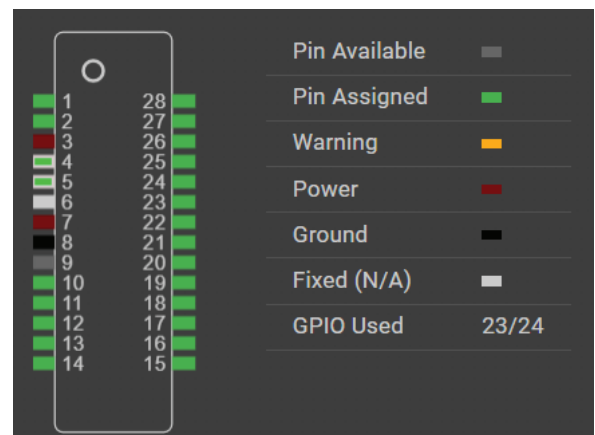

```
- GPIOA:
  + Standard Output: PA26
  + High-Speed Output: PA9
  + Standard Output: PA22
  + Standard Input: PA15
  + Standard Input: PA16

- SYSCFG
- TIMA0:
  + Capture/Compare Pin 0: PA21

- I2C0:
  + I2C Serial Data line (SDA): PA0
  + I2C Serial Clock line (SCL): PA1

- UART0:
  + RX Pin: PA11
  + TX Pin: PA10

- UART1:
  + RX Pin: PA18
  + TX Pin: PA17

- UART3:
  + RX Pin: PA25
  + TX Pin: PA14

- SPI0:
  + SPI SCLK (Clock): PA6
  + SPI PICO (Peripheral In, Controller Out): PA5
  + SPI POCI (Peripheral Out, Controller In): PA4
  + SPI CS1 (Chip Select 1): PA3
  + SPI CS2 (Chip Select 2): PA24
  + SPI CS3/CD (Chip Select 3/Command Data): PA23

- ADC0:
  + ADC12 Channel 0 Pin: PA27

- EVENT
- DMA
- BOARD:
  + Debug Clock: PA20
  + Debug Data In Out: PA19
```