




NAMA : DE AMUTIA HUJENI
 NIM : 09010182327001
 KELAS : MI3A
 MATKUL : PRAKTIKUM JARINGAN KOMPUTER

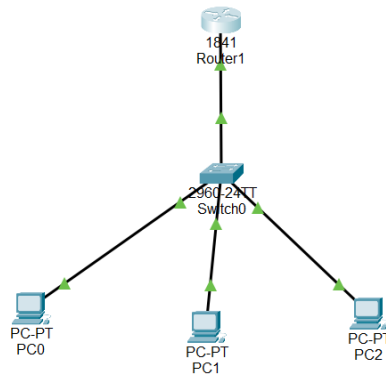


```

ROUTER_DHCP>en
ROUTER_DHCP#sh ip dhcp binding
IP address      Client-ID/      Lease expiration      Type
                Hardware address
192.168.1.21    0010.1185.7B4D  --                    Automatic
192.168.1.22    0004.9A11.45DD  --                    Automatic
192.168.1.23    0001.97D6.AE3A  --                    Automatic
ROUTER_DHCP#
  
```

NO	IP ADDRESS	MAC ADDRESS	LEASE EXPIRATION	TTYPE
1	192.168.1.21	0010.1185.7B4D	-	Automatic
2	192.168.1.22	0004.9A11.45DD	-	Automatic
3	192.168.1.23	0001.97D6.AE3A	-	Automatic

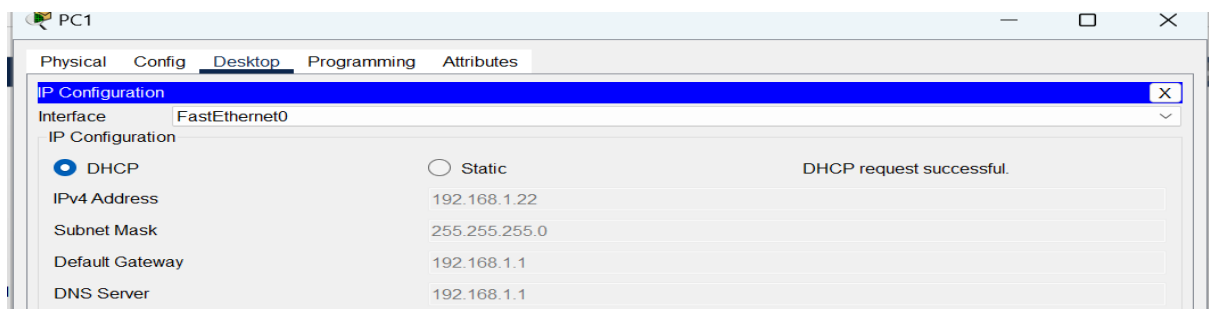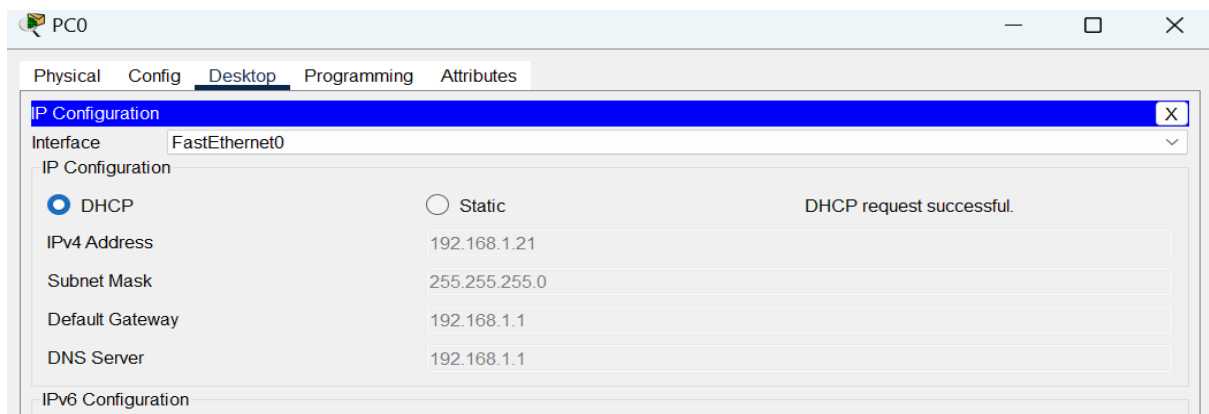

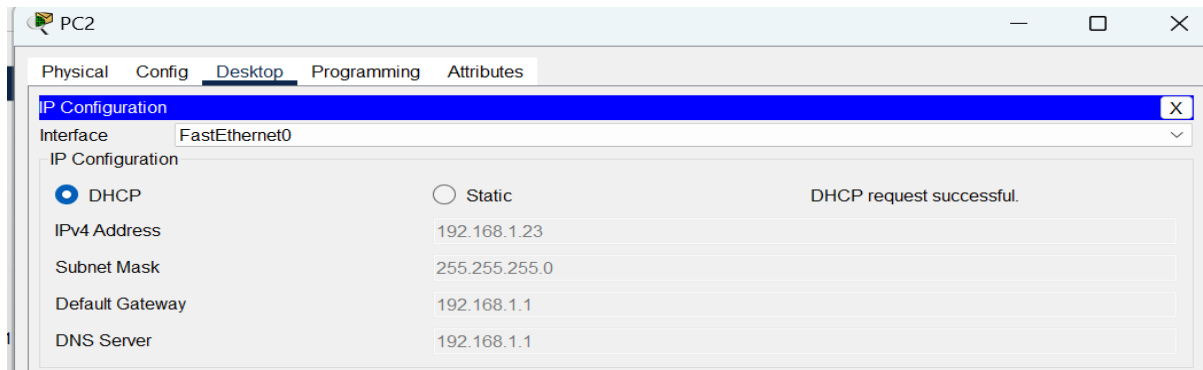

NO	CLIENT	IP ADDRESS	NETMASK	GATEWAY	DNS
1	PC 0	192.168.1.21	255.255.255.0	192.168.1.1	192.168.1.1
2	PC 1	192.168.1.22	255.255.255.0	192.168.1.1	192.168.1.1
3	PC 2	192.168.1.23	255.255.255.0	192.168.1.1	192.168.1.1

PC 0 KE PC 1

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.22

Pinging 192.168.1.22 with 32 bytes of data:

Reply from 192.168.1.22: bytes=32 time<1ms TTL=128
Reply from 192.168.1.22: bytes=32 time<1ms TTL=128
Reply from 192.168.1.22: bytes=32 time<1ms TTL=128
Reply from 192.168.1.22: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

```

PC 0 KE 2

```

C:\>ping 192.168.1.23

Pinging 192.168.1.23 with 32 bytes of data:

Reply from 192.168.1.23: bytes=32 time<1ms TTL=128
Reply from 192.168.1.23: bytes=32 time<1ms TTL=128
Reply from 192.168.1.23: bytes=32 time<1ms TTL=128
Reply from 192.168.1.23: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.23:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

```

PC 1 KE PC 0

```
C:\>ping 192.168.1.21

Pinging 192.168.1.21 with 32 bytes of data:

Reply from 192.168.1.21: bytes=32 time<1ms TTL=128
Reply from 192.168.1.21: bytes=32 time<1ms TTL=128
Reply from 192.168.1.21: bytes=32 time<1ms TTL=128
Reply from 192.168.1.21: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC 1 KE PC 2

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.1681.23
Ping request could not find host 192.1681.23. Please check the name and try again.
C:\>ping 192.168.1.23

Pinging 192.168.1.23 with 32 bytes of data:

Reply from 192.168.1.23: bytes=32 time<1ms TTL=128
Reply from 192.168.1.23: bytes=32 time<1ms TTL=128
Reply from 192.168.1.23: bytes=32 time<1ms TTL=128
Reply from 192.168.1.23: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.23:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC 2 KE PC 0

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.21

Pinging 192.168.1.21 with 32 bytes of data:

Reply from 192.168.1.21: bytes=32 time<1ms TTL=128
Reply from 192.168.1.21: bytes=32 time<1ms TTL=128
Reply from 192.168.1.21: bytes=32 time<1ms TTL=128
Reply from 192.168.1.21: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC 2 KE PC 1

```
C:\>ping 192.168.1.22

Pinging 192.168.1.22 with 32 bytes of data:

Reply from 192.168.1.22: bytes=32 time<1ms TTL=128
Reply from 192.168.1.22: bytes=32 time<1ms TTL=128
Reply from 192.168.1.22: bytes=32 time<1ms TTL=128
Reply from 192.168.1.22: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

NO	SUMBER	HASIL	TUJUAN	HASIL
		YA/TIDAK		YA/TIDAK
1	PC 0	YA	PC 1	YA
		YA	PC 2	YA
2	PC 1	YA	PC 0	YA
		YA	PC 2	YA
3	PC2	YA	PC 0	YA
		YA	PC 1	YA